



Expenses Diary

Register Page:

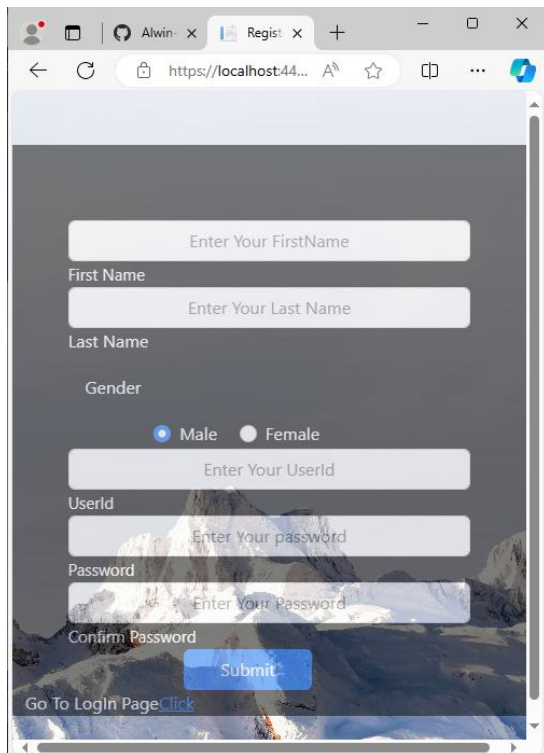


A screenshot of a web browser showing the 'Register' page. The browser's address bar displays 'https://localhost:44...'. The form is set against a dark background with a mountain landscape. It includes input fields for 'First Name' (placeholder: 'Enter Your FirstName'), 'Last Name' (placeholder: 'Enter Your Last Name'), 'Gender' (radio buttons for 'Male' and 'Female', with 'Male' selected), 'UserId' (placeholder: 'Enter Your UserId'), 'Password' (placeholder: 'Enter Your password'), and 'Confirm Password' (placeholder: 'Enter Your Password'). A blue 'Submit' button is at the bottom, along with a link 'Go To Login PageClick'.

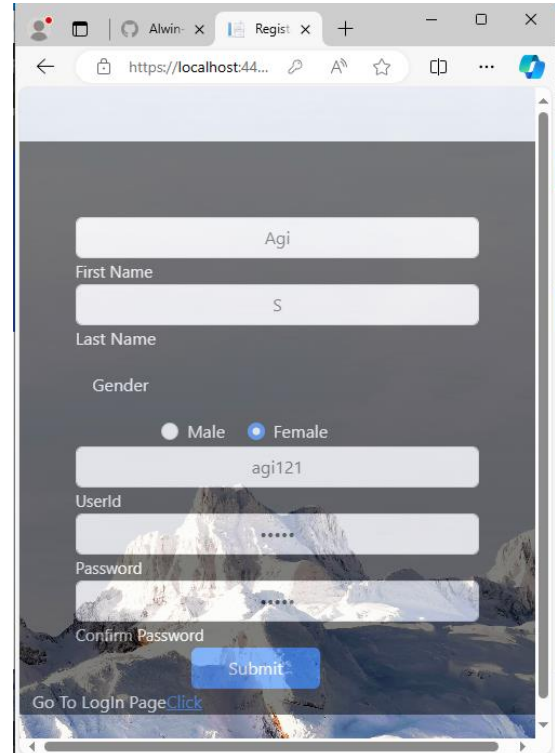



A screenshot of the same 'Register' page form, but with data entered: 'Agi' in the First Name field, 'S' in the Last Name field, 'Female' selected for Gender, 'agi121' in the UserId field, and masked characters '*****' in both the Password and Confirm Password fields. The 'Submit' button and the 'Go To Login PageClick' link are still visible at the bottom.

Login Page:

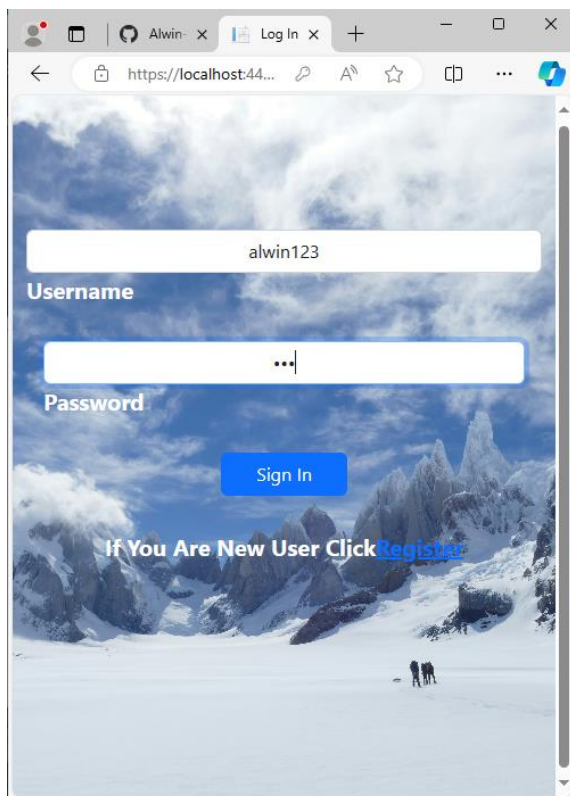

A screenshot of a web browser showing the 'Log In' page. The browser's address bar displays 'https://localhost:44...'. The form is set against a background image of a snowy mountain range. It includes input fields for 'Username' (containing 'alwin123') and 'Password' (containing masked characters '***'). A blue 'Sign In' button is positioned below the password field. At the bottom, there is a text prompt 'If You Are New User Click' followed by a blue link 'Register'.

Home Page:

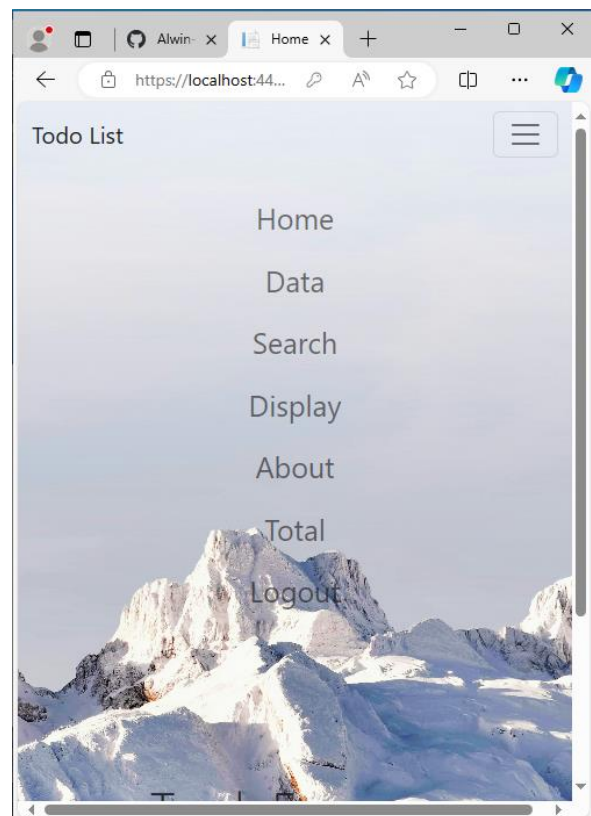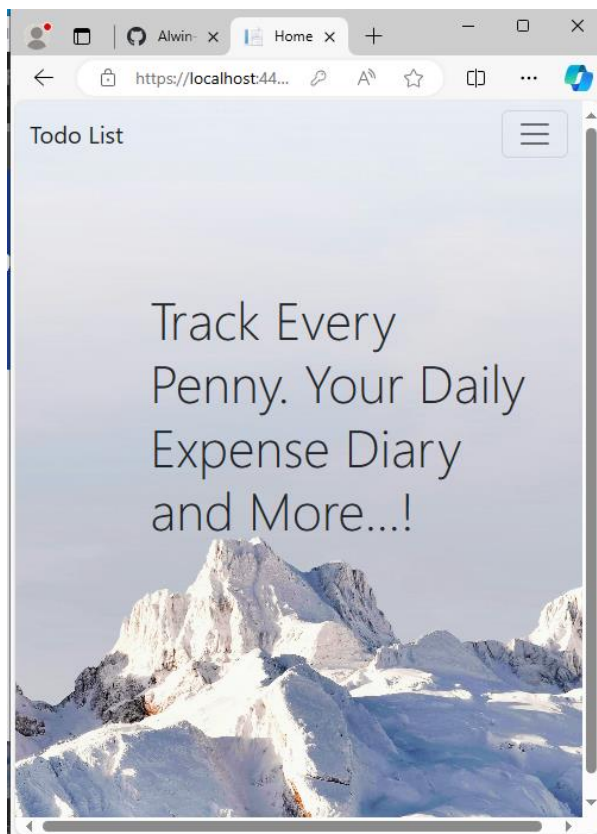

Insert Page:

The screenshot shows a web browser window with the address bar displaying 'https://localhost:44...'. The page title is 'Todo List'. The form contains the following fields and labels:

- User Id**: Input field with the value 'alwin123'.
- Date and Time**: Input field with the value '6/24/2024'.
- Shop Name**: Input field with the placeholder text 'Enter Your Shop Name'.
- Things**: Input field with the placeholder text 'Enter Your Things'.
- Amount**: Input field with the placeholder text 'Enter Your Amount'.
- Reason**: Input field with the placeholder text 'Enter Your Reason'.

This screenshot shows the same Insert Page form as the previous one, but with the following data entered:

- User Id**: alwin123
- Date and Time**: 6/24/2024
- Shop Name**: dmart
- Things**: water bottle,bag,containers
- Amount**: 500
- Reason**: for my child

A blue 'Submit' button is visible at the bottom right of the form.

Display page:

Alwin- xDisple x

https://localhost:44...

Todo List

alwin123

Your UserID

Submit

Your Data's

Shop Name	Things	Amount	Reason	Date
-----------	--------	--------	--------	------

Alwin- xDisple x

https://localhost:44...

Todo List

alwin123

Your UserID

Submit

Your Data's

Things	Amount	Reason	Date
biscuit	10	forme	2/23/12:00:AM
as	10	alkn	2/23/12:00:

Search Page:

Alwin- xSearch x

https://localhost:44...

Todo List

alwin123

Your UserID

mm/dd/yyyy

mm/dd/yyyy

If You Want

From Date

To Date

Shop Name

Submit

Your Data's

Shop Name	Things	Amount	Reason	Date
-----------	--------	--------	--------	------

Alwin- xSearch x

https://localhost:44...

alwin123

Your UserID

mm/dd/yyyy

mm/dd/yyyy

If You Want

From Date

To Date

Shop Name

Submit

Your Data's

Shop Name	Things	Amount	Reason
dmart	water, bottle, bag, containers	500	for my child

Total Amount Page:

alwin123

Your UserId

If You Want to See Uptodate Total Amount [Clickme](#)

mm/dd/yyyy mm/dd/yyyy

From Date To Date

Submit

alwin123

Your UserId

Submit

Total Amount: 942 Rs.

About Page:

Todo List

Welcome to Expenses Diary
Entery ! We're here to simplify
the way you manage your
finances and track your
expenses effectively. Whether
you're a seasoned budgeting
pro or just starting to take
control of your spending
habits, our platform is
designed to empower you on
your financial journey.

Source Code

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.Mvc;
using System.Data.SqlClient;
using System.Collections;
using System.Security.Cryptography.X509Certificates;
using System.Data;
using System.Drawing;
using System.Runtime.InteropServices;
using System.Web.UI.WebControls;
using System.Web.Security;

namespace protodo.Controllers
{
    public class MainController : Controller
    {

        public ActionResult newuser()
        {

            SqlConnection con = new SqlConnection("Database=todo;Data Source=DESKTOP-4JAHEO9\\SQLEXPRESS;Integrated Security=true");

            string firstname = Request.Form["fname"];
            string lastname = Request.Form["lname"];
            string gender = Request.Form["radiogroup"];
            if (string.IsNullOrEmpty(firstname))
            {
                Response.Write("");
                return View();
            }
            if (string.IsNullOrEmpty(gender))
            {
                Response.Write("Please Select Your Gender");
                return View();
            }
            string userid = Request.Form["userid"];
            string password = Request.Form["pass"];
            string cpassword = Request.Form["cpass"];
            if (password != cpassword)
            {
                TempData["match"] = "Password And Comfirm Passwords Are must match";
                return View();
            }
        }
    }
}
```

```

    }
    con.Open();
    string qr1 = "select userid from newuser where userid=@userid";
    SqlDataAdapter da = new SqlDataAdapter(qr1, con);
    da.SelectCommand.Parameters.AddWithValue("userid", userid);
    DataTable dt = new DataTable();
    da.Fill(dt);
    if (dt.Rows.Count > 0)
    {
        TempData["alertmessage"] = "User Name Already Taken...";
        return View();
    }

    else
    {
        string qr = "insert into newuser(firstname,lastname,gender,userid,password)
values(@firstname,@lastname,@gender,@userid,@password)";
        SqlCommand cmd = new SqlCommand(qr, con);
        cmd.Parameters.AddWithValue("firstname", firstname);
        cmd.Parameters.AddWithValue("lastname", lastname);
        cmd.Parameters.AddWithValue("gender", gender);
        cmd.Parameters.AddWithValue("userid", userid);
        cmd.Parameters.AddWithValue("password", password);
        cmd.ExecuteNonQuery();
        TempData["al"] = "inserted Successfully...";

    }
    return View();
}

public ActionResult login()
{
    return View();
}

public ActionResult logout()
{
    SqlConnection con = new SqlConnection("Database=todo;Data Source=DESKTOP-
4JAHEO9\\SQLEXPRESS;Integrated Security=true");
    con.Open();
    string userid = Request.Form["userid"];
    string password = Request.Form["pass"];
    string qr1 = "select userid,password from newuser where userid=@userid and
password=@password";
    SqlDataAdapter da = new SqlDataAdapter(qr1, con);
    da.SelectCommand.Parameters.AddWithValue("userid", userid);
    da.SelectCommand.Parameters.AddWithValue("password", password);
    DataTable dt = new DataTable();
    da.Fill(dt);

```

```

        if (dt.Rows.Count > 0)
        {
            return RedirectToAction("Mainpage");
        }
        return View();
    }

    public ActionResult Mainpage()
    {
        return View();
    }

    public ActionResult expences(FormCollection collection)
    {
        try
        {
            SqlConnection con = new SqlConnection("Database=todo;Data Source=DESKTOP-4JAHEO9\\SQLEXPRESS;Integrated Security=true");
            con.Open();
            string userid = collection["user1"];
            if(string.IsNullOrEmpty(userid))
            {
                TempData["war"] = "";
                return View();
            }
            string date = collection["time"];
            if (string.IsNullOrEmpty(date))
            {
                TempData["war"] = "date not be empty";
                return View();
            }
            string shopname = Request.Form["shop"];
            if (string.IsNullOrEmpty(shopname))
            {
                TempData["war"] = "shopname not be empty";
                return View();
            }
            string things = Request.Form["things"];
            if (string.IsNullOrEmpty(userid))
            {
                TempData["war"] = "Things not be empty";
                return View();
            }
            string amount = Request.Form["amount"];
            if (string.IsNullOrEmpty(amount))
            {
                TempData["war"] = "Amount not be empty";
                return View();
            }
            string reason = Request.Form["reason"];
            if (string.IsNullOrEmpty(reason))

```

```

        {
            TempData["war"] = "Reason not be empty";
            return View();
        }
        else
        {
            string qr = "insert into expences(userid,buydate,shopname,things,amount,reason)
values(@userid,@date,@shopname,@things,@amount,@reason)";
            SqlCommand cmd = new SqlCommand(qr, con);
            cmd.Parameters.AddWithValue("userid", userid);
            cmd.Parameters.AddWithValue("date", date);
            cmd.Parameters.AddWithValue("shopname", shopname);
            cmd.Parameters.AddWithValue("things", things);
            cmd.Parameters.AddWithValue("amount", amount);
            cmd.Parameters.AddWithValue("reason", reason);
            cmd.ExecuteNonQuery();
            TempData["ans"] = "Inserted Successfully";

        }

        return View();

    }
    catch (Exception ex)
    {
        TempData["fild"] = "faield"+ex.Message;
    }

    return View();
}
public ActionResult About()
{
    return View();
}
public ActionResult Display(FormCollection collection)
{
    try
    {
        string userid = collection["userid"];

        string connectionString = "Data Source=DESKTOP-4JAHEO9\\SQLEXPRESS;Initial
Catalog=todo;Integrated Security=True";
        string query = "SELECT * FROM expences WHERE userid=@userid";

        using (SqlConnection con = new SqlConnection(connectionString))
        {
            con.Open();
            SqlCommand cmd = new SqlCommand(query, con);
            cmd.Parameters.AddWithValue("@userid", userid);

            SqlDataAdapter da = new SqlDataAdapter(cmd);

```



```

        DataTable dt = new DataTable();
        da.Fill(dt);

        if (dt.Rows.Count > 0)
        {
            ViewBag.Userdata = dt;
            return View();
        }
        else
        {
            ViewBag.ErrorMessage = "No data found for the given user ID.";
        }
    }
}
catch (Exception ex)
{
    ViewBag.ErrorMessage = "An error occurred: " + ex.Message;
}

return View();
}

public ActionResult search(FormCollection collection)
{
    try
    {
        string userid = collection["userid"];
        string fromdate = Request.Form["fromdate"];
        string todate = Request.Form["todate"];
        string shopname = Request.Form["shopname"];

        string connectionString = "Data Source=DESKTOP-4JAHEO9\\SQLEXPRESS;Initial
Catalog=todo;Integrated Security=True";
        string query = "select*from expences where userid='alwin123' and buydate >=@fromdate
and buydate <=@todate or shopname=@shopname";

        using (SqlConnection con = new SqlConnection(connectionString))
        {
            con.Open();
            SqlCommand cmd = new SqlCommand(query, con);
            cmd.Parameters.AddWithValue("@userid", userid);
            cmd.Parameters.AddWithValue("@fromdate", fromdate);
            cmd.Parameters.AddWithValue("@todate", todate);
            cmd.Parameters.AddWithValue("@shopname", shopname);

            SqlDataAdapter da = new SqlDataAdapter(cmd);
            DataTable dt = new DataTable();
            da.Fill(dt);

            if (dt.Rows.Count > 0)
            {

```

```

        ViewBag.Userdata = dt;
        return View();
    }
    else
    {
        ViewBag.ErrorMessage = "No data found for the given user ID.";
    }
}
}
catch (Exception ex)
{
    ViewBag.ErrorMessage = "An error occurred: " + ex.Message;
}

return View();
}
public ActionResult totalamount(FormCollection collection)
{
    try
    {
        string userid = collection["userid"];
        string fromdate = Request.Form["fromdate"];
        string todate = Request.Form["todate"];

        string connectionString = "Data Source=DESKTOP-4JAHEO9\\SQLEXPRESS;Initial
Catalog=todo;Integrated Security=True";
        string query = "select sum(amount) from expences where userid=@userid and
buydate>=@fromdate and buydate<=@todate";

        using (SqlConnection con = new SqlConnection(connectionString))
        {
            con.Open();
            SqlCommand cmd = new SqlCommand(query, con);
            cmd.Parameters.AddWithValue("@userid", userid);
            cmd.Parameters.AddWithValue("@fromdate", fromdate);
            cmd.Parameters.AddWithValue("@todate", todate);

            SqlDataAdapter da = new SqlDataAdapter(cmd);
            DataTable dt = new DataTable();
            da.Fill(dt);

            if (dt.Rows.Count > 0)
            {
                ViewBag.Userdata = dt;
                return View();
            }
            else
            {
                ViewBag.ErrorMessage = "No data found for the given user ID.";
            }
        }
    }
}

```

```

    }
}
catch (Exception ex)
{

}

return View();
}

public ActionResult total(FormCollection collection,string button)
{
    try
    {
        string userid = collection["userid"];

        string connectionString = "Data Source=DESKTOP-4JAHEO9\\SQLEXPRESS;Initial
Catalog=todo;Integrated Security=True";
        string query = "select sum(amount) from expences where userid=@userid";

        using (SqlConnection con = new SqlConnection(connectionString))
        {
            con.Open();
            SqlCommand cmd = new SqlCommand(query, con);
            cmd.Parameters.AddWithValue("@userid", userid);

            SqlDataAdapter da = new SqlDataAdapter(cmd);
            DataTable dt = new DataTable();
            da.Fill(dt);

            if (dt.Rows.Count > 0)
            {
                ViewBag.Userdata = dt;
                return View();
            }
            else
            {
                ViewBag.ErrorMessage = "No data found for the given user ID.";
            }
        }
    }
    catch (Exception ex)
    {

    }

    return View();
}

```

```
}
```

```
}
```

Model:

```
using System;  
using System.Collections.Generic;  
using System.Linq;  
using System.Web;
```

```
namespace protodo.Models  
{  
    public class Expenses  
    {  
        public int UserID { get; set; }  
        public string BuyDate { get; set; }  
  
        public string ShopName { get; set; }  
  
        public string Things { get; set; }  
  
        public string Amount { get; set; }  
        public string Reason { get; set; }  
    }  
}
```

New User:

```
@{  
    Layout = null;  
}
```

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<meta name="viewport" content="width=device-width" />
```

```
<title>Register</title>
```

```
<link rel="stylesheet" href="~/Content/bootstrap.min.css" />
```

```
<style>
```

```
.left {  
    margin-left: auto;  
    text-align: center;  
    padding: 25px;  
    font-size: 25px;  
    background-color: transparent;  
    color: white;  
}  
.box1 {  
    background-color: rgba(0,0,0,.5);  
    color: #fff;  
}  
  
.box2 {  
    background-color: #000;  
    color: #fff;  
    opacity: .5;  
}
```

```
.top1 {
```

```

        position: relative;
        top: 50px;
    }

    .top2 {
        justify-content: center;
        top: 300px;
    }

    body {
        background-image: url('../images/w2.jpg');
        background-size: cover;
        height: 100vh;
        background-position: center;
        background-attachment: fixed;
    }
</style>
</head>
<body>
    <form action="newuser" method="post">

        <div class="text-warning">
            @TempData["alertmessage"]
        </div>
        <div class="text-success">
            @TempData["al"]
        </div>
        <div class="text-danger">
            @TempData["match"]
        </div>

        <div class="row ">
            <div class="offset-lg-2 col-lg-8 box2 top1">
                <div class="container ">
                    <div class="row justify-content-center" style="padding:70px 0px 0px 0px">
                        <div class="col-10 col-lg-8">
                            <input type="text" id="username" name="fname" class="form-control text-center"
placeholder="Enter Your FirstName" required>
                            <label for="username" class="text-white" style="font-size: 15px; ">First Name</label>
                        </div>
                        <div class="row justify-content-center">
                            <div class="col-10 col-lg-8">
                                <input type="text" id="lastname" name="lname" class="form-control" style="text-align:
center;"
                                placeholder="Enter Your Last Name" required>
                                <label for="lastname">Last Name</label>
                            </div>
                        </div>
                        <div style="padding: 19px;">
                            <div class="row">
                                <div class="col-2 offset-1 col-lg-2 offset-lg-3">
                                    <label>Gender</label>
                                </div>
                            </div>
                            <div class="row ">
                                <div class="col-2 offset-3 col-lg-2 offset-lg-4 ">
                                    <div class="form-check">
                                        <input type="radio" id="Male" name="radiogroup" value="Male" class="offset-2 col-1
form-check-input"
                                        checked><label for="Male">Male</label>

```

```

        </div>
    </div>
    <div class="col-2">
        <div class="form-check">
            <input type="radio" id="female" name="radiogroup" value="Female"
                class="offset-1 col-1 form-check-input"><label for="femlae">Female</label>
        </div>
    </div>
</div>
<div class="row justify-content-center">
    <div class="col-10 col-lg-8">
        <input type="text" id="username" name="userid" class="form-control text-center"
placeholder="Enter Your UserId" required>
        <label for="username" class="text-white" style="font-size: 15px; ">UserId</label>
    </div>
</div>
<div class="row justify-content-center">
    <div class="col-10 col-lg-8">
        <input type="password" id="password" name="pass" class="form-control text-center"
placeholder="Enter Your password" required>
        <label for="password" class="text-white" style="font-size: 15px; ">Password</label>
    </div>
</div>
<div class="row justify-content-center">
    <div class="col-10 col-lg-8">
        <input type="password" id="username" name="cpass" class="form-control text-center"
placeholder="Enter Your Password" required>
        <label for="username" class="text-white" style="font-size: 15px; ">Confirm
Password</label>
    </div>
</div>
<div class="row">
    <input type="submit" class="btn btn-primary col-3 offset-4" value="Submit">

    <label>Go To Login Page<a href="@Url.Action("login")">Click</a></label>

</div>
</div>
</div>
</div>

</form>
</body>
</html>

```

Login Cshtml:

```

@{
    Layout = null;
}

<!DOCTYPE html>

<html>
<head>
    <meta name="viewport" content="width=device-width" />
    <title>Log In</title>
    <link rel="stylesheet" href="~/Content/bootstrap.min.css" />
    <style>
        body {
            background-image: url('../images/w8.jpg');
            background-size: cover;

```



```

        height: 100vh;
        background-position: center;
    }
</style>
</head>

<body>
    <form action="logout" method="post">
        <div>
            <h2 style="color:white";>@TempData["al"]</h2>
            </div>
            <div style="top:100px; position: relative; ">
                <div class="container">
                    <div class="row justify-content-center" style="padding: 15px 0px;">
                        <div class="col-sm-7 col-lg-6">
                            <input type="text" id="username" name="userid" class="form-control text-center"
placeholder="Enter Your UserId here">
                            <label for="uesername" class="text-white" style="font-weight: bold;font-size: 20px;
">Username</label>
                        </div>
                    </div>
                    <div class="row justify-content-center" style="padding: 15px;">
                        <div class="col-sm-7 col-lg-6 ">
                            <input type="password" id="pass" name="pass" class="form-control text-center"
placeholder="Enter Your Password here">
                            <label for="pass" class="text-white" style="font-weight: bold;font-size:
20px;">Password</label>
                        </div>
                    </div>
                    <div class="row justify-content-center " style="padding: 15px;">
                        <input type="submit" value="Sign In" class="btn btn-primary col-3 col-lg-2 " onclick="per()"
/>
                    </div>
                    <div class="row text-center " style="padding: 15px;">
                        <label class="text-white" style="font-weight: bold;font-size: 20px;">If You Are New User
Click<a href="@Url.Action("newuser")">Register</a></label>
                    </div>
                </div>
            </div>
        </div>
    </form>

    <script>
        function per() {
            var getvalue = document.getElementById("username").value;
            localStorage.setItem('value1', getvalue);
        }
    </script>
</body>
</html>

```

About:

```

@{
    Layout = null;
}

```

```

<!DOCTYPE html>

<html>
<head>
  <meta name="viewport" content="width=device-width" />
  <title>About</title>
  <link rel="stylesheet" href="~/Content/bootstrap.min.css" />
  <style>
    .left {
      margin-left: auto;
      text-align: center;
      padding: 25px;
      font-size: 25px;
      background-color: transparent;
      color: white;
    }

    body {
      background-image: url('../images/w5.jpg');
      background-size: cover;
      height: 100vh;
      background-position: center;
      background-attachment: fixed;
    }
  </style>
</head>
<body>
  <header>
    <div class="container">
      <nav class="navbar navbar-expand-lg navbar-white ">
        <a href="" class="navbar-brand ">Todo List</a>
        <button type="button" data-bs-target="#mynav" data-bs-toggle="collapse" class="navbar-
toggler"><span class="navbar-toggler-icon"></span></button>
        <div class="collapse navbar-collapse " id="mynav">
          <ul class="navbar-nav left ">
            <li class="nav-item">
              <a href="@Url.Action("Mainpage")" class="nav-link">Home</a>
            </li>

            <li class="nav-item">
              <a href="@Url.Action("expences")" class="nav-link">Data</a>
            </li>
            <li class="nav-item">
              <a href="@Url.Action("search")" class="nav-link">Search</a>
            </li>
            <li class="nav-item">
              <a href="@Url.Action("Display")" class="nav-link">Display</a>
            </li>
            <li class="nav-item">
              <a href="@Url.Action("About")" class="nav-link">About</a>
            </li>
            <li class="nav-item">
              <a href="@Url.Action("totalamount")" class="nav-link">Total</a>
            </li>
            <li class="nav-item">
              <a href="@Url.Action("login")" class="nav-link">Logout</a>
            </li>
          </ul>
        </div>
      </nav>
    </div>
  </body>

```

```

</header>
<div class="container">
  <div class="row justify-content-center display-6" style="padding: 100px 0px 0px 0px;">
    <div class="col-10">
      <p>
        Welcome to Expenses Diary Entry ! We're here to simplify the way you manage your
        finances and track your
        expenses effectively. Whether you're a seasoned budgeting pro or just starting to take control
        of
        your spending habits, our platform is designed to empower you on your financial journey.
      </p>
    </div>
  </div>

</div>

<script src="../Scripts/bootstrap.min.js"></script>
<script src="../Scripts/jquery-3.4.1.js"></script>
</body>
</html>

```

Main Page:

```

@{
  Layout = null;
}

<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Home</title>
  <link rel="stylesheet" href="../Content/bootstrap.min.css" />
  <style>
    .left {
      margin-left: auto;
      text-align: center;
      padding: 25px;
      font-size: 25px;
      background-color: transparent;
      color: white;
    }

    body {
      background-image: url('../images/w2.jpg');
      background-size: cover;
      height: 100vh;
      background-position: center;
      background-attachment: fixed;
    }
  </style>

```

```

</head>

```

```

<body>

```

```

  <header>
    <div class="container">
      <nav class="navbar navbar-expand-lg navbar-white ">
        <a href="" class="navbar-brand ">Todo List</a>

```

```

        <button type="button" data-bs-target="#mynav" data-bs-toggle="collapse" class="navbar-
toggler"><span class="navbar-toggler-icon"></span></button>
        <div class="collapse navbar-collapse" id="mynav">
            <ul class="navbar-nav left">
                <li class="nav-item">
                    <a href="@Url.Action("Mainpage")" class="nav-link">Home</a>
                </li>

                <li class="nav-item">
                    <a href="@Url.Action("expences")" class="nav-link">Data</a>
                </li>
                <li class="nav-item">
                    <a href="@Url.Action("search")" class="nav-link">Search</a>
                </li>
                <li class="nav-item">
                    <a href="@Url.Action("Display")" class="nav-link">Display</a>
                </li>
                <li class="nav-item">
                    <a href="@Url.Action("About")" class="nav-link">About</a>
                </li>
                <li class="nav-item">
                    <a href="@Url.Action("totalamount")" class="nav-link">Total</a>
                </li>
                <li class="nav-item">
                    <a href="@Url.Action("login")" class="nav-link">Logout</a>
                </li>
            </ul>

        </div>
    </nav>
</div>
</header>
<div class="row">
    <div class="col-8 offset-2 col-lg-8 offset-3" style="padding: 100px 0px 0px 0px;">
        <span class="display-2 ani">
            Track Every Penny. Your Daily Expense Diary and More...!
        </span>
    </div>
</div>

<script src="../Scripts/bootstrap.min.js"></script>
<script src="../Scripts/jquery-3.4.1.min.js"></script>
</body>
</html>

```

Display:

```

@model protodo.Models.Expenses
@using System.Data
@{
    Layout = null;
}

```

```
<!DOCTYPE html>
```

```

<html>
<head>
    <meta name="viewport" content="width=device-width" />
    <title>Display</title>
    <link rel="stylesheet" href="../Content/bootstrap.min.css" />
    <style>

```

```

.max {
    max-width: 150px;
    word-wrap: break-word;
}

.left {
    margin-left: auto;
    text-align: center;
    padding: 25px;
    font-size: 25px;
    background-color: transparent;
    color: white;
}

body {
    background-image: url('../images/w7.jpg');
    background-size: cover;
    height: 100vh;
    background-position: center;
    position: sticky;
    background-attachment: fixed;
}

.td{
    font-size:large;
}
</style>
</head>
<body>
    <form action="Display" method="post">
        <header>
            <div class="container">
                <nav class="navbar navbar-expand-lg navbar-white">
                    <a href="" class="navbar-brand ">Todo List</a>
                    <button type="button" data-bs-target="#mynav" data-bs-toggle="collapse" class="navbar-
toggler"><span class="navbar-toggler-icon"></span></button>
                    <div class="collapse navbar-collapse " id="mynav">
                        <ul class="navbar-nav left ">
                            <li class="nav-item">
                                <a href="@Url.Action("Mainpage")" class="nav-link">Home</a>
                            </li>

                            <li class="nav-item">
                                <a href="@Url.Action("expences")" class="nav-link">Data</a>
                            </li>
                            <li class="nav-item">
                                <a href="@Url.Action("search")" class="nav-link">Search</a>
                            </li>
                            <li class="nav-item">
                                <a href="@Url.Action("Display")" class="nav-link">Display</a>
                            </li>
                            <li class="nav-item">
                                <a href="@Url.Action("About")" class="nav-link">About</a>
                            </li>
                            <li class="nav-item">
                                <a href="@Url.Action("totalamount")" class="nav-link">Total</a>
                            </li>
                            <li class="nav-item">
                                <a href="@Url.Action("login")" class="nav-link">Logout</a>
                            </li>
                        </ul>

```

```

        </div>
    </nav>
</div>
</header>
<div class="container">
    <div class="row justify-content-center" style="padding: 15px ;">
        <div class="col-sm-7 col-lg-6">
            <input type="text" id="user1" name="userid" class="form-control text-center"
                readonly>
            <label for="time" class="" style="font-weight: bold;font-size: 20px; ">Your UserID</label>
            <label for="" id="error" class="text-danger"></label>
        </div>
    </div>
    <div class="row justify-content-center " style="padding: 15px;">

        <input type="submit" value="Submit" class="btn btn-primary col-3 col-lg-2 " />

    </div>
    <div style="text-align: center;padding: 100px 0px 0px 0px ;">
        <span class="display-4 text-dark">Your Data's </span>
    </div>
    <div class="row justify-content-center" style="padding:40px 0px 0px 0px ;">
        <div class="col-10 table-responsive">
            <table class="table table-bordered table-hover " border="1">
                <thead class="">
                    <tr>
                        <th>Shop Name</th>
                        <th>Things</th>
                        <th>Amount</th>
                        <th>Reason</th>
                        <th>Date</th>
                    </tr>
                </thead>

                <tbody>
                    @{{
                        if (ViewBag.UserData != null)
                        {
                            foreach (DataRow row in ViewBag.UserData.Rows)
                            {
                                <tr>
                                    <td>@row["ShopName"]</td>
                                    <td>@row["Things"]</td>
                                    <td>@row["Amount"]</td>
                                    <td>@row["Reason"]</td>
                                    <td>@row["BuyDate"]</td>
                                </tr>
                            }
                        }
                    }}
                </tbody>
            </table>
        </div>
    </div>
</div>
</form>

<script>
window.onload = function () {
    var v2 = localStorage.getItem('value1');
    if (v2 !== null) {
        document.getElementById('user1').value = v2;
    }
}

```



```

    }
  }
</script>
<script src="../../Scripts/bootstrap.min.js"></script>
<script src="../../Scripts/jquery-3.4.1.js"></script>
</body>
</html>

```

Insert Data:

```

@{
    Layout = null;
}

<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Insert Expences</title>
    <link rel="stylesheet" href="../../Content/bootstrap.min.css" />
    <style>
        .left {
            margin-left: auto;
            text-align: center;
            padding: 25px;
            font-size: 25px;
            background-color: transparent;
            color: white;
        }

        body {
            background-image: url('../../images/w6.jpg');
            background-size: cover;
            height: 100vh;
            background-position: center;
            background-attachment: fixed;
        }
    </style>
</head>

<body>
    <form action="expences" method="post">
        <header>
            <div class="container">
                <nav class="navbar navbar-expand-lg navbar-white ">
                    <a href="" class="navbar-brand ">Todo List</a>
                    <button type="button" data-bs-target="#mynav" data-bs-toggle="collapse" class="navbar-
toggler"><span class="navbar-toggler-icon"></span></button>
                    <div class="collapse navbar-collapse " id="mynav">
                        <ul class="navbar-nav left ">
                            <li class="nav-item">
                                <a href="@Url.Action("Mainpage")" class="nav-link">Home</a>
                            </li>

                            <li class="nav-item">
                                <a href="@Url.Action("expences")" class="nav-link">Data</a>
                            </li>

                            <li class="nav-item">
                                <a href="@Url.Action("search")" class="nav-link">Search</a>

```

```

        </li>
        <li class="nav-item">
            <a href="@Url.Action("Display")" class="nav-link">Display</a>
        </li>
        <li class="nav-item">
            <a href="@Url.Action("About")" class="nav-link">About</a>
        </li>
        <li class="nav-item">
            <a href="@Url.Action("totalamount")" class="nav-link">Total</a>
        </li>
        <li class="nav-item">
            <a href="@Url.Action("login")" class="nav-link">Logout</a>
        </li>
    </ul>

</div>
</nav>
</div>
</header>
<h2 class="text-success">@TempData["ans"]</h2>
<h2 class="text-waring">@TempData["war"]</h2>
<h2 class="text-danger">@TempData["filid"]</h2>
<div style="padding: 10px 0px 0px 0px;">
    <div class="container">
        <div class="row justify-content-center" style="padding: 15px ;">
            <div class="col-sm-7 col-lg-6">
                <input type="text" id="user1" name="user1" class="form-control text-center"
                    placeholder="" value="v" readonly>
                <label for="user1" class="" style="font-weight: bold;font-size: 20px;">User Id</label>
            </div>
        </div>
        <div class="row justify-content-center" style="padding: 15px ;">
            <div class="col-sm-7 col-lg-6">
                <input type="text" id="time" name="time" class="form-control text-center"
                    placeholder="Enter Your Date" required>
                <label for="time" class="" style="font-weight: bold;font-size: 20px;">Date and Time</label>
                <label for="" id="error" class="text-danger"></label>
            </div>
        </div>
        <div class="row justify-content-center" style="padding: 15px ;">
            <div class="col-sm-7 col-lg-6">
                <input type="text" id="shop" name="shop" class="form-control text-center"
                    placeholder="Enter Your Shop Name" required>
                <label for="shop" class="" style="font-weight: bold;font-size: 20px;">Shop Name</label>
                <label for="" id="error1" class="text-danger"></label>
            </div>
        </div>
        <div class="row justify-content-center" style="padding: 15px ;">
            <div class="col-sm-7 col-lg-6">
                <input type="text" id="things" name="things" class="form-control text-center"
                    placeholder="Enter Your Things" required>
                <label for="things" class="" style="font-weight: bold;font-size: 20px;">Things</label>
                <label for="" id="error2" class="text-danger"></label>
            </div>
        </div>
        <div class="row justify-content-center" style="padding: 15px ;">
            <div class="col-sm-7 col-lg-6">
                <input type="number" id="amount" name="amount" class="form-control text-center"
                    placeholder="Enter Your Amount" required>
                <label for="amount" class="" style="font-weight: bold;font-size: 20px;">Amount</label>
                <label for="" id="error3" class="text-danger"></label>
            </div>
        </div>
    </div>

```

```

</div>
<div class="row justify-content-center" style="padding: 15px ;">
  <div class="col-sm-7 col-lg-6">
    <input type="text" id="reason" name="reason" class="form-control text-center"
      placeholder="Enter Your Reason" required>
    <label for="username" class="" style="font-weight: bold;font-size: 20px; ">Reason</label>
    <label for="" id="error4" class="text-danger"></label>
  </div>
</div>
<div class="row justify-content-center " style="padding: 15px;">

  <button type="submit" class="btn btn-primary col-3 col-lg-2 " onclick="act()">Submit</button>
</div>

</div>
</div>
</form>

<script>
  window.onload = function () {
    var v2 = localStorage.getItem('value1');
    if (v2 !== null) {
      document.getElementById('user1').value = v2;
    }
  }
</script>
<script>
  var date1 = new Date();
  var formatdate = date1.toLocaleDateString();
  document.getElementById("time").value = formatdate;
</script>

<script src="../Scripts/bootstrap.min.js"></script>
<script src="../Scripts/jquery-3.4.1.js"></script>
</body>

</html>

```

Search:

@model protodo.Models.Expenses

@using System.Data

```

@{
  Layout = null;
}

```

<!DOCTYPE html>

<html>

<head>

```

<meta name="viewport" content="width=device-width" />
<title>Search</title>
<link rel="stylesheet" href="../Content/bootstrap.min.css" />
<style>
  thead {
    background-color: blue;
  }

```

```

.max {
    max-width: 150px;
    word-wrap: break-word;
}

.left {
    margin-left: auto;
    text-align: center;
    padding: 25px;
    font-size: 25px;
    background-color: transparent;
    color: white;
}

body {
    background-image: url('../images/w2.jpg');
    background-size: cover;
    height: 100vh;
    background-position: center;
    position: sticky;
    background-attachment: fixed;
}
</style>
</head>
<body>
    <form action="search" method="post">
        <header>
            <div class="container">
                <nav class="navbar navbar-expand-lg navbar-white">
                    <a href="" class="navbar-brand">Todo List</a>
                    <button type="button" data-bs-target="#mynav" data-bs-toggle="collapse" class="navbar-
toggler"><span class="navbar-toggler-icon"></span></button>
                    <div class="collapse navbar-collapse" id="mynav">
                        <ul class="navbar-nav left">
                            <li class="nav-item">
                                <a href="@Url.Action("Mainpage")" class="nav-link">Home</a>
                            </li>

                            <li class="nav-item">
                                <a href="@Url.Action("expences")" class="nav-link">Data</a>
                            </li>
                            <li class="nav-item">
                                <a href="@Url.Action("search")" class="nav-link">Search</a>
                            </li>
                            <li class="nav-item">
                                <a href="@Url.Action("Display")" class="nav-link">Display</a>
                            </li>
                            <li class="nav-item">
                                <a href="@Url.Action("About")" class="nav-link">About</a>
                            </li>
                            <li class="nav-item">
                                <a href="@Url.Action("totalamount")" class="nav-link">Total</a>
                            </li>
                            <li class="nav-item">
                                <a href="@Url.Action("login")" class="nav-link">Logout</a>
                            </li>
                        </ul>

                    </div>
                </nav>
            </div>
        </header>
    </form>
</body>

```

```

<h2 class="text-warning">@TempData["war"]</h2>
<div class="container">

    <div class="row justify-content-center" style="padding: 15px ;">
        <div class="col-sm-7 col-lg-6">
            <input type="text" id="user1" name="userid" class="form-control text-center"
                placeholder="" readonly>
            <label for="time" class="" style="font-weight: bold;font-size: 20px; ">Your UserId</label>

        </div>
    </div>
    <div class="row justify-content-center" style="padding: 15px ;">
        <div class="col-4 col-lg-4">
            <input type="date" id="fromdate" name="fromdate" class="form-control text-center"
                placeholder="Enter Your From Date">
            <label for="time" class="" style="font-weight: bold;font-size: 20px; "> From Date</label>
            <label for="" id="error" class="text-danger"></label>
        </div>

        <div class="col-4 col-lg-4">
            <input type="date" id="todate" name="todate" class="form-control text-center"
                placeholder="Enter Your To Date">
            <label for="time" class="" style="font-weight: bold;font-size: 20px; "> To Date</label>
            <label for="" id="error" class="text-danger"></label>
        </div>

        <div class="col-4 col-lg-4">
            <input type="text" id="shopname" name="shopname" class="form-control text-center"
                placeholder="If You Want">
            <label for="time" class="" style="font-weight: bold;font-size: 20px; ">Shop Name</label>
            <label for="" id="error" class="text-danger"></label>
        </div>
    </div>

    <div class="row justify-content-center " style="padding: 15px; ">

        <input type="submit" value="Submit" class="btn btn-primary col-3 col-lg-2 " />

    </div>
    <div style="text-align: center;padding: 100px 0px 0px 0px ;">
        <span class="display-4 text-dark">Your Data's </span>
    </div>
    <div class="row justify-content-center " style="padding:40px 0px 0px 0px ;">
        <div class="col-10 table-responsive">
            <table class="table table-bordered table-hover ">
                <thead>
                    <tr>
                        <th>Shop Name</th>
                        <th>Things</th>
                        <th>Amount</th>
                        <th>Reason</th>
                        <th>Date</th>
                    </tr>
                </thead>

                <tbody>
                    @{
                        if (ViewBag.UserData != null)
                        {
                            foreach (DataRow row in ViewBag.UserData.Rows)
                            {
                                <tr>

```

```

        <td>@row["ShopName"]</td>
        <td>@row["Things"]</td>
        <td>@row["Amount"]</td>
        <td>@row["Reason"]</td>
        <td>@row["BuyDate"]</td>
    </tr>
}
    }
}
</tbody>
</table>
</div>
</div>
</div>
</form>

<script>
    window.onload = function () {
        var v2 = localStorage.getItem('value1');
        if (v2 !== null) {
            document.getElementById('user1').value = v2;
        }
    }
</script>
<script src="../../Scripts/bootstrap.min.js"></script>
<script src="../../Scripts/jquery-3.4.1.js"></script>
</body>
</html>

```

Totoal amount:

```

@model protodo.Models.Expenses
@using System.Data
@{
    Layout = null;
}

```

```
<!DOCTYPE html>
```

```

<html>
<head>
    <meta name="viewport" content="width=device-width" />
    <title>totalamount</title>
    <link rel="stylesheet" href="../../Content/bootstrap.min.css" />
    <style>
        .left {
            margin-left: auto;
            text-align: center;
            padding: 25px;
            font-size: 25px;
            background-color: transparent;
            color: white;
        }

        body {
            background-image: url('../../images/w2.jpg');
            background-size: cover;
            height: 100vh;
            background-position: center;
            position: sticky;
            background-attachment: fixed;
        }
    </style>

```



```

</style>
</head>
<body>
  <form action="totalamount" method="post">
    <header>
      <div class="container">
        <nav class="navbar navbar-expand-lg navbar-white">
          <a href="" class="navbar-brand">Todo List</a>
          <button type="button" data-bs-target="#mynav" data-bs-toggle="collapse" class="navbar-
toggler"><span class="navbar-toggler-icon"></span></button>
          <div class="collapse navbar-collapse" id="mynav">
            <ul class="navbar-nav left">
              <li class="nav-item">
                <a href="@Url.Action("Mainpage")" class="nav-link">Home</a>
              </li>

              <li class="nav-item">
                <a href="@Url.Action("expences")" class="nav-link">Data</a>
              </li>
              <li class="nav-item">
                <a href="@Url.Action("search")" class="nav-link">Search</a>
              </li>
              <li class="nav-item">
                <a href="@Url.Action("Display")" class="nav-link">Display</a>
              </li>
              <li class="nav-item">
                <a href="@Url.Action("About")" class="nav-link">About</a>
              </li>
              <li class="nav-item">
                <a href="@Url.Action("totalamount")" class="nav-link">Total</a>
              </li>
              <li class="nav-item">
                <a href="@Url.Action("login")" class="nav-link">Logout</a>
              </li>

            </ul>

          </div>
        </nav>
      </div>
      <div class="container">
        <div class="row justify-content-center" style="padding: 15px;">
          <div class="col-sm-7 col-lg-6">
            <input type="text" id="user1" name="userid" class="form-control text-center"
placeholder="" readonly>
            <label for="time" class="" style="font-weight: bold;font-size: 20px;">Your UserId</label>

          </div>
          <div class="row justify-content-center" style="padding:5px;">

            <label class="col-11 col-lg-8 offset-1 offset-lg-3">If You Want to See Uptodate Total Amount<a
class="" href="@Url.Action("total")">Clickme</a></label>

          </div>
          <div class="row justify-content-center" style="padding: 15px;">
            <div class="col-4 col-lg-4">
              <input type="date" id="fromdate" name="fromdate" class="form-control text-center"
placeholder="Enter Your From Date" required>
              <label for="time" class="" style="font-weight: bold;font-size: 20px;"> From Date</label>
              <label for="" id="error" class="text-danger"></label>
            </div>

```

```

        <div class="col-4 col-lg-4">
            <input type="date" id="todate" name="todate" class="form-control text-center"
                placeholder="Enter Your To Date" required>
            <label for="time" class="" style="font-weight: bold;font-size: 20px; ">To Date</label>
            <label for="" id="error" class="text-danger"></label>
        </div>
    </div>

    <div class="row justify-content-center " style="padding: 15px;">

        <input type="submit" value="Submit" class="btn btn-primary col-3 col-lg-2 " />

    </div>
    <div class="row justify-content-center">

        @if (ViewBag.Userdata != null)
        {
            <span class="col-8 col-lg-4 offset-lg-2" style="font-size:30px;">Total Amount:
@ViewBag.Userdata.Rows[0][0] Rs.</span>
        }
        else
        {
            <h1>@ViewBag.ErrorMessage</h1>
        }
    </div>

</div>
</form>

<script>
window.onload = function () {
    var v2 = localStorage.getItem('value1');
    if (v2 !== null) {
        document.getElementById('user1').value = v2;
    }
}
</script>
<script src="~/Scripts/bootstrap.min.js"></script>
<script src="~/Scripts/jquery-3.4.1.js"></script>
</body>
</html>

```

Overall Totoal:

```
@model protodo.Models.Expenses
```

```
@using System.Data
```

```
@{
    Layout = null;
}
```

```
<!DOCTYPE html>
```

```

<html>
<head>
    <meta name="viewport" content="width=device-width" />
    <title>totalamount</title>
    <link rel="stylesheet" href="~/Content/bootstrap.min.css" />
    <style>
        .left {

```

```

        margin-left: auto;
        text-align: center;
        padding: 25px;
        font-size: 25px;
        background-color: transparent;
        color: white;
    }

    body {
        background-image: url('../images/w2.jpg');
        background-size: cover;
        height: 100vh;
        background-position: center;
        position: sticky;
        background-attachment: fixed;
    }
</style>
</head>
<body>
    <form action="total" method="post">
        <header>
            <div class="container">
                <nav class="navbar navbar-expand-lg navbar-white">
                    <a href="" class="navbar-brand">Todo List</a>
                    <button type="button" data-bs-target="#mynav" data-bs-toggle="collapse" class="navbar-
toggler"><span class="navbar-toggler-icon"></span></button>
                    <div class="collapse navbar-collapse" id="mynav">
                        <ul class="navbar-nav left">
                            <li class="nav-item">
                                <a href="@Url.Action("Mainpage")" class="nav-link">Home</a>
                            </li>

                            <li class="nav-item">
                                <a href="@Url.Action("expences")" class="nav-link">Data</a>
                            </li>
                            <li class="nav-item">
                                <a href="@Url.Action("search")" class="nav-link">Search</a>
                            </li>
                            <li class="nav-item">
                                <a href="@Url.Action("Display")" class="nav-link">Display</a>
                            </li>
                            <li class="nav-item">
                                <a href="@Url.Action("About")" class="nav-link">About</a>
                            </li>
                            <li class="nav-item">
                                <a href="@Url.Action("totalamount")" class="nav-link">Total</a>
                            </li>
                            <li class="nav-item">
                                <a href="@Url.Action("login")" class="nav-link">Logout</a>
                            </li>

                        </ul>

                    </div>
                </nav>
            </div>
            <div class="container">
                <div class="row justify-content-center" style="padding: 15px ;">
                    <div class="col-sm-7 col-lg-6">
                        <input type="text" id="user1" name="userid" class="form-control text-center"
placeholder="" readonly>
                        <label for="time" class="" style="font-weight: bold;font-size: 20px; ">Your UserId</label>
                    </div>
                </div>
            </div>
        </header>
    </form>
</body>
</html>

```

```

    </div>
</div>

<div class="row justify-content-center " style="padding: 15px;">
    <input type="submit" value="Submit" class="btn btn-primary col-3 col-lg-2 " />

</div>
<div class="row justify-content-center">

    @if (ViewBag.Userdata != null)
    {
        <span class="col-8 col-lg-4 offset-lg-1" style="font-size:30px;">Total Amount:
    @ViewBag.Userdata.Rows[0][0] Rs.</span>
    }
    else
    {
        <h1>@ViewBag.ErrorMessage</h1>
    }

</div>

</div>
</form>

<script>
window.onload = function () {
    var v2 = localStorage.getItem('value1');
    if (v2 !== null) {
        document.getElementById('user1').value = v2;
    }
}
</script>
<script src="../../Scripts/bootstrap.min.js"></script>
<script src="../../Scripts/jquery-3.4.1.js"></script>
</body>
</html>

```