


DBS Lab 9 Tasks

1)

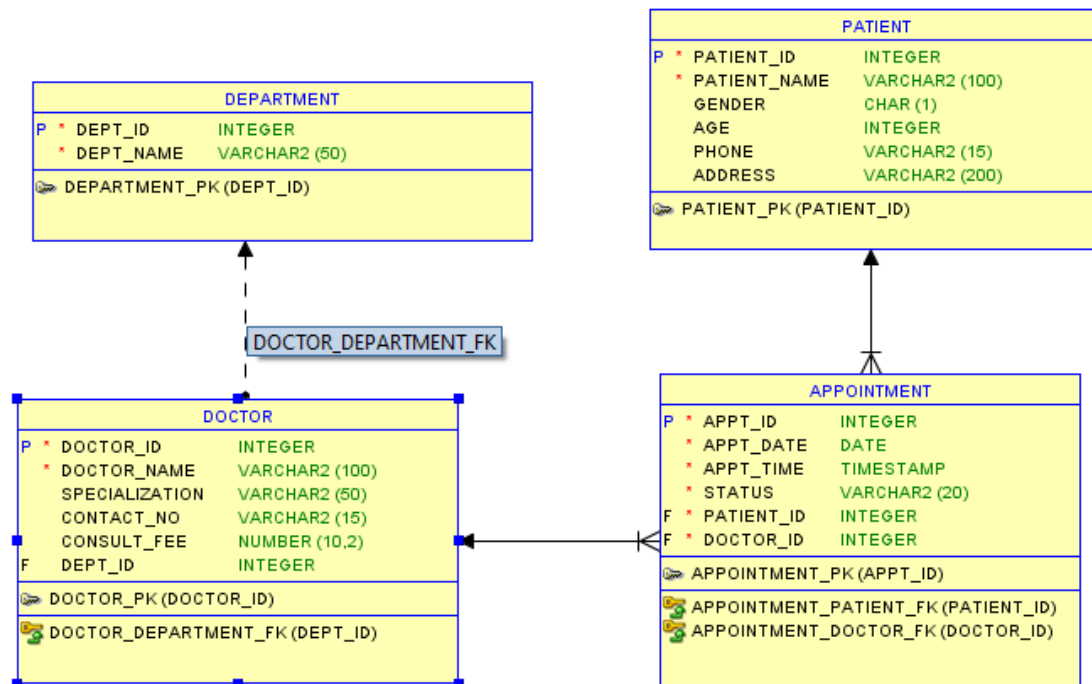

DDL

```

-- Generated by Oracle SQL Developer Data Modeler 18.1.0.082.1041
-- at:      2026-04-29 20:33:13 PKT
-- site:    Oracle Database 11g
-- type:    Oracle Database 11g
  
```

```

CREATE TABLE appointment (
    appt_id      INTEGER NOT NULL,
    appt_date    DATE NOT NULL,
    appt_time    TIMESTAMP NOT NULL,
  
```

```
        status          VARCHAR2(20) NOT NULL,  
        patient_id      INTEGER NOT NULL,  
        doctor_id       INTEGER NOT NULL  
    );
```

```
ALTER TABLE appointment  
    ADD CONSTRAINT chk_appointment_status CHECK ( status IN (  
        'Scheduled',  
        'Completed',  
        'Cancelled'  
    ) );
```

```
ALTER TABLE appointment ADD CONSTRAINT appointment_pk PRIMARY KEY ( appt_id  
);
```

```
CREATE TABLE department (  
    dept_id      INTEGER NOT NULL,  
    dept_name    VARCHAR2(50) NOT NULL  
);
```

```
ALTER TABLE department ADD CONSTRAINT department_pk PRIMARY KEY ( dept_id );
```

```
CREATE TABLE doctor (  
    doctor_id      INTEGER NOT NULL,  
    doctor_name    VARCHAR2(100) NOT NULL,  
    specialization  VARCHAR2(50),  
    contact_no     VARCHAR2(15),  
    consult_fee    NUMBER(10,2),  
    dept_id        INTEGER  
);
```

```
ALTER TABLE doctor ADD CONSTRAINT doctor_pk PRIMARY KEY ( doctor_id );
```

```
CREATE TABLE patient (  
    patient_id    INTEGER NOT NULL,  
    patient_name  VARCHAR2(100) NOT NULL,  
    gender        CHAR(1),  
    age          INTEGER,  
    phone        VARCHAR2(15),  
    address       VARCHAR2(200)  
);
```

```
ALTER TABLE patient  
    ADD CONSTRAINT patient_chk_gender CHECK ( gender IN (  
        'M',  
        'F',  
        'O'  
    ) );
```

```
ALTER TABLE patient ADD CONSTRAINT patient_pk PRIMARY KEY ( patient_id );
```

```
ALTER TABLE appointment  
    ADD CONSTRAINT appointment_doctor_fk FOREIGN KEY ( doctor_id )  
        REFERENCES doctor ( doctor_id );
```

```
ALTER TABLE appointment  
    ADD CONSTRAINT appointment_patient_fk FOREIGN KEY ( patient_id )  
        REFERENCES patient ( patient_id );
```

```
ALTER TABLE doctor  
    ADD CONSTRAINT doctor_department_fk FOREIGN KEY ( dept_id )  
        REFERENCES department ( dept_id );
```

-- Oracle SQL Developer Data Modeler Summary Report:

--

-- CREATE TABLE	4
-- CREATE INDEX	0
-- ALTER TABLE	9
-- CREATE VIEW	0
-- ALTER VIEW	0
-- CREATE PACKAGE	0
-- CREATE PACKAGE BODY	0
-- CREATE PROCEDURE	0
-- CREATE FUNCTION	0
-- CREATE TRIGGER	0
-- ALTER TRIGGER	0
-- CREATE COLLECTION TYPE	0
-- CREATE STRUCTURED TYPE	0
-- CREATE STRUCTURED TYPE BODY	0
-- CREATE CLUSTER	0
-- CREATE CONTEXT	0
-- CREATE DATABASE	0
-- CREATE DIMENSION	0
-- CREATE DIRECTORY	0
-- CREATE DISK GROUP	0
-- CREATE ROLE	0
-- CREATE ROLLBACK SEGMENT	0
-- CREATE SEQUENCE	0
-- CREATE MATERIALIZED VIEW	0
-- CREATE SYNONYM	0
-- CREATE TABLESPACE	0
-- CREATE USER	0
--	
-- DROP TABLESPACE	0
-- DROP DATABASE	0

```
--
-- REDACTION POLICY                                0
--
-- ORDS DROP SCHEMA                                0
-- ORDS ENABLE SCHEMA                              0
-- ORDS ENABLE OBJECT                              0
--
-- ERRORS                                           0
-- WARNINGS                                         0
```

Queries

```
119
120 SELECT A.APPT_ID, P.PATIENT_NAME, D.DOCTOR_NAME, DP.DEPT_NAME, A.APPT_DATE FROM APPOINTMENT A
121 JOIN PATIENT P
122     ON A.PATIENT_ID = P.PATIENT_ID
123 JOIN DOCTOR D
124     ON A.DOCTOR_ID = D.DOCTOR_ID
125 JOIN DEPARTMENT DP
126     ON D.DEPT_ID = DP.DEPT_ID;
```

Script Output x Query Result x

SQL | All Rows Fetched: 0 in 0.005 seconds

APPT_ID	PATIENT_...	DOCTOR_...	DEPT_NAME	APPT_DATE
---------	-------------	------------	-----------	-----------


```
127
128 SELECT D.DOCTOR_ID, D.DOCTOR_NAME, D.SPECIALIZATION, D.CONSULT_FEE
129 FROM DOCTOR D
130 JOIN DEPARTMENT DP
131     ON DP.DEPT_ID = D.DEPT_ID
132 WHERE DP.DEPT_ID = D.DEPT_ID AND DP.DEPT_NAME = 'Cardiology';
```

Script Output x Query Result x

SQL | All Rows Fetched: 0 in 0.002 seconds

DOCTOR_ID	DOCTOR_...	SPECIALI...	CONSULT...
-----------	------------	-------------	------------

2)

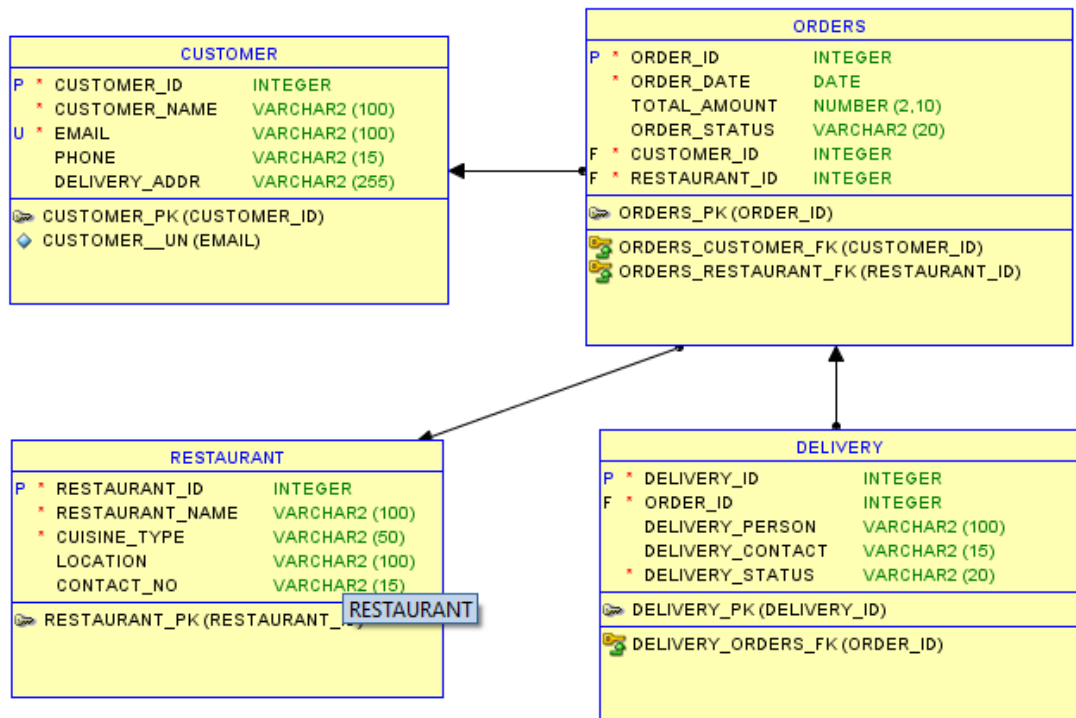

DDL

-- Generated by Oracle SQL Developer Data Modeler 18.1.0.082.1041

-- at: 2026-04-29 21:29:12 PKT

-- site: Oracle Database 11g

-- type: Oracle Database 11g

```

CREATE TABLE customer (
    customer_id    INTEGER NOT NULL,
    customer_name  VARCHAR2(100) NOT NULL,
    email          VARCHAR2(100) NOT NULL,
    phone          VARCHAR2(15),
    delivery_addr  VARCHAR2(255)
);
  
```

```
ALTER TABLE customer ADD CONSTRAINT customer_pk PRIMARY KEY ( customer_id );
```

```
ALTER TABLE customer ADD CONSTRAINT customer__un UNIQUE ( email );
```

```
CREATE TABLE delivery (  
    delivery_id          INTEGER NOT NULL,  
    order_id             INTEGER NOT NULL,  
    delivery_person       VARCHAR2(100),  
    delivery_contact      VARCHAR2(15),  
    delivery_status       VARCHAR2(20) NOT NULL  
);
```

```
ALTER TABLE delivery  
    ADD CONSTRAINT chk_delivery_status CHECK ( delivery_status IN (  
        'Assigned',  
        'Transit',  
        'Delivered'  
    ) );
```

```
ALTER TABLE delivery ADD CONSTRAINT delivery_pk PRIMARY KEY ( delivery_id );
```

```
CREATE TABLE orders (  
    order_id             INTEGER NOT NULL,  
    order_date           DATE DEFAULT SYSDATE NOT NULL,  
    total_amount         NUMBER(2,10),  
    order_status         VARCHAR2(20),  
    customer_id          INTEGER NOT NULL,  
    restaurant_id        INTEGER NOT NULL  
);
```

```
ALTER TABLE orders ADD CONSTRAINT orders_pk PRIMARY KEY ( order_id );
```

```

CREATE TABLE restaurant (
    restaurant_id    INTEGER NOT NULL,
    restaurant_name  VARCHAR2(100) NOT NULL,
    cuisine_type     VARCHAR2(50) NOT NULL,
    location         VARCHAR2(100),
    contact_no       VARCHAR2(15)
);

```

```

ALTER TABLE restaurant ADD CONSTRAINT restaurant_pk PRIMARY KEY (
restaurant_id );

```

```

ALTER TABLE delivery
    ADD CONSTRAINT delivery_orders_fk FOREIGN KEY ( order_id )
        REFERENCES orders ( order_id );

```

```

ALTER TABLE orders
    ADD CONSTRAINT orders_customer_fk FOREIGN KEY ( customer_id )
        REFERENCES customer ( customer_id );

```

```

ALTER TABLE orders
    ADD CONSTRAINT orders_restaurant_fk FOREIGN KEY ( restaurant_id )
        REFERENCES restaurant ( restaurant_id );

```

-- Oracle SQL Developer Data Modeler Summary Report:

--

-- CREATE TABLE	4
-- CREATE INDEX	0
-- ALTER TABLE	9
-- CREATE VIEW	0
-- ALTER VIEW	0

-- CREATE PACKAGE	0
-- CREATE PACKAGE BODY	0
-- CREATE PROCEDURE	0
-- CREATE FUNCTION	0
-- CREATE TRIGGER	0
-- ALTER TRIGGER	0
-- CREATE COLLECTION TYPE	0
-- CREATE STRUCTURED TYPE	0
-- CREATE STRUCTURED TYPE BODY	0
-- CREATE CLUSTER	0
-- CREATE CONTEXT	0
-- CREATE DATABASE	0
-- CREATE DIMENSION	0
-- CREATE DIRECTORY	0
-- CREATE DISK GROUP	0
-- CREATE ROLE	0
-- CREATE ROLLBACK SEGMENT	0
-- CREATE SEQUENCE	0
-- CREATE MATERIALIZED VIEW	0
-- CREATE SYNONYM	0
-- CREATE TABLESPACE	0
-- CREATE USER	0
--	
-- DROP TABLESPACE	0
-- DROP DATABASE	0
--	
-- REDACTION POLICY	0
--	
-- ORDS DROP SCHEMA	0
-- ORDS ENABLE SCHEMA	0
-- ORDS ENABLE OBJECT	0
--	

-- ERRORS 0

-- WARNINGS 0

Queries

```
248 SELECT C.CUSTOMER_NAME, R.RESTAURANT_NAME, O.TOTAL_AMOUNT, O.ORDER_STATUS
249 FROM ORDERS O
250 JOIN CUSTOMER C
251     ON C.CUSTOMER_ID = O.CUSTOMER_ID
252 JOIN RESTAURANT R
253     ON R.RESTAURANT_ID = O.RESTAURANT_ID
254 ;
```

Script Output x Query Result x

SQL | All Rows Fetched: 0 in 0.005 seconds

CUSTOMER...	RESTAUR...	TOTAL_A...	ORDER_S...
-------------	------------	------------	------------


```
255
256 SELECT O.ORDER_ID, C.CUSTOMER_NAME, D.DELIVERY_PERSON FROM ORDERS O
257 JOIN CUSTOMER C
258     ON C.CUSTOMER_ID = O.CUSTOMER_ID
259 JOIN DELIVERY D
260     ON O.ORDER_ID = D.ORDER_ID
261 WHERE D.DELIVERY_STATUS = 'Pending';
```

Script Output x Query Result x

SQL | All Rows Fetched: 0 in 0.002 seconds

ORDER_ID	CUSTOMER...	DELIVERY...
----------	-------------	-------------

3)

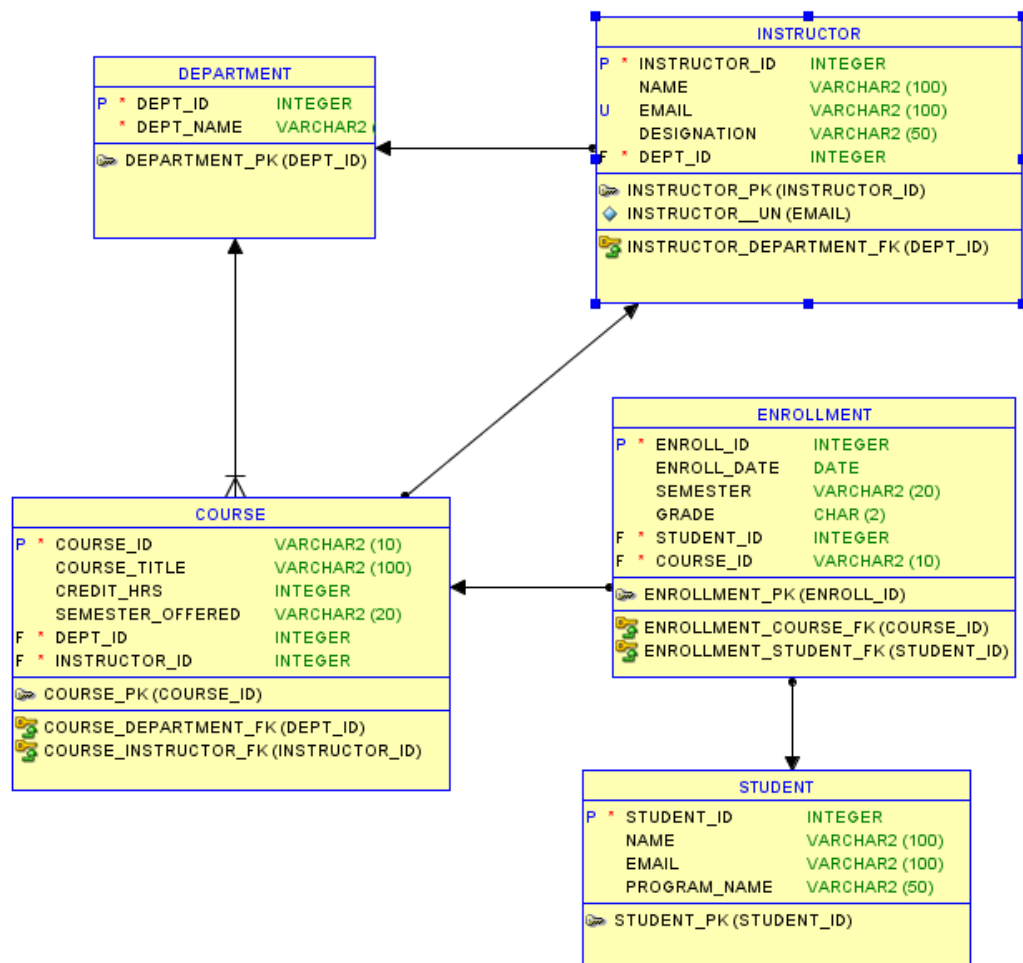

DDL

-- Generated by Oracle SQL Developer Data Modeler 18.1.0.082.1041

-- at: 2026-04-29 21:53:47 PKT

-- site: Oracle Database 11g

-- type: Oracle Database 11g

```

CREATE TABLE course (
    course_id          VARCHAR2(10) NOT NULL,
    course_title       VARCHAR2(100),
    credit_hrs         INTEGER,
    semester_offered   VARCHAR2(20),
  
```

```
dept_id          INTEGER NOT NULL,  
instructor_id    INTEGER NOT NULL  
);
```

```
ALTER TABLE course ADD CONSTRAINT course_pk PRIMARY KEY ( course_id );
```

```
CREATE TABLE department (  
    dept_id      INTEGER NOT NULL,  
    dept_name    VARCHAR2(100) NOT NULL  
);
```

```
ALTER TABLE department ADD CONSTRAINT department_pk PRIMARY KEY ( dept_id );
```

```
CREATE TABLE enrollment (  
    enroll_id    INTEGER NOT NULL,  
    enroll_date  DATE,  
    semester     VARCHAR2(20),  
    grade        CHAR(2),  
    student_id   INTEGER NOT NULL,  
    course_id    VARCHAR2(10) NOT NULL  
);
```

```
ALTER TABLE enrollment ADD CONSTRAINT enrollment_pk PRIMARY KEY ( enroll_id  
);
```

```
CREATE TABLE instructor (  
    instructor_id INTEGER NOT NULL,  
    name          VARCHAR2(100),  
    email         VARCHAR2(100),  
    designation   VARCHAR2(50),  
    dept_id       INTEGER NOT NULL  
);
```

```
ALTER TABLE instructor ADD CONSTRAINT instructor_pk PRIMARY KEY (
instructor_id );
```

```
ALTER TABLE instructor ADD CONSTRAINT instructor__un UNIQUE ( email );
```

```
CREATE TABLE student (
    student_id    INTEGER NOT NULL,
    name          VARCHAR2(100),
    email         VARCHAR2(100),
    program_name  VARCHAR2(50)
);
```

```
ALTER TABLE student ADD CONSTRAINT student_pk PRIMARY KEY ( student_id );
```

```
ALTER TABLE course
    ADD CONSTRAINT course_department_fk FOREIGN KEY ( dept_id )
        REFERENCES department ( dept_id );
```

```
ALTER TABLE course
    ADD CONSTRAINT course_instructor_fk FOREIGN KEY ( instructor_id )
        REFERENCES instructor ( instructor_id );
```

```
ALTER TABLE enrollment
    ADD CONSTRAINT enrollment_course_fk FOREIGN KEY ( course_id )
        REFERENCES course ( course_id );
```

```
ALTER TABLE enrollment
    ADD CONSTRAINT enrollment_student_fk FOREIGN KEY ( student_id )
        REFERENCES student ( student_id );
```

```
ALTER TABLE instructor
    ADD CONSTRAINT instructor_department_fk FOREIGN KEY ( dept_id )
        REFERENCES department ( dept_id );
```

-- Oracle SQL Developer Data Modeler Summary Report:

--

-- CREATE TABLE	5
-- CREATE INDEX	0
-- ALTER TABLE	11
-- CREATE VIEW	0
-- ALTER VIEW	0
-- CREATE PACKAGE	0
-- CREATE PACKAGE BODY	0
-- CREATE PROCEDURE	0
-- CREATE FUNCTION	0
-- CREATE TRIGGER	0
-- ALTER TRIGGER	0
-- CREATE COLLECTION TYPE	0
-- CREATE STRUCTURED TYPE	0
-- CREATE STRUCTURED TYPE BODY	0
-- CREATE CLUSTER	0
-- CREATE CONTEXT	0
-- CREATE DATABASE	0
-- CREATE DIMENSION	0
-- CREATE DIRECTORY	0
-- CREATE DISK GROUP	0
-- CREATE ROLE	0
-- CREATE ROLLBACK SEGMENT	0
-- CREATE SEQUENCE	0
-- CREATE MATERIALIZED VIEW	0
-- CREATE SYNONYM	0
-- CREATE TABLESPACE	0
-- CREATE USER	0

```
--
-- DROP TABLESPACE                                0
-- DROP DATABASE                                    0
--
-- REDACTION POLICY                                  0
--
-- ORDS DROP SCHEMA                                  0
-- ORDS ENABLE SCHEMA                                0
-- ORDS ENABLE OBJECT                                0
--
-- ERRORS                                             0
-- WARNINGS                                           0
```

Queries

```
385 SELECT S.NAME, C.COURSE_TITLE, I.NAME FROM ENROLLMENT E
386 JOIN STUDENT S
387     ON S.STUDENT_ID = E.STUDENT_ID
388 JOIN COURSE C
389     ON C.COURSE_ID = E.COURSE_ID
390 JOIN INSTRUCTOR I
391     ON I.INSTRUCTOR_ID = C.INSTRUCTOR_ID;
```

Script Output x Query Result x

SQL | All Rows Fetched: 0 in 0.004 seconds

NAME	COURSE_...	NAME_1
------	------------	--------

```
393 SELECT C.COURSE_TITLE, C.COURSE_TITLE, I.NAME FROM COURSE C
394 JOIN INSTRUCTOR I
395     ON I.INSTRUCTOR_ID = C.INSTRUCTOR_ID
396 WHERE C.SEMESTER_OFFERED = 'Fall 2025';
```

Script Output x Query Result x

SQL | All Rows Fetched: 0 in 0.002 seconds

COURSE_...	COURSE_...	NAME
------------	------------	------