


Step 1: create telnet for remote access

```
ROUTER#conf t
Enter configuration commands, one per line. End with CNTL/Z.
ROUTER(config)#int eth 0/0
ROUTER(config-if)#ip add 50.0.0.1 255.0.0.0
ROUTER(config-if)#no sh
ROUTER(config-if)#exit
ROUTER(config)#line vty 0 1
ROUTER(config-line)#transport input telnet
^
% Invalid input detected at '^' marker.

ROUTER(config-line)#transport input telnet
ROUTER(config-line)#password telnet
ROUTER(config-line)#login
ROUTER(config-line)#exit
ROUTER(config)#
```

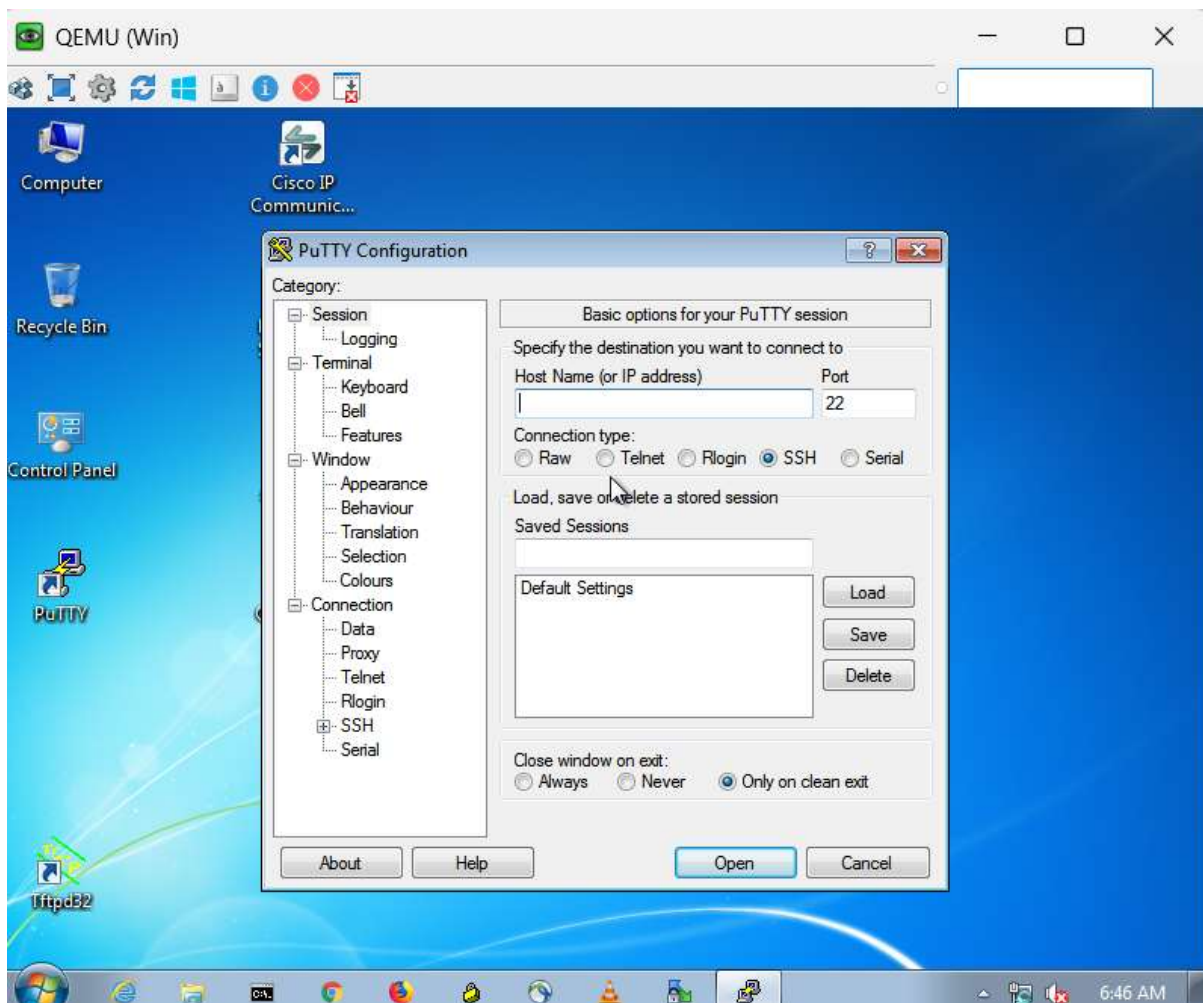


Step 2 : create ssh connection

```
ROUTER(config)#hostname ssh
ssh(config)#ip domain name ssh.com
ssh(config)#ip ssh version 2
Please create RSA keys to enable SSH (and of atleast 768 bits for SSH v2).
ssh(config)#crypto key generate rsa modulus 2048
*
% Invalid input detected at '^' marker.

ssh(config)#crypto key generate rsa modulus 2048
The name for the keys will be: ssh.ssh.com

% The key modulus size is 2048 bits
% Generating 2048 bit RSA keys, keys will be non-exportable...
[OK] (elapsed time was 10 seconds)

ssh(config)#
*Jul 19 06:51:28.718: %SSH-5-ENABLED: SSH 2.0 has been enabled
ssh(config)#ip ssh version 2
ssh(config)#username akilan password akilan
ssh(config)#line vty 0 4
ssh(config-line)#transport input ssh
ssh(config-line)#login local
ssh(config-line)#exit
ssh(config)#exit
ssh#
*Jul 19 06:54:00.260: %SYS-5-CONFIG_I: Configured from console by console
ssh#
```

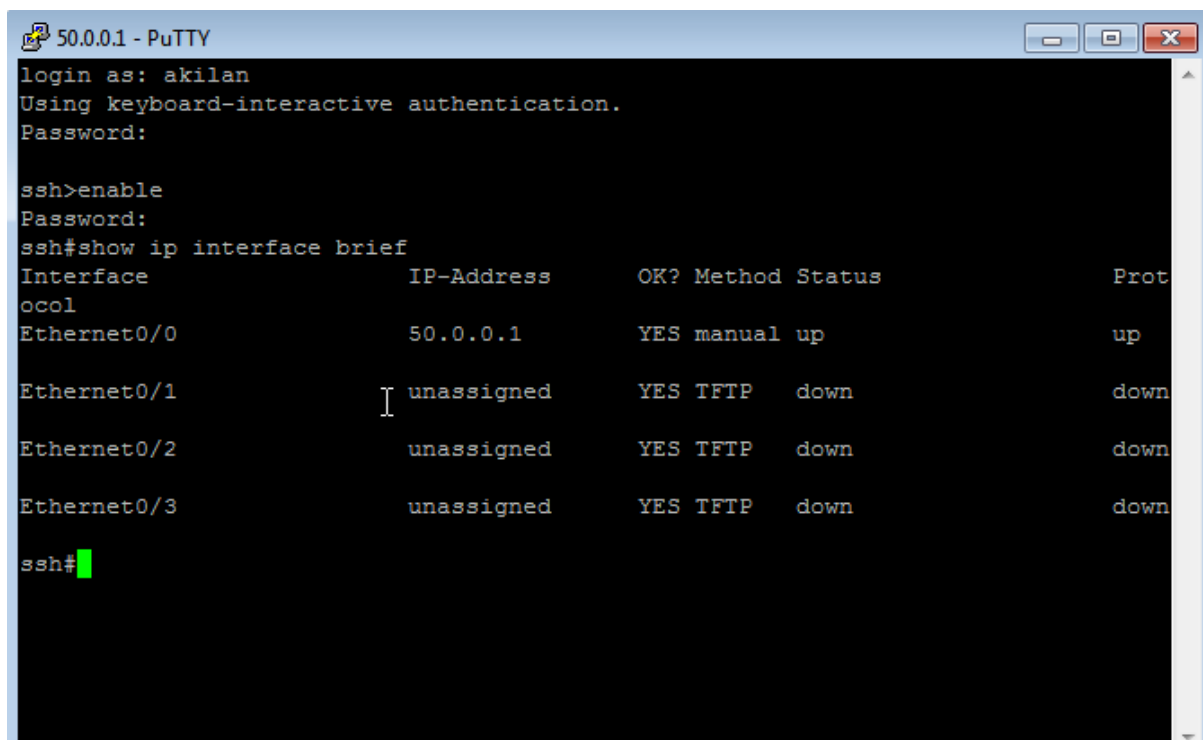

The screenshot shows a PuTTY terminal window titled "50.0.0.1 - PuTTY". The terminal output shows the login process for user "akilan" using keyboard-interactive authentication. After logging in, the user enters "enable" to enter privileged mode. Then, the user enters "show ip interface brief" to display the status of the network interfaces. The output shows four interfaces: Ethernet0/0 (50.0.0.1, up), Ethernet0/1 (unassigned, down), Ethernet0/2 (unassigned, down), and Ethernet0/3 (unassigned, down). The terminal prompt is "ssh#".

```
50.0.0.1 - PuTTY
login as: akilan
Using keyboard-interactive authentication.
Password:

ssh>enable
Password:
ssh#show ip interface brief
Interface                IP-Address      OK? Method Status  Prot
ocol
Ethernet0/0              50.0.0.1        YES manual up      up
Ethernet0/1              unassigned      YES TFTP  down    down
Ethernet0/2              unassigned      YES TFTP  down    down
Ethernet0/3              unassigned      YES TFTP  down    down

ssh#
```