


⇒ Attention Mechanism

* Along with "context Vector" we give "additional content".

⇒ Attention Mechanism Sequence to Sequence Network.

⇒ Encoder Decoder Seq2Seq:

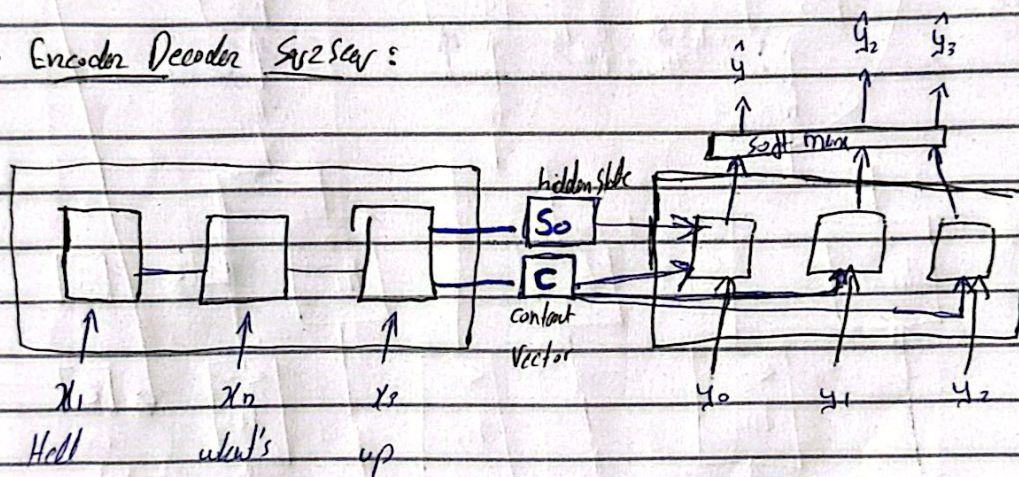


* as Sentence length increases the Context Vector has more info of recent timestamps & not far time timestamps.

↳ Attention Seq2Seq Neural Network.

→ Use Bi-Directional LSTM.


* $a_{ij} * h_i \Rightarrow$ how much context of h_i should I consider

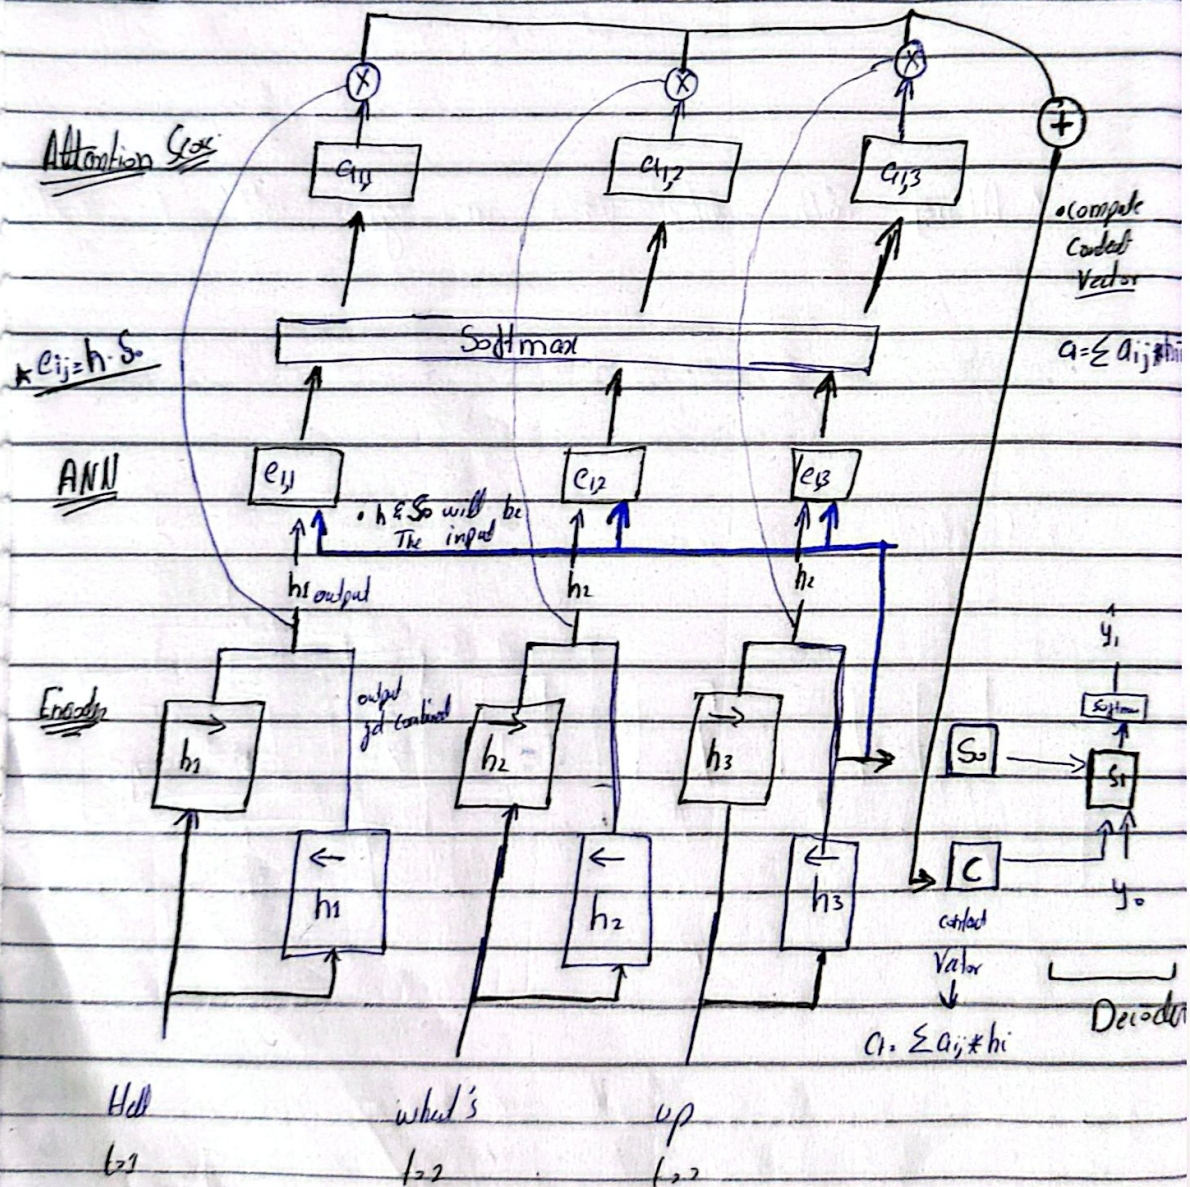

* This is the Attention Mechanism.

* if in Decoder I want 2nd Node or 3rd Node etc.

* for 2nd Node S_2 : Right Now S_0 is given to "ANN" to form e_{ij} along with " h_i ".
Now for S_2 instead of S_0 we will give S_1 along with " h_i " to form "ANN" & then using that generate Context " C_2 ".

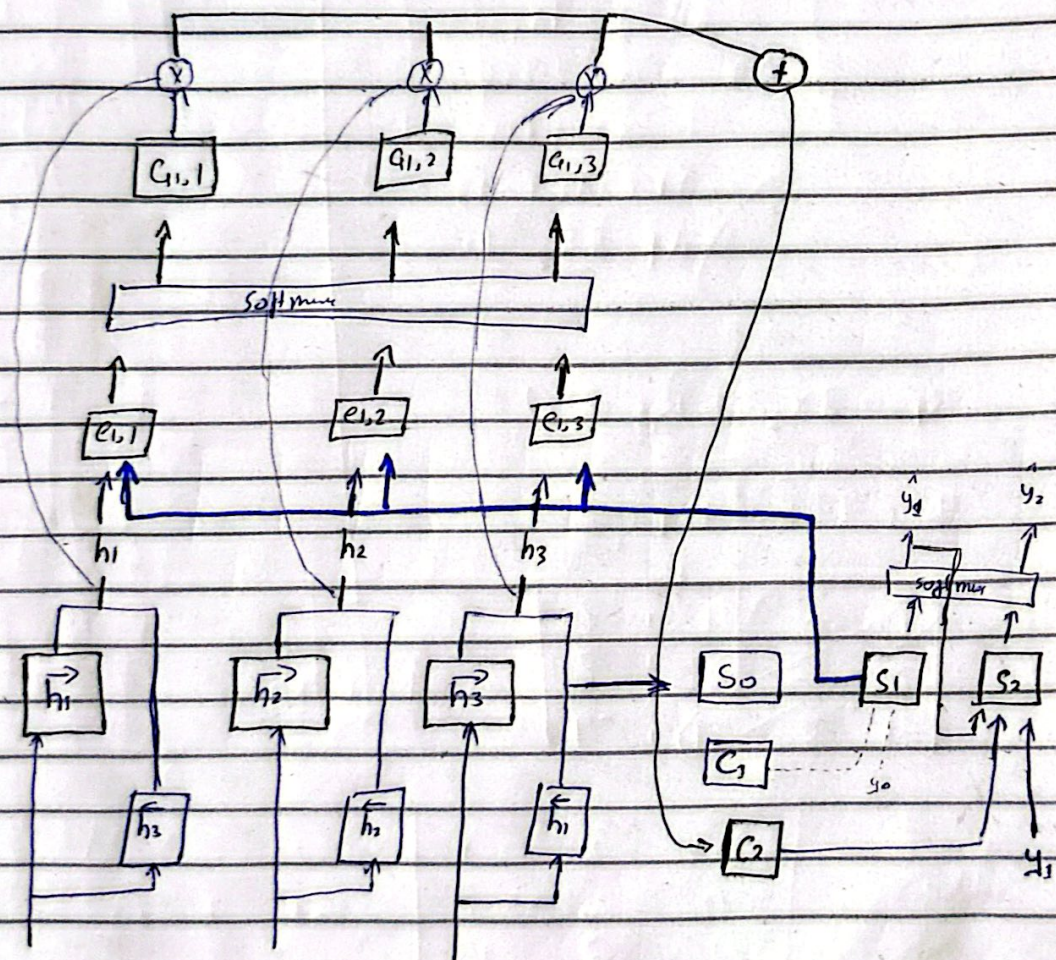

* In previous S_0 was used To generate Context

* Here we used S_1 To generate Context.