Release notes: ENEO IP Integration

Release Note: ENEO IP Device Integration

New Integration:

- A new device type **ENEO IP** has been integrated into **Genesis**.
- Users can now add **ENEO IP devices** by providing the following details:
  - **IP Address**
  - **HTTP/HTTPS Port**
  - **Username**
  - **Password**

Key Points:

- The name **ENEO IP** indicates that the device is added to Genesis using its **IP address**.
- Once added, these devices can be managed and monitored like other supported device types in Genesis.

Note: If user faces any issues related to stream, ensure the following settings are done in the web client of the ENEO IP devices

Step 1: Login to the webclient of the device in the browser
Step 2: Validate the following settings of the device

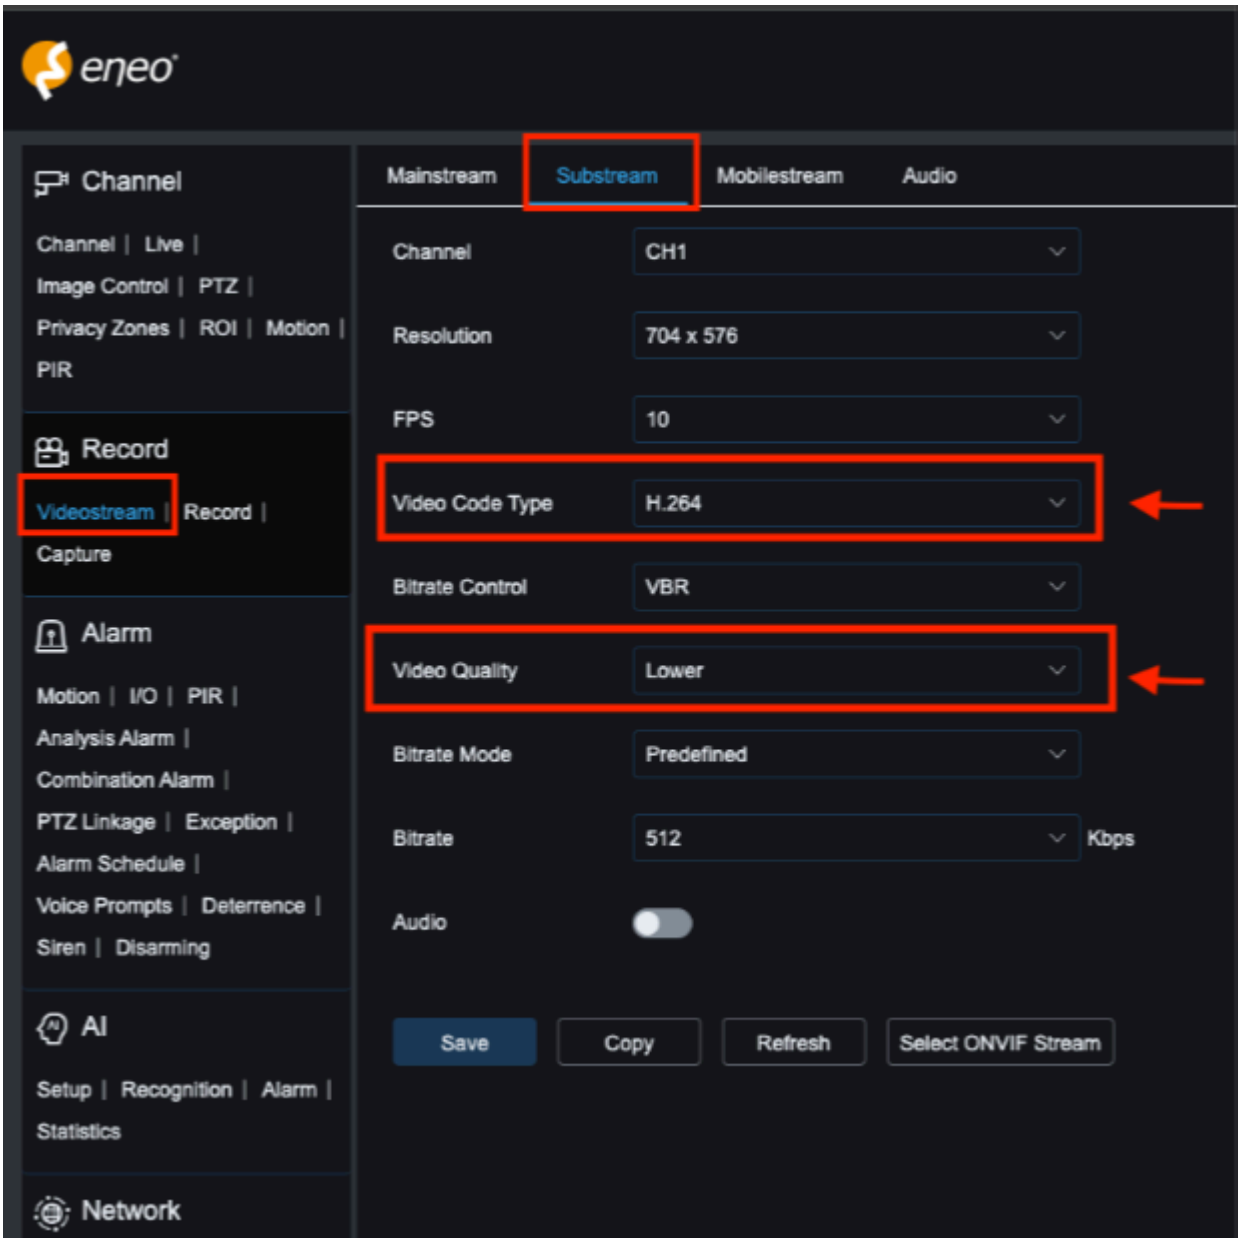
eneo
Channel
Channel | Live |
Image Control | PTZ |
Privacy Zones | ROI | Motion |
PIR
Record
Videostream | Record |
Capture
Alarm
Motion | I/O | PIR |
Analysis Alarm |
Combination Alarm |
PTZ Linkage | Exception |
Alarm Schedule |
Voice Prompts | Deterrence |
Siren | Disarming
AI
Setup | Recognition | Alarm |
Statistics
Network
Mainstream
Substream
Mobilestream
Audio
Channel
CH1
Resolution
704 x 576
FPS
10
Video Code Type
H.264
Bitrate Control
VBR
Video Quality
Lower
Bitrate Mode
Predefined
Bitrate
512
Kbps
Audio
Save
Copy
Refresh
Select ONVIF Stream

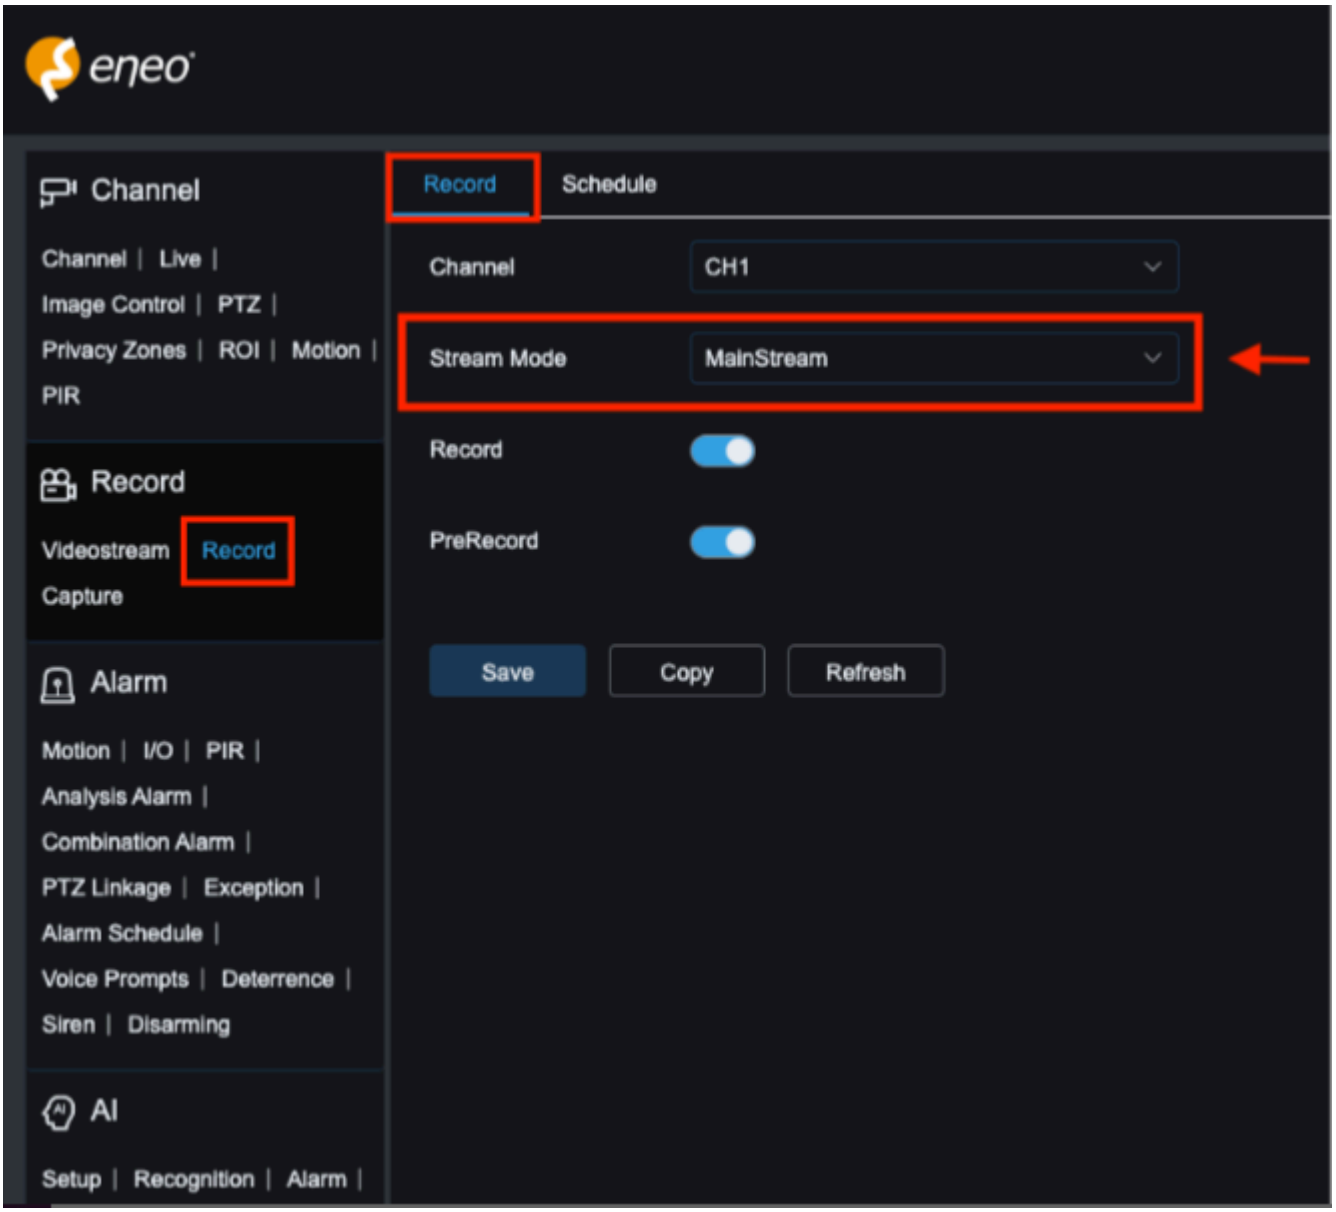
eneo
Channel
Channel | Live |
Image Control | PTZ |
Privacy Zones | ROI | Motion |
PIR
Record
Videostream
Record
Capture
Alarm
Motion | I/O | PIR |
Analysis Alarm |
Combination Alarm |
PTZ Linkage | Exception |
Alarm Schedule |
Voice Prompts | Deterrence |
Siren | Disarming
AI
Setup | Recognition | Alarm |
Record
Schedule
Channel
CH1
Stream Mode
MainStream
Record
PreRecord
Save
Copy
Refresh

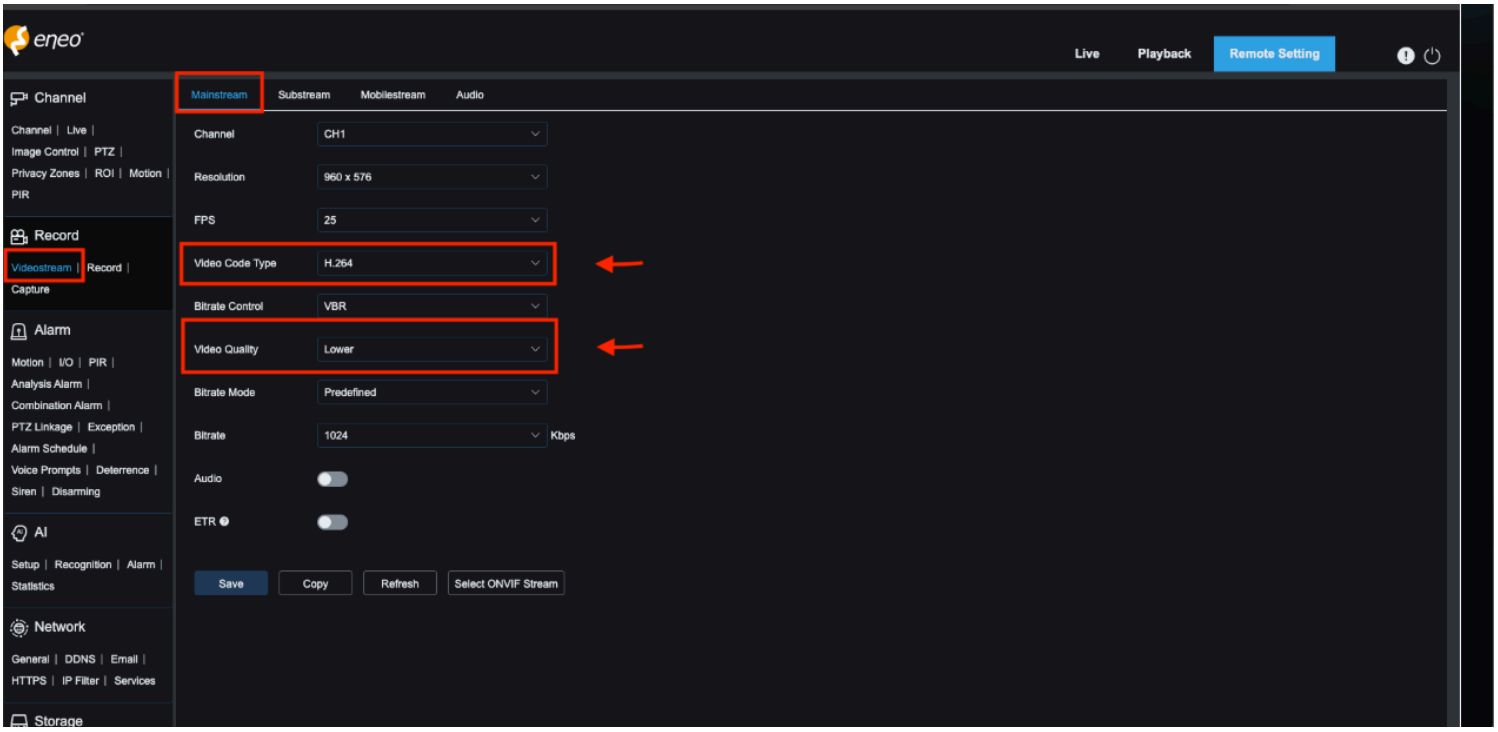
eneo
Live
Playback
Remote Setting
Channel
Channel | Live |
Image Control | PTZ |
Privacy Zones | ROI | Motion |
PIR
Record
Videostream | Record |
Capture
Alarm
Motion | I/O | PIR |
Analysis Alarm |
Combination Alarm |
PTZ Linkage | Exception |
Alarm Schedule |
Voice Prompts | Deterrence |
Siren | Disarming
AI
Setup | Recognition | Alarm |
Statistics
Network
General | DDNS | Email |
HTTPS | IP Filter | Services
Storage
Mainstream
Substream
Mobilestream
Audio
Channel
CH1
Resolution
960 x 576
FPS
25
Video Code Type
H.264
Bitrate Control
VBR
Video Quality
Lower
Bitrate Mode
Predefined
Bitrate
1024
Kbps
Audio
ETR
Save
Copy
Refresh
Select ONVIF Stream

Steps to configure ENEO IP device in genesis

Step 1:Add ENEO Parameters to Genesis:

Parameter Type: string

Parameter Name: ENEO_Device_Custom_baseUrl

Parameter Value :http://eneo.nxgen.cloud:1880/

Steps to add custom property:

Step 1: Login to genesis

Step 2: Navigate to configuration app

Step 3: At service provider level, click on edit button under overview tab

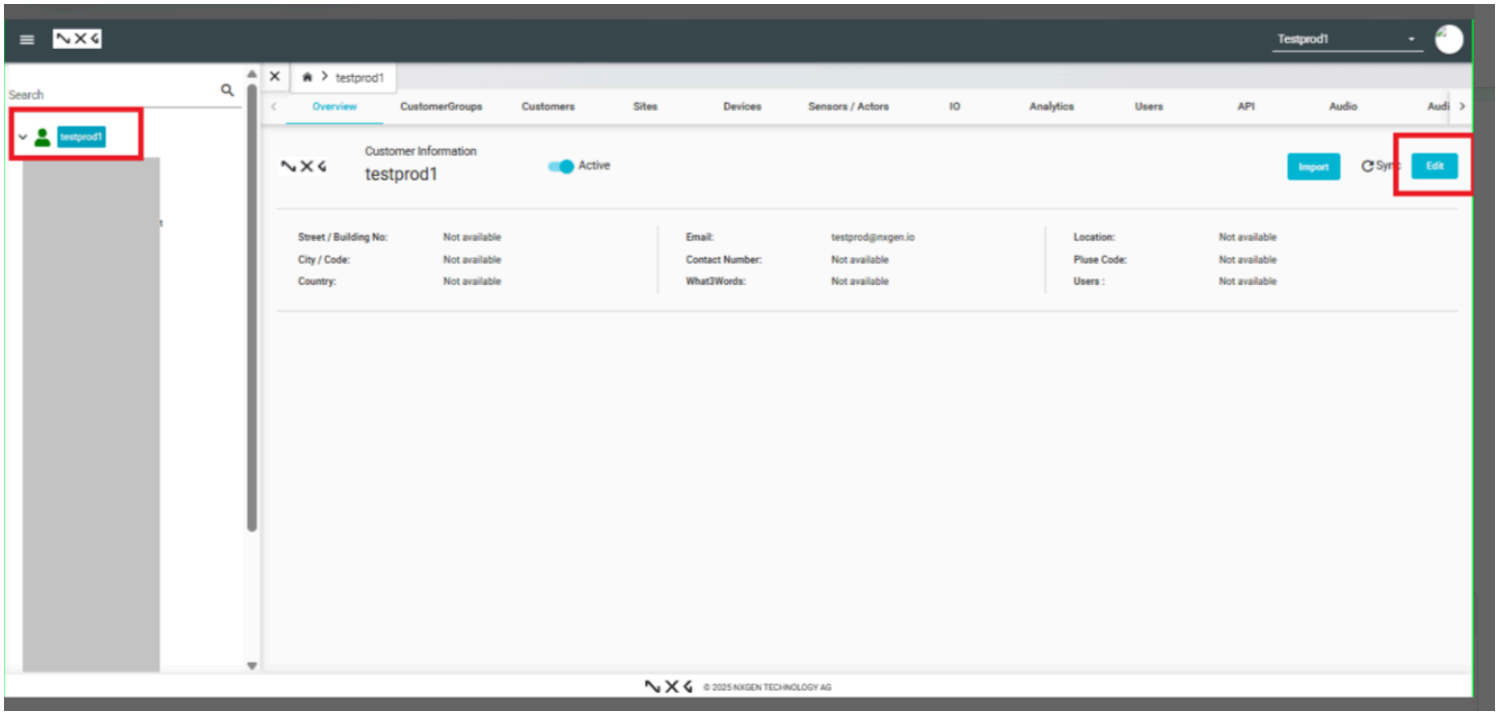

Step 4: Click on additional settings tab->Custom property

Step 5: Scroll down and click on "Add +" button

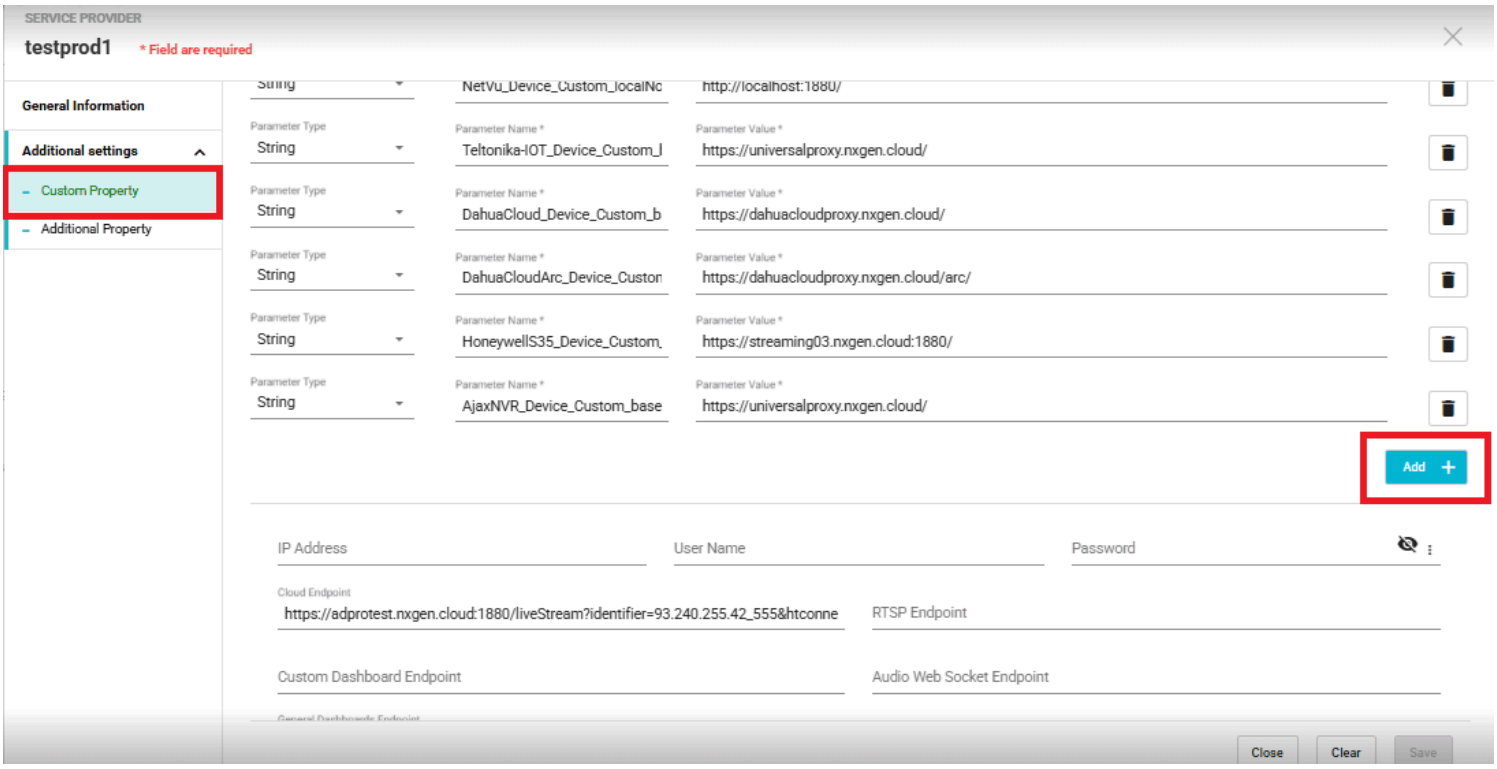

Step 6: Enter parameter name and value as mentioned above

Parameter Type: string

Parameter Name: ENEOIP_Device_Custom_baseUrl

Parameter Value : https://universalproxy.nxgen.cloud/

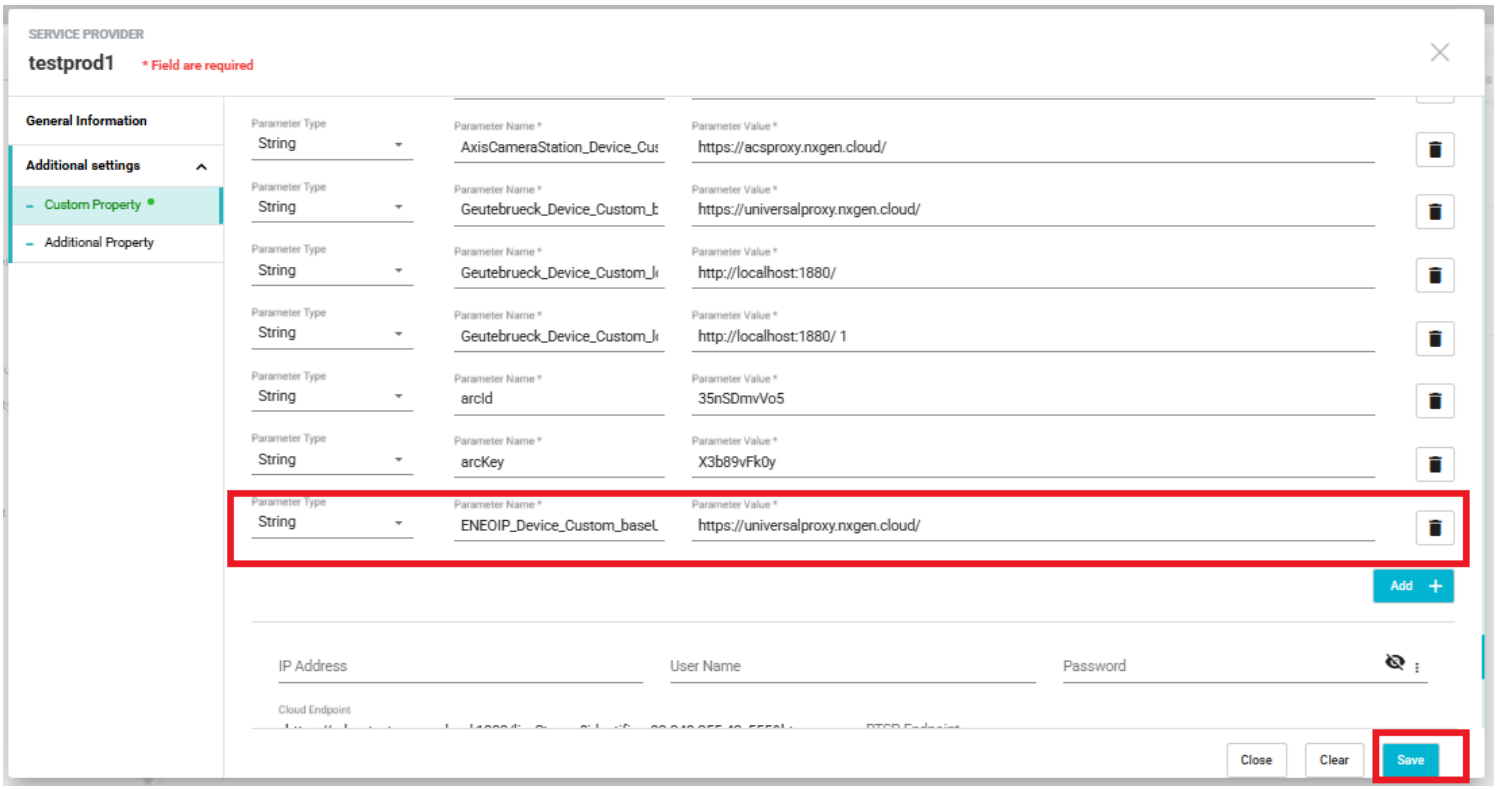

Step 2: Steps to add a device

Step 1: Login to genesis

Step 2: Navigate to configuration app

Step 3: Select a site in tree view and click on devices tab at site level

Step 4: Click on "Add" button

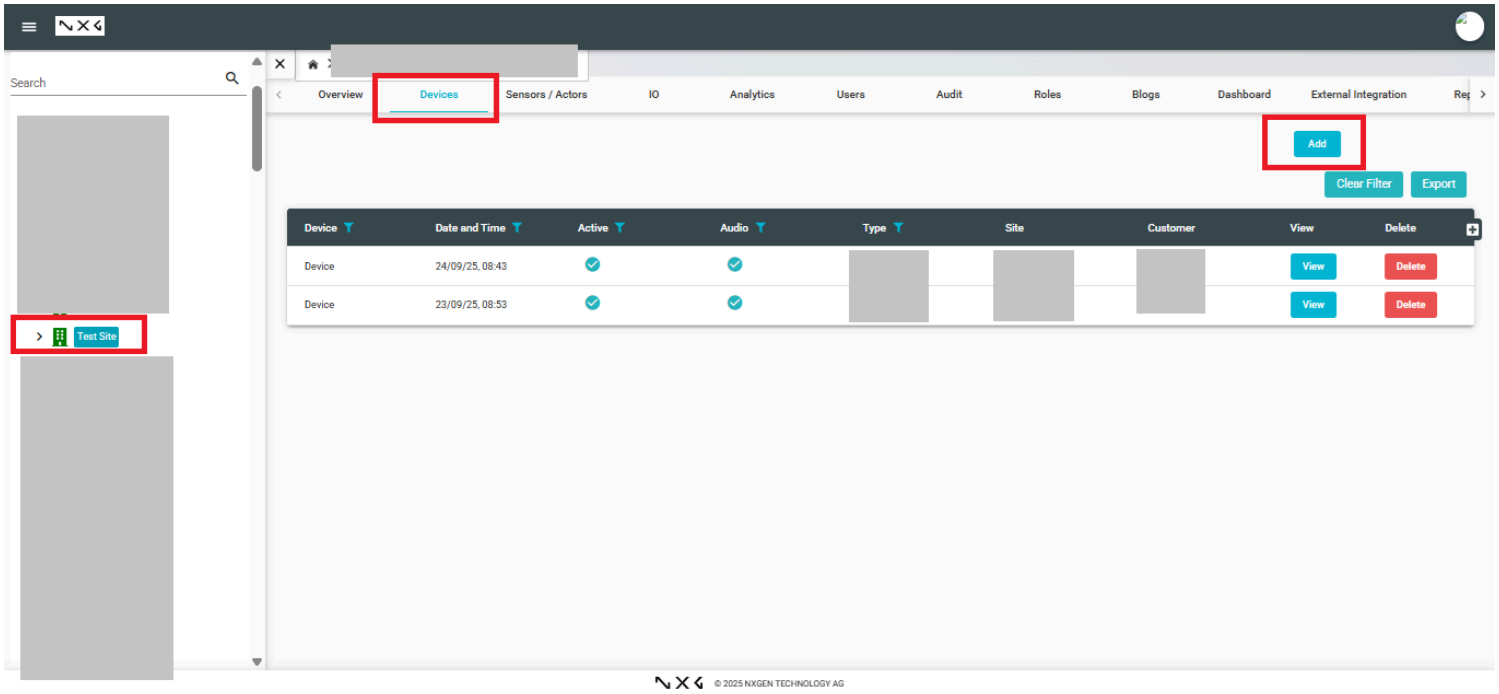

Step 5: Select the device types as "ENEO IP" from the "Type" Drop down

Step 6: Provide the mandatory details

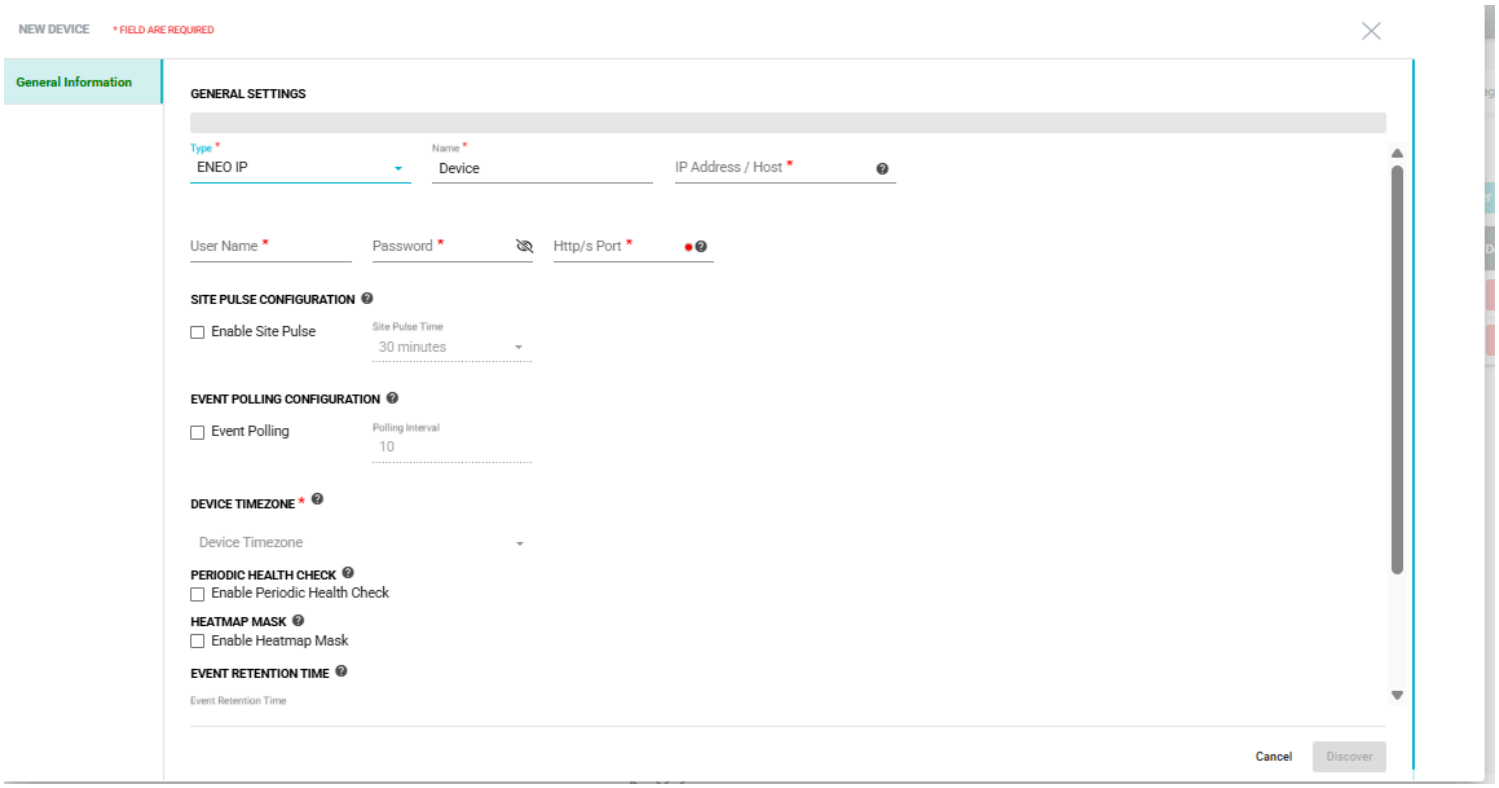

Step 7: Click on "Discover" button

Note: Ensure to enable the event polling checkbox for events to flow into genesis

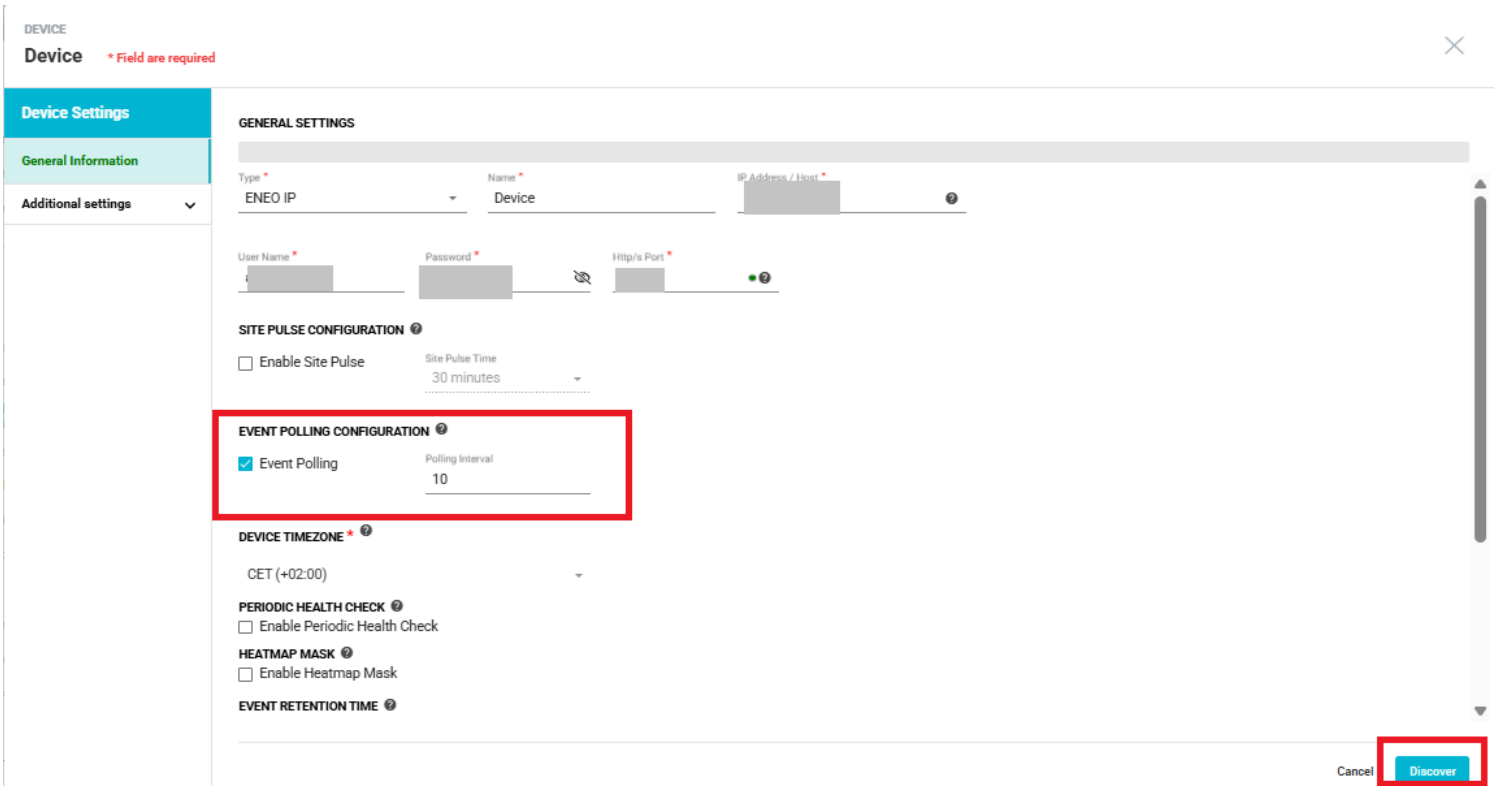

Step 8: Once discovered successfully click on the "Save" button

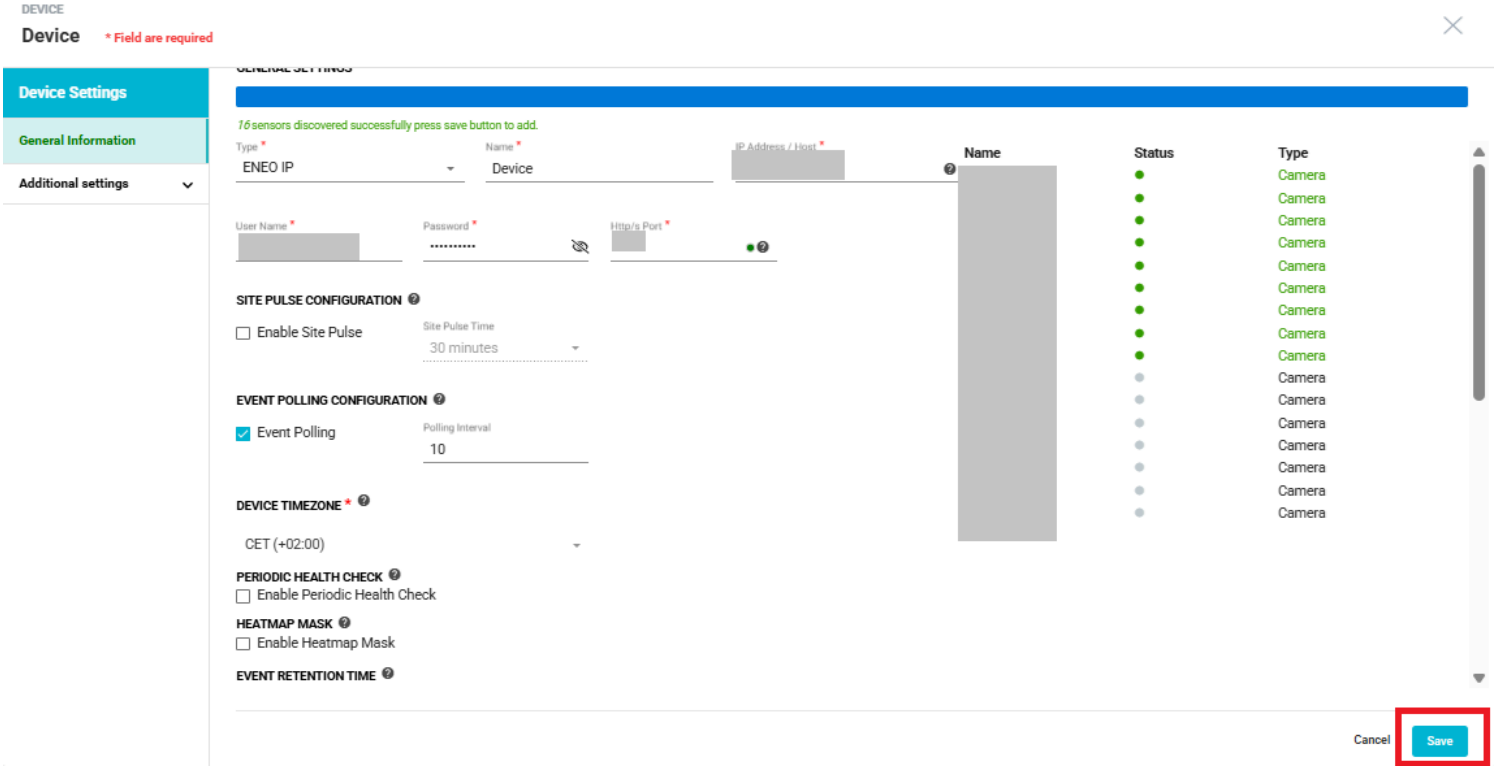

Step 9: Once saved, a success pop up "Device created" should be displayed and device should be listed in the data table

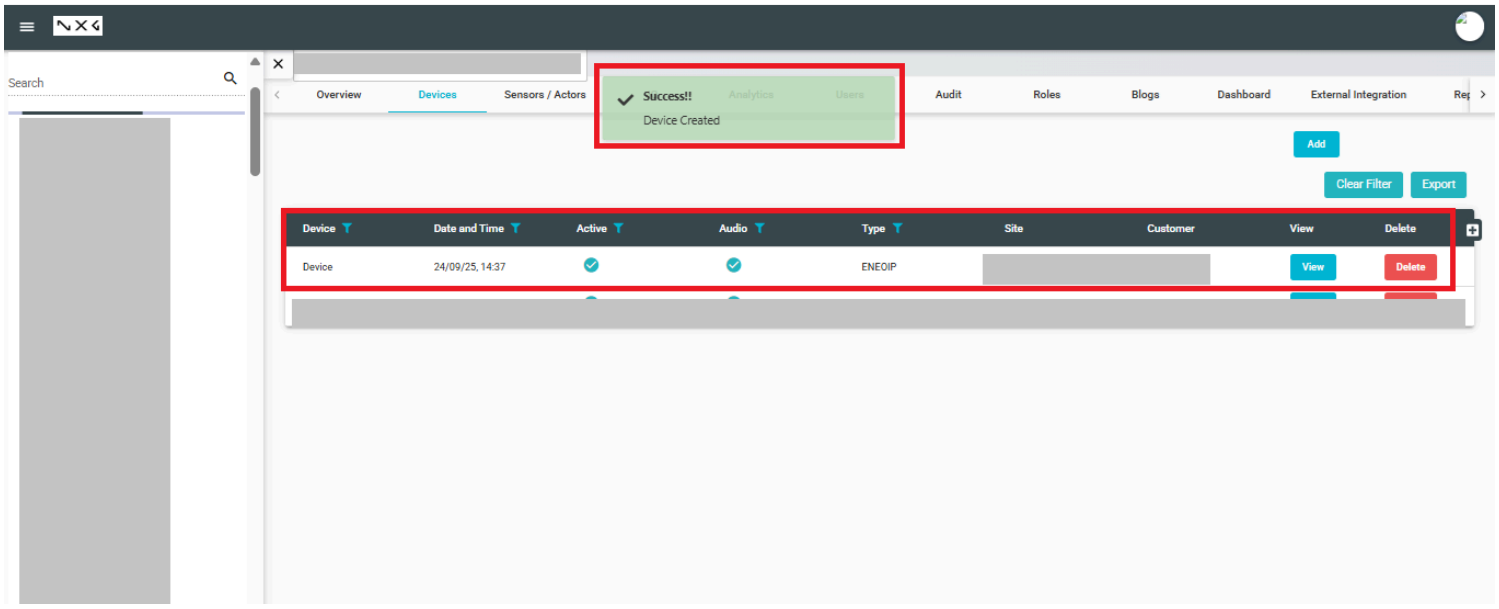
Search
Overview
Devices
Sensors / Actors
Success!!
Device Created
Analytics
Users
Audit
Roles
Blogs
Dashboard
External Integration
Add
Clear Filter
Export
Device
Date and Time
Active
Audio
Type
Site
Customer
View
Delete
Device
24/09/25, 14:37
ENEOIP
View
Delete