

Q 1	Which of the following best describes the relationship between the tomcat [cmdb_ci_app_server_tomcat] table and the application server [cdmb_ci_app_server] table.	Choose 2
	A:-- Tomcat table is a child of the application server table B:-- Tomcat does not extend the Application Server table. C:-- Tomcat table is a parent of the application Server table. D:-- Tomcat table extends the application Server table	
Q 2	In General, Discovery can provide which of the following kinds of application relationships	Choose 2
	A:-- application to application B:-- Mid Server to target C:-- Tcp to udp D:-- host to applicable.	
Q 3	As a first step in horizontal discovery, which of the following is where the shazzam probe is placed in a request.	
	A:-- ECC Queue B:-- Target. C:-- Discovery log D:-- Pattern Log	
Q 4	Hardware Models can have a one to many relationship with the following	Choose 3
	A:-- Assets B:-- Model Categories C:-- Configuration Items D:-- Product Owner E:-- Manufacturer	
Q 5	What pattern operation allows the transfer of a file from the MID Server to a target?	
	A:-- Create Connection B:-- Parse File C:-- Manage Attachments D:-- Put File	
Q 6	Which of the choices have a higher chance of leading to lost data during ci reclassification	
	A:-- Downgrading B:-- Identifying	

	C:-- Upgrading D:-- Switching	
Q 7	When designing steps with operations requiring variables, it is best practice to do What?	
	A:-- Query targets for variables. B:-- Design for a static environment C:-- hard code variables D:-- always use a scalar variable	
Q 8	Which Choice best describes how to use a behaviour for discovery?	
	A:-- The behavior checkbox on a CI B:-- The MID Server Selection method on a Discovery Schedule. C:-- The Behavior drop-down menu on a Discovery Status. D:-- The Behavior drop-down menu on a Discovery IP Range.	
Q 9	Which choice best describes what happens when, by default, duplicate Cis are detected during identification and reconciliation?	
	A:-- Each set of duplicate CI's is added to a de-duplication task. B:-- An associated identification rule is created automatically. C:-- The next discovery is stopped for the CI that is duplicated. D:-- A notification is sent to the CI owner.	
Q 10	Which of the below choices are the most probable results of the following image? 	

2. Select Table Name And Fields

Tables

Q win32_pro

Fields

Win32_Process

Win32_Processor

Win32_ProcessStartTrace

Win32_ProcessStartup

Win32_ProcessStopTrace

Win32_ProcessTrace

OtherTransferCount

PageFaults

PageFileUsage

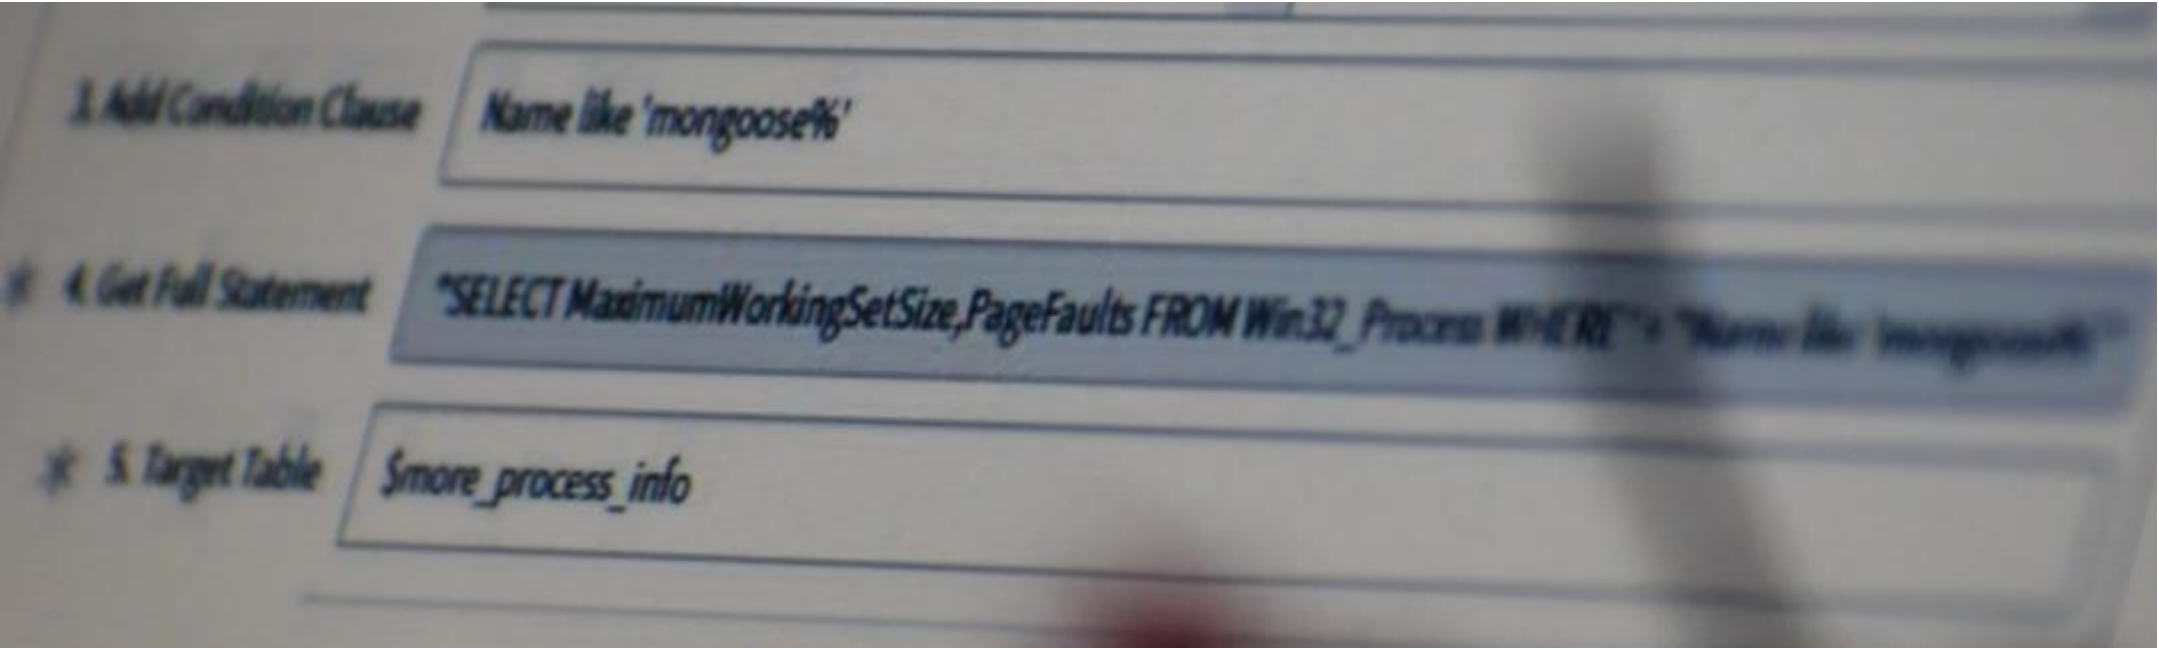
ParentProcessId

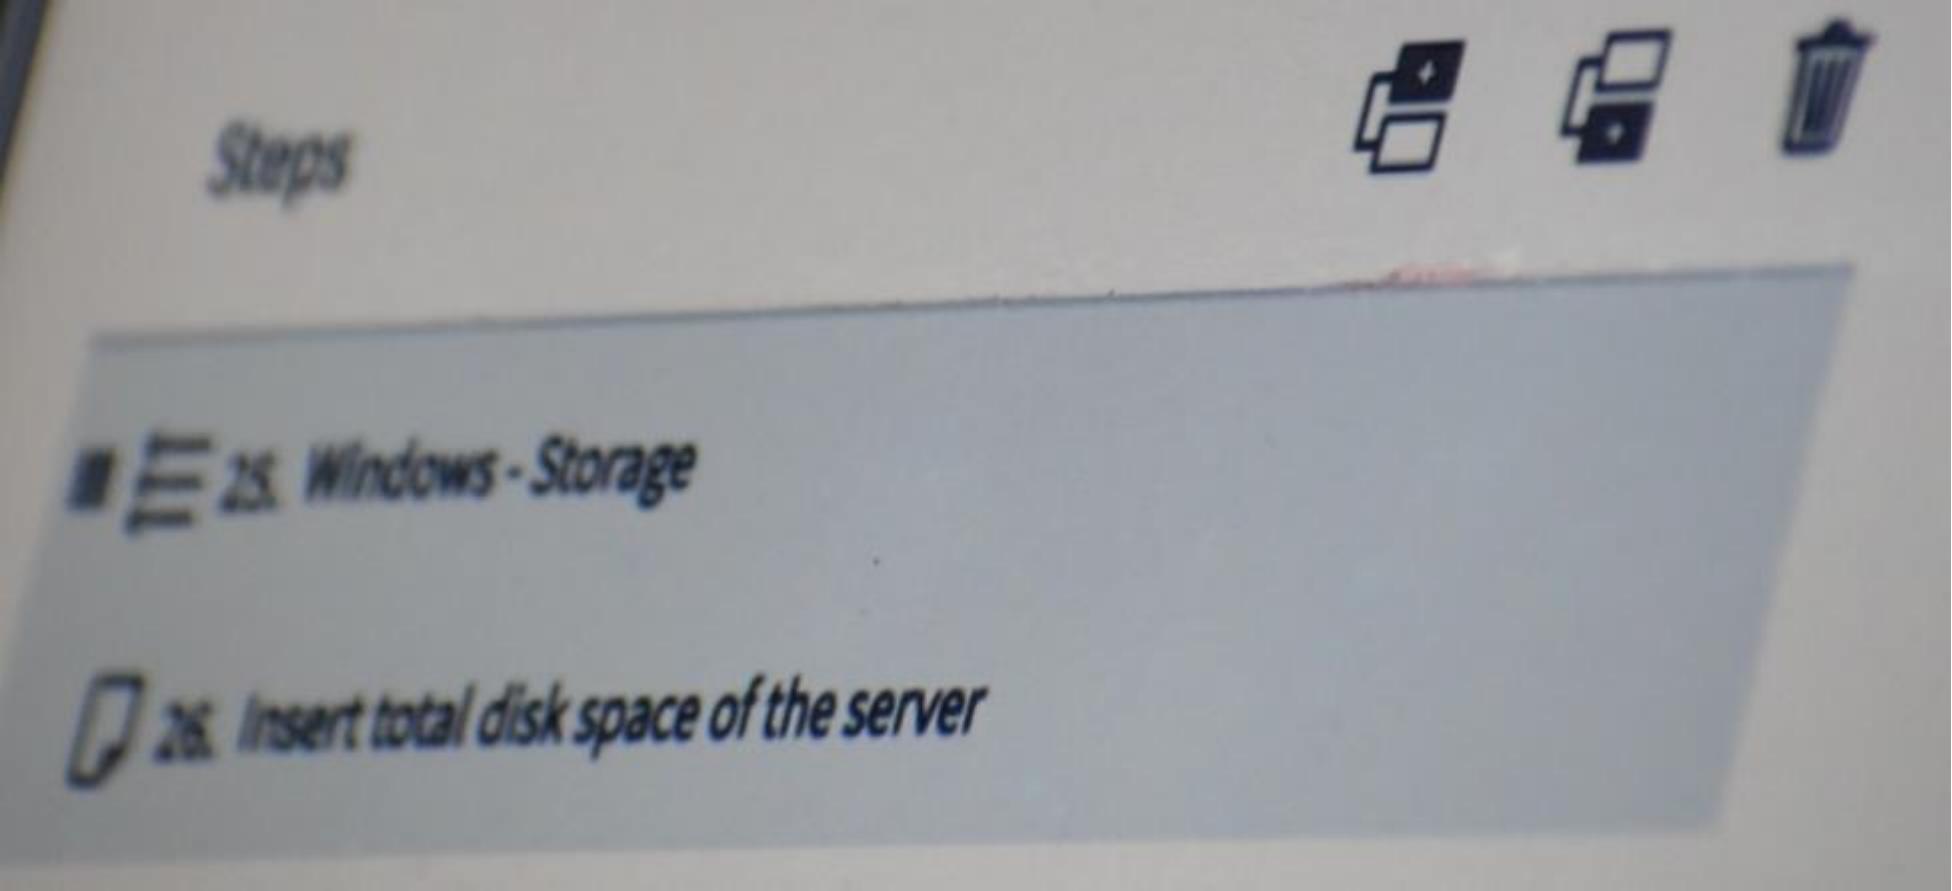
PeakPageFileUsage

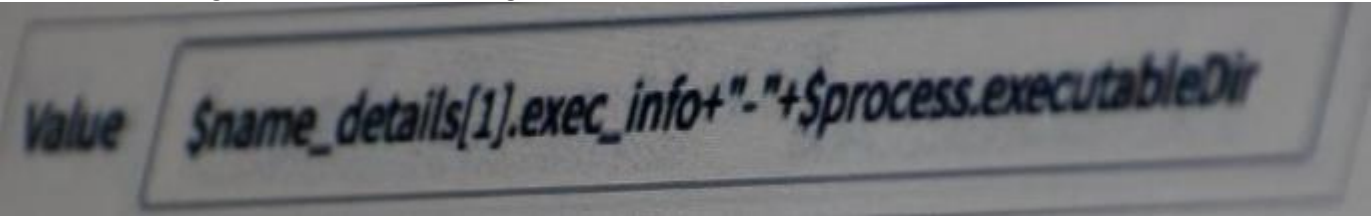
PeakVirtualSize

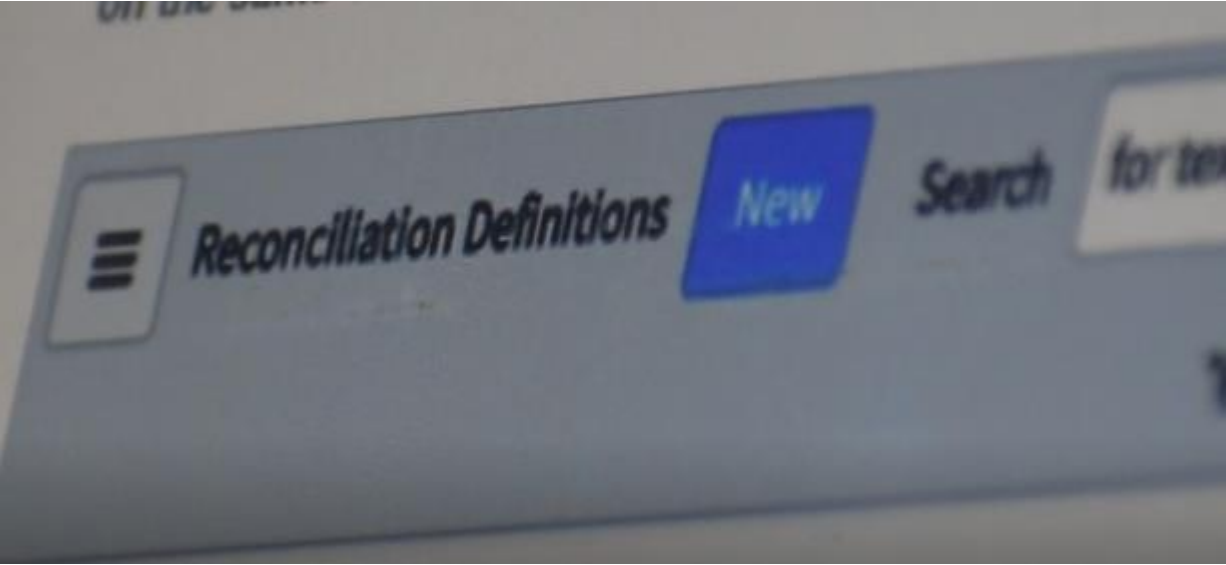
3. Add Condition Clause

Name like 'mongoose%'

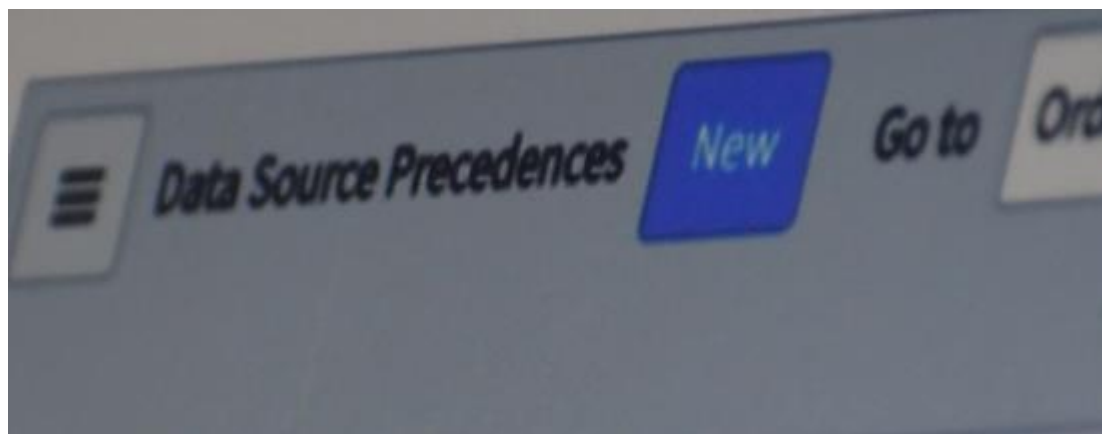
		
	A:-- A Scalar variable named 'PeakVirtualSize'. B:-- A tabular variable named 'Win32_Process'. C:-- A scalar variable named 'MaximumWorkingSetSize'. D:-- A Scalar Variable named 'PageFaults'. E:-- A tabular variable named 'WMI Query'. F:-- A tabular variable named 'more_process_info'.	
Q 11	Which of the following properties define the maximum overall size for the returned payload that come from patterns?	
	A:-- mid.discovery.max_pattern_payload_size B:-- cmdb.properties.payload_max_size C:-- glide.discovery.payload_max D:-- mid.discovery.max_payload_size	
Q 12	For a pattern operation, which of the below choices could be a valid replacement for <_>?\$ifTable<_>.InstanceId	
	A:-- [] B:-- [*] C:-- [x] D:-- [.] E:-- [&]	

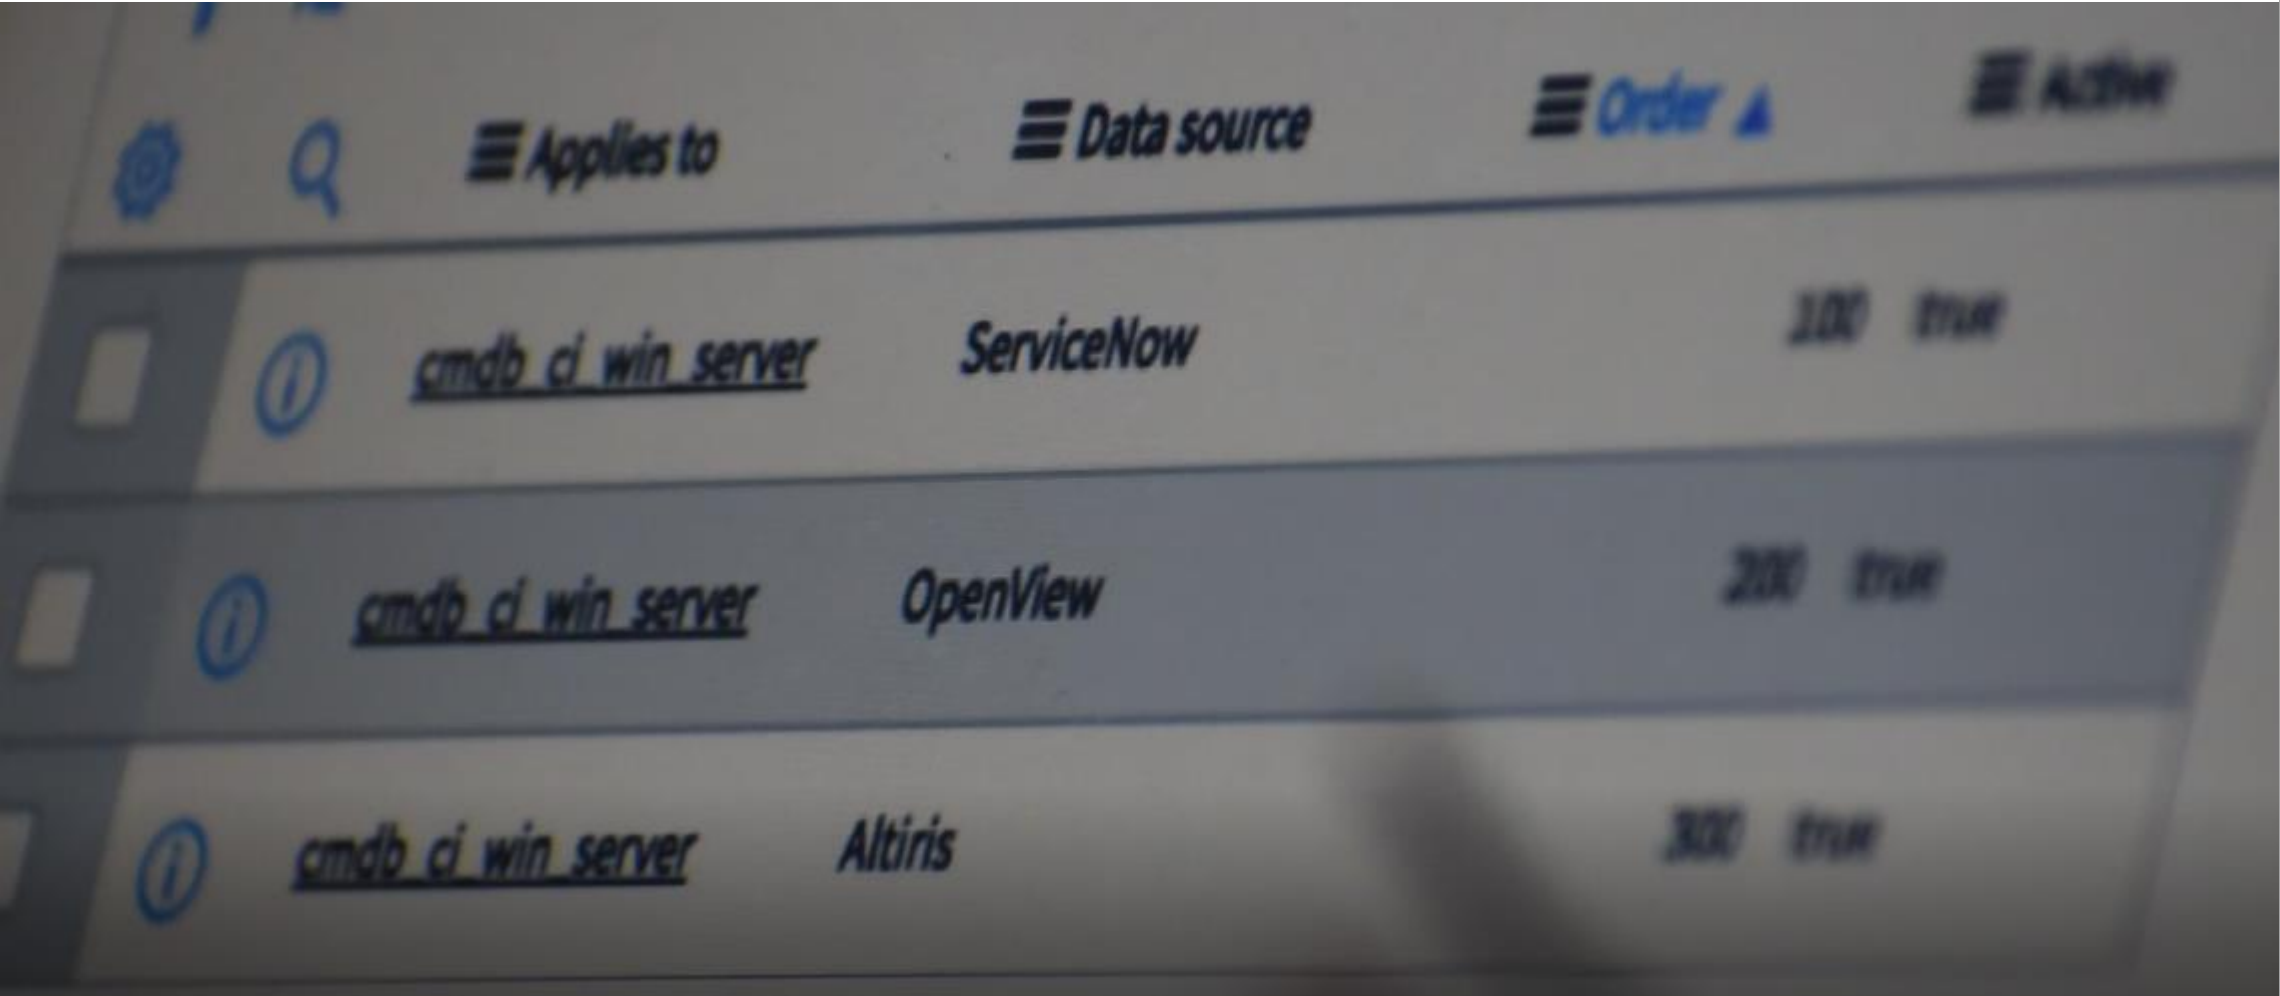
	F:--[3]	
Q 13	The Following shows part of the windows OS - Servers pattern in pattern Designer:  Which of the steps above use a shared library?	
	A:-- Step 26 B:-- Both Steps C:-- Step 25 D:-- Neither Step	
Q 14	What is found on the far-right section of the pattern Designer for horizontal patterns?	Choose 2

	A:-- CI Attributes B:-- Operations C:-- Temporary Variables D:-- CMDB Dashboard	
Q 15	In Order for the CMDB to be populated, what needs to match on a pattern and its related classifier?	
	A:-- Match Criteria and condition Script B:-- CI type and Order C:-- CI type and TAbble D:-- Pattern type and Table	
Q 16	Using the SNMP Query operation in a pattern for a custom device query, it is best practice to do what?	
	A:-- Use live Devices in production B:-- Enable SSH as a secondary protocol C:-- Modify the default MIB information D:-- Use the publish manufacturer's device MIB	
Q 17	In Discovery, What table associates an IP address and a credential?	
	A:-- Credential Affinity B:-- Service CI Association C:-- Tags D:-- Service Affinity	
Q 18	Based on this image, which of the following choices are true? 	
	A:-- There is a tabular variable named 'name_details'. B:-- This value cannot be used in a pattern Step. C:-- There is a scalar Variable labelled '1'. D:-- This is form a WMI query operation step.	
Q 19	During the Discovery process, What determines if an Asset record is created?	

	A:-- ECC Queue B:-- Configuration Item C:-- CMDB D:-- Model Product E:-- Model Category	
Q 20	Which Choice best describes a horizontal discovery pattern?	Choose 2
	A:-- classifiers that execute probes B:-- port scanning tool C:-- credential depot D:-- Steps that execute Operations E:--	
Q 21	Based on the following images, Which choice best describes what occurs if Discovery sets the name attribute of a discovered Windows Server CI to 'Windows1' and then Altiris discovery runs detecting 'Windows2' for name attribute on the same CI? 	

	 Data source	 Applies to	 Attributes	 Active
	<u>Altiris</u>	Windows Server [cmdb_ci_win_server]	name	true
	<u>OpenView</u>	Windows Server [cmdb_ci_win_server]	name	true
	<u>ServiceNow</u>	Windows Server [cmdb_ci_win_server]	name	true

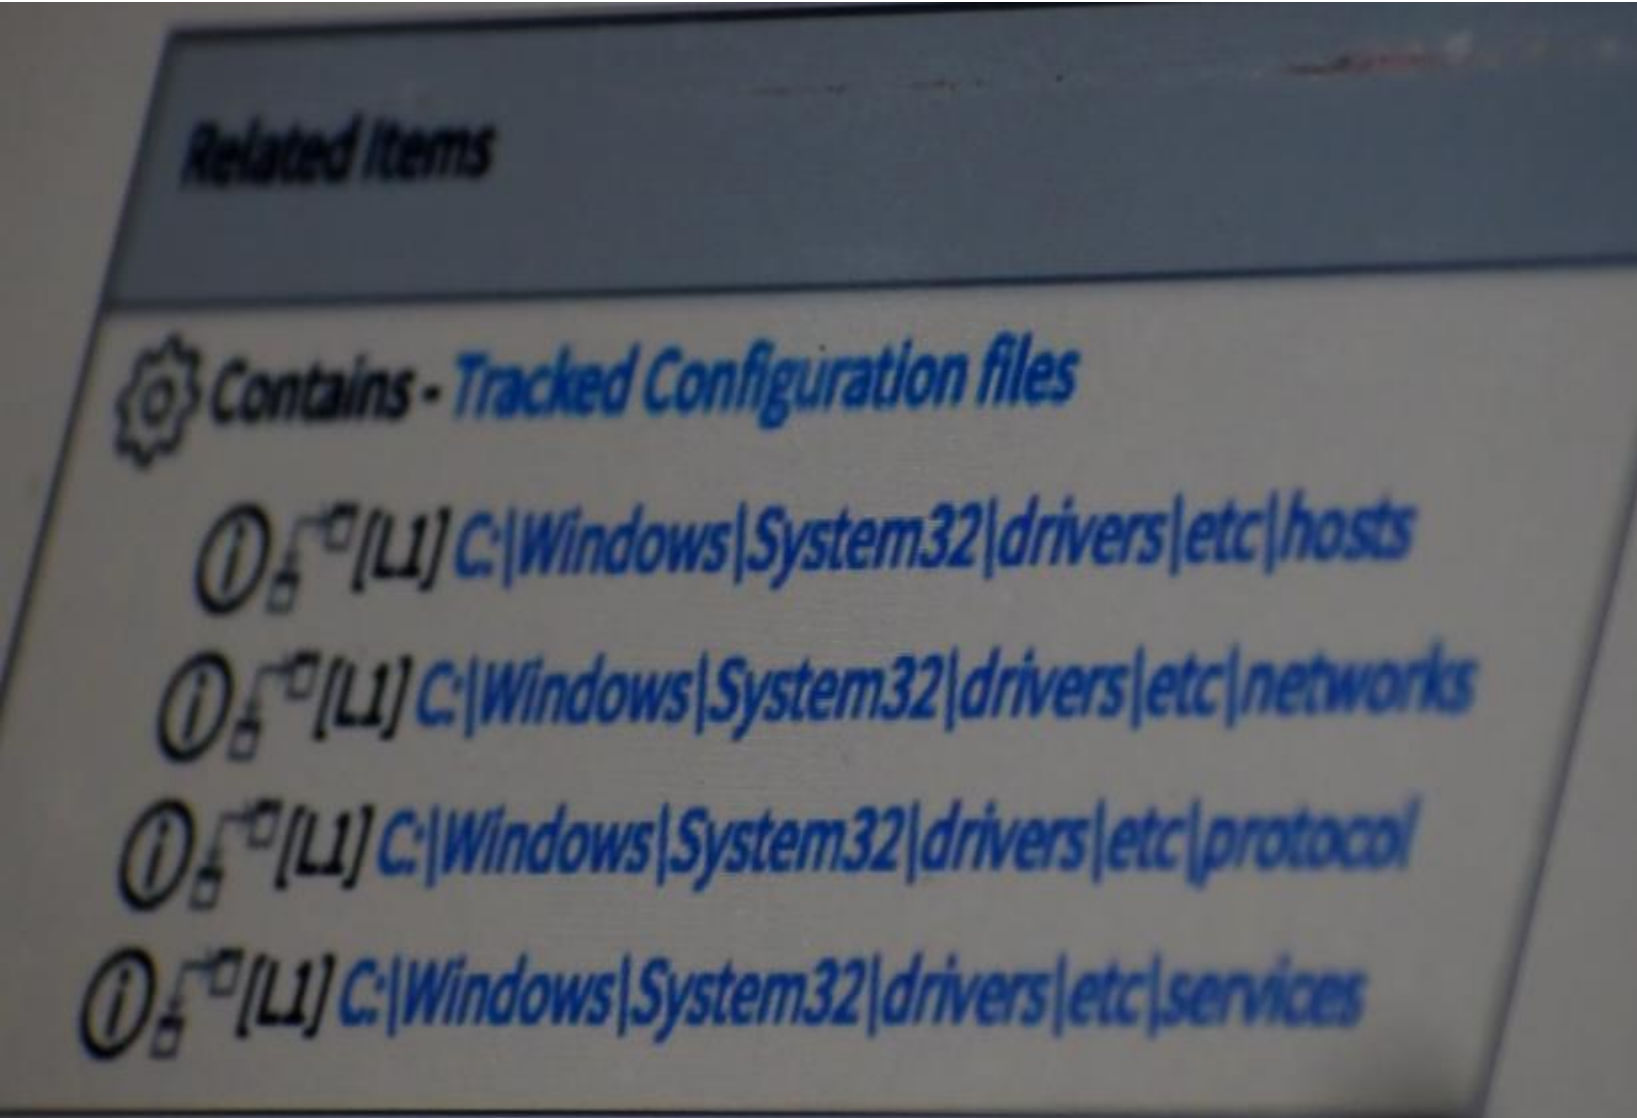


		
	A:-- The name of the CI does not populate with either discovery. B:-- The CI is not discovered because Discovery is not listed in either image C:-- The name of the CI stays 'Windows1' D:-- The name of the CI changes to 'Windows2'.	
Q 22	Which of the choices below best represent key capabilities of a ServiceNow ITOM Enterprise solution?	Choose 2
	A:-- Manage Hybrid Clouds B:-- Create an Engaging User Experience	

	C:-- Build New Apps Fast D:-- Proactively Eliminate Service Outages	
Q 23	If the WMI Service is not running on a host, it will prevent the discovery of which devices?	
	A:-- Unix B:-- Windows C:-- Network D:-- Storage	
Q 24	In a discovery Pattern, Which types are available with CI Attributes in the pattern Designer?	
	A:-- Main Pattern CI type B:-- All CI types C:-- Global CI types D:-- Related CI types	
Q 25	Which of the below Choices are Kinds of Variables used in discovery patterns?	Choose 3
	A:-- CI Attributes B:-- Fixed C:-- Global D:-- Prefix E:-- Temporary	
Q 26	Which of the below choices are benefits of Tracked configuration files?	Choose 2
	A:-- No Credentials needed B:-- Content Version comparison C:-- Unwanted Files removed from target D:-- Files tracked as CIs	
Q 27	On the Ecc Queue, sensor records have a queue value of _ and probe records have a Queue value of _.	
	A:-- Started, ready B:-- Output, input C:-- ready, Started D:-- Input, output	
Q 28	What related list on a classifier dictates which horizontal pattern probe is launched?	

	A:-- Triggers probes B:-- pattern probes C:-- Classification Criteria D:-- Discovery log	
Q 29	File-based Discovery is triggered during the:	
	A:-- Identification Phase B:-- Exploration Phase C:-- Pattern phase D:-- Classify Phase E:-- scan phase	
Q 30	What does the MID Server need to collect vCenter events?	
	A:-- Firewall B:-- vCenter Event Collector extension C:-- MID SNMP Trap Listener extension D:-- vCenter probes	
Q 31	What is the recommended method of consolidating duplicate CIs?	
	A:-- Ignore Duplicate CI B:-- Event CI Remediation C:-- Duplicate CI Remediator D:-- Manual CI Remediation	
Q 32	Which of the following must be configured to allow a MID Server to access servers using WinRM?	
	A:-- Servers are configured as trusted hosts of the MID Server B:-- MID Servers must be configured as a trusted source with DNS C:-- MID Servers need to be added to the WinRM Group policy on the Servers D:-- MID Servers Properties Add WinRM	
Q 33	A config File for an application has the following three lines: Line1: app build 1.2.3.4. Version 5.14 Line2: installation_dir=c:\opt\bin Line3: build_type=Server. Which methods below will extract the build and version numbers from these lines using a horizontal discovery pattern?	Choose 2
	A:-- Parse File operation with Delimited text parsing strategy B:-- Find Matching URL operation with Target Variable	

	C:-- Parse File operation with Regular Expression parsing Strategy D:-- Get Process operation with correct port.	
Q 34	Which of the following choices must be installed on a MID Server to run credential-less Discovery?	
	A:-- Credential-less Extension B:-- Defender C:-- Nmap D:-- Advanced IP Scanner	
Q 35	Which choice best describes a Functionality Definition?	
	A:-- Defines the IP addresses to discover. B:-- Defines what CI identifiers to use. C:-- Defines what Behavior to use from a Discovery Schedule. D:-- Defines what protocols to detect from within a Behavior.	
Q 36	For What is File based Discovery used?	
	A:-- To discover the contents of flat files such as configuration files. B:-- To discover the checksum of a file and store it to track for changes. C:-- To discover that file names confirm to defined naming standard. D:-- To discover file paths to recognize the signature of installed software.	
Q 37	Which choice best represents how to modify the functionality shown in this image?	



A:-- From a probe
B:-- From a Discovery Pattern
C:-- From the MID Server
D:-- From a classifier
E:--

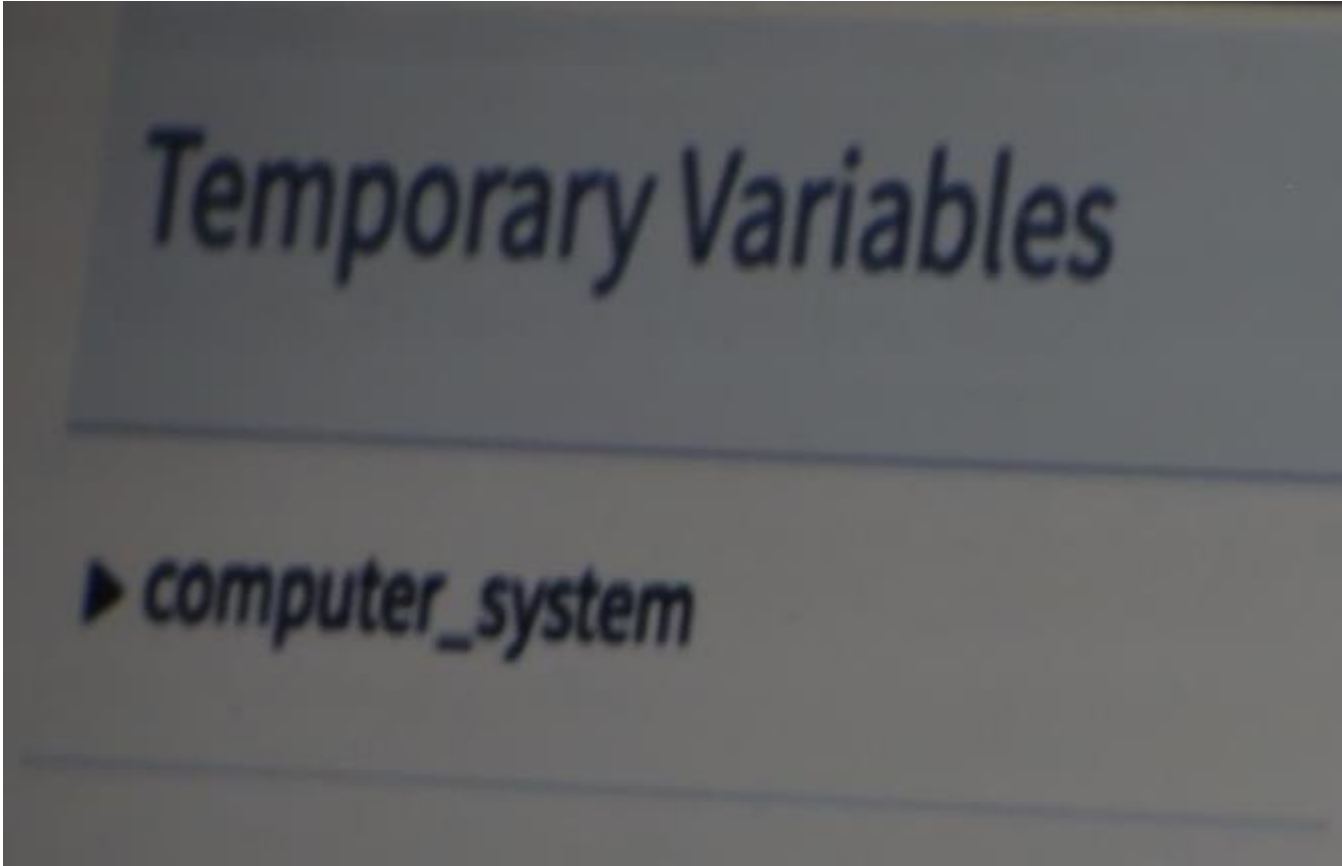
Q 38	The CMDB contains which of the following record types?	
Choose 2 answers:-	A:-- Asset B:-- Relation Type C:-- Configuration Item(CI) D:-- Model E:--	
Q 39	For the Parse Variable pattern operation, what is required to have two different parsing methods to populate variables?	
	A:-- A tabular and a Scalar variable. B:-- Two different debug mode sessions. C:-- Two different Define Parsing selections on the same step. D:-- Two different steps. E:--	
Q 40	For the set parameter Value operation, which of the following is used in the syntax to declare a constant, unchanging	
	A:-- Hash tag B:-- Dollar sign C:-- Brackets D:-- Quotes E:--	
Q 41	SNMP Credentials require which of the following	
	A:-- usernames B:-- port 135 access C:-- read community strings D:-- write community strings E:--	
Q 42	Which metrics comprise the completeness KPI for CMDB Health?	
Choose 2 answers:-	A:-- Audit B:-- overall C:-- Recommended D:-- Required E:--	
Q 43	Which of the following is required for a MID server to have access to automatically stay up-to-date with instance versions?	

	A:-- docs.servicenow.com B:-- service-now.com C:-- developer.service-now.com D:-- install.service-now.com E:--	
Q 44	After running Discovery and viewing the ECC Queue tab, what are some of the displayed default fields?	
	A:-- CMDB CI B:-- Pattern log link C:-- Topic D:-- Queue E:-- Discovery schedule name. F:-- Details G:-- Source	
Q 45	Which of the following choices explain differences between service Mapping and Discovery?	
	A:-- Discovery utilize IP address ranges for initial discovery, Service Mapping Uses entry points. B:-- Discovery requires agent installation to find hardware devices, Service Mapping requires agents for software. C:-- Discovery finds applications and devices on your network, Service Mapping monitors those devices. D:-- Discovery addresses inventory-related use-cases, While Service Mapping allows for the creation of accurate maps of application Service topologies. E:--	
Q 46	What would you see in the Discovery pattern log that you would not see in the ECC Queue?	
	A:-- Success or Failure of the individual pattern steps B:-- Shazzam probe payload C:-- Relationships created D:--Payload of CI attributes and relationships E:--	A
Q47	Which of the choices best describes a tabular variable in a discovery pattern?	
	A:-- A single string B:-- A single column C:-- Each cell is a scalar variable D:-- Each cell is a CI attribute E:--	
Q 48	How do you create relationships between CI'S in a horizontal pattern?	

	A:-- By using the create relation/reference operation B:-- By using the create connections operation C:-- Relationships are created automatically for each successful connection section D:-- Relationships can not be created via patterns E:--	A
Q 49	Which of the following ServiceNow platform functionalities can be used to automatically modify an attribute of a configuration item when it is first discovered?	
	A:-- CI Class Manager B:-- Business Rule C:-- Notifications D:-- Scheduled jobs E:--	A
Q 50	Which of the following fields are editable from a merge table pattern operation	
	A:-- First Table B:-- Target Table C:-- Primary Table D:-- Second Table E:--	A, B,D
Q 51	What is the advantage of discovery range sets?	
	A:--Range sets are the only way to have more than one IP range defined within a discovery schedule. B:--Range Sets provide flexibility in management and identification of known networks for simplicity of administration. C:-- All the necessary range sets are installed in the base installation of discovery D:-- Range sets show the number of Ips in a subnet. E:--	B
Q 52	For a Parse Variable operation, When using the Delimited text parsing Strategy, which options are available in a step?	
	A:-- Positions B:- Use SNMP Browser C:-- Delimiters D:-- Merge Criteria E:--	A,C
Q 53	When configuring the MID Server Service Settings, which of the following is not a valid MID Server name?	
	A:-- midserver1 B:- my_mid_server1	A

	C:-- mid_server1 D:-- mid.server1 E:--	
Q54	Which of the following describes the recommended permission level for credentials to discover windows servers?	
	A:-- A standard domain user with read access B:- A user with root access across the domain C:--A domain user with local administrator D:-- A domain administrator with sudo access. E:--	C
Q 55	Which of the following are contained in an extension section of a discovery pattern?	
	A:-- Shared libraries B:- Network libraries C:-- Identification sections D:-- connection sections E:--	A
Q 56	Which ECC Queue message contains the XML payload returned from the MID Server?	
	A:-- Pending B:- Input C:-- Output D:--Ready E:--	B
Q 57	What is the default thread count for a MID Server?	
	A:-- 50 B:- 5 C:-- 1 D:-- 25 E:--	D
Q 58	For a pattern operation, which of the following choices is used to combine variables into a single variable in Value fields?	
	A:-- + B:- AND C:-- == D:-- [*]	

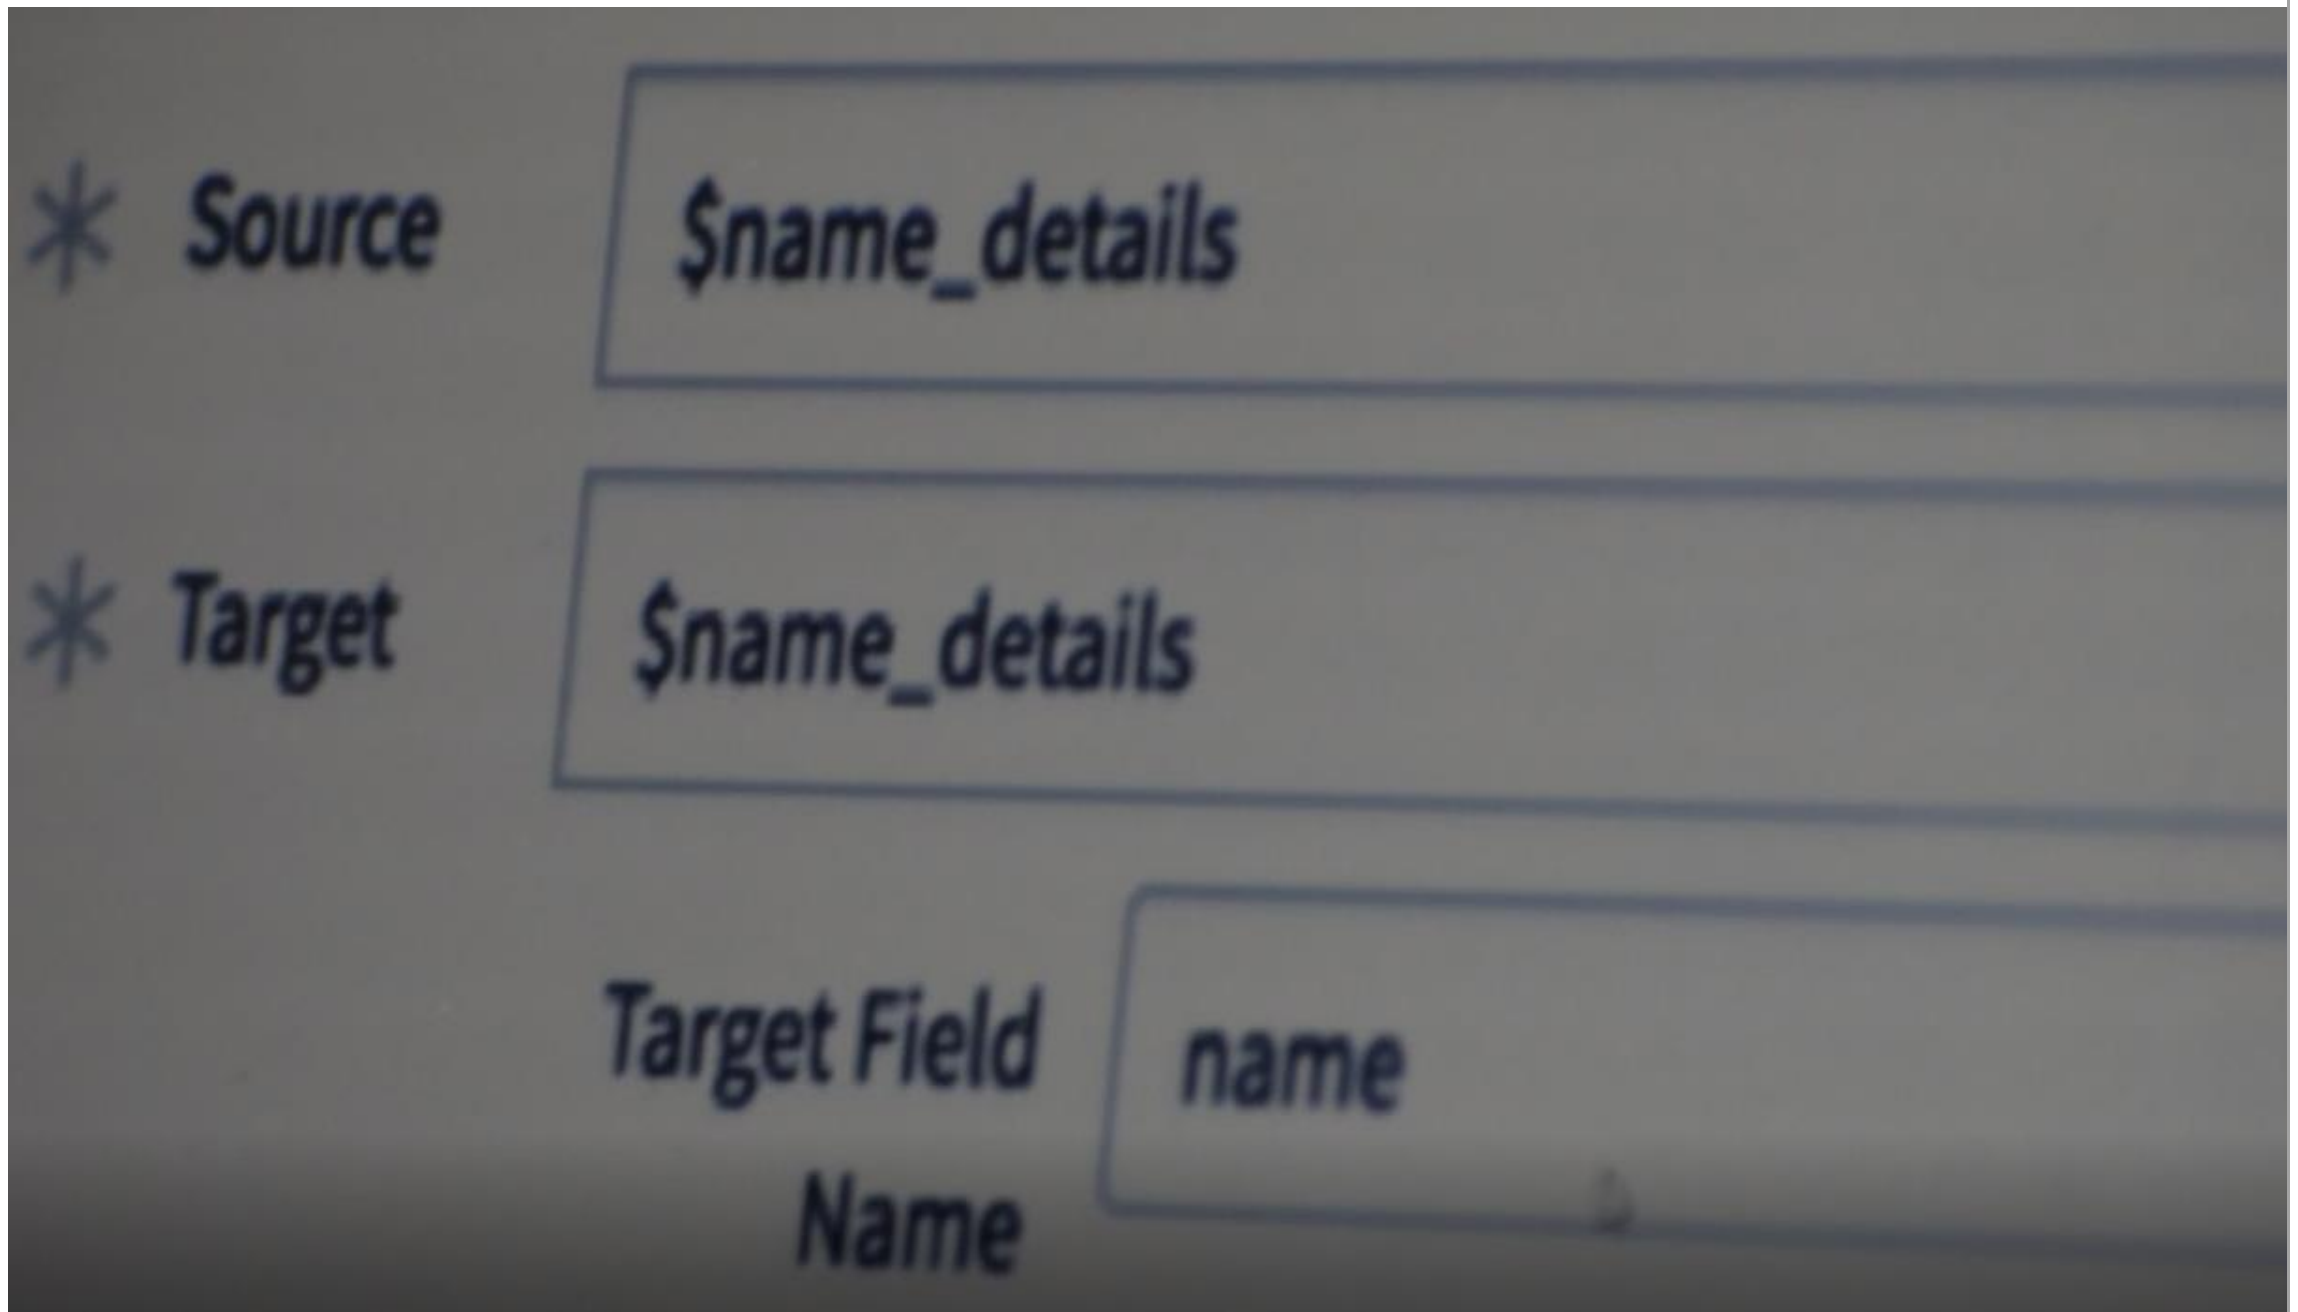
	E:--	
Q 59	Which of the following related lists can assist with troubleshooting discovery from a discovery status?	
	A:-- Discovery log B:- ECC Queue C:-- Running Processes D:-- Devices E:--	A,B,D
Q 60	What do most Discovery properties start with?	
	A:-- glide.itom B:- glide.discovery C:-- disco.release D:-- discovery.prop E:--	B
Q 61	The deletion strategy is set to 'Mark as absent' for related Disk CIs discovered via the Linux Server Pattern. If a related Disk CI is not found the next time the Linux Server is discovered, the following will happen:	
	A:-- The Disk Status CI (install_status) is set to Absent. B:- The Disk CI Operational Status (operational_status) is set to Non-Operational. C:-- The Linux Server CI Status (install_status) is set to Absent. D:-- The Linux Server CI Operational Status (Operational_status) is set to Non-Operational E:--	A
Q 62	As a best Practice during a Discovery implementation, who of the following is recommended to enter credentials into the credentials table?	
	A:-- ServiceNow Engagement Manager B:- ServiceNow Technical consultant C:-- Partner D:-- Customer E:--	D
Q 63	Which of the below choices are possible options under ACTION ON ALL in the Recommended Actions pane for an automated Error Messages list with in Discovery > Home?	
	A:-- Ping IP Addresses B:- Retry Discovery C:-- Make Ranges D:-- View instructions E:--	B, D

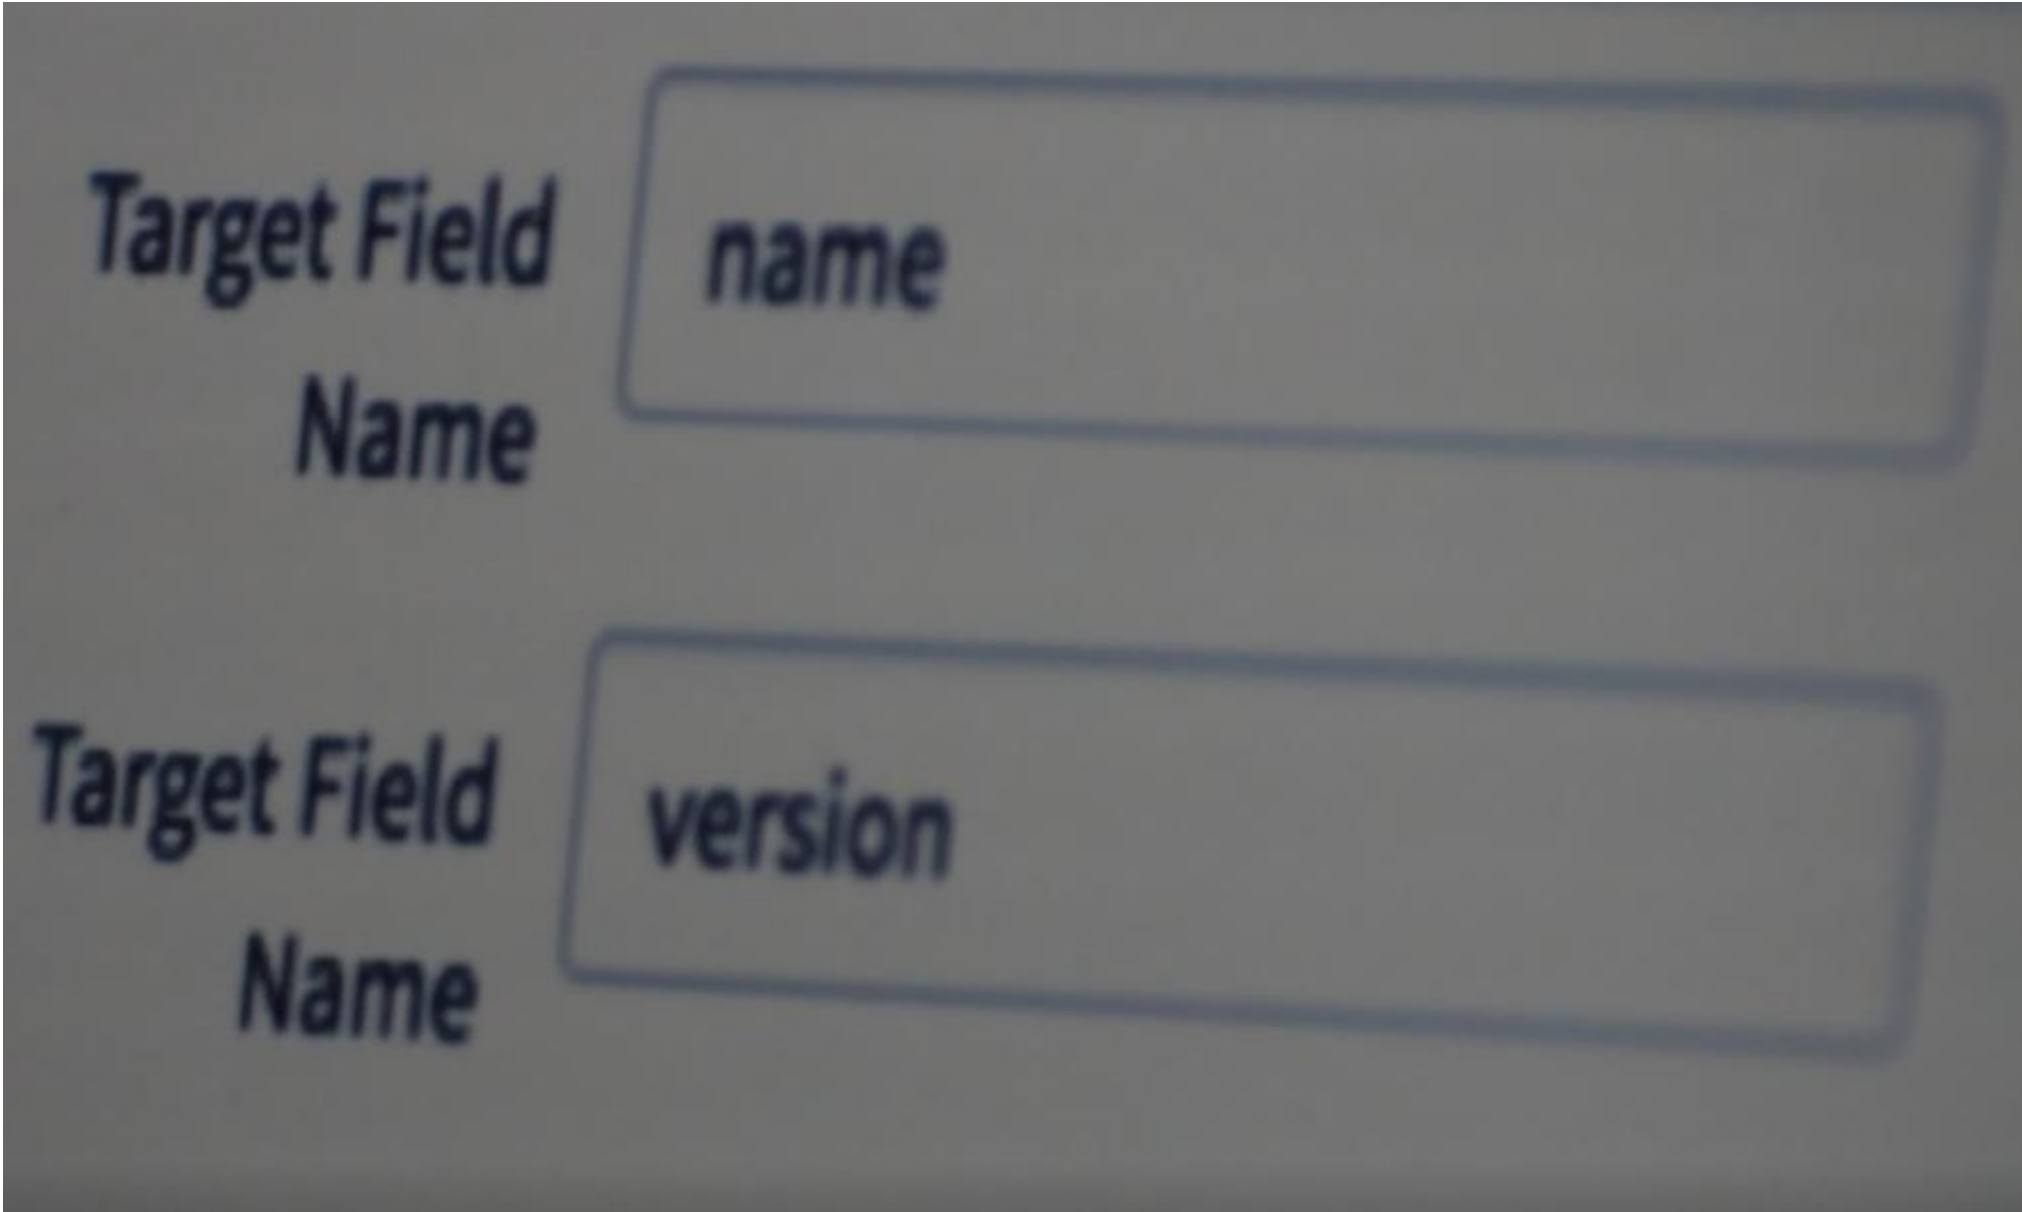
Q 64	From Pattern Designer, Which horizontal pattern type is the image below showing? 	
	A:-- Computer System B:- Application C:-- Infrastructure D:-- Service Mapping E:--	A
Q 65	Which of the choices are types of temporary variables in a discovery pattern? Choose 2 answers	
	A:-- Tablular/Table B:- SQL Statement C:-- Scaler/List D:-- Command E:--	A, C

Q 66	From the Discovery Status record, Which of the following does a device record contain?	
	A:-- Contains a link to the discovered asset B:- the CMDB Health Dashboard link C:-- contains a link to the discovered CI D:-- the contents of the discovered CI E:--	D
Q67	In a pattern operation, which of the following correctly calls the value of the executableDir variable from the tabular process variable?	
	A:-- \$process_executableDir B:- "Process_executableDir" C:-- Process(executableDir) D:-- \$Process.executableDir E:--	D
Q 68	Which of the following ServiceNow platform functionalities can be used to query the CMDB on an ongoing basis and creates tasks based on the CMDB data?	
	A:-- CMDB Health Dashboard B:- Business Rules C:-- Data Policies D:-- Process Classifier E:--	A
Q 69	Which of the following choices may be global variables for steps in horizontal discovery patterns?	
	A:-- System B:- Baseline C:-- computer_system D:-- Process E:--	C,D
Q 70	Which of the following ServiceNow platform functionalities can be used to enforce certain fields in the CMDB as mandatory?	
	A:-- Discovery Schedule B:- CI Field Manager C:-- Scheduled jobs D:-- Data policies. E:--	B

Q 71

What operation is shown in this image?



		
	A:-- Put File B:-- Transform Table C:-- Parse VArable	A

	D:-- Union Table E:--	
Q 72	Which one of the following is not used in a horizontal discovery pattern?	
	A:-- Variables B:- Connectivity Section C:-- Operations D:-- Identification Section E:--	B
Q 73	Which choice best describes how to use a Behavior for discovery?	
	A:-- The MID Server Selection method on a Discovery Schedule. B:- The behavior drop-down menu on a Discovery status. C:--The behavior checkbox on a CI D:-- The Behavior drop-down menu on a discovery IP Range E:--	A
Q 74	Discovery Patterns can be ignored by selecting the following?	
	A:-- Create a pattern step that fails B:- Set the Active field to FALSE C:-- Set the Extension Section to TERMINATE D:-- Set the status field to DRAFT. E:--	B
Q 75	During the Port Scan Phase what could the Warning level error “No results returned from probe.” mean?	
	A:-- Logical or physical firewall preventing connectivity B:- Process Classifier incorrectly configured C:-- Wrong Credentials D:-- Incorrect data source Precedence E:--	A
Q 76	Which choice could cause the error “Active, couldn’t classify” to occur on a Discovery Status While discovering a new network device?	
	A:-- SNMP Credentials are incorrect. B:- An SNMP Classification must be updated or created for the new device. C:-- SNMP only behavior is not configured. D:-- A firewall blocking the communication between the MID Server and the target device. E:--	A

Q77	Which choice best describes the Reconciliation process?	
	A:-- The process of reconciling uniquely identifying Cis, to determine if the CI already exists in the CMDB or if it is a newly discovered CI. B:- The process of reconciling Cis and CI attributes by allowing only designated authoritative data sources to write to the CMDB at the CI table and attribute level. C:-- The process of normalizing applications to allow the data to be used by software Asset Management. D:--The Process of reconciling a deleted CI, if it is identified as a duplicate. The result is stored in de-duplication tasks. E:--	B
Q78	Which of the below choices are possible categories after selecting the Errors tile from Discovery > Home?	
	A:-- Credentials B:- Correctness C:-- Configuration D:-- Schedules E:-- Netwrok F:-- Completeness	A,C,E
Q 79	What is the recommended method for excluding specific software from discovery on windows and Unix Servers?	
	A:--Discovery Properties B:- Probe Modification C:-- Pattern Modification D:--Configuration console E:--	D
	A:-- B:- C:-- D:-- E:--	
	A:-- B:- C:-- D:-- E:--	

