


SERVICENOW INTEGRATION WITH FLOW DESIGNER

Use Case

Integrate two ServiceNow instances to automatically create an Incident in the target instance when a new Incident is created in the source instance — using **Flow Designer** with **no scripting**.


Step-by-Step Procedure

1. Log in to the Source ServiceNow Instance
2. Activate ServiceNow IntegrationHub Installer Plugin

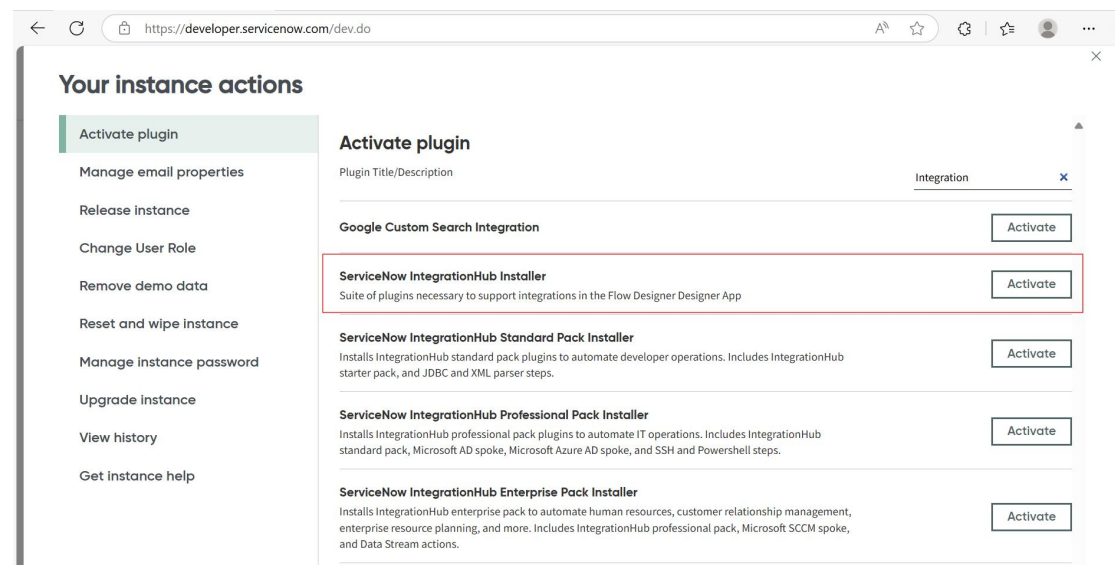


3. Go to Flow Designer and create a new Flow


Trigger: Created
Table: Incident

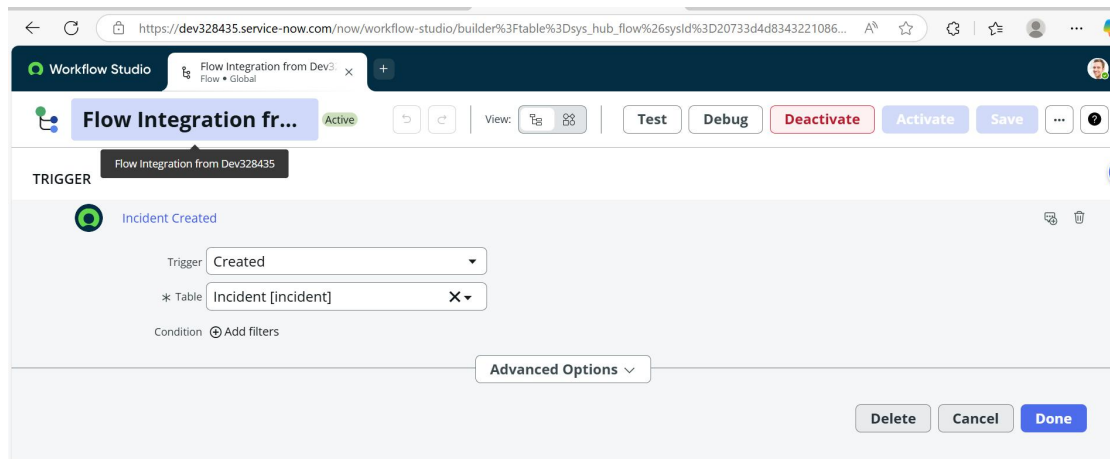

4. Create a Custom Action

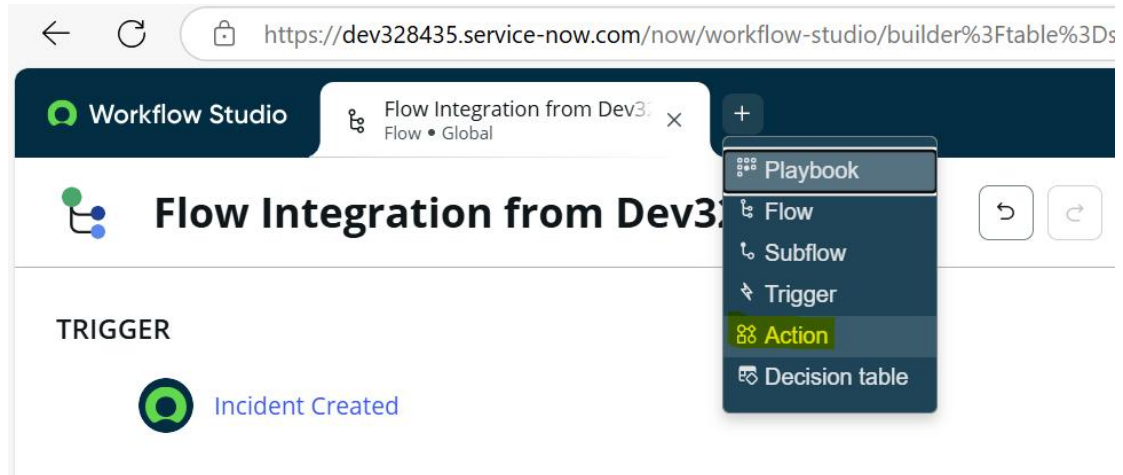


5. Click on **Create Input** and add the required fields eg. Number, Short description, Description, State, Caller id

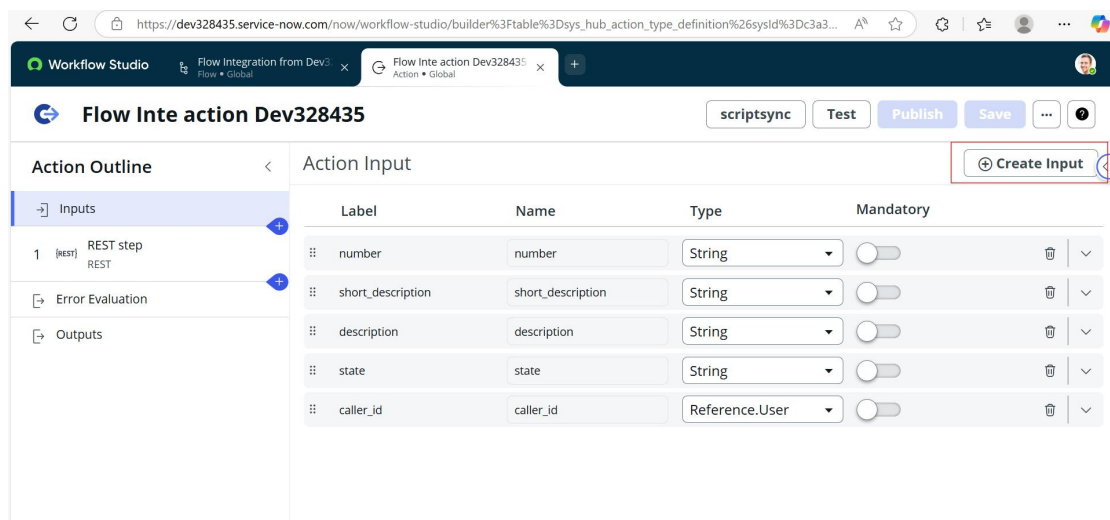

6. Add a REST Step


Click the “+” icon in your custom action.

Choose **REST Step** from the available actions.

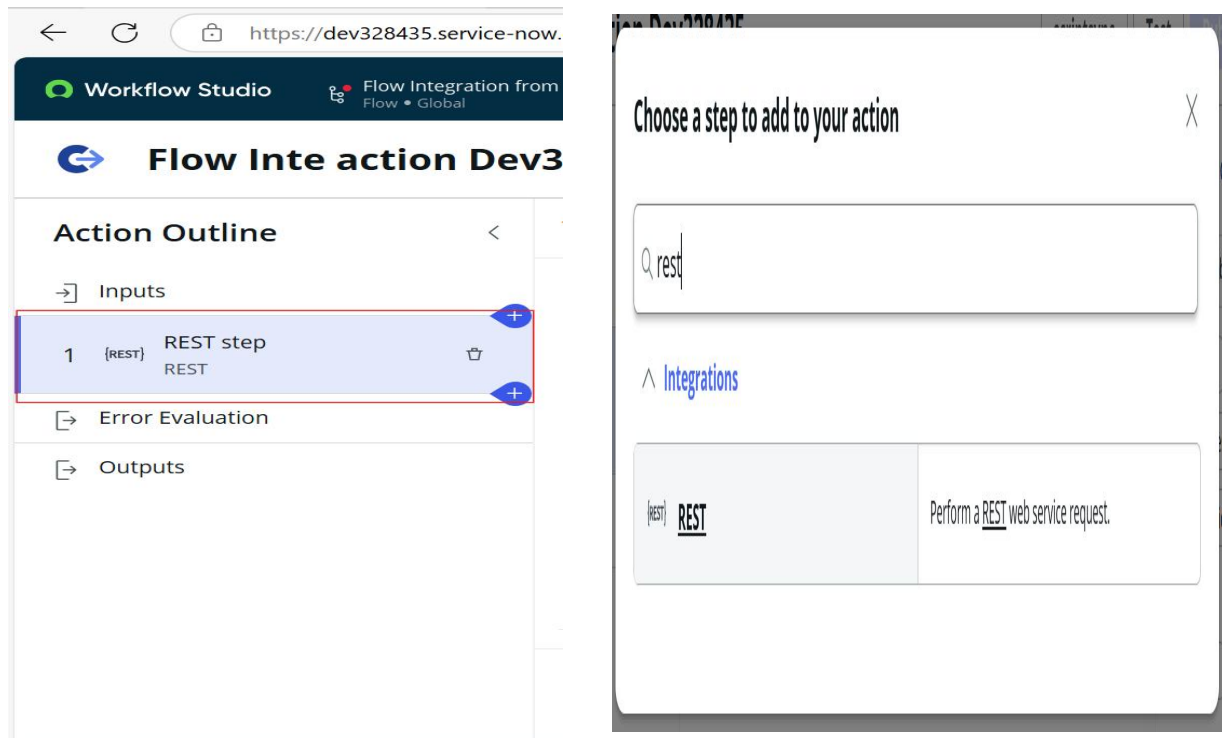


7. Select Define Connection Inline in Connection field

8. Endpoint URL: <https://<target-instance>.service-now.com/api/now/table/incident>

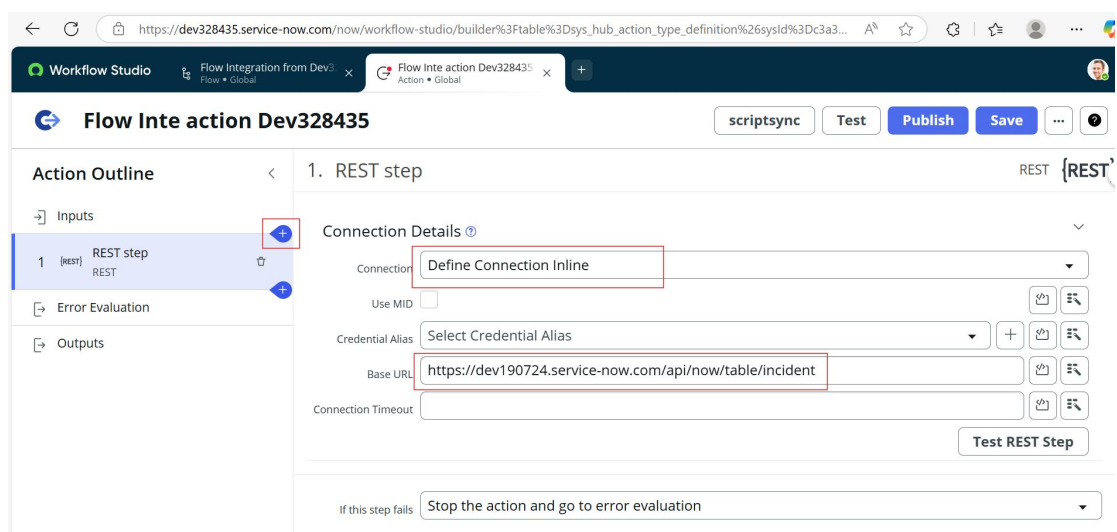

9. Set Up Authentication
In **Credential Alias**, click **+ New**.
Choose **Basic Auth Credentials**.

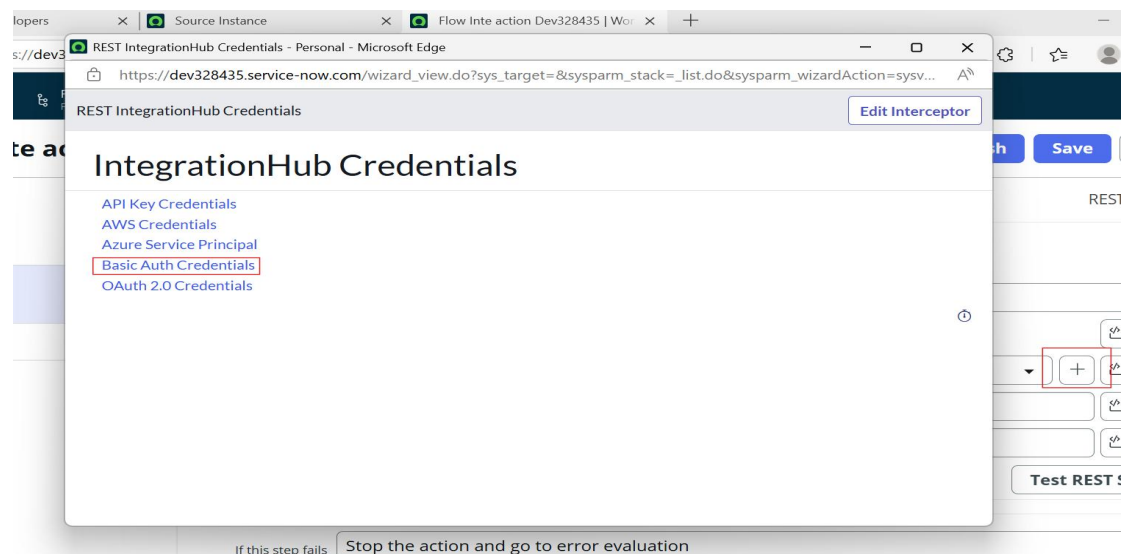

10. Provide the **Username** and **Password** of a user from the **Target Instance**.
11. Click on Credential alias

The screenshot shows the 'Basic Auth Credentials' configuration page in the ServiceNow interface. The page has a header with the title 'Basic Auth Credentials' and a 'Submit' button. Below the header, there are several input fields: 'Name' (containing 'Target Instance - dev190724'), 'Order' (containing '100'), 'User name' (containing 'Integration user'), and 'Password' (filled with dots). A red rectangular box highlights the 'User name' and 'Password' fields. Below these fields, there is a blue informational message: 'A connection alias resolves your connection and credential at runtime. More than one Credential can be active per Connection Alias at a time. If more than one credential is active, they will be used in order.' Below this message, there is a section labeled 'Credential alias' with a red asterisk and a lock icon. At the bottom of the page, there is a 'Submit' button and a 'Related Links' section with a link to 'External Storage View'.

12. Click on New button for a new Credential

Connection & Credential Aliases | Source Instance - Personal - Microsoft Edge

https://dev328435.service-now.com/sys_alias_list.do?sysparm_target=basic_auth_credentials.tag&sysparm_refer...

Connection & Credential Aliases for text Search New

All

ID Search

sn_cicd_spoke.CICD

13. Enter a name for credential alias and select **Type** as **Credential**

14. Click Submit

https://dev328435.service-now.com/sys_alias.do?sys_id=-1&sys_is_list=true&sys_target=sys_alias&sysparm_che...

Connection & Credential Aliases New record Submit

* Name Integration user ID

Application Global Parent Alias

* Type Connection and Credential

* Connection type Credential

Support Multiple Active Connections

Default Retry Policy Default HTTP Retry Policy

Configuration Template Select a template for configuring connection and credential records.

15. Click on Submit button for Basic Auth

New Record | Basic Auth Credentials | Source Instance - Personal - Microsoft Edge

https://dev328435.service-now.com/basic_auth_credentials.do?WIZARD:action=follow&sys_action=&sys_id=-1...

Basic Auth Credentials
New record View: IntegrationHub

A connection alias resolves your connection and credential at runtime. More than one Credential can be active per Connection Alias at a time. If more than one credential is active, they will be used in order.

* Credential alias

Select target record

x Integration_user

16. HTTP Method: POST

Workflow Studio

Flow Integration from Dev328435

Flow Inte action Dev328435

scriptsync Test Publish Save ...

> 1. REST step

REST {REST}

Build Request Manually

Resource Path

HTTP Method POST

Name	Value
Accept	application/json

if this step fails Stop the action and go to error evaluation

17. Add Request Body Parameters in JSON

Workflow Studio Flow Integration from Dev3 Flow Inte action Dev328435

Flow Inte action Dev328435

> 1. REST step

Request Content

Request Type

Request Body[Text]

```
{
  "number": "action ▶ number ✕",
  "short_description": "action ▶ short_description ✕",
  "description": "action ▶ description ✕",
  "state": "action ▶ state ✕",
  "caller_id": "action ▶ caller_id ✕"
}
```

9812 characters remaining

18. Use the Data Pill Picker to map each value from the Action Inputs.

Flow Inte action Dev328435 scriptsync Test Publish Save ... ?

> 1. REST step

Request Type

Request Body[Text]

```
{
  "number": "action ▶ number ✕",
  "short_description": "action ▶ short_description ✕",
  "description": "action ▶ description ✕",
  "state": "action ▶ state ✕",
  "caller_id": ""
}
```

9832 characters remaining

Retry Policy [?](#)

If this step fails

REST {REST}

Inputs

Inputs	
number	String
short_description	String
description	String
state	String
caller_id	Record

19. Define Outputs:

Click on Create Output and Add necessary output fields

Workflow Studio Flow Integration from Dev3 Flow Inte action Dev328435

Flow Inte action Dev328435

scriptsync Test Publish Save ... ?

Action Outline


- Inputs
- 1 [REST] REST step
- Error Evaluation
- Outputs

Action Output

Create Output Edit Edit Mode

Label	Name	Type	Mandatory
number	number	String	☐
short_description	short_description	String	☐
description	description	String	☐
state	state	String	☐
caller_id	caller_id	Reference.User	☐

20. Use the **Data Pill Picker** to map each value from the Action Inputs. Once the REST step and mappings are complete, click **Publish**.

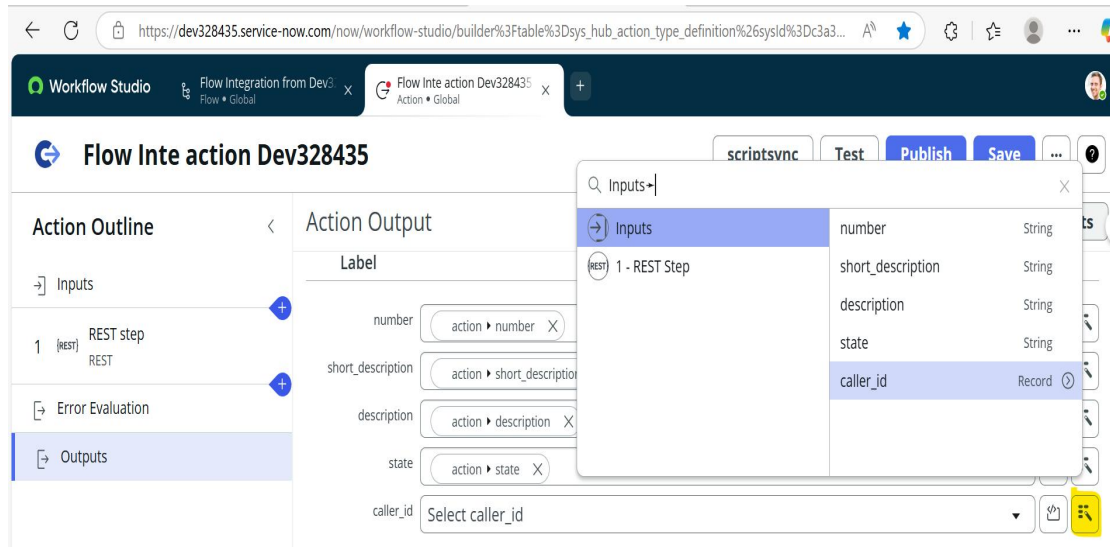


The screenshot shows the ServiceNow Workflow Studio interface for editing an action named 'Flow Inte action Dev328435'. The 'Action Outline' on the left lists the components: 'Inputs', '1 - REST step', 'Error Evaluation', and 'Outputs'. The 'Action Output' on the right displays a table of output fields and their mappings:

Label	Mapping
number	action > number
short_description	action > short_description
description	action > description
state	action > state
caller_id	Select caller_id

A 'Data Pill Picker' is open, showing a search bar and a list of inputs. The 'caller_id' input is highlighted, indicating it is being mapped to the 'caller_id' output field.

21. Go back to your Flow and **add the newly created Action**.

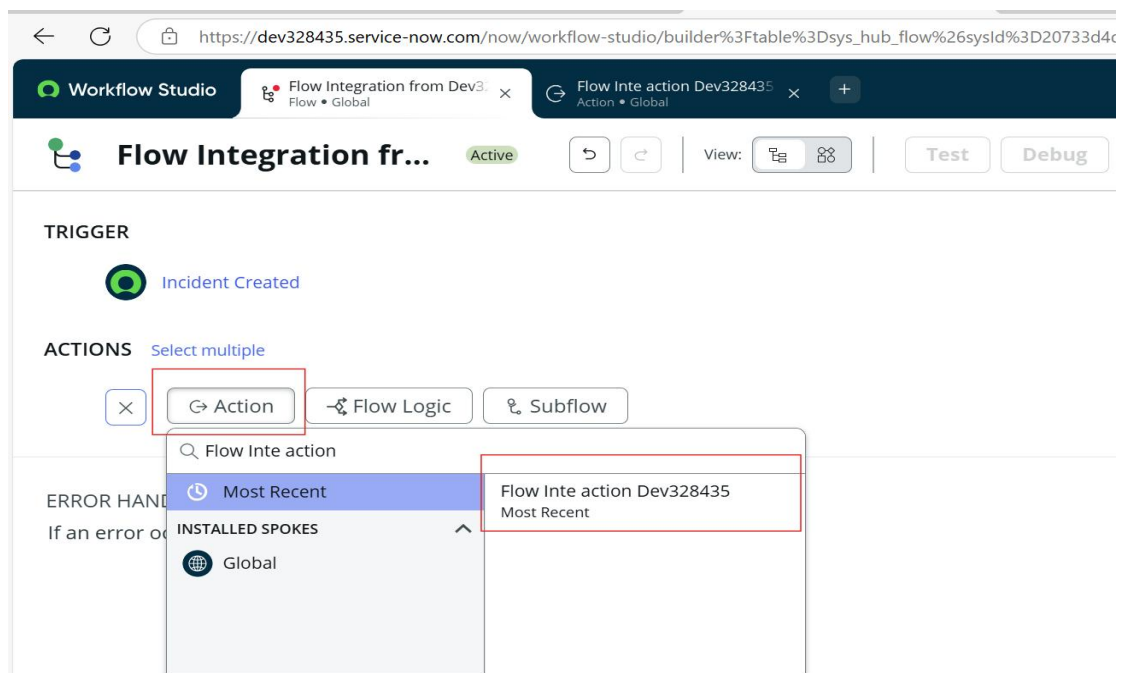

The screenshot shows the ServiceNow Workflow Studio interface for editing a flow named 'Flow Integration fr...'. The 'TRIGGER' is 'Incident Created'. The 'ACTIONS' section shows a list of actions, with 'Flow Inte action Dev328435' selected. The 'ERROR HANDLING' section is also visible.

The 'ACTIONS' section shows a list of actions, with 'Flow Inte action Dev328435' selected. The 'ERROR HANDLING' section is also visible.

22. Map values using **Data Pill Picker**.

The screenshot shows the ServiceNow Workflow Studio interface. A search bar at the top contains the text "trigger - Record Created - Incident Record - short". Below the search bar, a table lists available data pills:

Trigger - Record Created	Incident Record	Record	Short description	String
	Incident Table	Table		
	Run Start Time UTC	Date/Time		
	Run Start Date/Time	Date/Time		

Below the table, the "Action Inputs" section shows fields for "number", "short_description", "description", "state", and "caller_id [User]". The "caller_id [User]" field is currently set to "Select caller_id". At the bottom right, there are buttons for "Delete", "Cancel", and "Done".

23. Click **Activate** to enable the integration.

The screenshot shows the ServiceNow Workflow Studio interface. The top navigation bar includes the "Workflow Studio" tab and the "Flow Integration from Dev32..." action. The action is currently "Inactive". The "Action Inputs" section shows fields for "number", "short_description", "description", "state", and "caller_id [User]". The "caller_id [User]" field is currently set to "Trigger - Record C...". At the bottom right, there are buttons for "Delete", "Cancel", and "Done".

On the right side, the "Data" panel is expanded, showing the "Flow Variables" section. Under "Flow Variables", there is a section for "Trigger - Record Created" which lists the following variables:

- Incident Record (Record)
- Incident Table (Table)
- Run Start Time UTC (Date/Time)
- Run Start Date/Time (Date/Time)

Below this list, there is a section for "1 - Flow Inte action Dev328435".

24. In the **Source Instance**, navigate to the **Incident** table and create a new record.

The screenshot shows the 'Source Instance- INC0010057 | Inci...' page in ServiceNow. The form is for Incident INC0010057. The following fields are highlighted with red boxes:

- Number: INC0010057
- * Caller: Alene Rabeck
- State: In Progress
- Impact: 3 - Low
- Urgency: 3 - Low
- Priority: 5 - Planning
- * Short description: Testing Flow Designer Integration from Source to Target Instance.
- * Description: Testing Flow Integration from dev328435 to dev190724.

Other visible fields include Channel (None), Category (Inquiry / Help), Correlation ID, Subcategory (None), Service, Service offering, Configuration item, Assignment group, and Assigned to (Aqib Mushtaq).

25. In the **Target Instance**, verify that a new Incident record has been created with the same values.

The screenshot shows the 'Target Instance- INC0010057 | Incid...' page in ServiceNow. The form is for Incident INC0010057. The following fields are highlighted with red boxes:

- Number: INC0010057
- * Caller: Alene Rabeck
- State: In Progress
- Impact: 3 - Low
- Urgency: 3 - Low
- Priority: 5 - Planning
- * Short description: Testing Flow Designer Integration from Source to Target Instance.
- Description: Testing Flow Integration from dev328435 to dev190724.

Other visible fields include Channel (None), Category (Inquiry / Help), Correlation ID, Correlation display, Subcategory (None), Service, Service offering, Configuration item, Assignment group, and Assigned to.