

Client Script

Client scripts allow the system to run JavaScript on the client (web browser) when client-based events occur, such as when a form loads, after form submission, or when a field changes value.

Use client scripts to configure forms, form fields, and field values while the user is using the form. Client scripts can:

- > make fields hidden or visible
- > make fields read only or writable
- > make fields optional or mandatory based on the user's role
- > set the value in one field based on the value in other fields
- > modify the options in a choice list based on a user's role
- > display messages based on a value in a field

Client Script will execute in four ways

On Load: Runs when a form is loaded


On Change: Runs when a particular field changes value

On Submit: Runs when a form is submitted

On CellEdit: Runs when a cell on a list changes value

Procedure to create client script

1. In the left navigation pane under System Definition we will find the client script

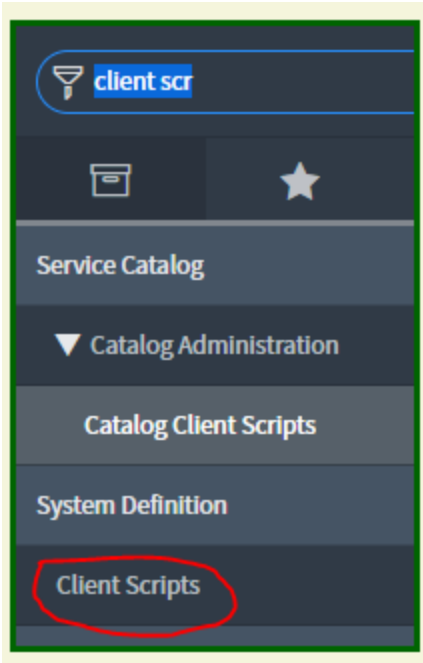

2. Below is the table where we can find all client scripts.

Client Scripts New Search for text Search					
All > Class = Client Script					
		Name	Active	Table	Application
☐	i	Maximum Duration Range Check	true	Transaction Quota Rule [sysrule_quota]	Global
☐	i	Set protocol based on auth type	true	HTTP(s) Connection [http_connection]	Global
☐	i	Make Additional Comments Mandatory	true	Incident [incident]	Global
☐	i	Populate downgrade from license	true	Software Upgrade and Downgrades [cmdb_m2m_downgrade_model]	Global
☐	i	Set Activity Definition Variables	true	Workflow UI Policy Action [wf_ui_policy_action]	Global

3. Click on new button to create Client script

Client Scripts **New** Search for text Search

Client Script
New record

Name **Popup Example** **Client script name**

Table **Vulnerability Management [u_v...** **in which table client script will execute**

UI Type **Desktop** **in which type of device the client script will execute**

Type **Desktop**
Mobile / Service Portal
All

Application **Global**

Active ☒

Inherited ☐

Global ☒ **Client script will applicable for all views or perticular views**

Description

Messages

Script

1 **Here we will write our script**

4. There are 4 types of client script

onCellEdit

onChange

onLoad

onSubmit

5. Action gets triggered based on these 4 types of events.

UI Type	Desktop
Type	-- None -- -- None -- onCellEdit onChange onLoad onSubmit
Description	

OnLoad

If we select the onLoad then when the page will load, the client script will run.

Client Script
New record

Name	Popup Example	Application	
Table	Vulnerability Management {u_v... ▼	Active	
UI Type	All ▼	Inherited	
Type	onLoad ▼	Global	
Description			
Messages			
Script	function onLoad() { //Type appropriate comment here, and begin script below alert("This is an example"); }		

OnChange

onChange() client script will get executed when user change any value in an existing form.

Client Script
New record

Name **OnChange Example** Application Global

Table **Vulnerability Management [u_v...** Active ☒

UI Type Desktop Inherited ☐

Type **onChange** Global ☒

Field name **Short Description** Which field change the client script will execute.
Here any change of "short description" filed, the client script will execute.

Description

Messages

Script

```
1 function onChange(control, oldValue, newValue, isLoading, isTemplate) {  
2     if (isLoading || newValue === '') {  
3         return;  
4     }  
5  
6     //Type appropriate comment here, and begin script below  
7     alert('Example for OnChange');  
8 }
```

OnSubmit

onSubmit() client script will get executed when use submits the form.

Client Script
New record

Name: OnSubmit Example

Table: Vulnerability Management (u_v...)

UI Type: Desktop

Type: onSubmit

Application: Global

Active: ☒

Inherited: ☐

Global: ☒

Description:

Messages:

Script:

```
1 function onSubmit() {  
2 //Type appropriate comment here, and begin script below  
3 alert('Example for onSubmit')  
4 }
```

onCellEdit

It is used in list view. Cell mean a particular row inside a column. Like a excel cell.

In list view in service now we will get the value as a tabular form so here one value is like cell value. So here if we want to modify any value and trigger a client script then we can use onCellEdit.

