


GlideAjax

Lets start first try to understand what is AJAX in general before we jump in ServiceNow GlideAjax .

- AJAX term is stand for Asynchronous JavaScript and XML. AJAX allows us to update part of our web page asynchronously by exchanging small amounts of data with the server, that's exchange occurs behind the scene instead of reloading the whole form.
- The GlideAjax class is used by client-side scripts to send data to and receive data from the ServiceNow server.
- The client-side script passes parameters to the Script Include. The Script Include returns data as XML or a JSON object.
- The client-side script parses data from the response and can use the data in subsequent script logic.

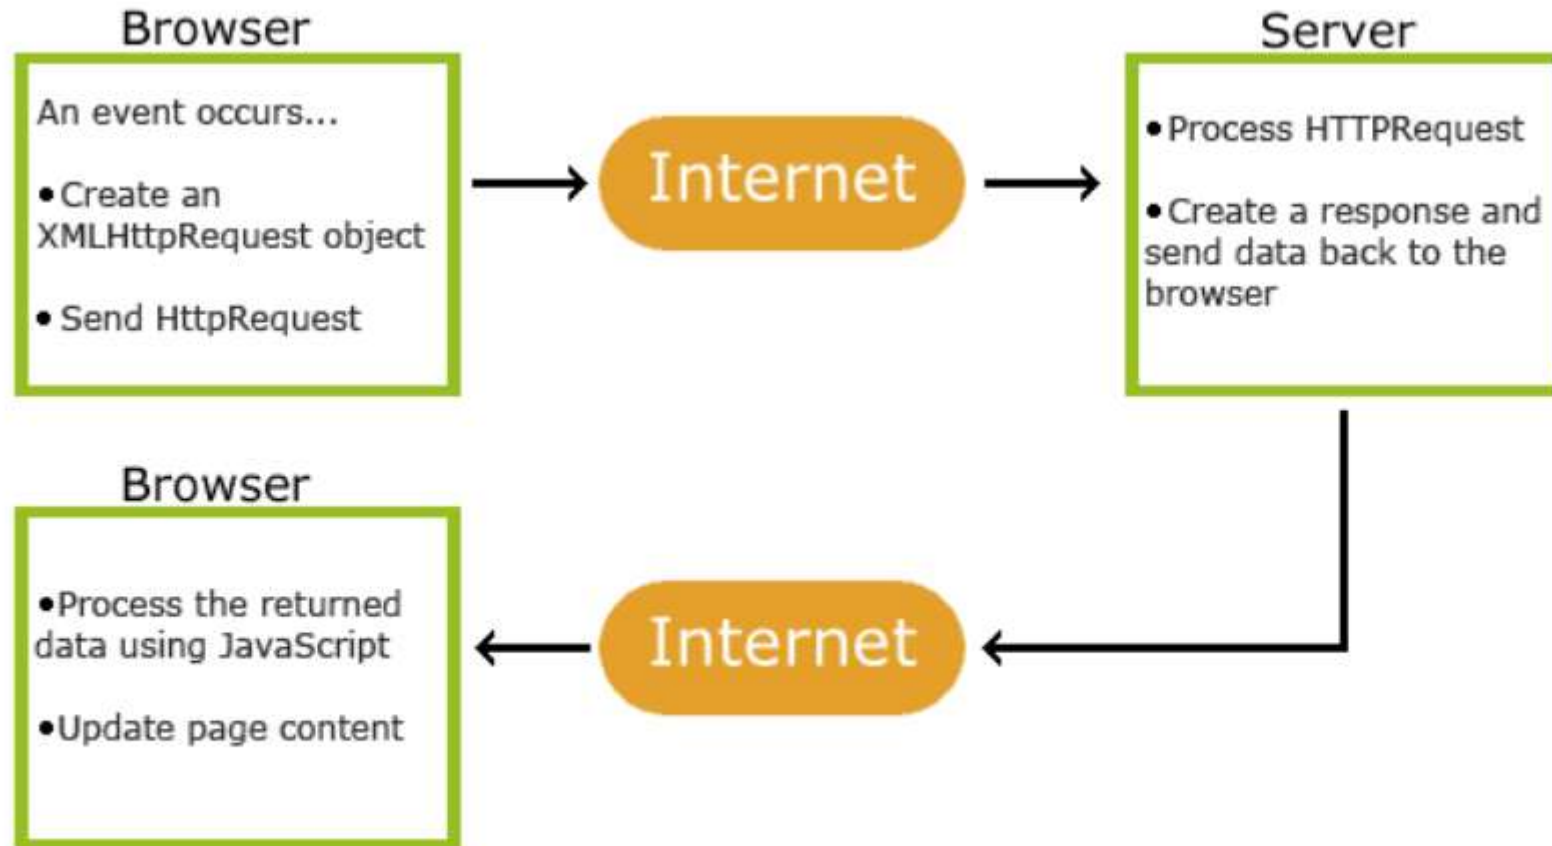


Important points to remember:-

- We should initialize GlideAjax with name of script include which we have to use
- The script includes which we will use, we should make sure that client callable checkbox must be checked.
- The client-side script passes parameters using GlideAjax to the Script Include. The parameter uses naming conventions.
- So make sure that the naming convention must have prefix “sysparm_”. For example, GlideAjax pass function name in parameter which it requires to execute at server end. Some example syntax are mentioned below:
- `ga.addParam('sysparm_name','<scriptIncludeFunctionName>');`
- `ga.addParam('sysparm_firstname','Shivani');`
- `ga.addParam('sysparm_location','Delhi');`
- The main benefit of GlideAjax is that we can easily calls pass parameters to the [ServiceNow script include](#) and using naming conventions.
- NOTE :-'sysparm_name' is always used for parameter function (the function which has to executed in script include) and `getXML ()`, `getXMLWait ()` functions are used to execute the code.

why we execute server side code from client side?

- When we want to validate the things on the client form that time, we need to execute server side code from client side.
- Let's take one example:- On incident form , the requirement is that the end user can only submit the form , when his manager belongs to any specific group(ABC group).
- So, here for validation to get manager group name from the database or server .

Different type of GlideAjax in ServiceNow

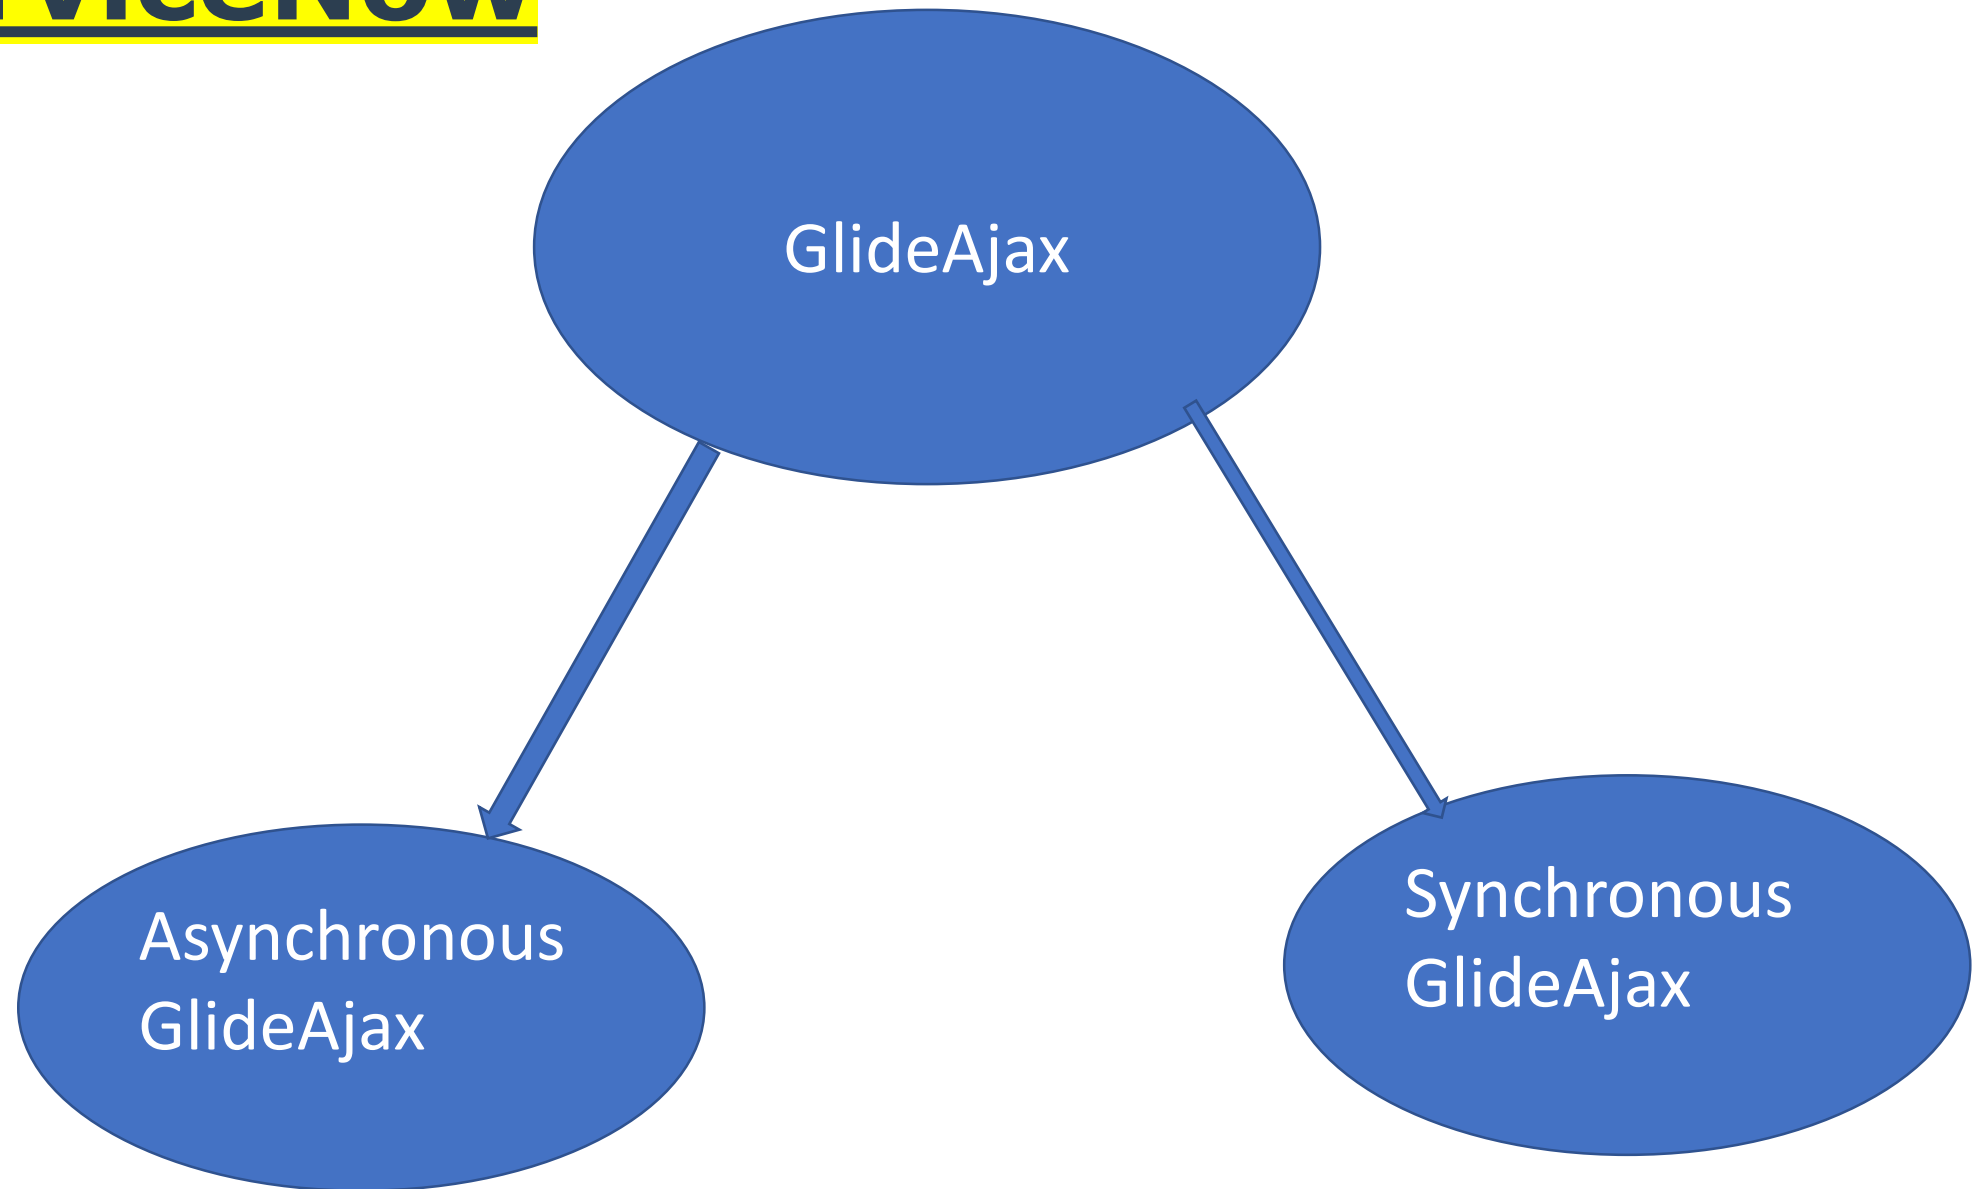

Asynchronous and Synchronous GlideAjax ServiceNow

- In Asynchronous GlideAjax we use `getXML ()` call back functions, through which code run on backend to get the response from server. So, because of that user can proceed with other fields filling etc.

- Synchronous GlideAjax use `getXMLWait ()` function, so user cannot process with other fields filling or other fields will get freeze until the response is not received from the server.

Syntax:-

```
var ga = new GlideAjax("scriptIncludeAuto");
```

Initialize with the same
name as script Include

```
ga.addParam("sysparm_name", "userValues");
```

Function defined in
Script Include

```
ga.addParam("user", callerId);
```

```
ga.getXML(pop);
```

Using getXML()
Function, its means
Asynchronous call

```
function pop(response) {
```

CallBackFunction

```
var serverresults = (response.responseXML.documentElement.getAttribute("answer"));
```

```
alert(serverresults);
```

Way to define
Parameter

Extract the data from the XML
returned by the script Include

What is call back function?

- The function is said to be callback function, when it is passed as an argument to another function so that it can be called back later. This function is used to avoid application halt while the data is being fetched from the database or server.

```
var ga = new GlideAjax("scriptIncludeAuto");
ga.addParam("sysparm_name", "userValues");
ga.addParam("user", callerId);
ga.xmlGetXML(pop);
function pop(response) {
    var serverresults = (response.responseXML.documentElement.getAttribute("answer"));
    alert(serverresults);
}
```

CallBackFunction

passed as an argument
to another Function

The diagram illustrates the concept of a callback function. It shows a code snippet where a function named 'pop' is defined and then passed as an argument to the 'xmlGetXML' method of a 'GlideAjax' object. Red annotations highlight the 'pop' function and its use as an argument, with a label 'CallBackFunction' pointing to the function definition and 'passed as an argument to another Function' pointing to the 'pop' argument in the 'xmlGetXML' call.