Resource 1: Doctor

a) Use Case: Create a new doctor


Resource(s): Doctors

HTTP Method: POST


Request URL: http://127.0.0.1:8000/doctors

Request Body:


```
{
"firstName": "Alyssa",
"lastName": "Qi",
"specialtyId": "Spec_1",
"tier": "Specialist",
"email": "alyssaqi@email.com",
"phone": "400-300-2000",
"licenseNumber": "ALY-001",
"yearsOfExperience": 12,
"ratingAverage": 5.0
}
```

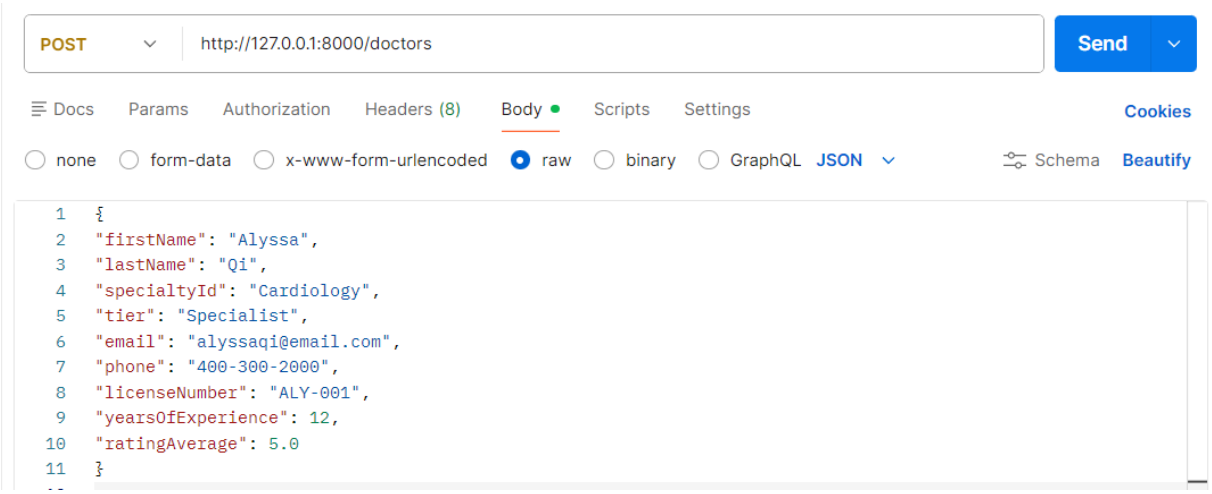Response:

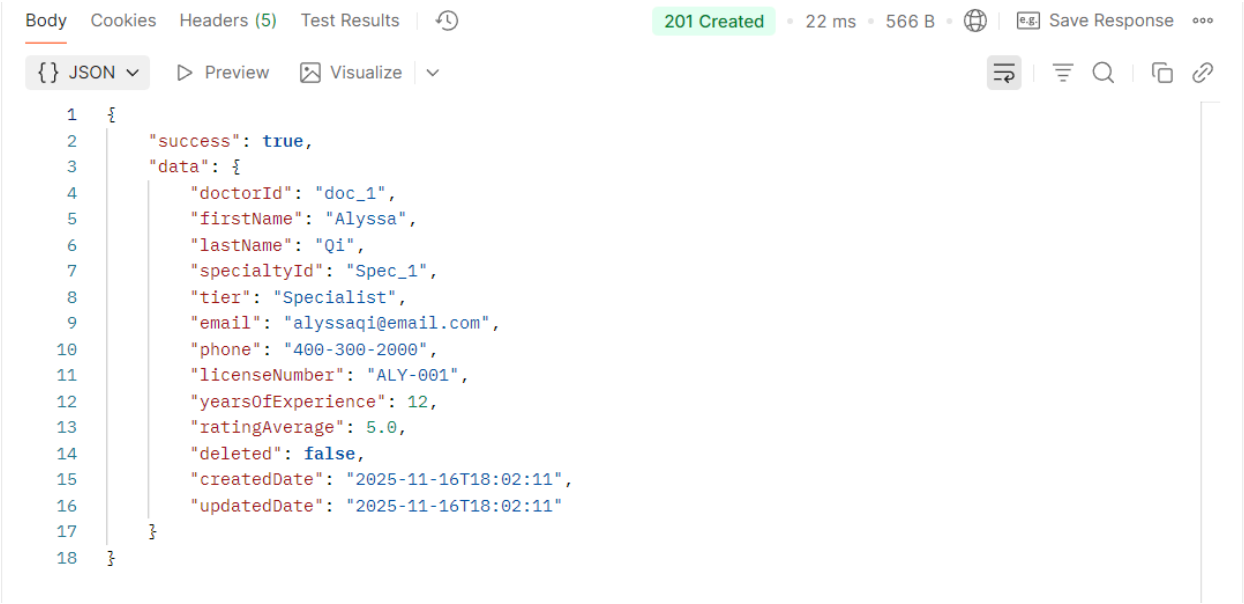

b) Use Case: Get all doctors (Sort by Rating Average)

Resource(s): Doctors


HTTP Method: GET

Request URL: http://127.0.0.1:8000/doctors?limit=20&sortBy=ratingAverage&order=asc


Request Body: N/A

Response:


1. Without Authorization header

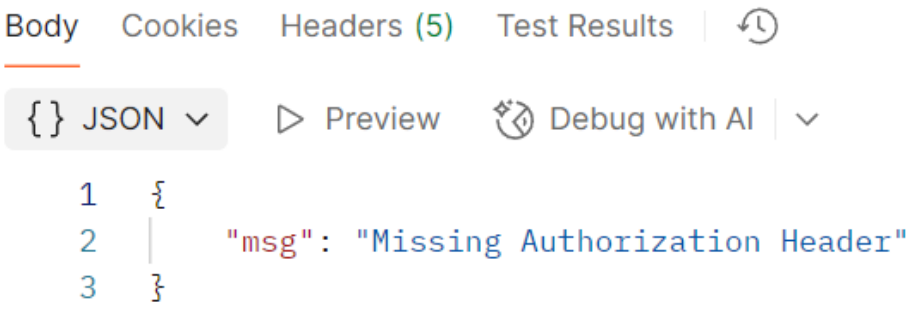

2. Create and fetch an access_token

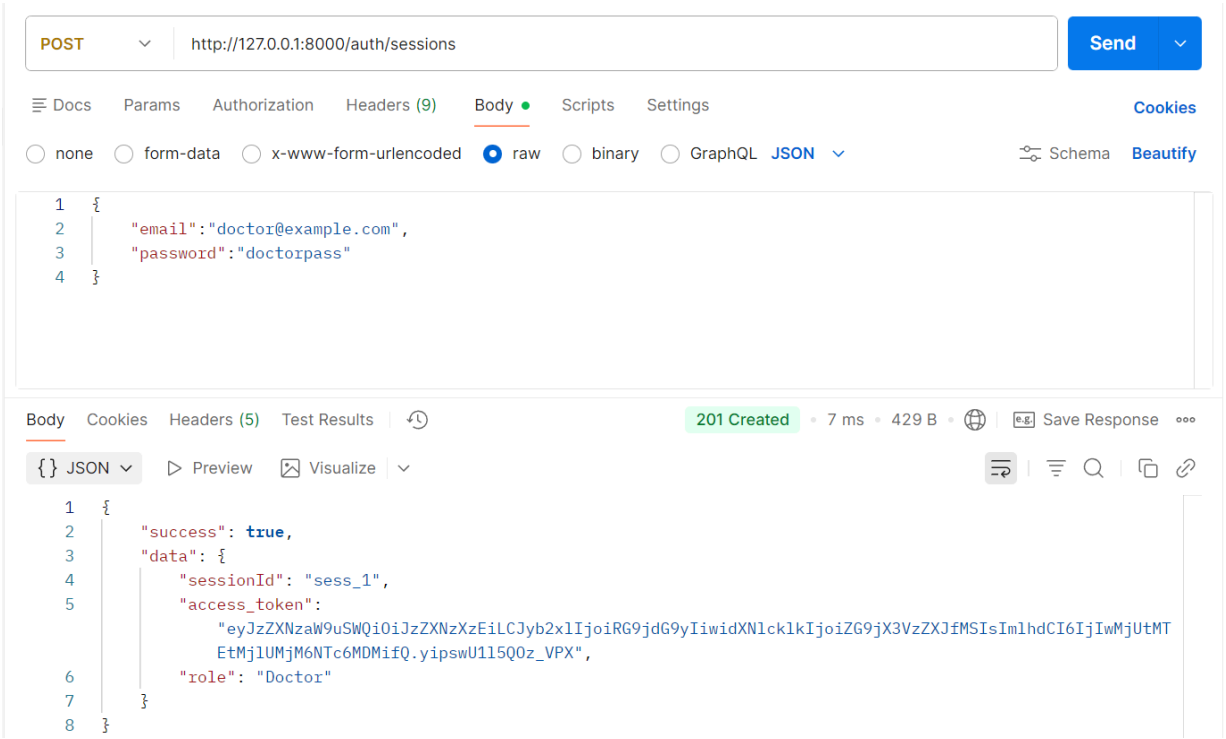

3. With Authorization

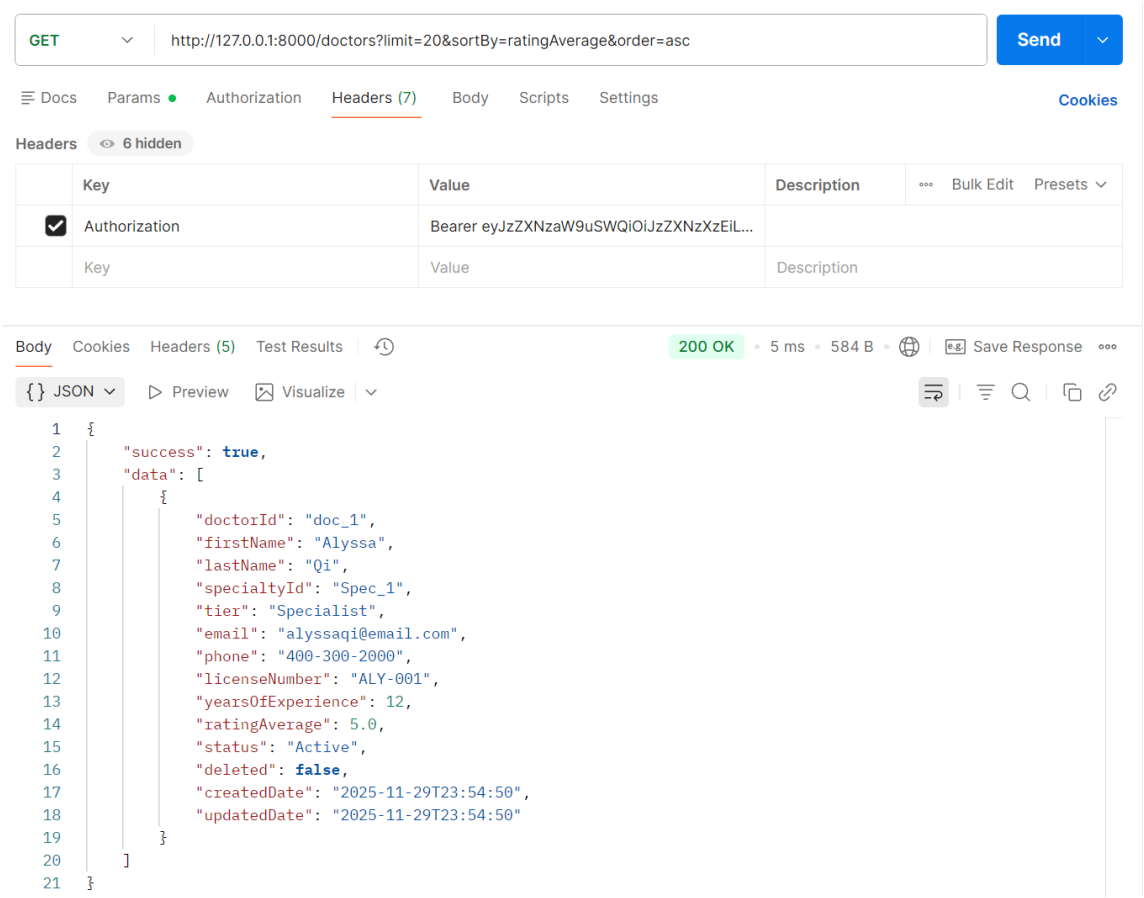

c) Use Case: Get a specific doctor


Resource(s): Doctors

HTTP Method: GET


Request URL: http://127.0.0.1:8000/doctors/doc_1

Request Body: N/A


1. Without Authorization header

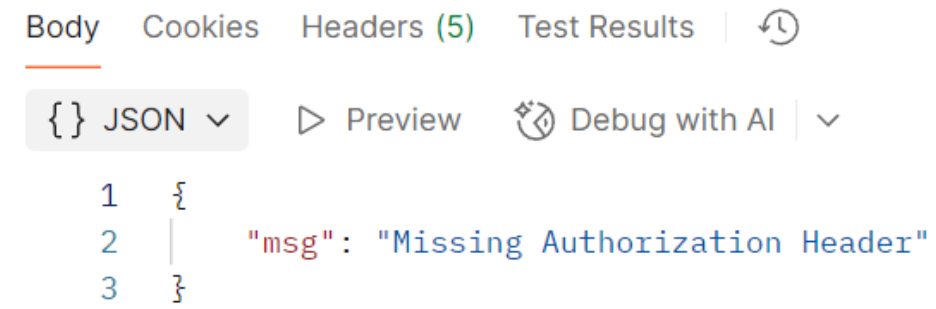

2. Create and fetch an access_token

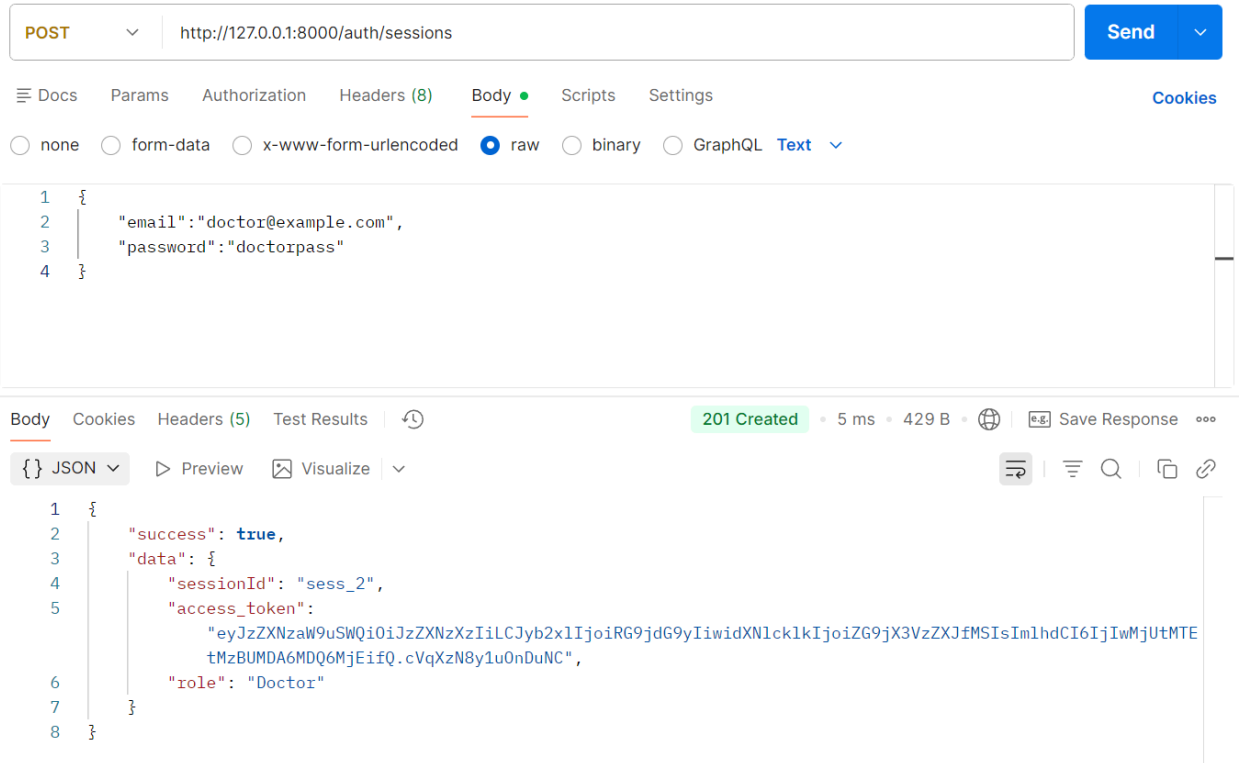

3. With Authorization

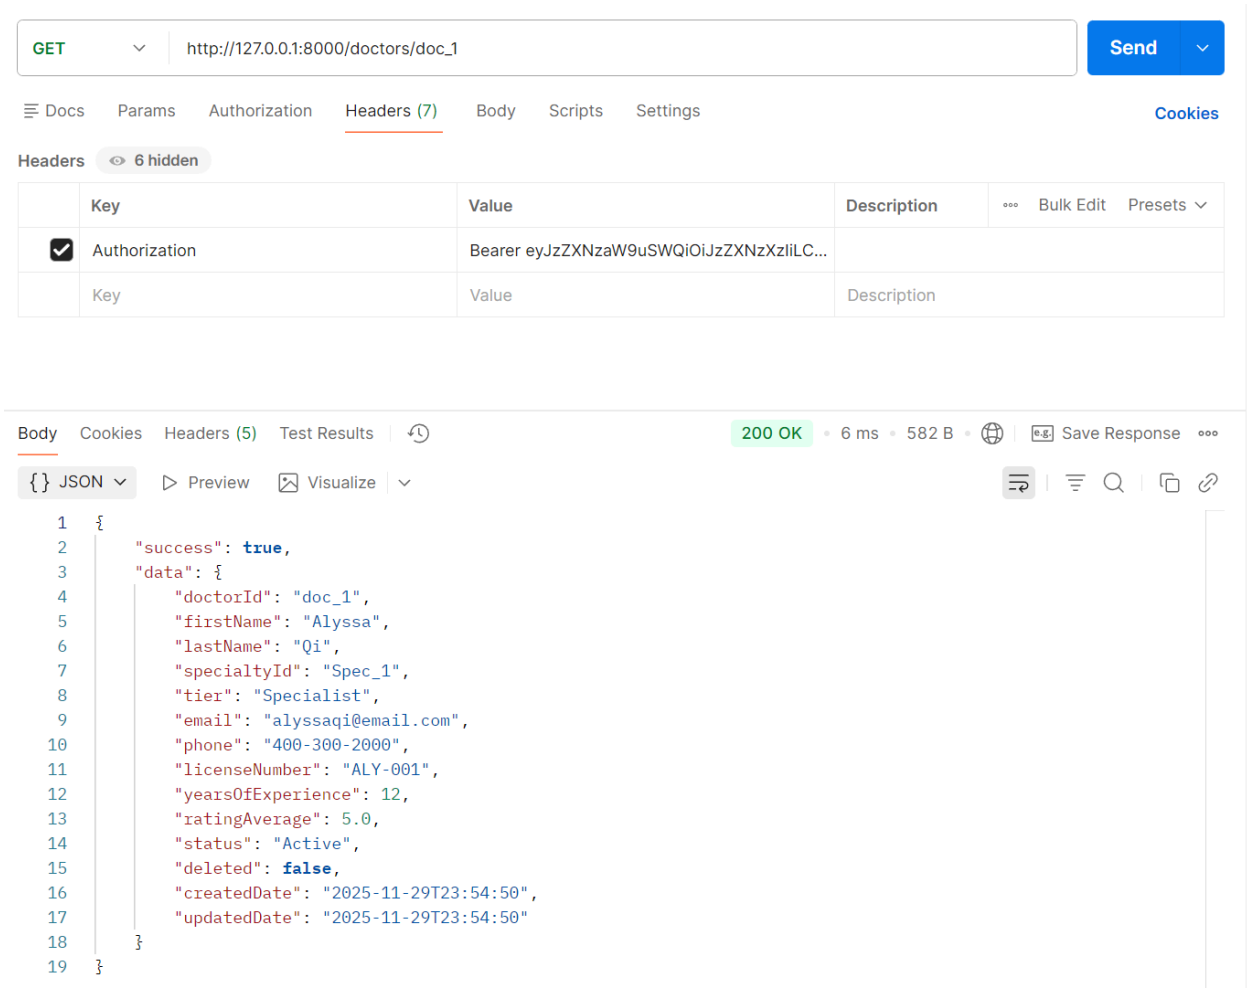

d) Use Case: Update a specific doctor

Resource(s): Doctors

HTTP Method: PATCH


Request URL: http://127.0.0.1:8000/doctors/doc_1

Request Body:

```
{


"yearsOfExperience": 13

}
```

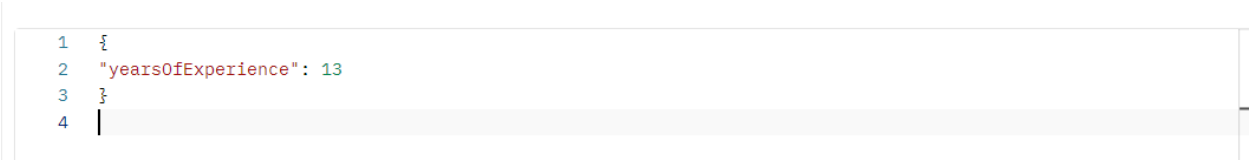


Response:


1. Without Authorization header

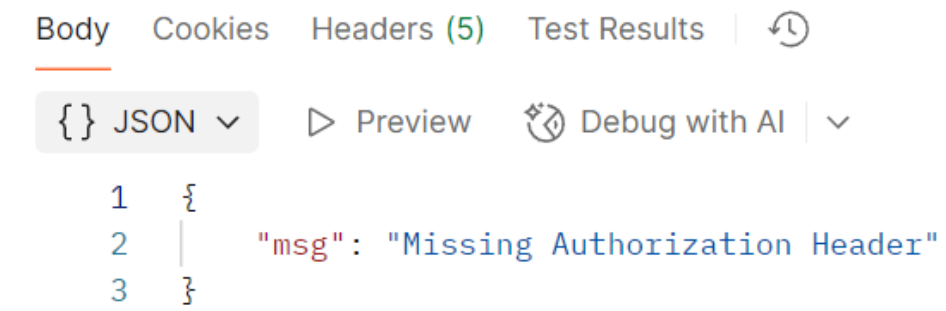

2. Create and fetch an access_token

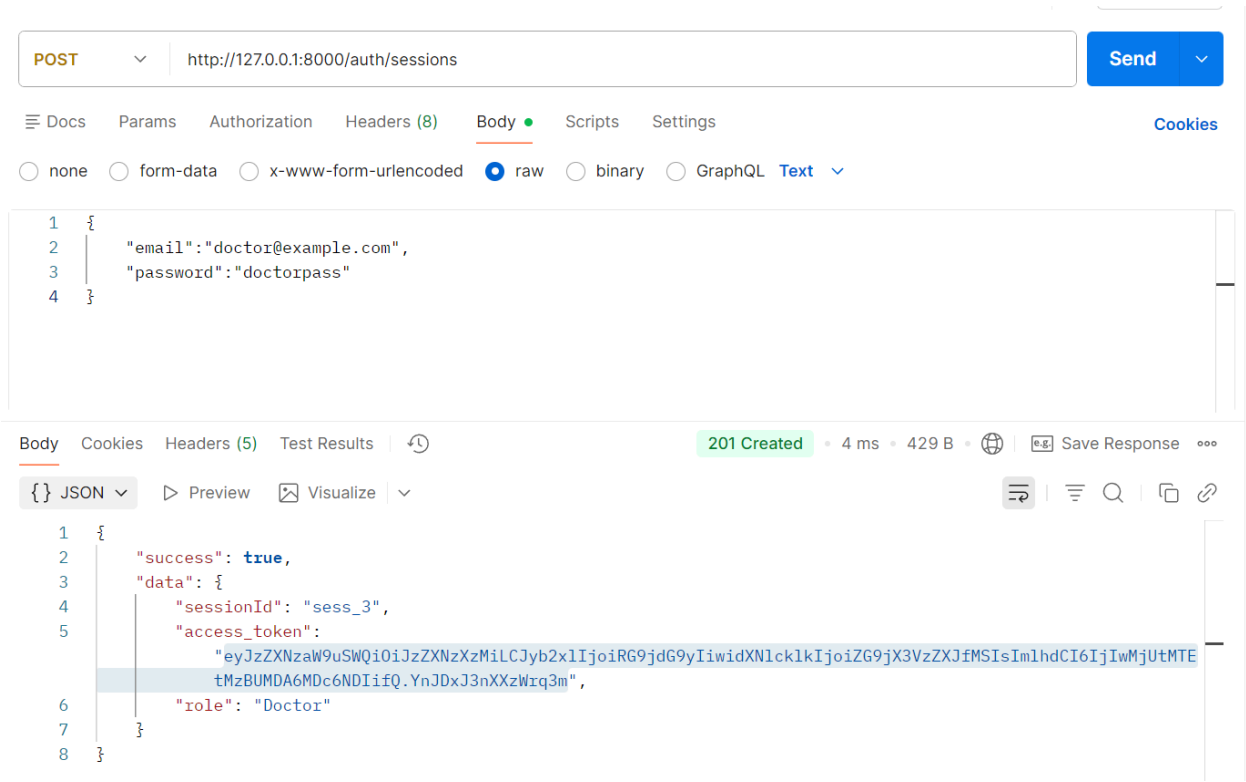

3. With Authorization

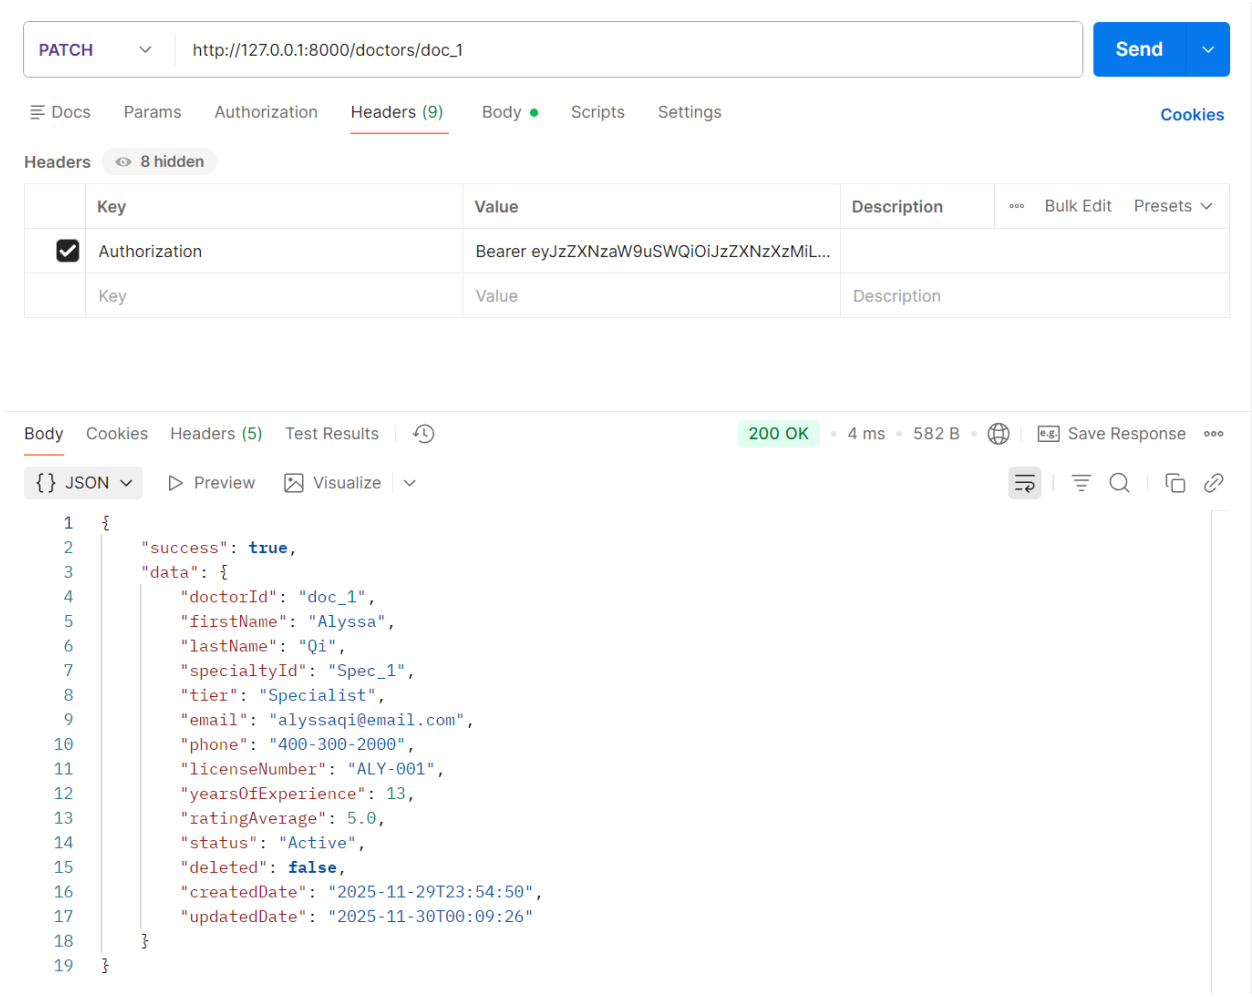

e) Use Case: Soft-delete a specific doctor

Resource(s): Doctors


HTTP Method: DELETE

Request URL: http://127.0.0.1:8000/doctors/doc_2


Request Body: N/A

Response:


1. Without Authorization header

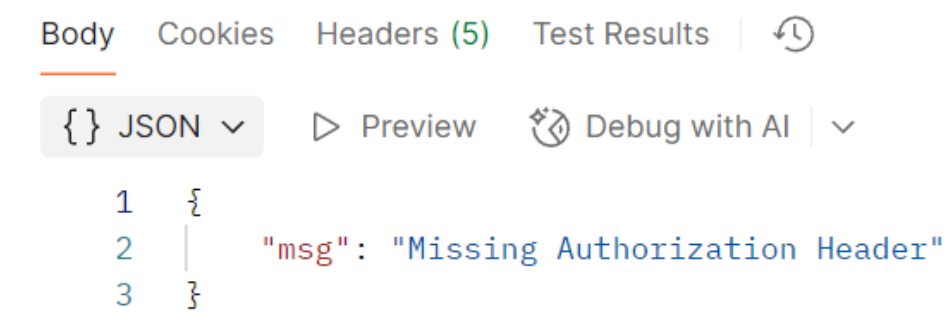

2. Create and fetch an access_token

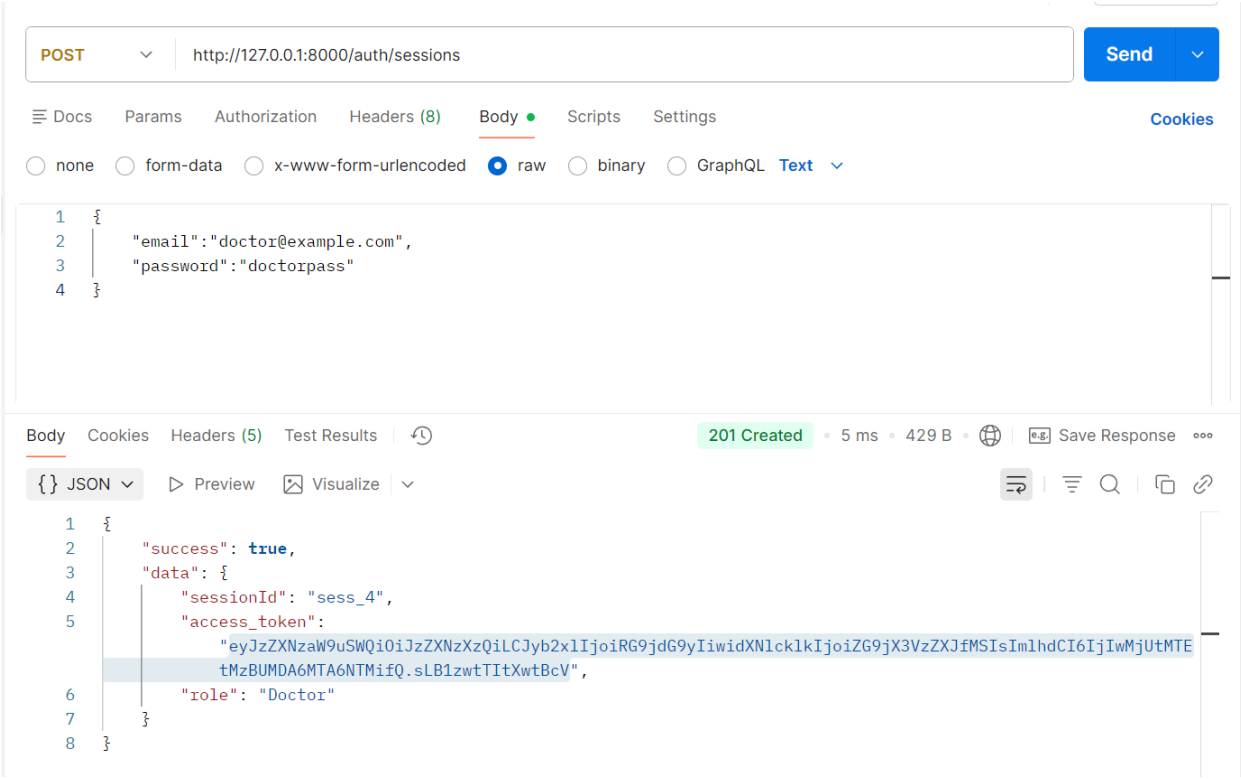

3. With Authorization

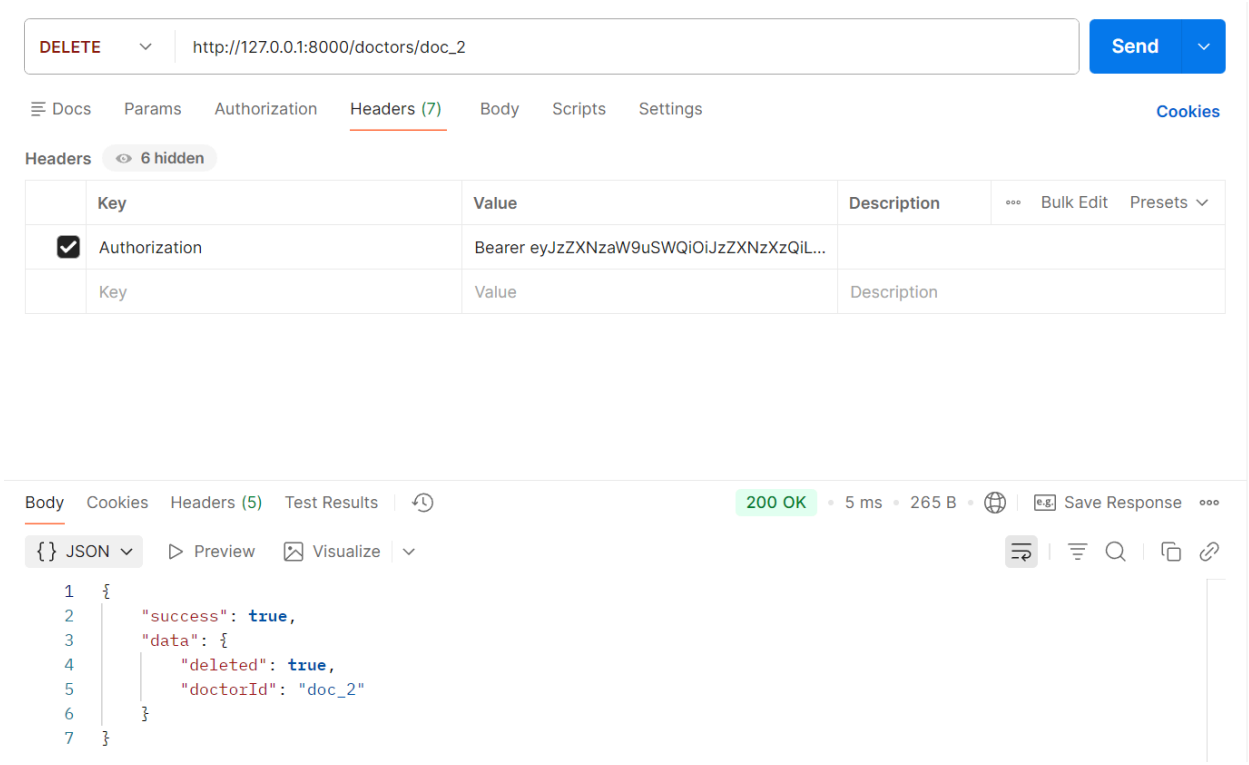

Resource 2: Patients

a) Use Case: Create a new patient

Resource(s): Patients

HTTP Method: POST

Request URL: http://127.0.0.1:8000/patients

Request Body:

```
{
"firstName": "Zoe",
"lastName": "Lee",
"dateOfBirth": "1995-08-12",
"registrationDate": "2025-11-20",
"gender": "F",
"email": "zoe@email.com",
```

```
"phone": "333-555-1111",

"address": "Mountain View",

"insuranceProvider": "Blue Shield",

"medicalHistory": "No known allergies"

}
```



```
{
"firstName": "Zoe",
"lastName": "Lee",
"dateOfBirth": "1995-08-12",
"registrationDate": "2025-11-20",
"gender": "F",
"email": "zoe@email.com",
"phone": "333-555-1111",
"address": "Mountain View",
"insuranceProvider": "Blue Shield",
"medicalHistory": "No known allergies"
}
```


Response:


```
{
    "success": true,
    "data": {
        "patientId": "pat_1",
        "firstName": "Zoe",
        "lastName": "Lee",
        "dateOfBirth": "1995-08-12",
        "gender": "F",
        "email": "zoe@email.com",
        "phone": "333-555-1111",
        "address": "Mountain View",
        "insuranceProvider": "Blue Shield",
        "medicalHistory": "No known allergies",
        "registrationDate": "2025-11-20",
        "deleted": false,
        "createdDate": "2025-11-30T00:13:50",
        "updatedDate": "2025-11-30T00:13:50"
    }
}
```


b) Use Case: Get all patients

Resource(s): Patients


HTTP Method: GET

Request URL:
http://127.0.0.1:8000/patients?page=1&limit=25&sort=lastName&order=asc&gender=F


Request Body: N/A

Response:


1. Without Authorization header

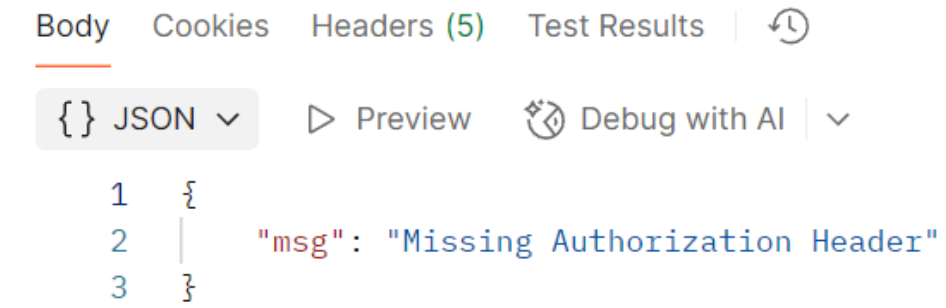

2. Create and fetch an access_token

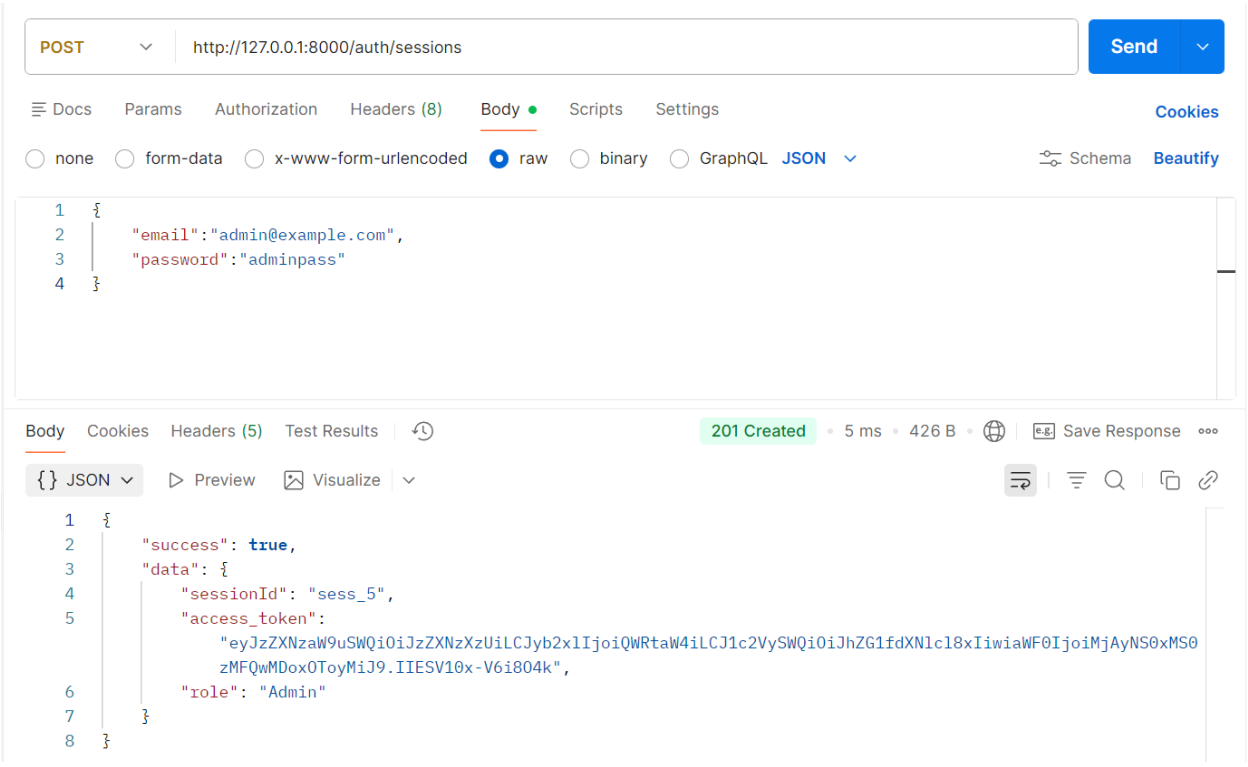

3. With Authorization

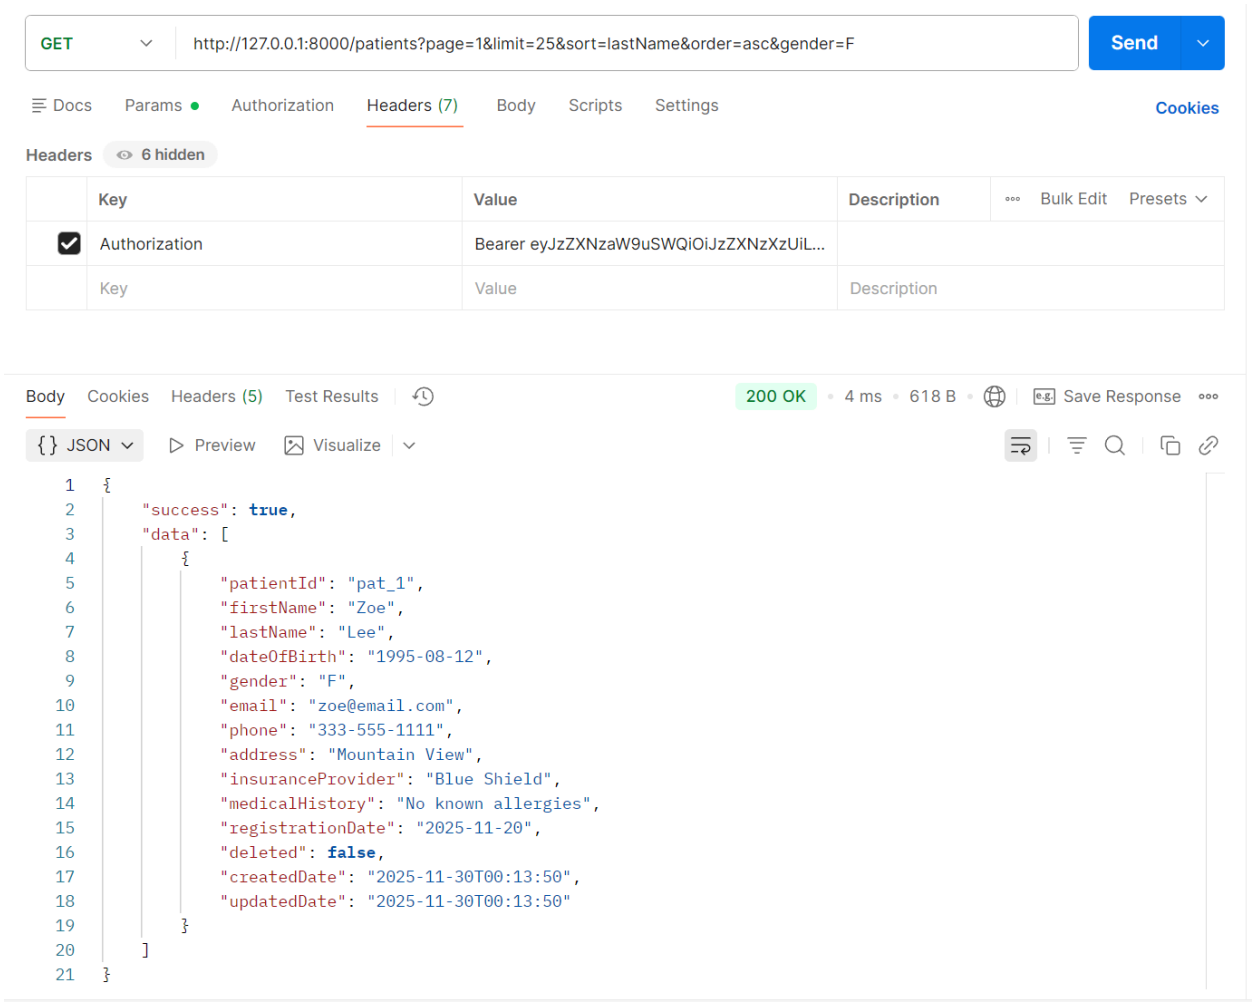

c) Use Case: Get a specific patient

Resource(s): Patients


HTTP Method: GET

Request URL: http://127.0.0.1:8000/patients/pat_1


Request Body: N/A

Response:


1. Without Authorization header

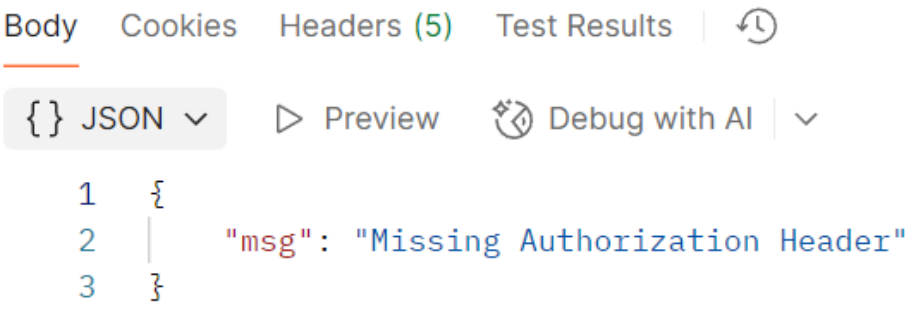

2. Create and fetch an access_token

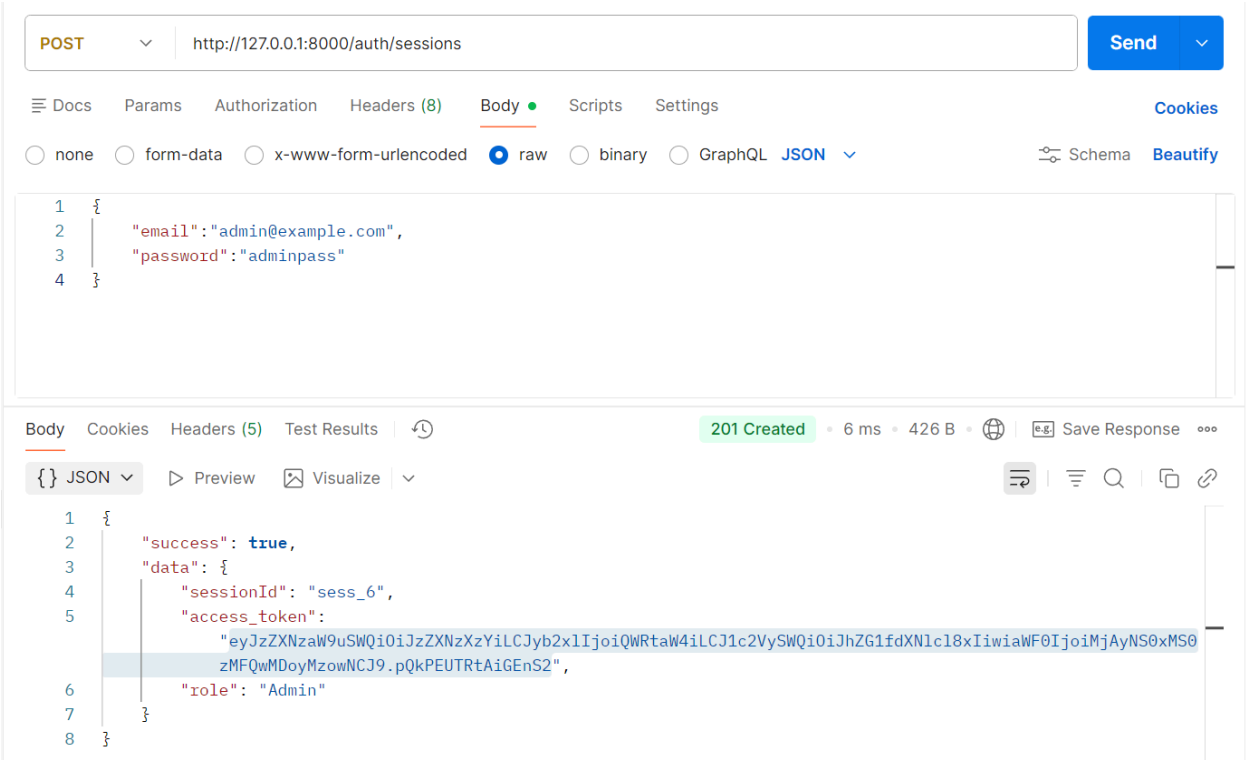

3. With Authorization

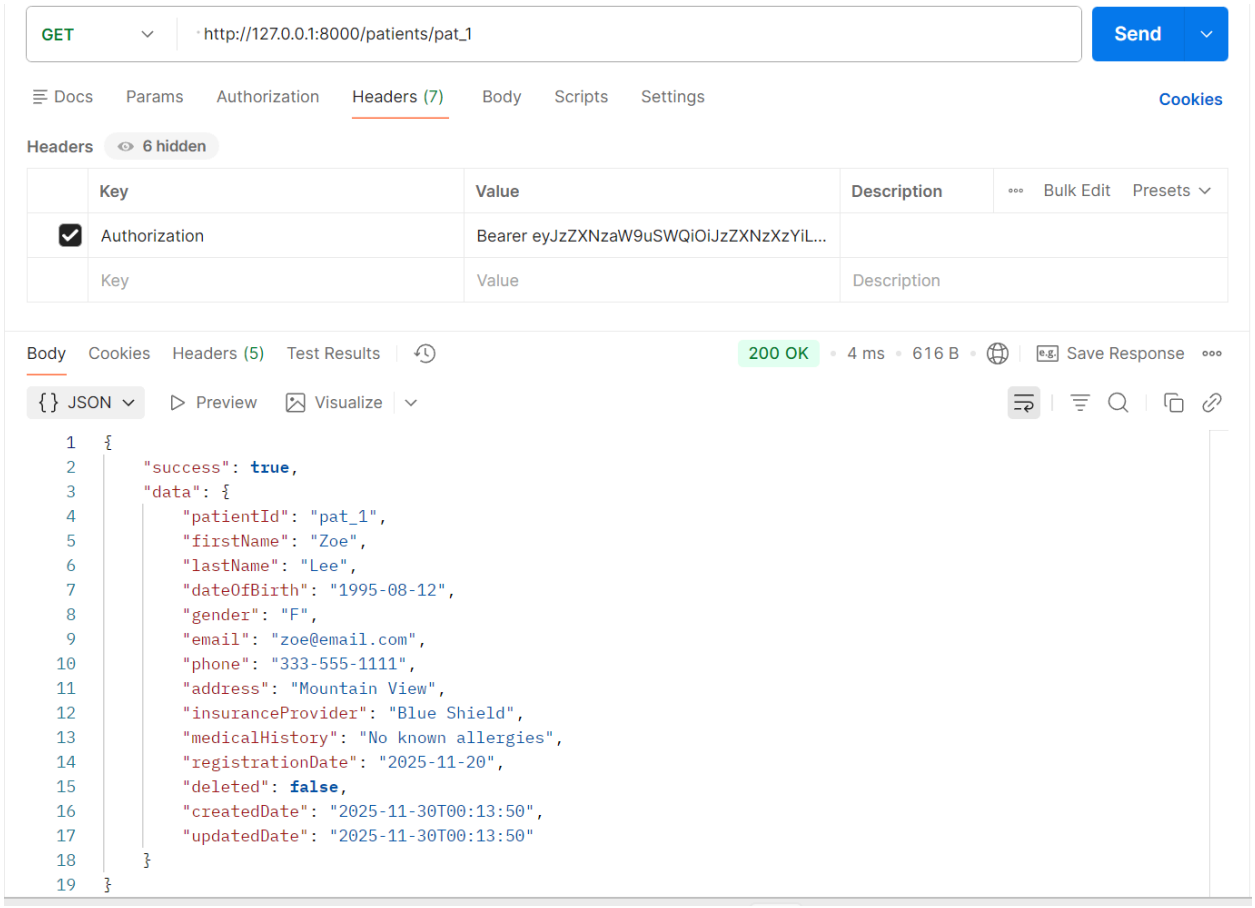

d) Use Case: Update a specific patient

Resource(s): Patients

HTTP Method: PATCH


Request URL: http://127.0.0.1:8000/patients/pat_1

Request Body:

```
{


"address": "santa clara"

}
```

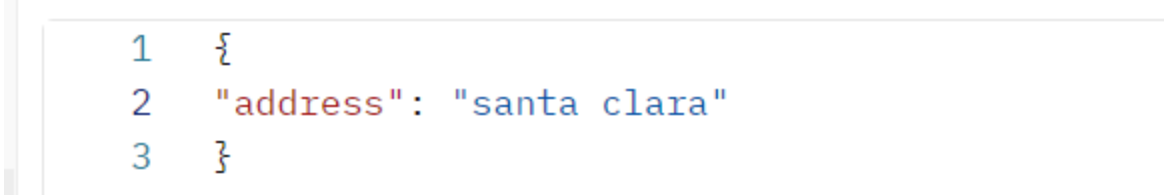


Response:


1. Without Authorization header

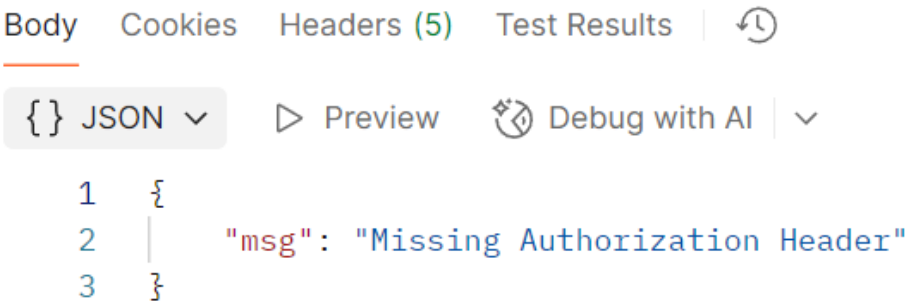

2. Create and fetch an access_token

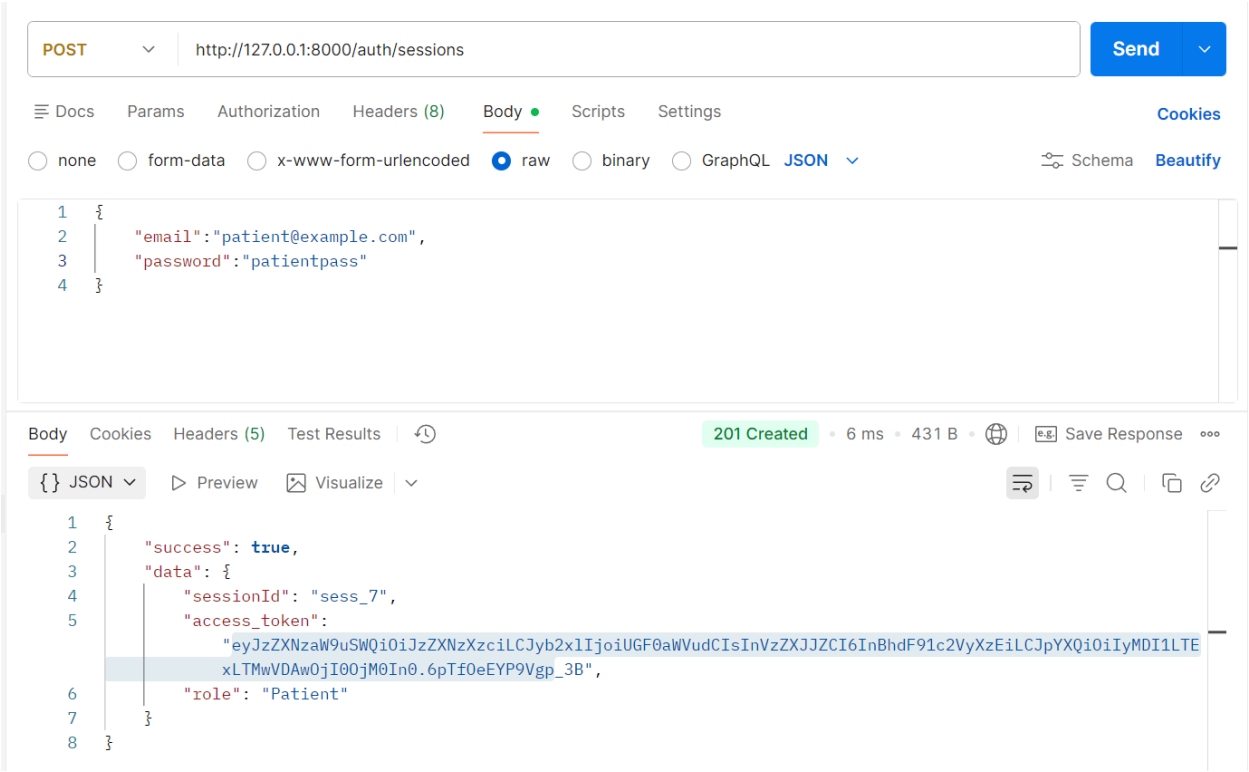

3. With Authorization

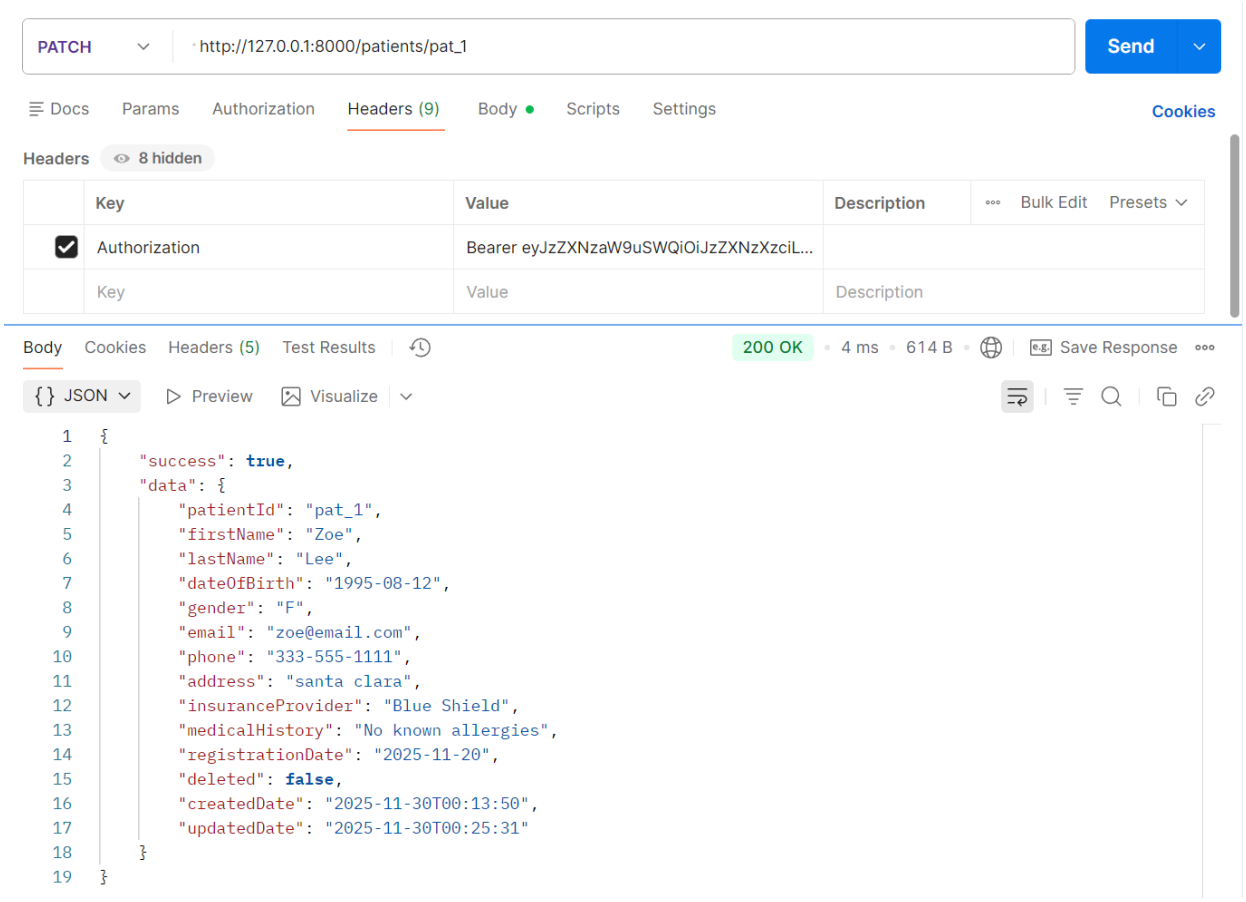

e) Use Case: Soft-delete a specific patient

Resource(s): Patients


HTTP Method: DELETE

Request URL: http://127.0.0.1:8000/patients/pat_2


Request Body: N/A

Response:


1. Without Authorization header

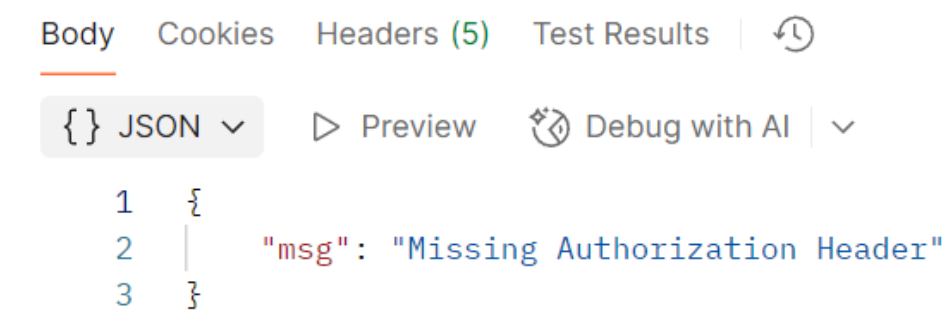


2. Create and fetch an access_token

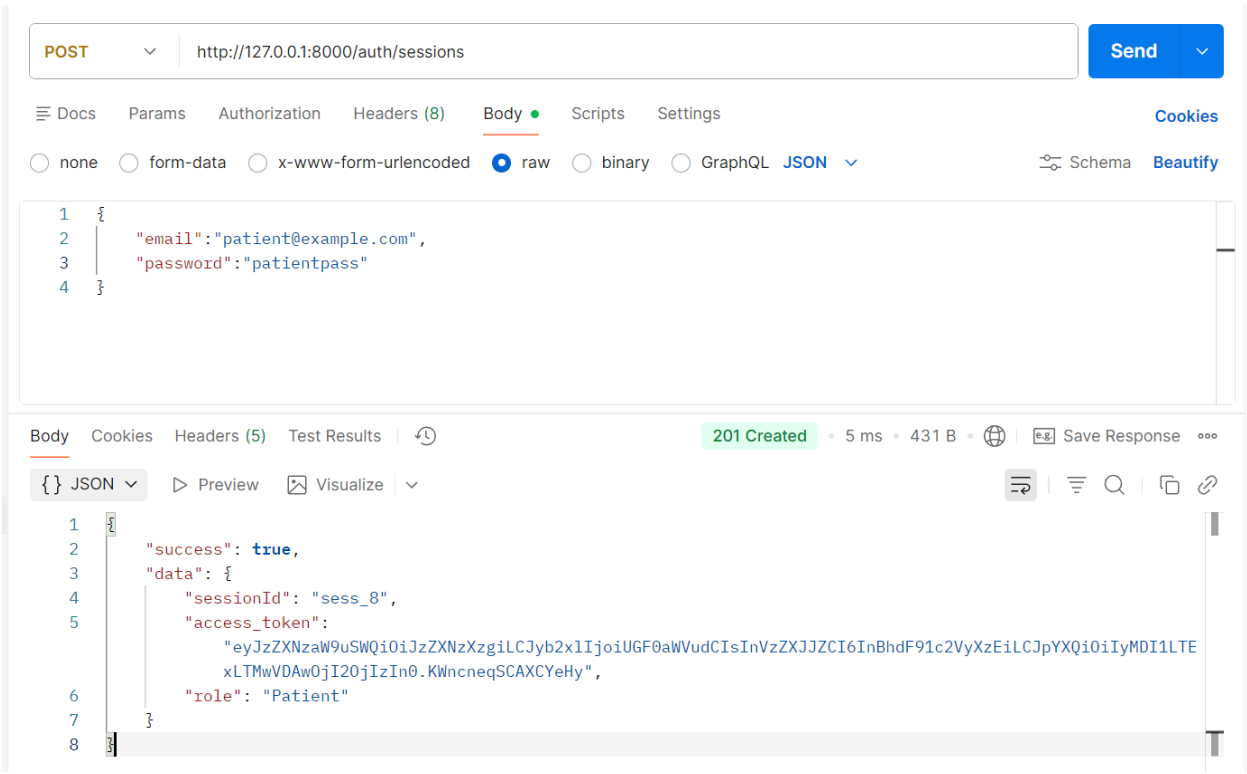

3. With Authorization

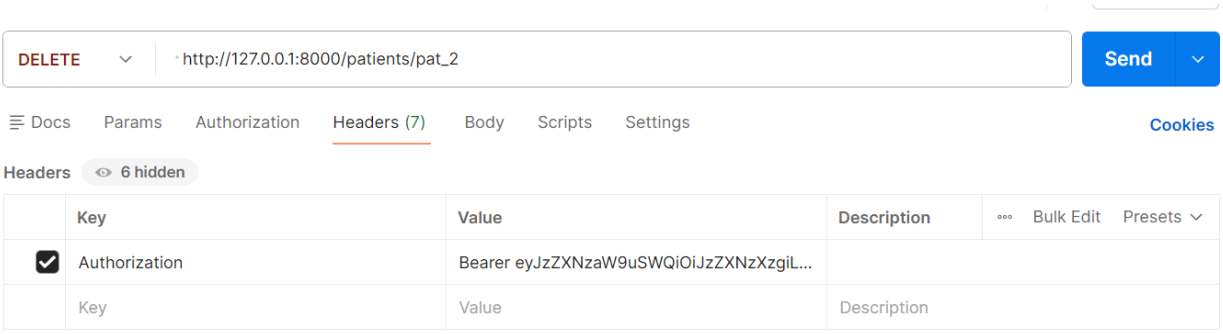

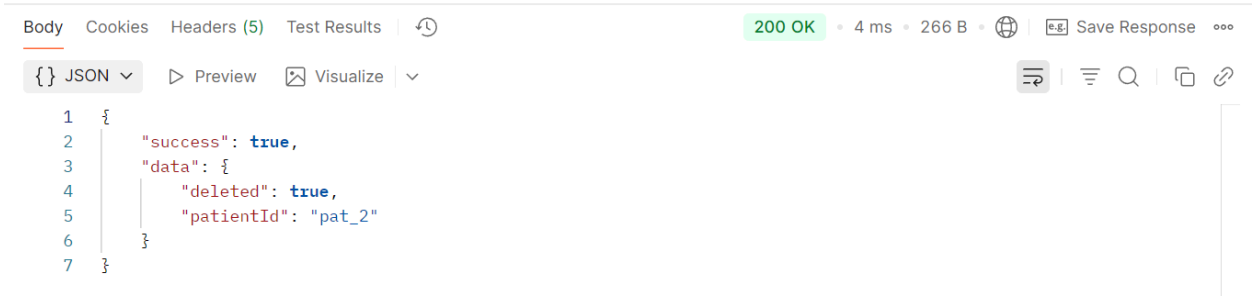

Resource 3: Payment

a) Use Case: Create a new payment record

Resource(s): Payment

HTTP Method: POST

Request URL: http://127.0.0.1:8000/payments

Request Body:


```
{
"consultationId": "cons_1",
"patientId": "pat_1",
"doctorId": "doc_1",
"amount": 120.00,
"paymentDate": "2025-11-19T10:30:00",
"status": "Pending",
"notes": "Initial charge"
```

}



```
{
"consultationId": "cons_1",
"patientId": "pat_1",
"doctorId": "doc_1",
"amount": 120.00,
"paymentDate": "2025-11-19T10:30:00",
"status": "Pending",
"notes": "Initial charge"
}
```


Response:


1. Without Authorization header

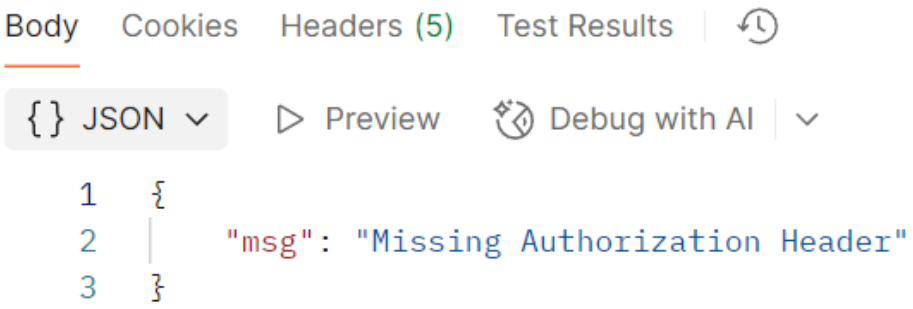

2. Create and fetch an access_token

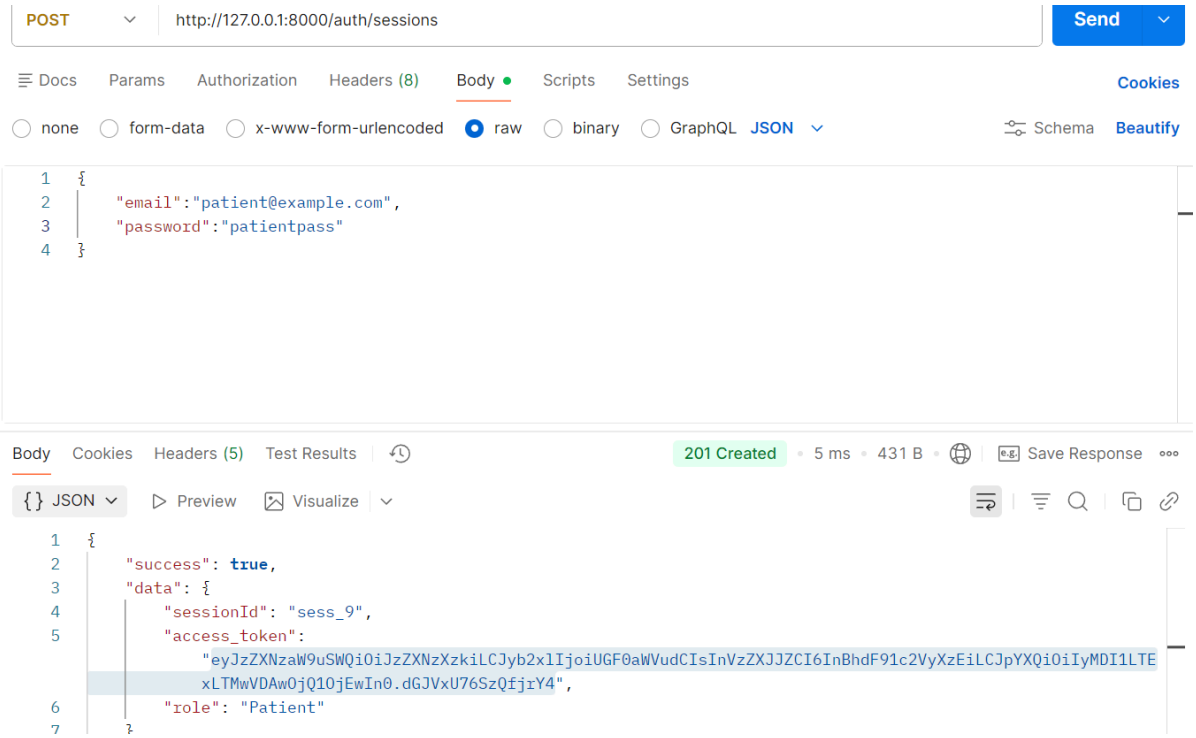

3. With Authorization

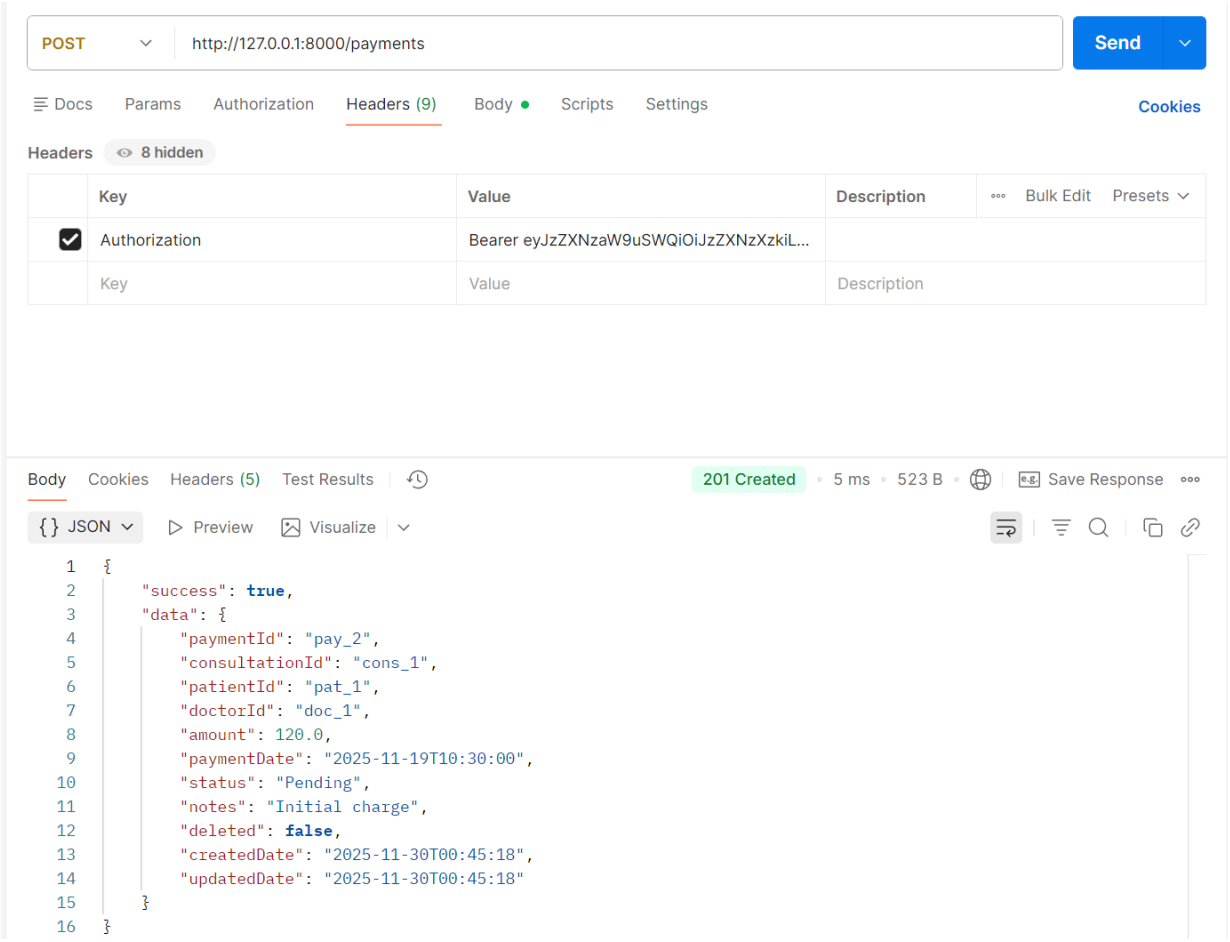

b) Use Case: Get all payments

Resource(s): Payment


HTTP Method: GET

Request URL: http://127.0.0.1:8000/payments


Request Body: N/A

Response:


1. Without Authorization header

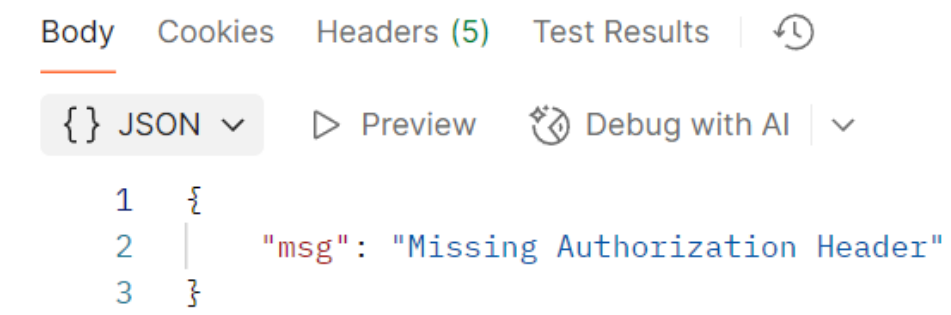

2. Create and fetch an access_token

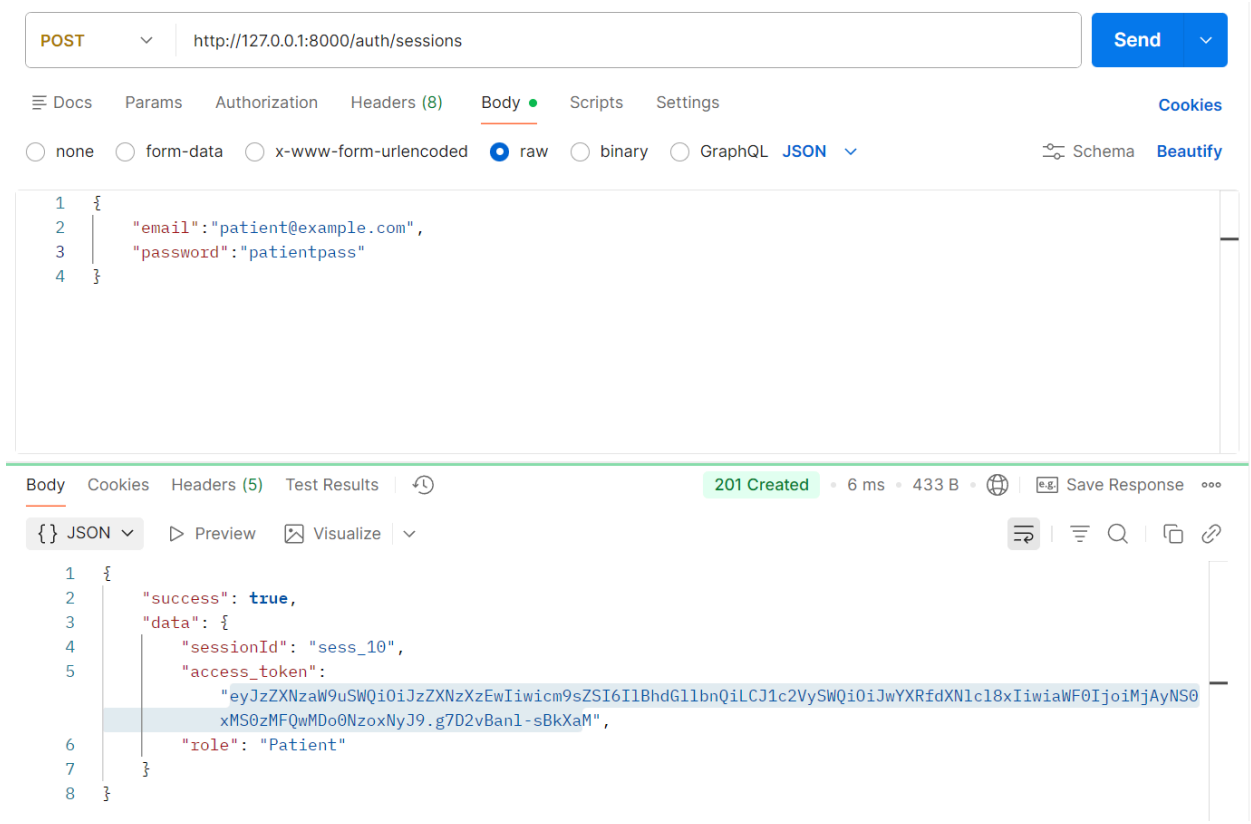

3. With Authorization

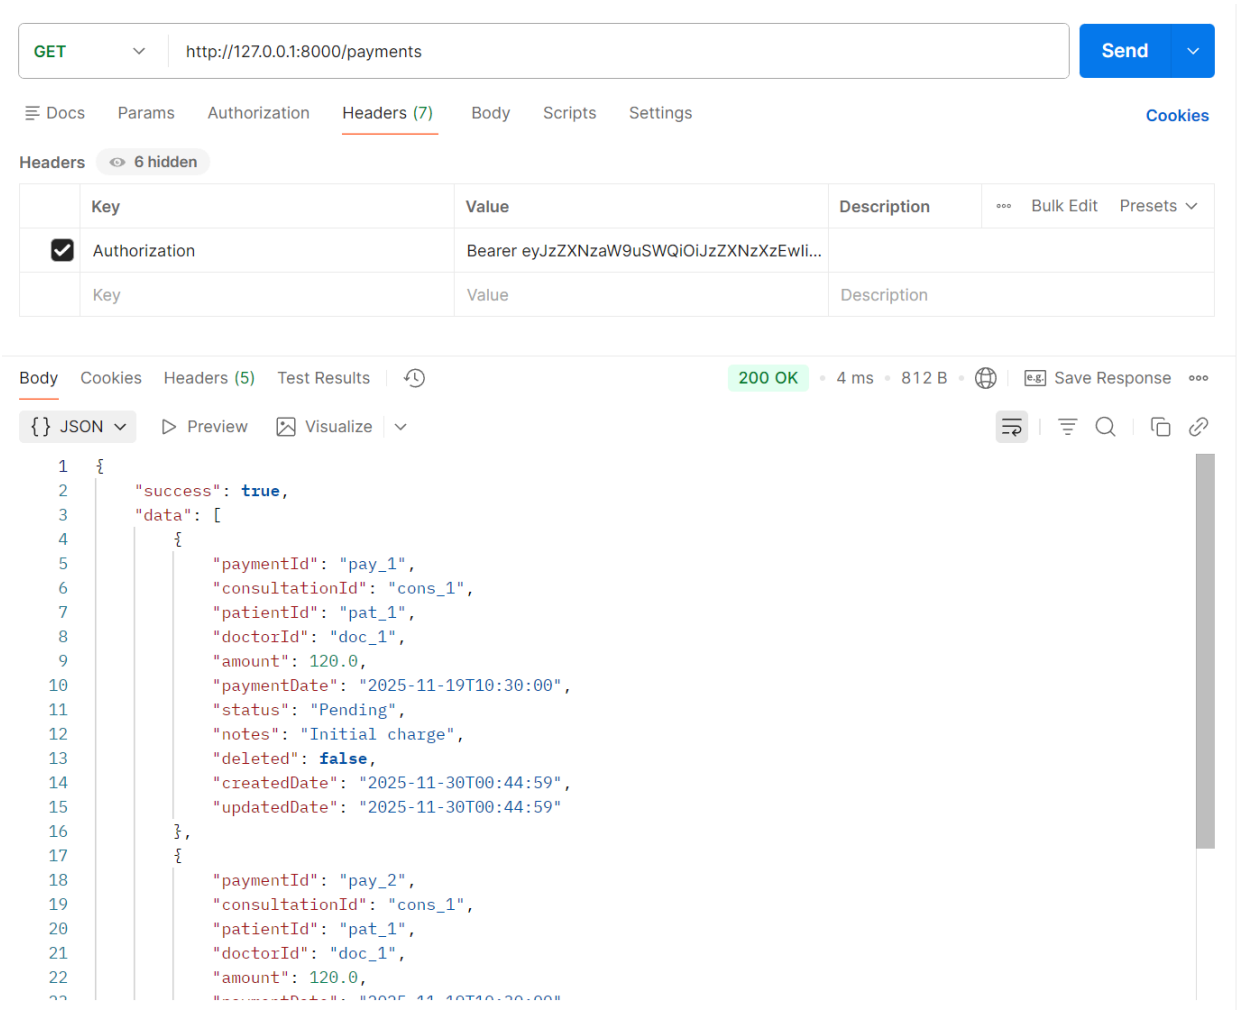

c) Use Case: Get details of a specific payment

Resource(s): Payment


HTTP Method: GET

Request URL: http://127.0.0.1:8000/payments/pay_1


Request Body: N/A

Response:


1. Without Authorization header

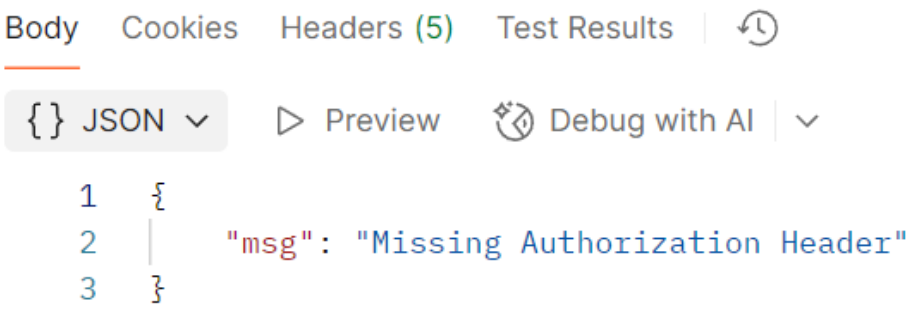

2. Create and fetch an access_token

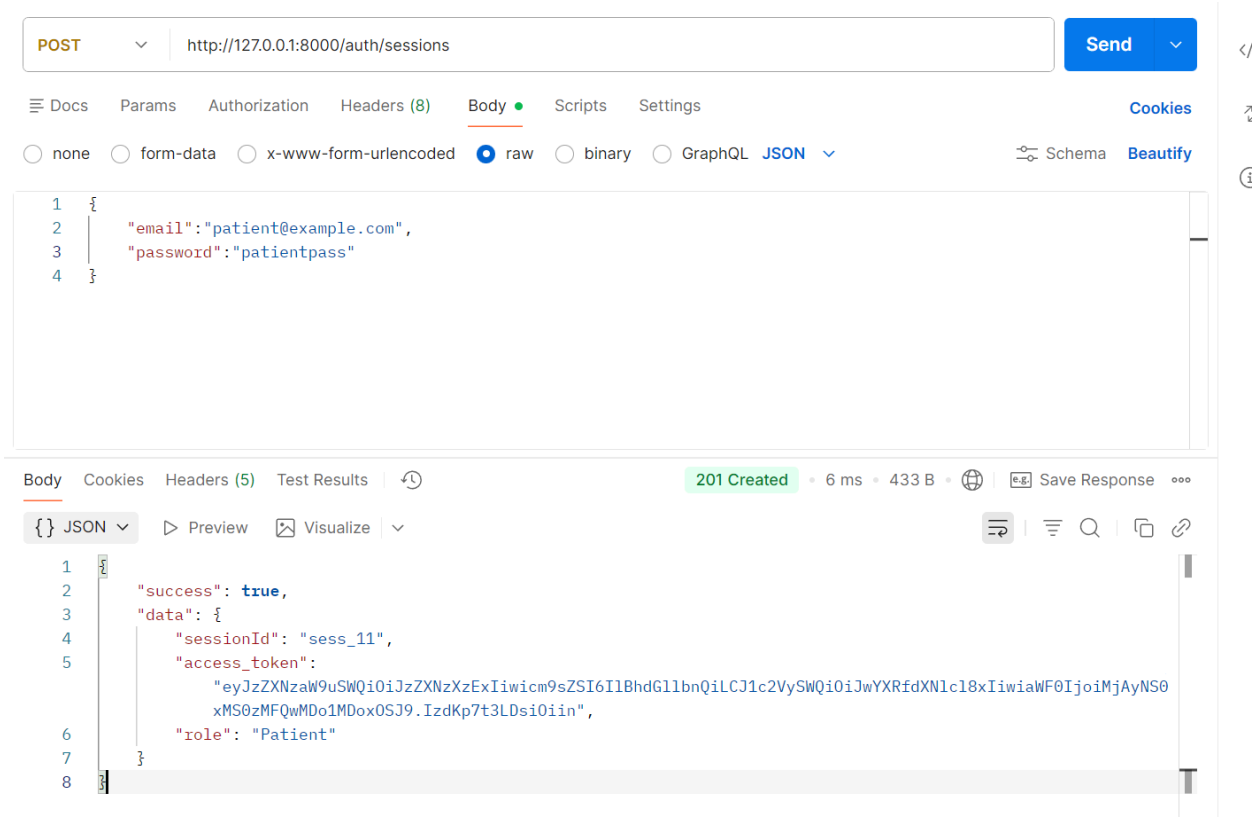

3. With Authorization

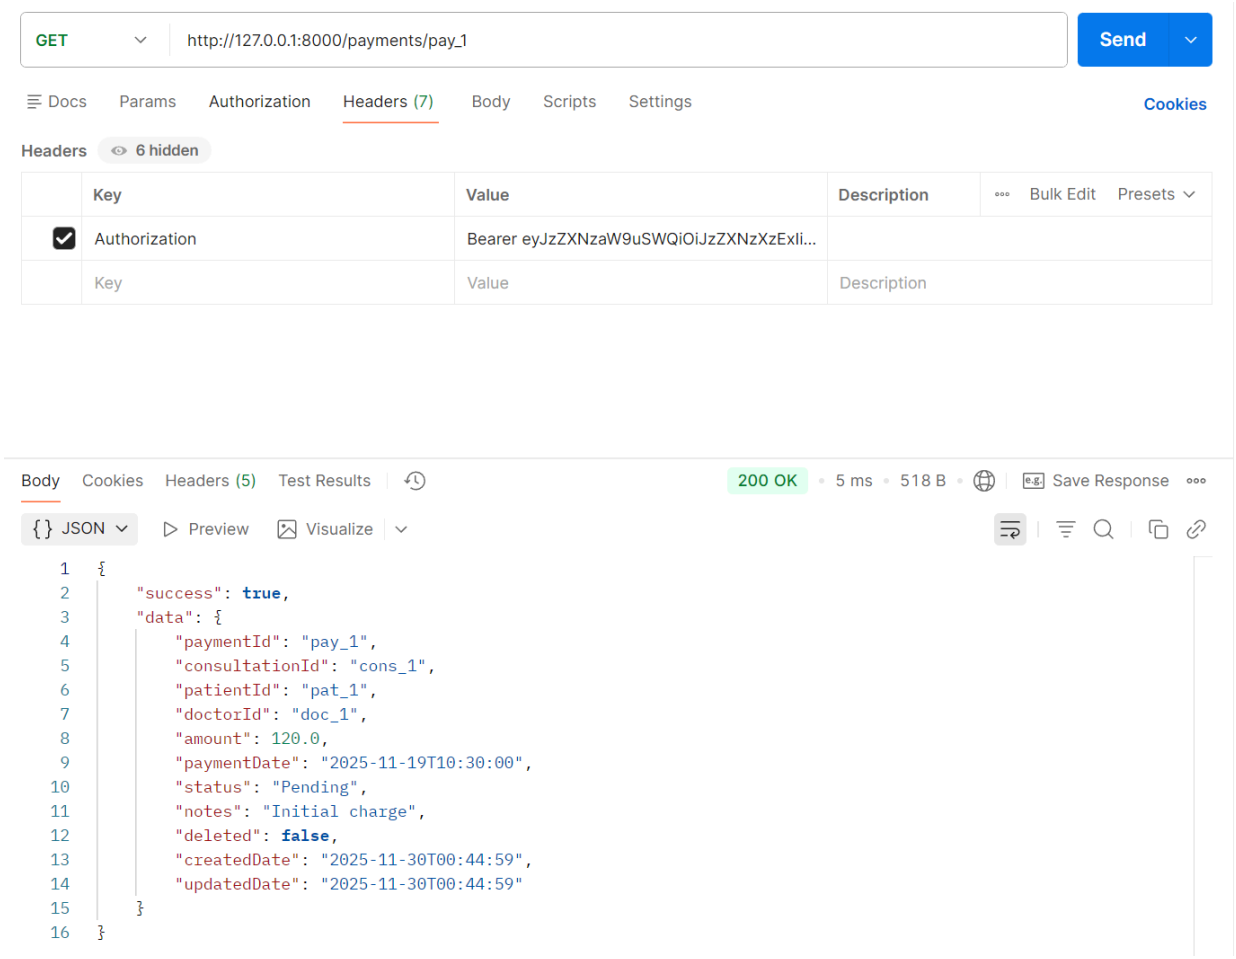

d) Use Case: Update a specific payment

Resource(s): Payment

HTTP Method: PATCH


Request URL: http://127.0.0.1:8000/payments/pay_1

Request Body:

```
{


"status": "Completed"

}
```




Response:


1. Without Authorization header

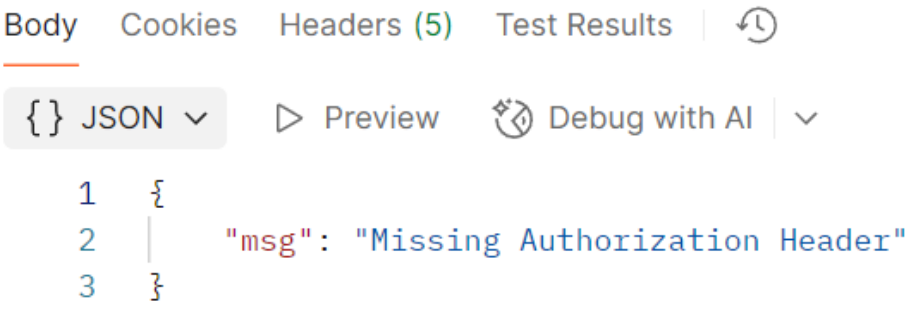


2. Create and fetch an access_token

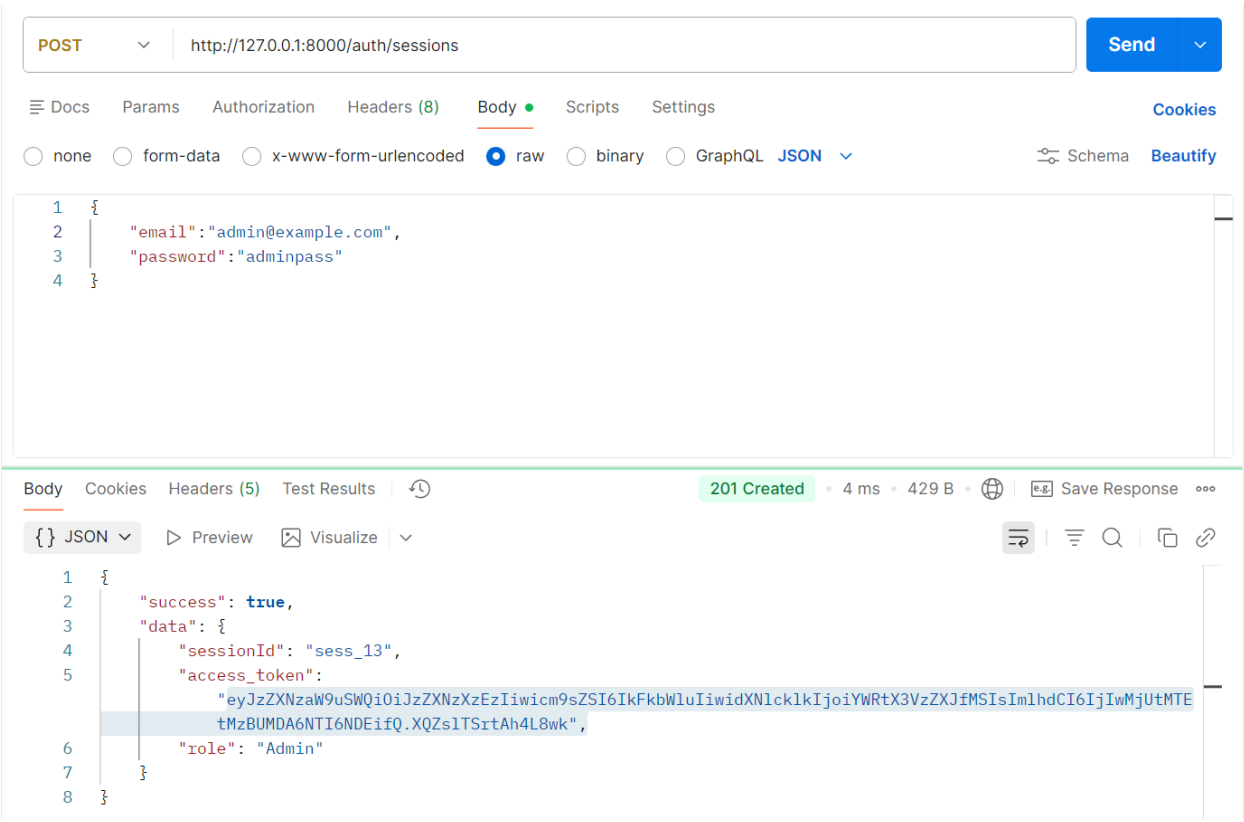

3. With Authorization

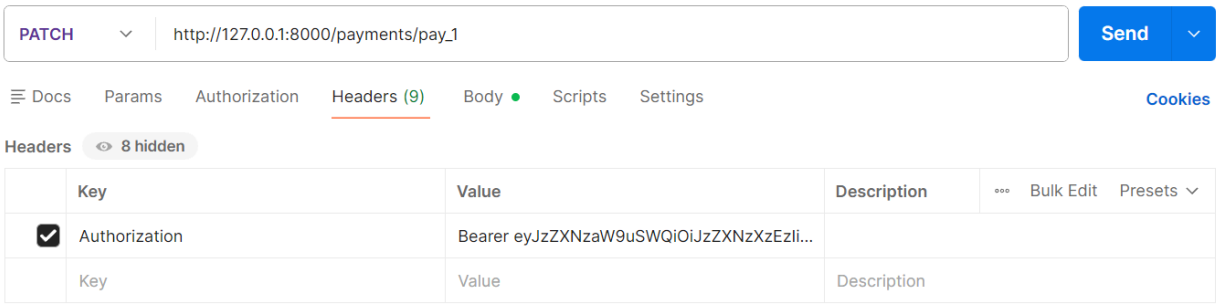

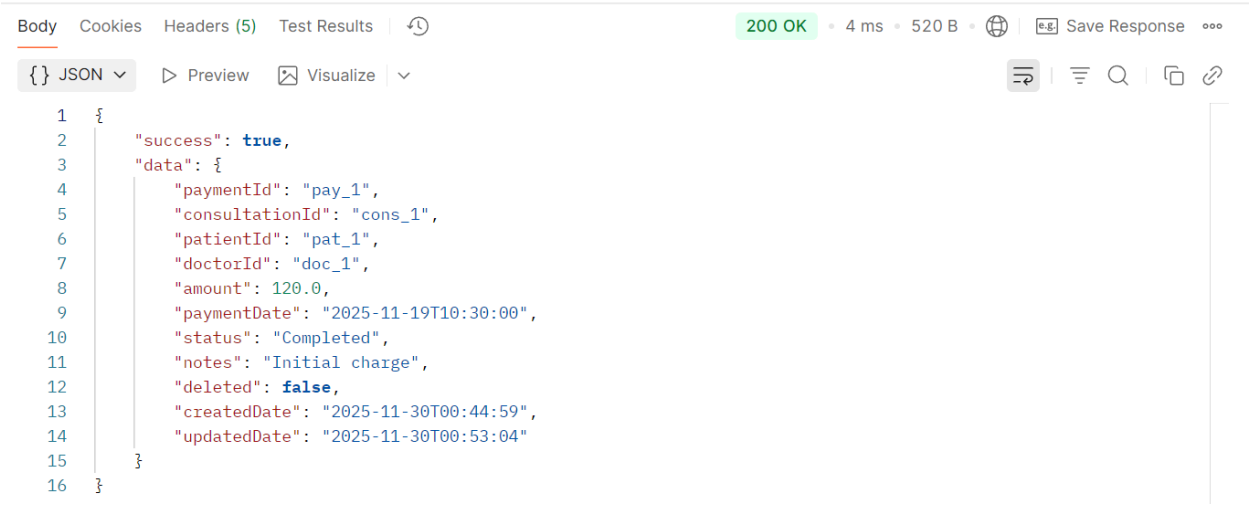

e) Use Case: Delete a specific payment

Resource(s): Payment


HTTP Method: DELETE

Request URL: http://127.0.0.1:8000/payments/pay_1


Request Body: N/A

Response:


1. Without Authorization header

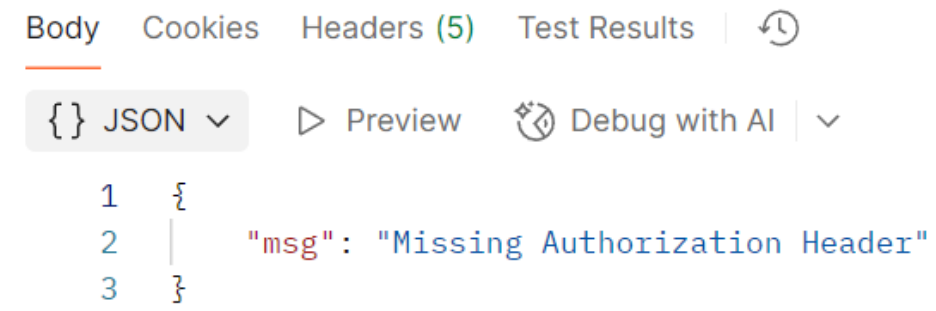

2. Create and fetch an access_token

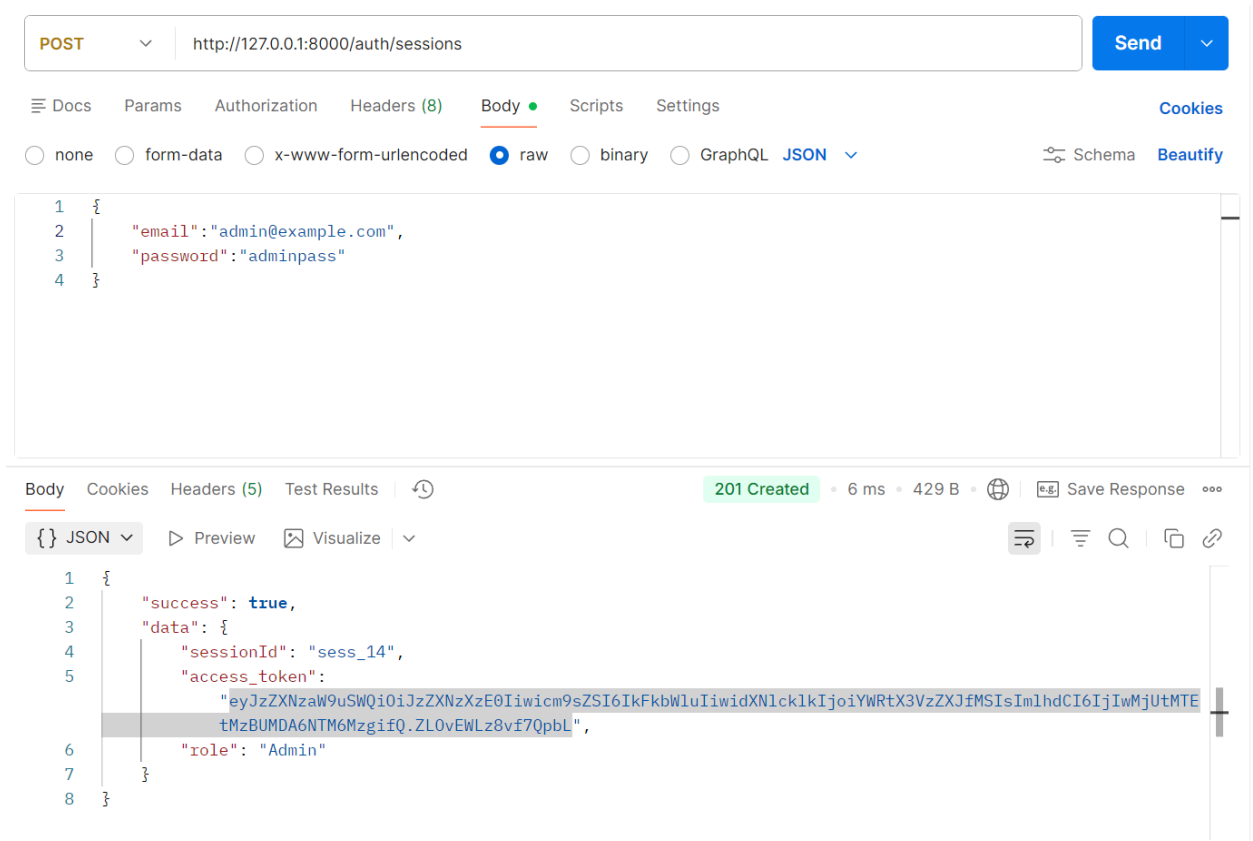

3. With Authorization

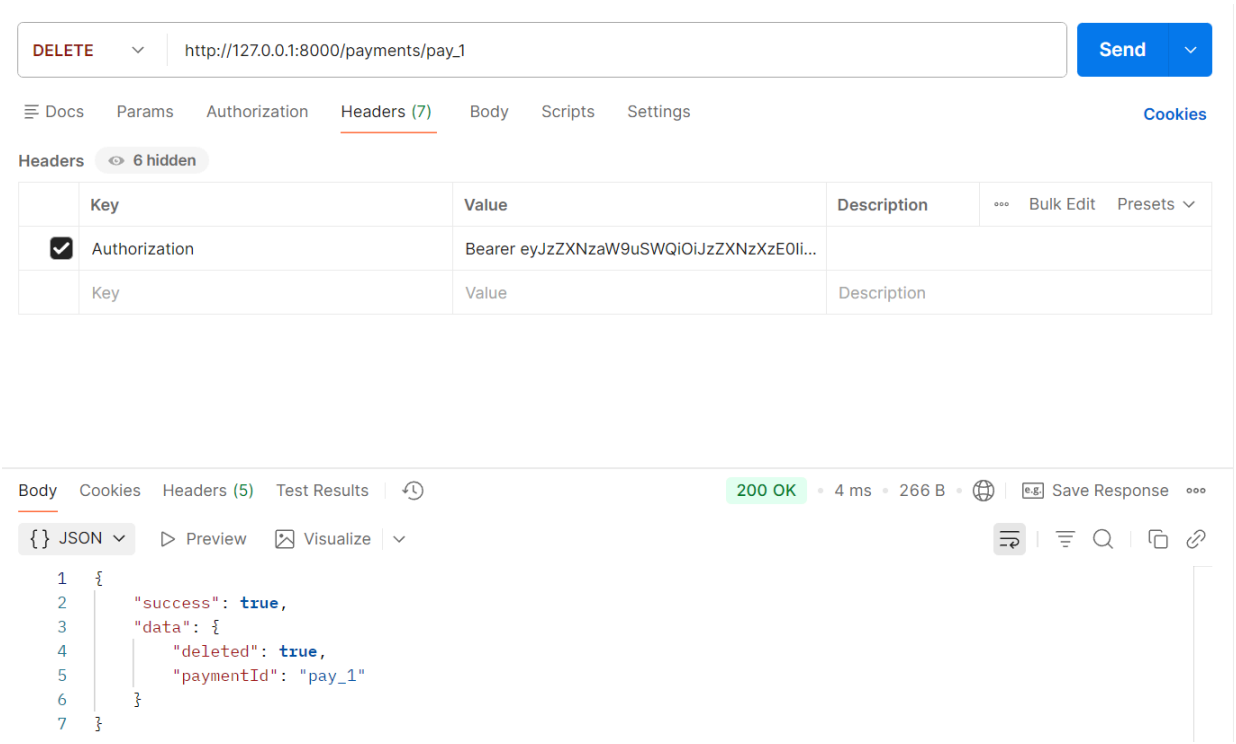

Authentication URLs

a) Use Case: Create a login session

Resource(s): Authentication

HTTP Method: POST

Request URL: http://127.0.0.1:8000/auth/sessions

Request Body:

```
{

    "email":"patient@example.com",

    "password":"patientpass"

}
```

Response:



b) Use Case: Delete a login session

Resource(s): Authentication


HTTP Method: DELETE

Request URL: http://127.0.0.1:8000/auth/sessions/sess_16


Request Body: N/A

Response:

1. Without Authorization header

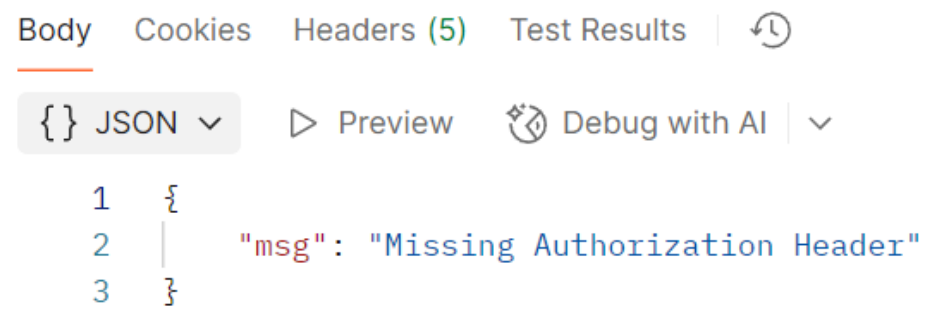

2. Create and fetch an access_token

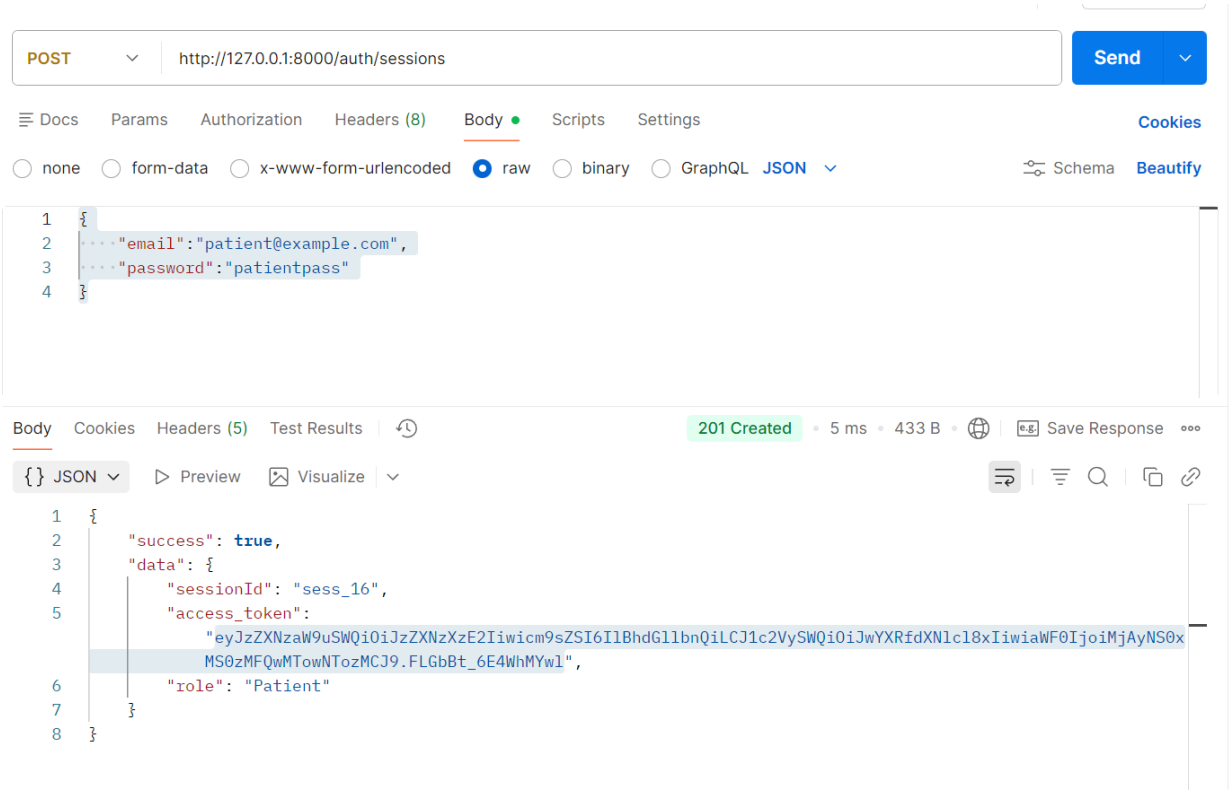

3. With Authorization

