



Faculty of Computer and Information



Menoufia University

# Learning in Nonstationary Environment:Concept Drift handling techniques

A thesis submitted to the Faculty of Computers and Information,  
Menoufia University, in partial fulfillment of the requirements for  
the degree of Master of Computers and Information

In  
**[Information Systems]**

By  
**Ahmed Hamdy Madkour**

Teaching Assessment at Information Systems Department, Faculty  
of Computers and Information, Menoufia University

## Supervised By

### **Prof. Hatem Mohamed**

Professor of Information Systems,  
Dean for Faculty of Computers and  
Information, Menoufia University

### **Dr. Amgad Monir**

Lecturer of Information Systems,  
Faculty of Computers and Information,  
Menoufia University

[

]

[

]

**2024**





Faculty of Computer and Information



Menoufia University

# Learning in Nonstationary Environment:Concept Drift handling techniques

A thesis submitted to the Faculty of Computers and Information,  
Menoufia University, in partial fulfillment of the requirements for  
the degree of Master of Computers and Information

In  
**[Information Systems]**

By  
**Ahmed Hamdy Madkour**

Teaching Assessment at Information Systems Department, Faculty  
of Computers and Information, Menoufia University

## Examination Committee

### **Prof. Hatem Mohamed**

Professor of Information Systems,  
Dean for Faculty of Computers and  
Information, Menoufia University

[ ]

### **Prof. Hatem Mohamed**

Professor of Information Systems,  
Faculty of Computers and Information,  
Menoufia University

[ ]

### **Prof. Hatem Mohamed**

LProfessor of Information Systems,  
Faculty of Computers and Information,  
Menoufia University

[ ]

**2024**



## **Abstract**

This thesis addresses challenges in machine learning models when dealing with multi-class imbalanced data streams in non-stationary environments. These challenges result in biases, unreliable predictions, and diminished model performance. To overcome these issues, the thesis introduces innovative approaches that combines Dynamic Ensemble Selection (DES) technique, an adaptive method for handling imbalanced multi-class data streams, a concept drift detector, eigen vector technique, and the K-Nearest Neighbors (KNN) algorithm to address class overlap. The main objective is to improve the classification of imbalanced multi-class drifted data streams. The adaptive oversampling method generates synthetic samples to mitigate imbalanced data stream issues, with KNN ensuring non-overlapping generated samples. A drift detector assists in deciding whether to keep existing classifiers or create new ones to handle incoming data streams. Dynamic Ensemble Selection (DES) optimizes the classification task by selecting the most appropriate classifier for incoming data. The proposed method offers an effective solution for achieving accurate and resilient classification in the context of imbalanced multi-class drifted data streams. Additionally, the thesis discusses challenges posed by emerging new classes in dynamic data streams for incremental learning. Existing approaches struggle with high false positive rates, long prediction times, and the impractical assumption of having access to true labels for all instances when new classes emerge. To address these challenges, the thesis proposes a novel framework that integrates concept drift detection using the ADWIN method and ensemble stratified bagging. By leveraging true labels during the learning process, the framework effectively detects concept drifts and adapts to accommodate emerging new classes. Furthermore, the thesis discusses challenges faced by machine learning models in heterogeneous multi-source streams and non-stationary conditions, which can introduce biases and unreliable predictions. In response, the thesis introduces a comprehensive framework that combines dynamic ensemble selection, eigenvector techniques, and a concept drift detector to enhance transfer learning

of multi-class data streams subject to drift. During the training phase, the proposed weighted method assigns appropriate weights to each classifier, mitigating adverse learning effects. Eigenvectors handle heterogeneous multi-source streams, and Dynamic Ensemble Selection (DES) determines the most fitting classifiers for incoming data. A concept drift detector identifies and addresses drifted chunks within the data stream. The experimental results on various datasets, encompassing benchmark datasets, a real application stream dataset, and synthetic data streams, consistently demonstrate the superior performance of the proposed approach in effectively addressing challenges inherent in such dynamic data streams. Through evaluations conducted on both real-world and synthetic datasets, the framework exhibits exceptional accuracy, precision, recall, geometric mean, and F1-measure, all while maintaining an efficient runtime. This robust performance positions the proposed approach as a frontrunner in enabling incremental learning within real-time scenarios, particularly in the context of emerging new classes. The framework provides a comprehensive solution to the intricate complexities associated with incremental learning in dynamic data streams. Moreover, the experimental findings underscore the efficacy and superiority of the proposed approach, particularly when confronted with the unique challenges posed by imbalanced drifted streams, emerging new classes, and heterogeneous multi-source drifted data streams. Comparisons against state-of-the-art chunk-based methods consistently highlight the effectiveness of this approach in successfully managing the complexities inherent in these multifaceted data stream challenges. In essence, the proposed approach stands out as a powerful and versatile solution, showcasing its ability to outperform existing methods and addressing the evolving demands of imbalanced drifted streams and heterogeneous multi-source streams. **Keywords:** - Auto machine learning, Concept drift, Imbalanced Stream, Transfer Learning, Emerging new Classes, and Dynamic Ensemble Selection.

## **Summary**

The thesis proposes three innovative solutions to challenges faced by machine learning models in handling multi-class imbalanced data streams, emerging new classes, and heterogeneous multi-class streams in non-stationary environments. The primary issues include bias, unreliable predictions, and decreased overall model performance. The first proposed approach integrates the Dynamic Ensemble Selection (DES), an adaptive oversampling method for handling imbalanced multi-class data streams, a concept drift detector, and the K-Nearest Neighbors (KNN) algorithm to address class overlap. The adaptive oversampling method generates synthetic samples, leveraging KNN to ensure non-overlapping samples. A drift detector helps decide whether to keep existing classifiers or create new ones for incoming data streams. Dynamic Ensemble Selection optimizes classifier performance. The approach demonstrates effectiveness in achieving accurate and resilient classification in imbalanced multi-class drifted data streams, as validated through experiments on various datasets. Similarly, the second paper addresses the challenge of emerging new classes in dynamic data streams, affecting incremental learning. The second proposed approach integrates concept drift detection using the ADWIN method and ensemble stratified bagging. Leveraging true labels during the learning process, this approach detects concept drifts and adapts to emerging new classes. Evaluation using real and synthetic datasets shows superiority in accuracy, precision, recall, geometric mean, and F1 measure while maintaining efficient runtime. The framework promises to enable incremental learning in real-time scenarios, offering a comprehensive solution by combining concept drift detection (ADWIN) and ensemble stratified bagging. Lastly, the third approach tackles challenges arising from heterogeneous multi-source streams and non-stationary conditions in machine learning models. The third proposed approach combines DES, eigen vector techniques, and a concept drift detector to enhance transfer learning of multi-class data streams subject to drift. The weighted method assigns appropriate weights

to each classifier during training, mitigating adverse learning effects. Eigenvectors handle heterogeneous multi-source streams, and DES determines fitting classifiers for incoming data. The concept drift detector identifies and addresses drifted chunks within the data stream. Experiments on various datasets demonstrate the efficacy and superiority of the proposed approach in addressing challenges presented by transfer learning from heterogeneous multi-sources and concept drift, outperforming state-of-the-art chunk-based methods.

## Acknowledgements

First and foremost, I give my deep thanks to Allah for giving me the opportunity and the strength to accomplish this work.

I would like to thank my supervisors Dr. Hatem Mohammed and Dr. Amgad Monir for their help and support during my work for creating a very inspiring research environment. They have been helpful with background information and have continually encouraged me and helped me with comments on my work. They always had time to discuss new ideas and give feedback on early ideas and research problems.

I would like to thank my family who was a constant source of rising and supporting my spirit. Thanks go out especially to my father, my mother, my wife, and my brothers for support and encouragement.

Finally, special thanks to my faculty, department, and my colleagues.

*Thank you everyone,*

Ahmed Madkour

October 2024



# Contents

<b>List of Figures</b>	<b>xi</b>
<b>List of Tables</b>	<b>xv</b>
<b>1 Introduction</b>	<b>1</b>
1.1 Challenges . . . . .	6
1.2 Motivation and Scope . . . . .	6
1.2.1 Thesis Motivations . . . . .	6
1.2.2 Thesis Scope . . . . .	8
1.2.3 Solution Methodology . . . . .	9
1.3 Thesis Objectives . . . . .	9
1.4 Thesis Questions . . . . .	10
1.5 Contributions . . . . .	10
1.6 Publications . . . . .	12
1.7 Research Methodology . . . . .	13
1.8 Structure of the Dissertation . . . . .	14
<b>2 Background</b>	<b>17</b>
2.1 Concept Drift Sources . . . . .	18
2.2 Concept Drift Types . . . . .	18
2.3 Concept Drift Components . . . . .	19
2.3.1 Concept Drift Detection . . . . .	20
2.3.2 Understanding Phase . . . . .	21
2.3.3 Adaptation Phase . . . . .	22

## CONTENTS

---

2.4 Metrics . . . . .	26
2.4.1 Recall . . . . .	27
2.4.2 Precision . . . . .	27
2.4.3 F1 Score . . . . .	27
2.4.4 Balanced Accuracy (BAC) . . . . .	28
2.4.5 G-mean . . . . .	28
2.4.6 Specificity . . . . .	28
<b>3 State-of-the-art</b>	<b>29</b>
3.1 Concept Drift . . . . .	30
3.2 Classifier Ensemble Selection . . . . .	31
3.3 Imbalanced data Streams . . . . .	32
3.4 Streams with Emerging New Classes (SENC) . . . . .	33
3.5 Transfer Learning . . . . .	34
3.6 Comparsion . . . . .	37
3.6.1 Imbalanced Stream . . . . .	37
3.6.2 Emergence of new classes . . . . .	39
3.6.3 Transfer Learning . . . . .	42
3.7 Remarks . . . . .	45
<b>4 Dynamic Classification Ensembles for Handling Imbalanced Multiclass Drifted Data Streams</b>	<b>47</b>
4.1 Motivations and Contributions . . . . .	50
4.2 Proposed Methodology . . . . .	50
4.2.1 Approach Overall Details . . . . .	51
4.2.2 Synthetic Data Generator . . . . .	53
4.3 Experimental Results . . . . .	56
4.3.1 Experimental setup . . . . .	57
4.3.2 Data Streams . . . . .	58
4.3.3 Analysis of Experimental Results . . . . .	59
4.3.3.1 Results on the Benchmark Stream . . . . .	59
4.3.3.2 Results on the Real Application Stream . . . . .	60
4.3.3.3 Results on the Synthetic Stream . . . . .	61

---

## CONTENTS

4.3.4	Analysis of Class Overlap Factor between Proposed Approach (PA), MLSMOTE, and MLSOL Techniques . . . . .	63
4.3.5	Analyzing Runtime Factor Between the Proposed Approach, MLSMOTE, and MLSOL Techniques . . . . .	66
4.3.6	Analyzing Non-parametric Tests between the Proposed Approach, MLSMOTE, and MLSOL Techniques . . . . .	67
4.4	Conclusion and Future Works . . . . .	68
<b>5</b>	<b>Addressing Emerging New Classes in Incremental Streams via Concept Drift Techniques</b>	<b>71</b>
5.1	Motivations and Contributions . . . . .	73
5.2	Proposed Methodology . . . . .	73
5.2.1	Proposed Approach Flow . . . . .	74
5.2.2	Emerging New Classes Phase Details . . . . .	75
5.3	Experimental Results . . . . .	77
5.3.1	Experimental Setup . . . . .	79
5.3.2	Data Streams . . . . .	79
5.3.3	Compared Approaches . . . . .	80
5.3.4	Examination of Experimental Findings . . . . .	81
5.3.4.1	Results On The Benchmark Dataset . . . . .	81
5.3.4.2	Results On Real Application Stream . . . . .	82
5.3.4.3	Results On Synthetic Stream . . . . .	83
5.3.5	Runtime Analysis Of The Best Algorithms . . . . .	84
5.3.6	Comparison between GNB, KNN, and HT, SVC . . . . .	85
5.3.7	Comparison between ADWIN and DDM . . . . .	86
5.4	Conclusion And Future Directions . . . . .	86
<b>6</b>	<b>Dynamic Classification Ensembles for Handling Imbalanced Multiclass Drifted Data Streams</b>	<b>93</b>
6.1	Motivations and Contributions . . . . .	95
6.2	Proposed Methodology . . . . .	96
6.2.1	HTL Overall Details . . . . .	97
6.2.2	Classifier Creation Details . . . . .	98
6.2.3	HTL Detailed Algorithm . . . . .	99

## CONTENTS

---

6.3	Experimental Results . . . . .	104
6.3.1	Experimental setup . . . . .	104
6.3.1.1	Data Streams . . . . .	105
6.3.1.2	Compared Approaches . . . . .	105
6.3.2	Analysis of Experimental Results . . . . .	107
6.3.2.1	Results on Target Domains Dataset without Source Domain . . . . .	107
6.3.2.2	Results on the Homogeneous Source Domains Dataset . . . . .	108
6.3.2.3	Results on One Heterogeneous Source Domain .	109
6.3.2.4	Results on All Heterogeneous Source Domains Stream and Covertype Stream as the Target Domain . . . . .	111
6.3.2.5	Results on One Heterogeneous Source Domain .	113
6.3.3	4.3. Analysis Runtime between CORAL, CDTL, and HTL Techniques . . . . .	114
6.3.4	4.4. Analysis accuracy and runtime of HTL for online learning and chunk-based concept drift . . . . .	115
<b>7</b>	<b>Conclusions and Future Work</b>	<b>117</b>
7.1	Imbalanced multiclass stream . . . . .	117
7.2	Imbalanced multiclass stream . . . . .	118
7.3	Heterogeneous transfer learning . . . . .	119
	<b>Bibliography</b>	<b>121</b>

# List of Figures

1.1	The research methodology of the thesis. . . . .	2
1.2	The research methodology of the thesis. . . . .	3
1.3	The research methodology of the thesis. . . . .	13
2.1	Concept . . . . .	18
2.2	Concept Drift Types. . . . .	18
2.3	Concept Drift Types. . . . .	19
2.4	Concept Drift Main Components. . . . .	20
2.5	Understanding Phase of Concept Drift. . . . .	22
2.6	Retraining New Model Approach. . . . .	24
2.7	Ensemble Approach for Adaptation Phase. . . . .	25
2.8	Partial Updating Approach for Adaptation Phase. . . . .	26
3.1	Distribution of the prediction accuracy. . . . .	38
3.2	Stream Emerging New Class Overview . . . . .	40
3.3	Stream Emerging Nearest Neighbor Ensemble (SENNE) Overview.	41
3.4	k-nearest Neighbor Ensemble-based (KENNE) Overview. . . . .	41
3.5	Coralation Alignment (CORAL) Overview. . . . .	44
3.6	Concept Drift Transfer Learning (CDTL) Overview. . . . .	44
4.1	Proposed Approach Flow. . . . .	54
4.2	Synthetic Data Generator Flow. . . . .	54
4.3	Synthetic Data Generator Flow. . . . .	60
4.4	Synthetic Data Generator Flow. . . . .	61
4.5	Synthetic Data Generator Flow. . . . .	62

## LIST OF FIGURES

---

4.6	Synthetic Data Generator Flow. . . . .	62
4.7	Synthetic Data Generator Flow. . . . .	63
4.8	Synthetic Data Generator Flow. . . . .	64
4.9	Synthetic Data Generator Flow. . . . .	65
4.10	Synthetic Data Generator Flow. . . . .	66
4.11	Synthetic Data Generator Flow. . . . .	66
5.1	Proposed Approach Flow . . . . .	76
5.2	Emerging Phase Flow . . . . .	77
5.3	Steps Example for a Dataset with Two Features (x, y) and Three Classes (Blue, Black, Green). (a) Use the K-means algorithm to cluster the current chunk. (b) Determine the maximum distance between the class centroids . . . . .	78
5.4	Steps Example for new points (red points) with Two Features (x, y). (a) Identify new incoming instances (represented by red points) as potential new classes. (b) Determine if the new instance is part of a nearby existing class or belongs to an emerging new class. . .	78
5.5	Covertype stream for various emerging buffer sizes: (a) buffer size of 5, (b) buffer size of 10, (c) buffer size of 20, and (d) our adaptive buffer size. . . . .	82
5.6	Sensor stream for various emerging buffer sizes: (a) buffer size of 5, (b) buffer size of 10, (c) buffer size of 20, and (d) our adaptive buffer size. . . . .	83
5.7	Synthetic stream for various emerging buffer sizes: (a) buffer size of 5, (b) buffer size of 10, (c) buffer size of 20, and (d) our adaptive buffer size. . . . .	84
5.8	Covertype stream for concept drift detector (ADWIN, DDM) via several metrics (recall, precision, balanced accuracy, -mean, and $f_{1s}core$ ) . . . . .	85
5.9	Covertype stream for concept drift detector (ADWIN, DDM) via several metrics (recall, precision, balanced accuracy, mean, and $f_{1s}core$ ) . . . . .	86
6.1	Proposed Approach Flow. . . . .	101

---

## LIST OF FIGURES

6.2	Classifier Creation Approach . . . . .	101
6.3	Result of the Covertype Stream as the Target Domain without the Presence of the Source Domain. . . . .	108
6.4	Result of the Covertype Stream as the Target Domain and Homogeneous Source Domains. . . . .	109
6.5	Result of the Covertype Stream as the Target Domain and One Heterogeneous Source Domain. . . . .	110
6.6	Result of the Covertype Stream as the Target Domain and Multiple Heterogeneous Source Domains. . . . .	111
6.7	Result of the Sensor Stream as the Target Domain and Multiple Heterogeneous Source Domains. . . . .	112
6.8	Online learning and detector chunk-based result in Covertype stream via ADWIN detector . . . . .	112
6.9	Online learning and detector chunk-based result in Covertype stream via DDM detector . . . . .	113



# List of Tables

1.1	Publications in journals and conferences conducted during this thesis.	12
3.1	Comparison of MLSMOTE and MLSOL Methods . . . . .	39
3.2	Comparison of SENCForest, SENNE and KENNE Methods . . . . .	42
3.3	Comparison of CORAL, Malanie and CDTL Methods . . . . .	45
4.1	Characteristics of the datasets used in the experimentation. . . . .	59
4.2	Runtime of MLSMOTE, MLSOLE, and Proposed Approach (PA)	67
4.3	Kruskal-Wallis test between MLSMOTE, MLSOLE, and Proposed Approach (PA) . . . . .	68
5.1	The datasets utilized in the experimentation exhibited various characteristics. . . . .	90
5.2	Running time of SENCForest, SENNE, KENNES, and PA. . . . .	90
5.3	Running time of KNN, SVC, GNB, and HT as a base classifier. . .	90
5.4	RUNNING TIME ADWIN and DDM as a drift detector. . . . .	91
6.1	Characteristics of the datasets used in the experimentation. . . . .	106
6.2	The Comprehensive Performance of CORAL, CDTL, and HTL Across All Previous Experiments . . . . .	114
6.3	Runtimes (in seconds) for CORAL, CDTL, and HTL . . . . .	115
6.4	Runtimes (in seconds) for Online Learning, ADWIN, and EDMM drift detector . . . . .	116



# List of Algorithms

1	Proposed Framework Algorithm for Imbalanced Multi-Class Drifted Data Streams . . . . .	55
2	Synthetic data generator . . . . .	56
3	Proposed Approach Flow . . . . .	88
4	Emerging Phase Flow . . . . .	89
5	Emerging Phase Flow . . . . .	103



*Success is the sum of small efforts,  
repeated day-in and day-out.*

Robert Collier

CHAPTER

# 1


# Introduction

Governments and companies are producing vast streams of data and require effective data analytics and machine learning methods to assist in making predictions and decisions promptly. One crucial aspect is the machine learning pipeline, which involves training a prepared dataset to construct a model and subsequently utilizing this model to predict new instance outputs. As depicted in Fig. 1.1, the process entails fetching historical data from the database during the training phase to construct the machine learning model. Then, the system can input new instances from the database to predict the output.

Nevertheless, when endeavoring to forecast outcomes for fresh instances sourced from an alternative database, as illustrated in Fig. 1.2 , there frequently emerges a conspicuous decline in accuracy. This disparity accentuates the imperative for model developers to intervene and rectify the issue. Addressing this, developers must adjust and retrain the model utilizing datasets from the new environment to ameliorate accuracy. This iterative process aims to refine the model's precision and ensure its efficacy across diverse contexts, thereby bolstering the reliability of decision-making and predictive capabilities. To confront this challenge, the field of auto machine learning endeavors to facilitate online updates to the model without necessitating direct intervention from developers for modification.

## 1. INTRODUCTION


---

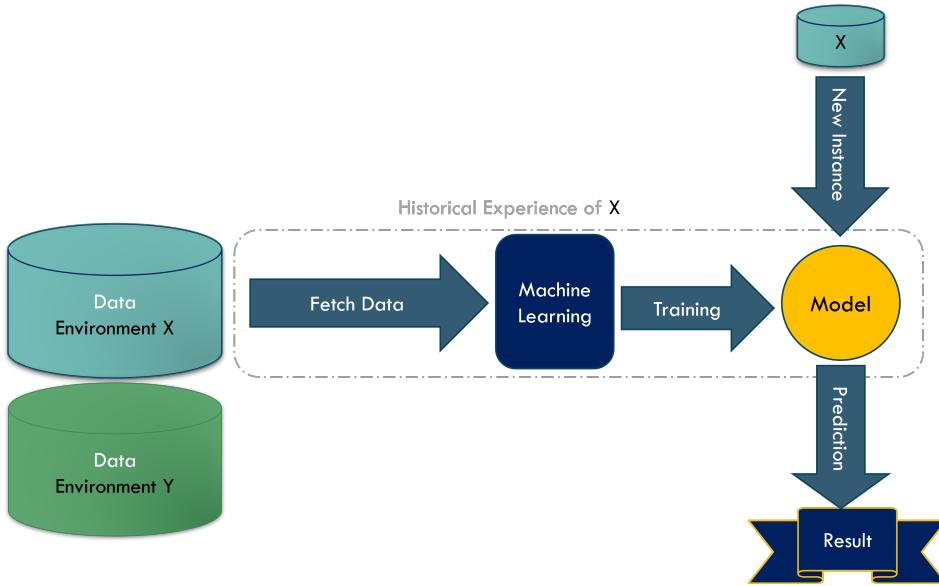

**Figure 1.1:** The research methodology of the thesis.

In recent years, the surge in high-speed data streams has posed notable challenges for machine learning models, particularly in the context of streaming data analysis. These data streams, characterized by continuous, dynamic, and high-volume data arrivals, demand adaptive learning algorithms that can effectively cope with their evolving nature [1] [2] [3]. Within these evolving data environments, two paramount challenges have emerged: concept drift, class imbalance, Emerging new class, and heterogenous transfer learning.

Concept drift, a phenomenon defined by the evolving statistical properties of a data generation process over time [4] [5], introduces a dynamic element to the data, necessitating continuous adaptation of machine learning models. This shift can manifest as changes in underlying concepts, relationships between variables, or alterations in data distribution. Traditional models trained on historical data may suffer diminished accuracy or become inadequate when confronted with new data influenced by concept drift, highlighting the need for effective concept drift detection mechanisms. Addressing concept drift involves the utilization of concept drift detectors, which are methods capable of identifying changes in data stream distributions. These detectors rely on information related to classifier performance or incoming data items to signal the need for model updates, retraining, or even

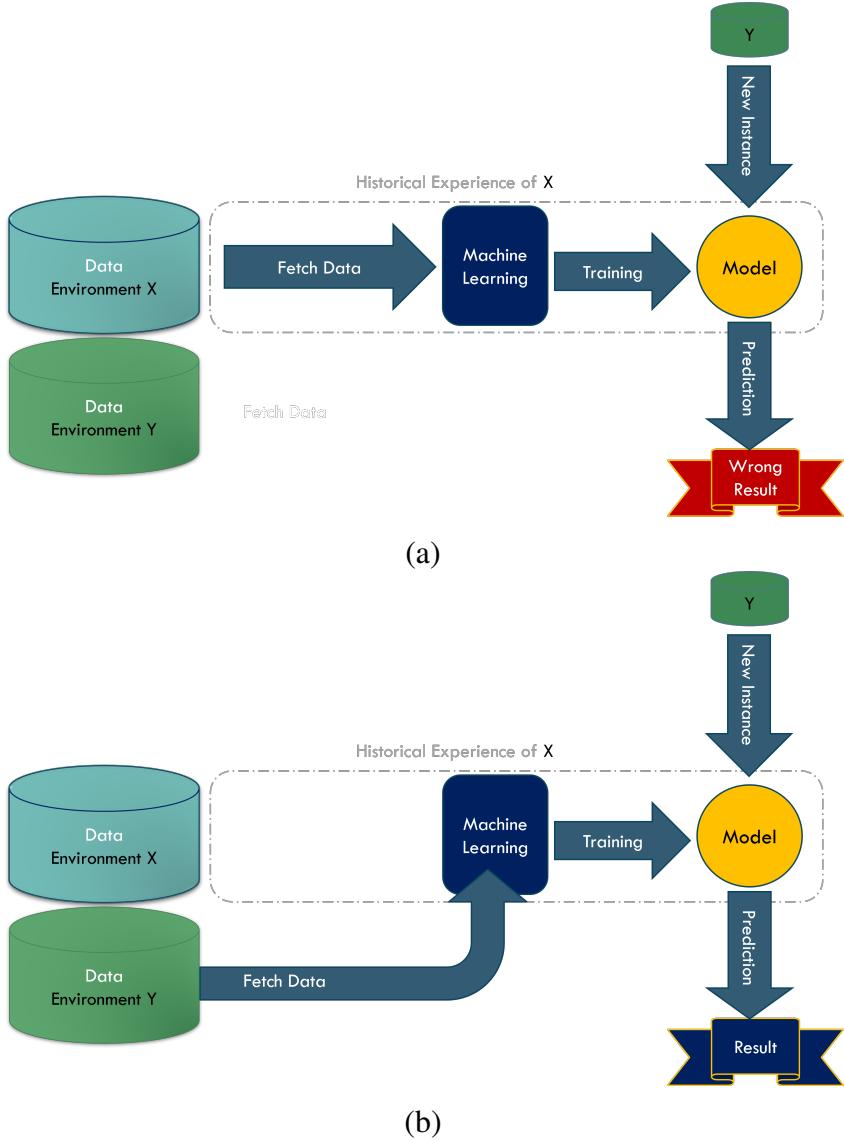

**Figure 1.2:** The research methodology of the thesis.

replacing the old model with a new one. The dynamic nature of concept drift necessitates ongoing monitoring and adaptation to maintain the model's efficacy.

Data streams also present challenges related to class imbalance, a condition characterized by uneven distribution among different classes [6] [7]. This scenario, especially prevalent in multi-class settings, poses a significant challenge for traditional classifiers. The risk of misclassifying minority class samples due to their

## 1. INTRODUCTION

---

limited representation demands specialized techniques to ensure accurate classification without sacrificing the performance of the majority class [8] [9] [10] [11]. To tackle class imbalance, three primary methods are commonly employed: sampling methods, algorithm adaptation methods, and hybrid methods. Sampling methods involve undersampling the majority class or oversampling the minority class to balance class distribution. Algorithm adaptation methods modify existing algorithms to handle imbalanced data [12] [13] [14], while hybrid methods combine data pre-processing with classification techniques, often utilizing ensemble classifiers to effectively mitigate class imbalance and enhance overall classifier performance [15] [16] [17] [18].

Another challenge arising in the context of class imbalance is class overlap, where instances from different classes share the same region in data space [19] [17]. This overlap complicates the task of distinguishing between representative instances of different classes, leading to performance challenges for traditional classifiers referred to as overlapping problems. Recent research introduces class-overlap undersampling methods to address this issue, leveraging local similarities among minority instances to identify potentially overlapping majority instances.

Therefore, both class imbalance and class overlap present significant hurdles in the realm of data stream analysis. Consequently, addressing class imbalance has become crucial in multi-class learning, leading to research efforts focusing on both concept drift and class imbalance challenges. Researchers have explored dynamic ensemble selection (DES) and multi-class oversampling techniques to tackle these issues. Dynamic classifier ensembles offer a unique ability to adapt their composition based on data characteristics, making them valuable in situations with evolving data conditions [18]. Researchers focus on the overproduce-and-select approach for classifier ensemble selection methods. The objective of classifier ensemble selection is to choose an optimal subset of classifiers from a larger ensemble. The selection process is guided by various criteria, including individual performance measures, diversity metrics, meta-learning techniques, and performance estimation approaches. This optimization is particularly important in scenarios where a balance between accuracy and computational resource constraints is critical. There are two distinct approaches: static and dynamic selection. Static selection involves

---

assigning classifiers to predefined feature partitions, while dynamic selection adaptively selects classifiers based on their competency [20]. Dynamic selection offers two choices: individual models, known as Dynamic Classifier Selection (DCS), and ensemble models, called Dynamic Ensemble Selection (DES). DCS algorithms enable the selection of the most appropriate classifier for each data point based on its local competencies. In contrast, DES focuses on selecting the optimal classifiers for each instance based on their competence within localized regions [21] [22] [23]. Competency assessment relies on a dynamic selection dataset (DSEL) containing labeled samples. Moreover, innovative techniques like the Randomized Reference Classifier introduce randomness into class supports to enhance adaptability in addressing challenges related to imbalanced data.

Additionally, transfer learning assumes a pivotal role in addressing the intricate challenges posed by dynamic data streams and inherent concept drift. This domain of research focuses on enhancing a model's learning performance within a target domain by harnessing knowledge gleaned from source domains [4] [6]. Techniques in transfer learning include reducing domain gaps through instance re-weighting and feature matching, along with strategies to mitigate negative knowledge transfer by down-weighting irrelevant source data.

Lastly, in the study, the focus extends to the specific scenario of Streams with Emerging New Classes (SENC). This refers to situations where new classes, not present during the initial training of a learning model, emerge in the data stream. Traditional learning approaches, designed for fixed or predefined class distributions, face challenges in effectively recognizing and adapting to these novel classes in real-time. The need for adaptive learning mechanisms that can handle the emergence of new classes underscores the complexity of real-world data stream scenarios.

In this chapter, the challenges for this research that naturally arise are discussed in Section 1.1. After this, the motivation, scope and solution methodology are presented in Section 1.2. After this, the objectives and research questions are presented in Sections 1.3 and 1.4, respectively. Next, the research contribution is summarised in Section 1.5. Next the research publication is presented in Section 1.6. Finally, the research methodology and the outline of this thesis are presented in Sections 1.7 and 1.8, respectively.

## **1. INTRODUCTION**

---

### **1.1 Challenges**

Within the swiftly evolving realm of machine learning, the proliferation of high-speed data streams presents a significant hurdle — the proficient management of non-stationary data environments. This challenge is marked by dynamic fluctuations in statistical attributes, fundamental concepts, and data distributions over time. The crux of the issue emerges as models, initially trained on historical data, experience a decline in accuracy when confronted with new data influenced by concept drift. This includes scenarios such as:

- Multi-class imbalanced data streams
- Overlapping classes
- Emergence of new classes
- Heterogeneous transfer learning

However, addressing these challenges yields substantial benefits. By effectively managing non-stationary data environments, organizations can enhance the adaptability and resilience of their machine learning systems. This enables more robust decision-making processes, improved predictive capabilities, and heightened performance across diverse contexts. Moreover, it fosters innovation and agility, empowering organizations to stay ahead in dynamic markets and evolving scenarios.

### **1.2 Motivation and Scope**

#### **1.2.1 Thesis Motivations**

The rapid advancements in machine learning, particularly in the realm of real-time data streams, have ushered in a new era of challenges that demand innovative solutions. The primary motivations driving this thesis stem from the necessity to overcome the limitations of traditional models and methods when faced with dynamic, non-stationary data environments. These motivations are outlined as follows:

## **1.2 Motivation and Scope**

---

- **Adapting to Emerging Classes in Real-Time Scenarios:** In today's fast-paced data-driven world, the sudden emergence of new classes within data streams presents a critical challenge. Existing models often falter when confronted with such unforeseen changes, leading to significant declines in predictive accuracy. Our motivation lies in developing robust, real-time adaptive mechanisms that enable models to swiftly and effectively accommodate new classes, ensuring that the system remains relevant and accurate despite the evolving data landscape.
- **Proactive Management of Concept Drift:** As data streams evolve, the underlying concepts and statistical properties often shift, resulting in concept drift. This phenomenon can severely degrade the performance of models if not addressed promptly. Our research is motivated by the need to create sophisticated strategies that proactively detect and manage concept drift, ensuring that models can maintain high accuracy and adapt to changes in the data environment over time.
- **Dynamic Optimization of Classifier Ensembles:** The dynamic nature of non-stationary data streams necessitates the continuous optimization of classifier ensembles to handle emerging classes and shifting data distributions effectively. We are motivated to pioneer techniques that enable the real-time adjustment of classifier ensembles, thereby enhancing the overall performance of classification algorithms in evolving contexts.
- **Addressing Multi-Class Imbalance in Streaming Data:** Imbalanced data distributions, especially in multi-class scenarios, pose significant challenges for accurate classification. Traditional approaches often fail to adequately represent minority classes, leading to biased outcomes. Our motivation is to develop innovative methods that can dynamically address class imbalances, ensuring fair and accurate classification across all classes, even in non-stationary environments.
- **Enhancing Transfer Learning in Non-Stationary Contexts:** Transfer learning has emerged as a powerful technique for leveraging knowledge from diverse source domains. However, in non-stationary environments, the risk

## **1. INTRODUCTION**

---

of negative knowledge transfer can undermine model performance. Our research is driven by the need to create frameworks that facilitate effective transfer learning, minimizing negative transfer and maximizing the potential for positive knowledge transfer, thereby ensuring robust model performance across diverse and shifting data landscapes.

### **1.2.2 Thesis Scope**

This thesis aims to address the multifaceted challenges associated with managing non-stationary data streams through the development of innovative frameworks and methodologies. The scope of this research is defined by the following key areas:

- **Development of Adaptive Classifier Ensembles:** We will design and implement a dynamic classifier ensemble framework capable of real-time adaptation to emerging classes. This framework will be tested and validated across various streaming data scenarios to ensure its effectiveness in maintaining model accuracy amidst the continuous appearance of new classes.
- **Concept Drift Detection and Response Mechanisms:** The research will explore advanced methods for detecting and responding to concept drift within non-stationary data streams. We will focus on creating mechanisms that not only identify drift but also adapt the classification model in real-time to maintain high predictive accuracy.
- **Innovative Solutions for Multi-Class Imbalance:** The thesis will delve into the complexities of multi-class imbalanced data in streaming environments. We will propose and evaluate novel techniques for dynamically adjusting class distributions and optimizing classifier performance, with a particular focus on preserving the representation of minority classes.
- **Framework for Heterogeneous Transfer Learning:** A significant part of the research will involve developing a framework for heterogeneous transfer learning that addresses the challenges posed by non-stationary data streams. This framework will leverage the eigenvector technique to facilitate effective knowledge transfer, ensuring that models can adapt to new domains without suffering from negative transfer effects.

## **1.3 Thesis Objectives**

---

- **Real-Time Model Adaptation:** The scope of the thesis will include the creation of methodologies that enable real-time model adaptation in response to both emerging classes and shifting data distributions. These methodologies will be designed to operate efficiently within the constraints of high-speed data streams, minimizing computational complexity while maximizing classification accuracy.

### **1.2.3 Solution Methodology**

Through these focused areas of research, the thesis aims to contribute significantly to the field of machine learning by providing practical, scalable solutions for the challenges posed by non-stationary data streams. The outcomes of this research are expected to enhance the adaptability, resilience, and performance of machine learning systems in real-time, dynamic environments. This thesis endeavors to devise solutions to its contributions through three distinct approaches:

- **Dynamic Classification Ensembles for handling Imbalanced Multi-class Drifted Data streams:** This approach is designed to address challenges posed by imbalanced multi-class streams and overlapping classes within data streams.
- **Addressing Emerging New Classes in Incremental Streams via Concept Drift Techniques :** This initiative aims to manage the emergence of new classes in non-stationary environments effectively.
- **Addressing Heterogeneous Transfer Learning Problem in data streams via Concept Drift:** This approach aims to handle the complexities of heterogeneous transfer learning from multiple sources in non-stationary environments.

## **1.3 Thesis Objectives**

The thesis objectives for our research stems from the imperative need to address the following key motivations:

## 1. INTRODUCTION

---

- **Objective 1.** Thandling Imbalanced Multiclass Drifted Data and overlapping classes streams.
- **Objective 2.** addressing Emerging New Classes in Incremental Streams via Concept Drift and K-means Techniques.
- **Objective 3.** addressing Heterogeneous Transfer Learning Problem in data streams via Concept Drift and Eigenvector Techniques.

### 1.4 Thesis Questions

- $Q_1$ . What is the impact of imbalanced stream on the performance of ML models in Nonstationary Environment?
- $Q_2$ . What is the impact of reducing overlapping classes stream on the performance of ML models in Nonstationary Environment?
- $Q_3$ . How does the emergence of new classes in data streams affect the stability and performance of ML models?
- $Q_4$ . how can ML models be adapted to accommodate such changes?
- $Q_5$ . how to employe concept drift to solve the emerging new classes problem?
- $Q_6$ . How does the Heterogeneous sources in data streams affect the stability and performance of Transfer Learning Technique?
- $Q_7$ . What approaches or techniques can be employed in heterogeneous transfer learning to facilitate knowledge transfer across diverse sources and domains?

### 1.5 Contributions

Our research endeavors to create advanced frameworks designed for effectively managing non-stationary data streams while prioritizing high accuracy and minimizing computational complexity. The key contributions of our work can be summarized as follows:

- **Incorporation of Concept Drift Detection and Ensemble Classifier:** Our primary innovation involves incorporating a concept drift detection method

## **1.5 Contributions**

---

alongside an ensemble classifier. This integration enables real-time adaptation and refinement of our proposed framework in response to transfer learning in non-stationary environments. This methodology ensures the continuous evolution of our classification model in alignment with the changing data landscape.

- **Dynamic Classifier Ensemble Framework for Emergence Class Problem:** We introduce a classification framework that harnesses dynamic classifier ensemble techniques to address the emergence class problem. This framework enhances the performance of classification algorithms when dealing with non-stationary data streams featuring emerging new classes. By dynamically adjusting the ensemble based on data characteristics, our framework improves the accuracy and effectiveness of classification models, effectively tackling challenges associated with emerging new classes.
- **Introduction of Precise Weighting Method for Local Classifiers of the transfer learning framework:** A significant advancement in our research is the introduction of a precise weighting method to assess the significance of each local classifier within the ultimate classifier. This method enhances the accuracy of the overall classifier by providing a nuanced evaluation of individual classifier contributions.
- **Development of Innovative Framework using Eigenvector Technique for addressing heterogenous transfer learning problem:** A significant stride in our research involves the creation of an innovative framework, harnessing the power of the eigenvector technique. This framework is specifically designed to tackle the challenges posed by heterogeneous transfer learning problems. By leveraging the eigenvector technique, our framework enables the seamless transfer of knowledge from diverse source domains to the target domain, thereby enhancing adaptability and overall performance.
- **Dynamic Adjustment Method to Multi-class Imbalanced Data:** Our classification framework introduces a dynamic adjustment method tailored for multi-class imbalanced data scenarios. It seamlessly incorporates concept

## 1. INTRODUCTION

---

drift detection mechanisms and optimizes classifier ensemble selections, aiming to significantly improve classification accuracy in the context of multi-class imbalanced non-stationary streams.

- **Adaptive Method for Class Imbalance:** Additionally, we propose an adaptive method for addressing the class imbalance issue. This method considers data distributions and historical instances of class imbalance, especially in cases where class overlap occurs within multi-class and drifted data streams. The adaptive approach improves classification performance by selecting the most suitable oversampling method based on the unique characteristics of the data stream.

## 1.6 Publications

---

**Title:** Dynamic Classification Ensembles for Handling Imbalanced Multiclass Drifted Data Streams.

**Authors:** Madkour, Ahmed H., Hatem M. Abdelkader, and Amgad M. Mohammed

**Journal:** Information systems (Impact Factor = 8,1 → Q1).

**Status:** Published.

---

**Title:** Historical Isolated Forest for detecting and adaptation concept drifts in nonstationary data streaming.

**Authors:** Madkour, Ahmed H., Hatem M. Abdelkader, and Amgad M. Mohammed.

**Journal:** IJCI. International Journal of Computers and Information, 10.2 2023.

**Status:** Published.

---

**Title:** Addressing Emerging New Classes in Incremental Streams via Concept Drift Techniques.

**Authors:** Ahmed H., Madkour, Enrique Onieva, Hatem M. Abdelkader, and Amgad M. Mohammed.

**Journal:** Information Systems (Impact Factor = 3,0 → Q1).

**Status:** Under review.

---

**Title:** Addressing Heterogeneous Transfer Learning Problem in data streams via Concept Drift.

**Authors:** Ahmed H., Madkour, Enrique Onieva, Hatem M. Abdelkader, and Amgad M. Mohammed.

**Journal:** Evolving Systems (Impact Factor = 2,8 → Q2).

**Status:** Under review.


---

**Table 1.1:** Publications in journals and conferences conducted during this thesis.

During the research activities of this thesis, several international peer-reviewed journal articles were published to disseminate the obtained results. The publications can be found in Table 1.1.

### 1.7 Research Methodology

The research field of this thesis is moving fast due to technological advances and the continuous generation of new contributions in ML. Consequently, an iterative research methodology was followed. The main idea of this cyclical process is that the knowledge acquired in its initial phase helps to design an increasingly promising technique, either in terms of accurate results, or in terms of concept, offering originality and remarkable contributions. Fig. 1.3 shows the different phases of this research methodology. These phases are briefly described below:

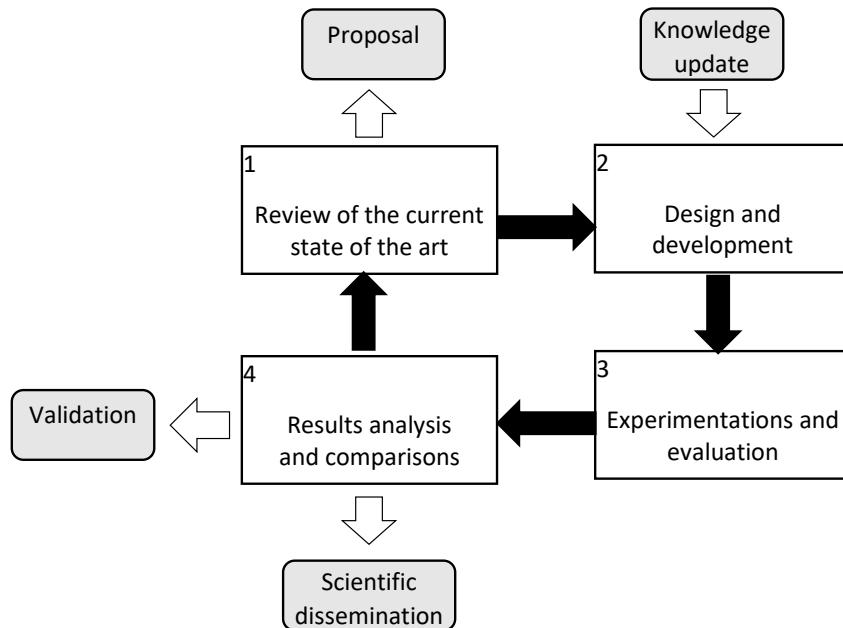

**Figure 1.3:** The research methodology of the thesis.

1. **Review of the current state-of-the-art:** The main objective of this phase is to investigate the state of the art related to the field under consideration to identify problems and/or challenges. To achieve this, the related bibliography is used, reviewing publications from the scientific community published in journals, and proceedings of international congresses. The knowledge acquired in this phase should lead to a proposal to address the identified challenges.

## **1. INTRODUCTION**

---

2. **Design and development:** In this phase, a novel proposal to solve the identified challenges is designed and developed. To this end, previously acquired or updated knowledge is used to ensure that the solution is always up-to-date with the current state of the art.
3. **Experimentation and evaluation:** The goal of this phase is to test the proposals resulting from the previous step to a process of experimentation. To carry out this procedure, it is crucial to provide some criteria and evaluation methods with which the results will be compared in the subsequent phase. All these criteria and methods must be built using the knowledge acquired in the first stage of the methodology.
4. **Results analysis and comparison:** After carrying out experimentation, results must be analyzed and compared with those obtained in the state-of-the-art. At this point, it is needed to check if the results obtained are enough to address the challenges identified in the first phase. In such a case, another methodological cycle begins to approach the following challenge identified or to keep working with the challenge under consideration if it was not still solved. In this stage, conclusions must be drawn from analyses of results, and knowledge obtained must be materialized in scientific dissemination, either through journals, or conferences.

### **1.8 Structure of the Dissertation**

The structure of the remainder of this thesis dissertation is outlined below.

**Chapter 2** reviews background about concept drift, concept drift types, concept drift components, adapting types.

**Chapter 3** reviews state-of-the-art concept drift, classifier ensemble selection, imbalanced data streams, Streams with Emerging New Classes (SENC), and transfer learning.

**Chapter 4** presents our first proposal to build an effective proposed approach for handling Imbalanced Multi-class Drifted Data streams.

## **1.8 Structure of the Dissertation**

---

**Chapter 5** provides our second proposal to addressing emerging new classes in incremental streams via concept drift techniques.

**Chapter 6** presents our third proposal to addressing heterogeneous transfer learning problem in incremental streams via concept drift techniques.

**Chapter 7** revisits the main goal and specific objectives posted earlier. In this chapter, we summarise the main contributions of this thesis and outline possible future research.



*The good thing about science is that  
it's true whether or not you believe  
in it.*

Neil deGrasse Tyson

CHAPTER  
**2**

## Background


Amidst the surge of vast streaming data, governments and businesses find themselves in an urgent need for sophisticated data analysis and machine learning analytics approaches. These tools are indispensable for anticipating future trends and making well-informed decisions. However, the perpetual emergence of new goods, markets, and consumer behaviors introduces a formidable challenge known as concept drift [24]. This phenomenon involves the variation of statistical parameters of the target variable over time in unexpected ways, posing a substantial obstacle to accurate forecasting and optimal decision-making. The patterns derived from historical data may become obsolete when applied to new and evolving datasets. The impact of concept drift extends across data-driven information systems, including decision support and early warning systems, diminishing their overall effectiveness. In the dynamic realm of big data, where data types and distributions are inherently unpredictable, the challenge of concept drift becomes even more pronounced. In response to this challenge, the field introduces a new subject: adaptive data-driven prediction/decision systems.

## 2. BACKGROUND

---

### 2.1 Concept Drift Sources

Concept drift, illustrated comprehensively in Fig. 2.2, unfolds through three distinct scenarios. First, (a) portrays a shift in data distribution, signifying changes in the underlying patterns and characteristics of the incoming data. This type of drift challenges the model's ability to adapt to new trends and patterns [25] [26] [27] [28]. Second, (b) showcases a change in function output, leading to the need for adjustments in the position of the class delimiter. Here, the relationship between input features and output classes undergoes transformations, demanding the model to realign its decision boundaries accordingly. Third, (c) presents a scenario involving a dual shift—both in data distribution and function output. This complex manifestation of concept drift requires the model to address simultaneous changes in underlying patterns and output relationships. Effectively navigating these shifts is crucial for maintaining the model's predictive accuracy and decision-making capabilities in dynamic environments. Understanding these nuanced aspects of concept drift is foundational for devising adaptive strategies in machine learning models.

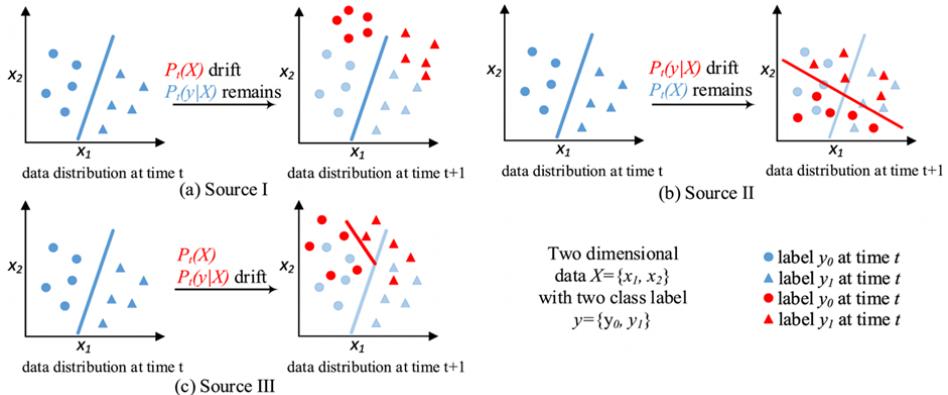

**Figure 2.1:** Concept .

**Figure 2.2:** Concept Drift Types.

### 2.2 Concept Drift Types

Concept drift is commonly categorized into four types, as illustrated in Fig. 2.3. In Types 1-3, the focus of research on concept drift adaptation revolves around

## 2.3 Concept Drift Components

minimizing the drop in accuracy and achieving the fastest recovery rate during the transformation process of concepts. Conversely, Type 4 drift delves into leveraging historical concepts, emphasizing the identification of the best-matched historical concepts within the shortest time frame when a new concept emerges—whether suddenly, incrementally, or gradually. To illuminate the distinctions between these types, [27] introduces the term "intermediate concept" to describe the transitional phases between concepts. As noted by [11], concept drift may not only occur at a precise timestamp but may also extend over a prolonged period. Consequently, intermediate concepts may emerge during the transformation, representing a blend of the starting and ending concepts in the case of incremental drift or embodying one of the starting or ending concepts, as observed in gradual drift. Understanding these intermediate concepts is essential for comprehending the nuanced dynamics of concept drift during transitions from one state to another.

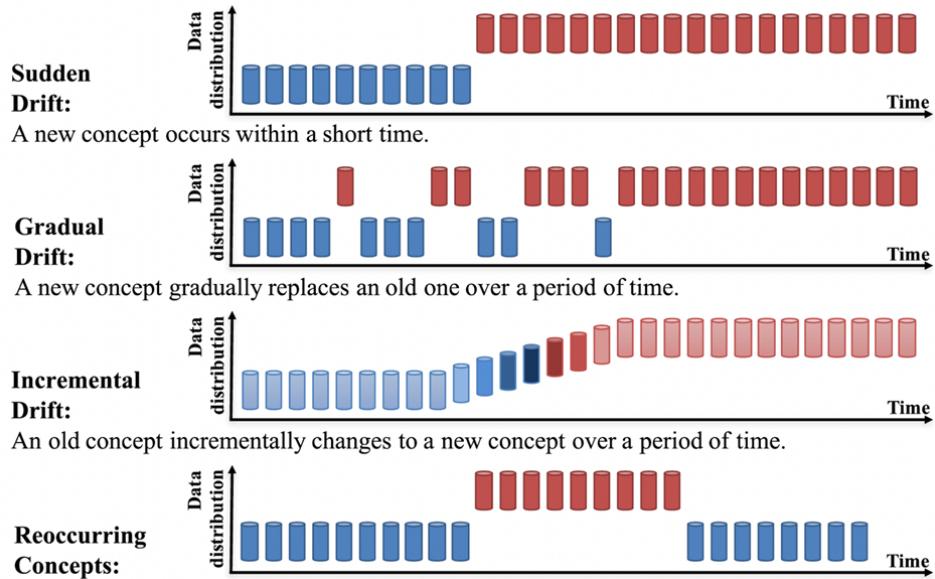


Figure 2.3: Concept Drift Types.


## 2.3 Concept Drift Components

Conventional machine learning primarily involves prediction and training/learning. However, learning under the concept drift paradigm introduces three additional crit-

## 2. BACKGROUND

---

ical steps as show in Fig. 2.4: concept drift detection, drift understanding, and drift adaptation. Concept drift detection involves identifying changed points or change time periods to define and predict drift. Drift understanding delves into crucial aspects such as when the drift starts, how long it lasts, and where it occurs, providing indispensable insights for the subsequent adaptation step. The adaptation step, also referred to as the reaction step, plays a pivotal role in updating current learning models in response to concept drift. Three main approaches address various types of drift: Simple Retraining, Ensemble Retraining, and Model Adjusting. Drift detection employs various tools and algorithms, comparing old and fresh data chunks with statistical models based on data distribution. Techniques vary, with some utilizing a constant chunk length and others employing a variable length. Drift understanding is essential for making well-informed decisions during the adaptation step. This involves calculating the necessary modifications in the trained model to adapt to new changes as shown in Fig. 2.5. The severity region determines whether to generate a completely new model or make minimal adjustments to the existing one.

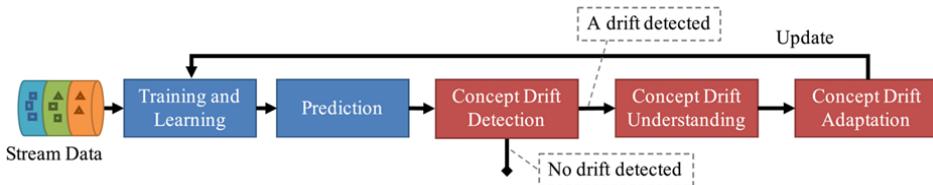

**Figure 2.4:** Concept Drift Main Components.

### 2.3.1 Concept Drift Detection

Drift detection involves techniques and mechanisms to characterize and quantify concept drift by identifying change points or intervals [11]. The general framework for drift detection consists of four stages:

- **Stage 1 (Data Retrieval):** This stage focuses on retrieving data chunks from data streams. Given that a single data instance lacks sufficient information to infer the overall distribution [25], organizing data chunks meaningfully is crucial for effective data stream analysis [29].

## **2.3 Concept Drift Components**

---

- **Stage 2 (Data Modeling):** This optional stage abstracts the retrieved data, extracting key features that contain sensitive information impacting a system in case of drift. This stage may involve dimensionality reduction or sample size reduction to meet storage and online speed requirements [11].
- **Stage 3 (Test Statistics Calculation):** This stage involves measuring dissimilarity or estimating distance to quantify drift severity and generate test statistics for hypothesis testing. Defining an accurate and robust dissimilarity measurement remains a challenging aspect of concept drift detection. Test statistics can also be used for clustering evaluation [30] and to determine dissimilarity between sample sets [31].
- **Stage 4 (Hypothesis Test):** This stage employs a specific hypothesis test to assess the statistical significance of the change observed in Stage 3, such as the p-value. These tests determine drift detection accuracy by establishing statistical bounds for the test statistics from Stage 3. Without Stage 4, the acquired test statistics are meaningless for drift detection, as they cannot establish the drift confidence interval. Commonly used hypothesis tests include estimating the distribution of test statistics [32] [33], bootstrapping [34] [35], the permutation test [25], and Hoeffding's inequality-based bound identification [36].

It is crucial to note that without Stage 1, the concept drift detection problem can be regarded as a two-sample test problem, examining whether the populations of two given sample sets are from the same distribution [31]. In other words, any multivariate two-sample test can be adopted in Stages 2-4 for detecting concept drift [31]. However, in cases where distribution drift may not be included in the target features, the selection of the target feature becomes critical for the overall performance of a learning system and poses a significant challenge in concept drift detection [37].


### **2.3.2 Understanding Phase**

The extent of concept drift severity serves as a valuable criterion for selecting appropriate drift adaptation strategies. As shown in Fig. 2.5, in a classification task

## 2. BACKGROUND

---

where the drift's severity is minimal, resulting in only a marginal shift in the decision boundary within the new concept, adjusting the current learner through incremental learning proves sufficient. Conversely, when confronted with high severity in concept drift, wherein the decision boundary undergoes substantial changes, it might be more effective to discard the old learner and opt for retraining a new one rather than incrementally updating the existing learner. It's noteworthy to mention that despite some researchers highlighting the capability to articulate and quantify the severity of detected drift, this information is not yet widely integrated into drift adaptation practices. The adaptation step offers three distinct ways to adapt the model. Simple Retraining involves training a new model using the most recent data, replacing the old model. Model Ensemble, the second approach, entails keeping and reusing existing models, which proves efficient when dealing with repeated instances of concept drift. The third approach, Model Adjusting, constructs a model that adapts flexibly from changed data, allowing partial updates when the original data distribution undergoes significant changes.

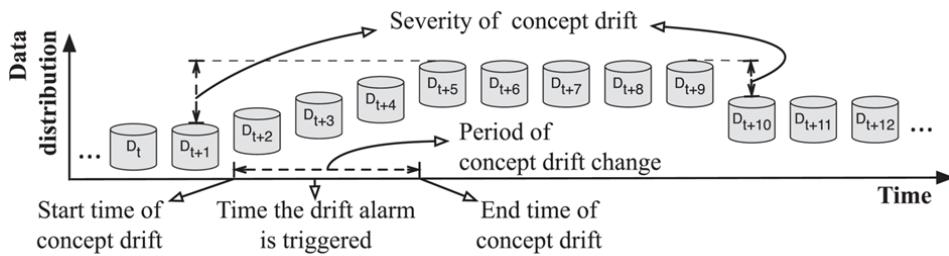

**Figure 2.5:** Understanding Phase of Concept Drift.

### 2.3.3 Adaptation Phase

This section delves into strategies for updating existing learning models in response to drift, referred to as drift adaptation or reaction. The three primary categories of drift adaptation methods are simple retraining, ensemble retraining, and model adjusting, each tailored to address specific types of drift.

#### A. Simple Retraining

One way to respond to concept drift is by retraining a new model with the

## **2.3 Concept Drift Components**


---

latest data, replacing the outdated model as shown in Fig.2.6. This approach requires an explicit concept drift detector to determine when to retrain the current model. A window strategy is commonly used, preserving recent data for retraining and/or utilizing old data for distribution change tests. An example of this strategy is Paired Learners [38], which employs two learners: the stable learner and the reactive learner. If the stable learner consistently misclassifies instances correctly classified by the reactive learner, indicating a new concept, the stable learner is replaced with the reactive learner. This method is straightforward, easy to implement, and adaptable at any point in the data stream. However, a trade-off arises when adopting a window-based strategy in determining an appropriate window size. A small window better reflects the latest data distribution, while a large window provides more data for training a new model. To address this challenge, the ADWIN algorithm [39] dynamically adjusts sub window sizes based on the rate of change between two sub-windows, eliminating the need for users to predefine window sizes. Beyond direct model retraining, researchers have explored integrating the drift detection process with the retraining process for specific machine learning algorithms. DELM [40], for instance, extends the traditional ELM algorithm, adapting to concept drift by dynamically adjusting the number of hidden layer nodes in response to increasing classification error rates, indicating a potential concept drift. Similarly, FP-ELM [41] introduces a forgetting parameter to the ELM model to adapt to drift conditions. A parallel version of the ELM-based method [42] has been developed for high-speed classification tasks under concept drift. OS-ELM [43], an online learning ensemble of regressor models, integrates ELM using an ordered aggregation (OA) technique to address the challenge of defining the optimal ensemble size. In the realm of instance-based lazy learners for handling concept drift, the Just-in-Time adaptive classifier [32] follows the "detect and update model" strategy, extending the traditional CUSUM test [44] to a pdf-free form for drift detection. When a concept drift is identified, old instances (beyond the last T samples) are removed from the case base. Advancements include extending this algorithm to handle recurrent concepts by considering and comparing the current concept to previously stored concepts [30] [32]. NEFCS [25], another

## 2. BACKGROUND

---

KNN-based adaptive model, employs a competence model-based drift detection algorithm [25] to locate drift instances in the case base and distinguish them from noise instances. The redundancy removal algorithm, Stepwise Redundancy Removal (SRR), is developed to eliminate redundant instances uniformly, ensuring that the reduced case base retains sufficient information for future drift detection.

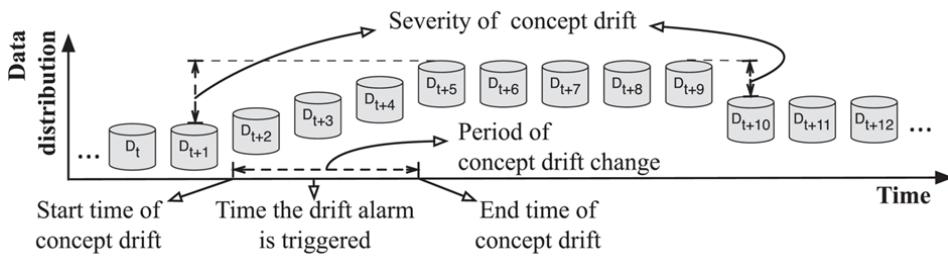


**Figure 2.6:** Retraining New Model Approach.

### B. Model Ensemble for Recurring Drift

In recurring concept drift scenarios, preserving and reusing old models can be more efficient than retraining new ones for each recurrence, forming the basis for employing ensemble methods [45]. These methods, a focus in stream data mining research, consist of base classifiers with varied types or parameters. Their outputs, determined by specific voting rules, collectively predict new data. Various adaptive ensemble methods, extending classical ones or introducing adaptive voting rules, address the challenges of concept drift as shown in Fig. 2.7. Classical ensemble methods like Bagging, Boosting, and Random Forests have been adapted for streaming data with concept drift. For instance, online Bagging [46] uses each instance once, simulating batch mode bagging. Leveraging Bagging [47] employs ADWIN drift detection to replace the existing classifier with the worst performance when concept drift is detected. Adaptive boosting [48], monitoring prediction accuracy through a hypothesis test, addresses concept drift, assuming classification errors on non-drifting data follow a Gaussian distribution. The Adaptive Random Forest (ARF) algorithm [49] extends the random forest

## 2.3 Concept Drift Components

tree algorithm, incorporating concept drift detection (e.g., ADWIN) to decide when to replace an obsolete tree. A similar approach is seen in [50], using Beyond classical methods, novel ensemble methods with innovative voting techniques tackle concept drift. Dynamic Weighted Majority (DWM) [51] adapts to drifts through weighted voting rules, managing base classifiers based on individual and global ensemble performance. Learn++NSE [52] addresses frequent classifier additions by weighting them based on prediction error rates. Specific types of concept drift are considered in specialized ensemble methods. Accuracy Update Ensemble (AUE2) [53] equally addresses sudden and gradual drift, using a batch mode weighted voting ensemble method. Optimal Weights Adjustment (OWA) [54] achieves a similar goal with weighted instances and classifiers. Special cases, like class evolution, are considered in [55], while recurring concepts are handled by monitoring concept information [56] [26]. Another method [57], refines the concept pool for recurring concepts.

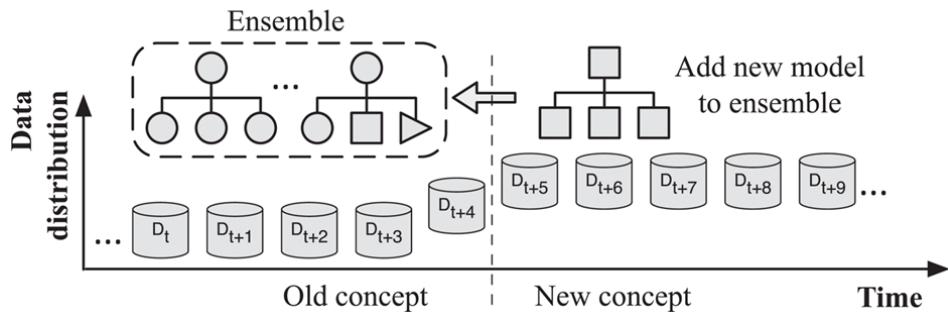

**Figure 2.7:** Ensemble Approach for Adaptation Phase.


### C. Model Ensemble for Recurring Drift

As Shown in Fig. 2.8, instead of retraining the entire model, an alternative is to construct a model with adaptive learning capabilities, allowing partial updates in response to changing data distributions [58], as in Fig. 2.8. This is efficient when concept drift occurs in localized regions. Many techniques in this category use the decision tree algorithm, leveraging its ability to adapt to individual sub-regions. VFDT [59] is a foundational contribution for high-speed data streams, employing the Hoeffding bound for node splitting.

## 2. BACKGROUND

---

VFDT processes each instance once, doesn't store instances, and has minimal maintenance costs. CVFDT [60], an extension, addresses concept drift by maintaining a sliding window of the latest data and replacing the original sub-tree with a better-performing alternative. VFDTc [60] enhances VFDT by handling numerical attributes and adapting to concept drift with node-level detection. Later extensions [61] [62] introduce an adaptive leaf strategy in VFDTc, selecting the best classifier from options like majority voting, Naive Bayes, and Weighted Naive Bayes. Recent studies [63][64] question VFDT's foundation, the Hoeffding bound, for non-independent variables in information gain. An alternative impurity measure is proposed in a new online decision tree model [64], demonstrating its reflection of concept drift and potential use in CVFDT. IADEM-3 [65] addresses Hoeffding bound concerns by computing the sum of independent random variables for drift detection and pruning.

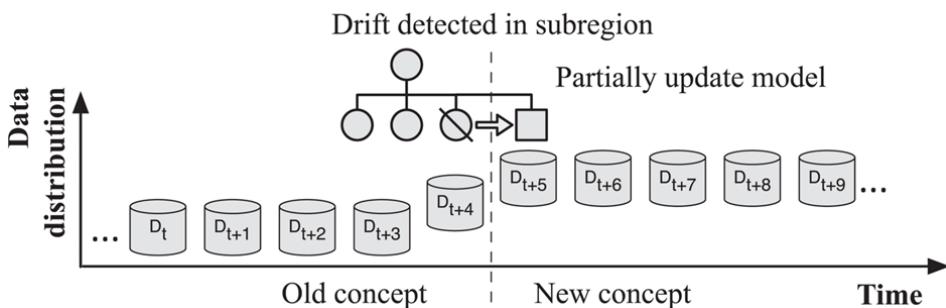

**Figure 2.8:** Partial Updating Approach for Adaptation Phase.

## 2.4 Metrics

The evaluation utilizes several metrics, including recall, precision, F1 score , Balanced Accuracy (BAC), G-mean, and specificity[66][67][68]. These metrics provide a comprehensive view of the classification performance, addressing different aspects such as correctness, balance, and the ability to detect positive and negative cases accurately. The following subsections define each metric used in the evaluation.

### 2.4.1 Recall

Recall, also known as sensitivity or true positive rate, measures the ability of the classifier to correctly identify positive instances. It is particularly important in scenarios where the detection of positive cases is crucial, such as in medical diagnoses or fraud detection.

$$\text{Recall} = \frac{TP}{TP + FN} \quad (2.1)$$

where  $TP$  represents the number of true positives, and  $FN$  represents the number of false negatives. A high recall indicates that most of the actual positive cases are correctly classified.

### 2.4.2 Precision

Precision measures the ability of the classifier to provide relevant positive predictions. It is defined as:

$$\text{Precision} = \frac{TP}{TP + FP} \quad (2.2)$$

where  $TP$  represents the number of true positives, and  $FP$  represents the number of false positives. Precision is crucial when false positives need to be minimized, for example, in spam detection or quality control systems.

### 2.4.3 F1 Score

The F1 score is the harmonic mean of precision and recall, and it provides a balanced view of the classifier's performance when both precision and recall are equally important:

$$\text{F1 Score} = 2 \times \frac{\text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}} \quad (2.3)$$

A higher F1 score indicates that the model achieves a good trade-off between precision and recall, making it useful in cases where there is an uneven class distribution.

## 2. BACKGROUND

---

### 2.4.4 Balanced Accuracy (BAC)

Balanced Accuracy (BAC) is defined as the average of recall for each class, which helps in evaluating the model's ability to correctly classify both positive and negative instances, especially in imbalanced datasets:

$$\text{BAC} = \frac{1}{2} \left( \frac{TP}{TP + FN} + \frac{TN}{TN + FP} \right) \quad (2.4)$$

where  $TN$  represents the number of true negatives. BAC is useful when the classes are imbalanced, as it treats both positive and negative classes equally.

### 2.4.5 G-mean

G-mean is the geometric mean of recall for each class, which measures the balance between classification performance on the positive and negative classes. It is defined as:

$$\text{G-mean} = \sqrt{\frac{TP}{TP + FN} \times \frac{TN}{TN + FP}} \quad (2.5)$$

G-mean is particularly useful in evaluating the performance of models on imbalanced datasets, as it ensures that both classes are predicted with similar accuracy.

### 2.4.6 Specificity

Specificity, also known as the true negative rate, measures the ability of the classifier to correctly identify negative instances. It is defined as:

$$\text{Specificity} = \frac{TN}{TN + FP} \quad (2.6)$$

where  $TN$  represents the number of true negatives, and  $FP$  represents the number of false positives. Specificity is crucial in scenarios where false positives need to be minimized, such as in screening tests where a false positive result may lead to unnecessary follow-up procedures.

*Nothing in life is to be feared, it is only to be understood. Now is the time to understand more, so that we may fear less.*

Marie Curie

CHAPTER

# 3

## State-of-the-art

In this chapter, we provide a comprehensive review of recent advancements in stream classification, addressing several critical challenges that arise in dynamic data environments. The rapid evolution of data streams introduces complexities such as concept drift, imbalanced multiclass scenarios, class overlap, classifier ensemble selection, emergence of new classes, and the incorporation of transfer learning. This introduction outlines the structure of the chapter and highlights the significance of each topic in advancing stream classification methodologies. The first section (Section 3.1) focuses on concept drift, a phenomenon where the statistical properties of the data change over time. We explore various methodologies developed for real-time detection and adaptation to concept drift in streaming scenarios. This includes a review of techniques that enable systems to identify shifts in data patterns promptly, ensuring sustained classification accuracy. By analyzing the strengths and limitations of these approaches, we highlight the necessity for robust drift detection mechanisms in evolving data streams. Next, in Section 3.2, we delve into classifier ensemble selection in the context of streaming data. As the characteristics of data streams evolve, selecting the most appropriate ensemble of classifiers becomes crucial. We present algorithms designed to dynamically choose the best-performing classifiers based on the current data distribution. This section

### **3. STATE-OF-THE-ART**

---

emphasizes the importance of adaptive ensemble strategies in enhancing classification performance amidst changing data landscapes. Section 3.3 addresses the challenges posed by imbalanced multiclass scenarios, particularly in the presence of overlapping classes. We discuss specialized oversampling techniques aimed at countering the effects of class imbalance in streaming data. By providing insights into effective strategies for balancing the representation of minority classes, we lay the groundwork for developing robust frameworks that can maintain performance in imbalanced drifted streams. As new classes emerge in streaming systems, traditional classifiers often struggle to adapt effectively. In Section 3.4, we explore methodologies that specifically focus on the integration of new classes within existing frameworks. This section highlights innovative approaches that enhance the adaptability of stream classification systems, ensuring they remain effective as new data patterns emerge. In Section 3.5, we examine the role of transfer learning in stream classification. This section discusses how transfer learning techniques can leverage knowledge from related tasks to improve classification performance in dynamic environments. We explore current methodologies that facilitate the transfer of information across different domains, particularly in situations where labeled data may be scarce. The insights gained from this discussion will be pivotal for understanding how transfer learning can complement other strategies in our proposed framework. In Section 3.6, To further contextualize our discussion, we conduct a comparative analysis of recent works in the field, focusing on the recent works for each challenge. We assess their contributions and identify limitations, illuminating specific gaps in the current research landscape that our work aims to address. Finally, Section 3.7 concludes this chapter by identifying key remarks and gaps, which inform the research direction for the subsequent chapters.

#### **3.1 Concept Drift**

In machine learning, concept drift refers to the phenomenon where the underlying data distribution changes over time [69–71] leading to a decrease in the accuracy or relevance of previously trained models. Detecting and responding to concept drift promptly is crucial for maintaining the performance of machine learning models. To address this challenge, various concept drift detection methods have been

### **3.2 Classifier Ensemble Selection**

---

proposed in the literature. One widely used method is the Drift Detection Method (DDM)[33, 47] which employs a statistical test to compare the error rate of a model on consecutive data sets. By identifying significant performance decreases, DDM signals the presence of concept drift. Another approach is the Early Drift Detection Method (EDDM)[33, 72] an extension of DDM that considers the error rate of a moving window of the latest data compared to the previous window. The ADaptive WINdow (ADWIN)[33, 72] approach uses a sliding window technique to monitor statistical differences between consecutive windows for drift detection. It dynamically adjusts the window size to adapt to changing drift patterns. The Kolmogorov-Smirnov windowing method (KSWIN) [72] calculates the Kolmogorov-Smirnov distance between two sliding windows to detect concept drift. Hoeffding’s bounds with moving average test (HDDMA) and its variant HDDMW compute upper and lower bounds for the true mean of the data stream [33, 47] . By comparing these bounds, they can detect changes in the data distribution indicative of concept drift. Lastly, the Page-Hinkley [73] method measures the cumulative sum of errors and detects drift when the sum exceeds a predefined threshold. These concept drift detection methods are crucial in enabling machine learning models to adapt to the evolving nature of data streams. By continuously monitoring and detecting changes in data distributions, these methods facilitate the necessary adjustments and updates to maintain the model’s performance and accuracy over time. Incorporating these methods into machine learning frameworks enhances their robustness and enables them to handle concept drift effectively.

## **3.2 Classifier Ensemble Selection**

This study focuses on the overproduce-and-select approach for classifier ensemble selection methods [23][20][74]. The primary objective of classifier ensemble selection is to identify the optimal subset of classifiers from a larger ensemble, considering various criteria such as performance measures, diversity metrics, meta-learning techniques, and performance estimation approaches. This selection process aims to reduce computational complexity, enhance efficiency, and improve overall ensemble performance, making it highly valuable for real-world applications. By carefully selecting a smaller subset of classifiers, ensemble selection strikes a balance

### **3. STATE-OF-THE-ART**

---

between accuracy and computational resources, adapting to the evolving nature of the data stream. This approach leverages the strengths of different classifiers and adjusts the ensemble composition to handle changing conditions effectively. The goal is to enhance the accuracy, robustness, and overall performance of classification models in dynamic and challenging scenarios. There are two main approaches to the selection process: static and dynamic selection. Static selection assigns classifiers to specific partitions of the feature space, while dynamic selection chooses a classifier specifically for each unknown data sample based on its local competencies. Dynamic Ensemble Selection (DES) is a widely recognized approach that selects the best classifiers for each test instance, considering their competence within the local region of competence. The Randomized Reference Classifier proposed by Woloszynski and Kurzynski [21] stands out among various approaches. This classifier introduces randomness through beta distribution, enhancing adaptability and robustness. By considering the stochastic nature of class supports, the Randomized Reference Classifier can potentially improve classification performance in concept drift scenarios. However, it is important to note that employing diversity measures during the classifier selection process, as demonstrated by Lysiak [22], may lead to smaller ensembles but does not necessarily enhance classification accuracy. Overall, the overproduce-and-select approach for classifier ensemble selection methods offers a comprehensive framework for addressing the challenges associated with concept drift. By dynamically adapting the ensemble composition and leveraging the competencies of individual classifiers, this approach aims to improve classification performance, efficiency, and adaptability in dynamic and challenging scenarios.

#### **3.3 Imbalanced data Streams**

In the context of imbalanced data classification, as previously discussed, researchers have categorized three primary methodologies[75]. Our study primarily focuses on the first category, which pertains to addressing imbalanced data streams, particularly through sampling methods, specifically generating synthetic instances to rectify the class imbalance. This process is commonly referred to as oversampling[76]

### **3.4 Streams with Emerging New Classes (SENC)**

---

and aims to balance instance quantities across both classes [77–80] . It’s important to note that class imbalance can manifest in two scenarios: binary imbalanced classes, featuring skewed distribution between two classes, and multi-class imbalanced situations. Our study is specifically centered on multi-class oversampling techniques. In addressing class imbalances within multi-class contexts, Multi-Label SMOTE (MLSMOTE) [9] has extended the principles of SMOTE to cater to imbalanced multi-class learning scenarios. MLSMOTE significantly enhances classifier performance by generating synthetic examples for each minority class label. This approach thoughtfully considers neighboring examples in the feature space, ensuring that synthetic examples are appropriately assigned to their respective minority classes. Moreover, a recent advancement known as Multi-Label Synthetic Oversampling based on Local label imbalance (MLSOL) [75] has emerged as a promising technique. MLSOL systematically combats local imbalances within the domain of multi-class classification by employing distinct sampling strategies for each label. Empirical research confirms MLSOL’s superiority by showcasing its capability to outperform existing methods in terms of classification accuracy and other evaluation metrics, particularly in effectively addressing local imbalance. Importantly, MLSOL offers a potentially effective approach to enhancing the performance of multi-class classification models, surpassing MLSMOTE in several aspects. Notably, MLSOL constructs synthetic samples exclusively from minority class instances within a restricted neighborhood, resulting in a more compact synthetic dataset compared to MLSMOTE. This attribute bears potential advantages for computational efficiency and helps mitigate concerns related to overfitting.

## **3.4 Streams with Emerging New Classes (SENC)**

Existing approaches have been proposed to detect and handle the emergence of new classes in streaming data. Clustering-based methods, such as SACCOS [81], EC-SMiner [82], and SAND [83], employ clustering techniques to identify new class emergence. However, these methods require access to true labels for either parts or all instances, limiting their practical applicability. Similarly, SENC-MaS [84] uses matrix sketches for detecting emerging new classes but assumes the availability of true label information for all instances. In contrast, tree-based methods like

### 3. STATE-OF-THE-ART

---

SENCForest [85] and SEEN [86] utilize anomaly detection techniques to identify new classes, often with limited or no label information. However, these methods often suffer from high false positive rates and runtime inefficiencies. Another approach, SENNE [87], focuses on exploiting local information using the nearest neighbor ensemble for improved detection performance. Nevertheless, the absence of an effective model retirement mechanism in SENNE results in longer runtimes than alternative methods. The k-nearest Neighbor Ensemble-based method (KNNENS) [88] method emerges as a promising solution for the challenges of streaming emerging new class problems. By effectively utilizing a k-nearest neighbor-based hypersphere ensemble and incorporating model updates, the KNNENS approach tackles the issues of new class detection and known class classification within a unified framework. It is worth noting that an explicit limitation of existing methods is their lack of utilization of concept drift techniques for detecting emerging new classes and retraining the classification model. This limitation highlights the need for approaches that can effectively handle concept drift while addressing the emergence of new classes in streaming data.

## 3.5 Transfer Learning

In recent years, transfer learning has received significant attention due to its growing importance in addressing disparities between source and target domain distributions. Bridging the gap in distribution disparities is vital for optimizing performance in transfer learning, resulting in the development of diverse approaches, which can be broadly categorized into instance re-weighting and feature matching [89]. Instance re-weighting methods focus on aligning domain distributions by adjusting the weights of source instances, enabling the reuse of those source instances that closely align with the target domain. Notably, there's a strong emphasis on estimating these instance weights. For example, Huang et al. [90] introduced the Kernel Mean Matching (KMM) technique, which calculates weights by minimizing the mean differences between instances from the source and target domains within a Reproducing Kernel Hilbert Space (RKHS). Sugiyama et al. [91] put forth the Kullback-Leibler Importance Estimation Procedure (KLIEP), utilizing Kullback-Leibler distance as a metric for assessing domain distribution

### **3.5 Transfer Learning**

---

dissimilarity, which includes a model selection step. Building on these instance re-weighting methods, Sun et al. [92] introduced the 2-Stage Weighting Framework for Multisource Domain Adaptation (2SW-MDA) to address challenges in multi-source transfer learning. It simultaneously adjusts the weights of source domains and their instances to reduce both marginal and conditional distribution disparities, akin to KMM, while leveraging the smoothness assumption for domain weighting. TrAdaBoost [93], a variation of the AdaBoost framework [94], operates by iteratively adjusting the weights of training data. In each iteration, it trains a classifier on a mix of source and target data and uses this classifier to make predictions on the training data. If a source instance is incorrectly predicted, its weight is reduced, diminishing its influence on the classifier. Conversely, the weights of misclassified target instances are increased to amplify their impact. An extension of TrAdaBoost, known as Multisource TrAdaBoost (MsTrAdaBoost) [95], is employed to address multi-source transfer learning challenges. MsTrAdaBoost combines each source and target dataset, training a separate classifier for each. Subsequently, it selects the classifier with the least error on the target data to update the instance weights. On a different note, feature matching aims to establish a shared feature representation space between source and target domains, which can be achieved through either symmetric or asymmetric transformations. A typical example of a symmetric transformation is the Transfer Component Analysis (TCA) method by Pan et al. [95], employing Maximum Mean Discrepancy (MMD) [96] [97] [89] to minimize differences in marginal distribution between source and target domains within an RKHS. Expanding on TCA, Joint Distribution Adaptation (JDA) [98] has been introduced to address both marginal and conditional distribution disparities. Recognizing the varying importance of marginal and conditional distribution differences across different problems, Wang et al. [98] [99] introduced the Balanced Distribution Adaptation (BDA) approach, which introduces a balancing factor. Subspace Alignment (SA) [100] focuses on aligning domain distributions in a lower-dimensional subspace, selecting crucial eigenvectors using principal component analysis [100] and learning a linear transformation matrix to minimize differences in eigenvectors between domains. In contrast, the Distribution Alignment between Two Subspaces (SDA-TS) [101] was proposed to align both bases and

### 3. STATE-OF-THE-ART

---

distributions. Correlation Alignment (CORAL) [102], [90], an asymmetric transformation approach, is designed to align sub-space bases and employs second-order statistics. CORAL uses a learned transformation matrix to project source instances into the target domain. While there is a wide range of feature matching techniques in transfer learning, it is imperative to prevent the negative transfer, which occurs when transferred knowledge hinders the performance of target tasks. One of the reasons for negative transfer is the inclusion of unrelated or detrimental source samples in the target domain. To mitigate this, transfer joint matching (TJM) [103] introduces sparsity regularization in the feature transformation matrix, aligning features and re-weighting instances simultaneously. Zhong et al. [104] have also developed strategies to mitigate the impact of unrelated source instances and ensure positive transfer. To tackle the challenges posed by partial transfer learning scenarios, where the source domain contains more classes than the target domain, prior works [105] [106] [1] introduce instance-level re-weighting and class-level re-weighting mechanisms. These mechanisms are employed to reduce the influence of outlier classes from the source domains. Additionally, another approach presented in [3] utilizes an adversarial neural network to align domain distributions. In this method, lower weights are assigned to the source samples that are deemed distant from the discriminator. This weighting reflects the perception that such instances have weaker relevance to the target domain. Yang et al. [107] introduce the HE-CDTL approach for Concept Drift Transfer Learning (CDTL). HE-CDTL leverages knowledge from both source domains and historical time steps within the target domain to improve learning performance. Its key advantages include the utilization of the class-wise weighted ensemble for historical knowledge and the implementation of AW-CORAL for knowledge extraction from source domains. The class-wise weighted ensemble empowers individual classes in the current learning process to select historical knowledge independently. AW-CORAL serves to minimize domain disparities between source and target domains while mitigating negative knowledge transfer. Extensive experiments demonstrate that HE-CDTL outperforms baseline methods in addressing transfer learning challenges in the context of concept drift. Melanie addresses the challenge of non-stationary environments by considering an online scenario where data in both source and target domains are generated. This method employs an online ensemble to learn models from each

domain, subsequently combining these models using a weighted-sum approach. The models are trained incrementally, with their weights dynamically adjusted to handle concept drift. Generally, Melanie can be adapted to address CDTL by substituting the online learning ensemble with an ensemble designed for chunk-based concept drift.

## 3.6 Comparsion

In this section, we undertake a critical comparison of closely related works addressing the challenges of imbalanced multiclass streams 3.6.1, the emergence of new classes 3.6.2, and the integration of transfer learning 3.6.3 within streaming environments. The increasing complexity of real-world data streams necessitates advanced methodologies that can effectively manage the intricacies of these challenges. By examining various approaches in the literature, we aim to highlight their contributions, strengths, and limitations in dealing with imbalanced data distributions, adapting to new class occurrences, and leveraging transfer learning techniques. This comparative analysis not only sheds light on the current state of research but also underscores the specific gaps and unresolved issues that our work seeks to address, ultimately paving the way for more robust and adaptive solutions in the realm of streaming data classification.


### 3.6.1 Imbalanced Stream

In the context of multi-class classification, addressing class imbalances is crucial. Multi-Label SMOTE (MLSMOTE) extends the principles of SMOTE to generate synthetic examples for each minority class label, thereby enhancing classifier performance by considering neighboring examples in the feature space. Recently, Multi-Label Synthetic Oversampling based on Local label imbalance (MLSOL) has emerged as a more effective technique. MLSOL systematically addresses local imbalances by employing distinct sampling strategies for each label. Empirical research demonstrates that MLSOL outperforms existing methods, including MLSMOTE, in terms of classification accuracy and computational efficiency. By

### 3. STATE-OF-THE-ART

---

generating synthetic samples exclusively from minority class instances within a restricted neighborhood, MLSOL produces a more compact and efficient synthetic dataset, mitigating concerns related to overfitting. As illustrated in Fig. 3.1, MLSOL is more likely to select  $x_1$  as a seed instance because it is surrounded by more neighbors of the opposite class for  $l_3$ . MLSMOTE assigns the label vector  $[0,1,0]$  to all synthetic instances based on their neighbors. In contrast, MLSOL creates more diverse instances by assigning labels according to their location. Moreover, synthetic instances  $c_2$  and  $c_3$  generated by MLSMOTE introduce noise, whereas MLSOL copies the labels of the nearest instance to the new examples. In summary, MLSMOTE tends to generate new instances biased toward the dominant class in the local area, whereas MLSOL effectively explores and exploits both the feature and label space.

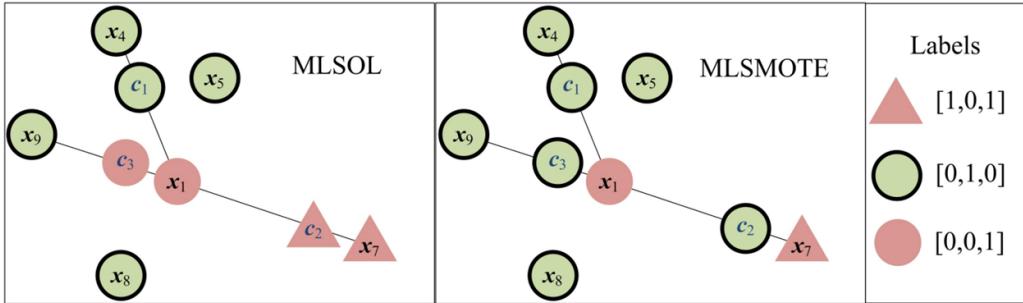

**Figure 3.1:** Distribution of the prediction accuracy.

Table 3.1 presents a comparison of two methods, MLSMOTE and MLSOL, which are designed to address the issue of imbalanced data in multi-class classification. MLSMOTE enhances classifier performance by generating synthetic examples for each minority class label, thereby balancing the class distribution. Its primary advantage is the generation of these synthetic examples, which helps mitigate the imbalance. However, it has significant limitations: the synthetic samples generated might be related to the majority class, which can blur the distinction between classes, and the method struggles with overlapping classes, leading to potential misclassification. On the other hand, MLSOL systematically combats local imbalances by employing distinct sampling strategies for each label within a restricted

### **3.6 Comparsion**

---

neighborhood. This localized approach allows MLSOL to generate synthetic examples more precisely, addressing local imbalances effectively. Nonetheless, like MLSMOTE, MLSOL faces challenges with overlapping classes, which can result in misclassification in areas where class boundaries are not clear. Despite its advantages in handling local imbalances, the overlapping class issue remains a critical limitation for both methods, affecting their overall effectiveness in classification tasks.

**Table 3.1:** Comparison of MLSMOTE and MLSOL Methods

<b>Method</b>	<b>Theory</b>	<b>Advantages</b>	<b>Limitations</b>
<b>MLSMOTE</b>	MLSMOTE significantly enhances classifier performance by generating synthetic examples for each minority class label.	Generating synthetic examples for each minority class label.	<ul style="list-style-type: none"><li>Random synthetic samples may be related to the majority class.</li><li>Overlapping classes.</li></ul>
<b>MLSOL</b>	MLSOL systematically combats local imbalances within the domain of multi-class classification by employing distinct sampling strategies for each label.	Generating synthetic examples for each minority class label within a restricted neighborhood.	<ul style="list-style-type: none"><li>Overlapping classes.</li></ul>

#### **3.6.2 Emergence of new classes**


Effectively detecting and adapting to new classes in streaming data is crucial for maintaining classification accuracy. Tree-based methods like SENCForest and SEEN utilize anomaly detection but face high false positive rates and runtime inefficiencies. SENNE improves detection performance using a nearest neighbor

### 3. STATE-OF-THE-ART

---


ensemble but suffers from longer runtimes due to the lack of an effective model retirement mechanism. The k-nearest Neighbor Ensemble-based method (KNNENS) addresses new class detection and known class classification using a k-nearest neighbor-based hypersphere ensemble and dynamic model updates. However, a critical limitation of these methods is their inadequate handling of concept drift, which is essential for detecting new classes and retraining the classification model. These methods represent the best closely related work for our proposal, which aims to build upon them by incorporating robust concept drift techniques for more adaptive and resilient classification systems.

Fig. 3.2 illustrates the SENCForest approach, which divides the space into three regions (normal, outlying, and anomaly) and detects emerging new classes (anomalies) using a calculated threshold path length. Fig. 3.3 depicts the SENNE algorithm, where hyperplanes are drawn in three dimensions ( $x_1$ ,  $x_2$ , and  $x_3$ ) for each class (Fig. 3.3a). New instances are then classified as emerging or known classes based on the rank of each class (Fig. 3.3b). Fig. 3.4 presents the KNNENS algorithm, which draws hyperplanes for all class samples (Fig. 3.4a), and classifies new instances using a voting mechanism to determine if the instance is an emerging or known class (Fig. 3.4b). These visualizations highlight the operational differences between the SENNE and KNNENS algorithms in handling the classification of emerging and known classes.

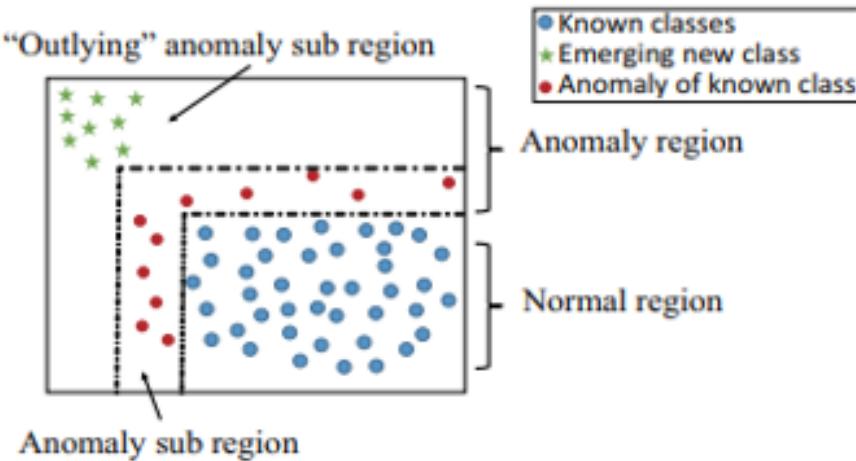


**Figure 3.2:** Stream Emerging New Class Overview

### 3.6 Comparsion

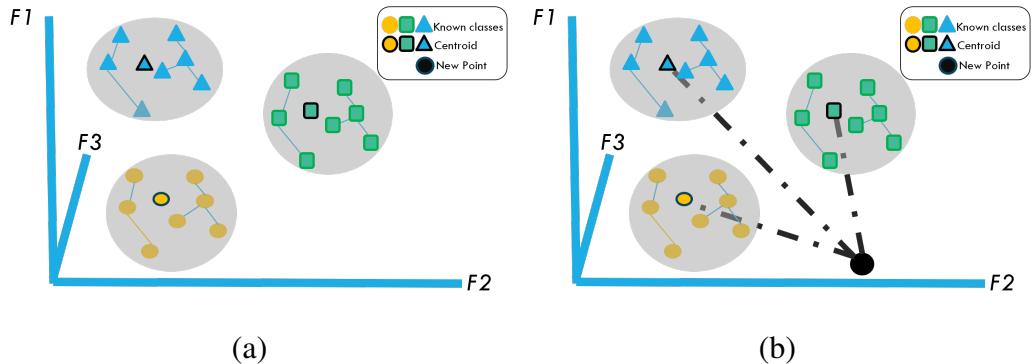

**Figure 3.3:** Stream Emerging Nearest Neighbor Ensemble (SENNE) Overview.

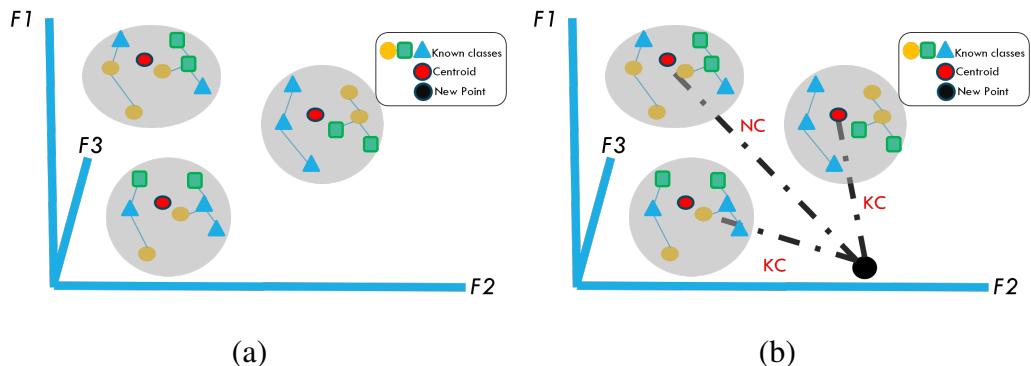

**Figure 3.4:** k-nearest Neighbor Ensemble-based (KENNE) Overview.

Table 3.2 compares three methods for emerging class detection: SENCForest, SENNE, and KNNENS. SENCForest employs the anomaly detection method iForest for new class detection and uses a threshold path to identify anomalies, serving both as an unsupervised anomaly detector and a supervised classifier. However, it has a high potential for false positives and depends on a complex path length threshold. SENNE utilizes a nearest neighbor-based hypersphere of one class ensemble to explore local neighborhood information and sort distances, handling both low and high geometric distances between classes. Its limitations include the assumption that the distribution of known classes remains unchanged and it has lengthy update times. KNNENS employs a nearest neighbor-based hypersphere of all class

### 3. STATE-OF-THE-ART

---

ensembles to explore local neighborhood information, reducing false positives for new classes without needing true labels for model updates. However, like SENNE, it assumes that the distribution of known classes remains unchanged.

**Table 3.2:** Comparison of SENCForest, SENNE and KENNE Methods

Method	Theory	Advantages	Limitations
<b>SENCForest</b>	employs anomaly detection method iForest [16] for a new class detection and then applies threshold path to detect the anomalies.	SENCForest serves as both an unsupervised anomaly detector and a supervised classifier.	<ul style="list-style-type: none"><li>Potential for High False Positives.</li><li>Dependency on Path Length Threshold (more complexity).</li></ul>
<b>SENNE</b>	nearest neighbor-based hypersphere of one class ensemble to explore local neighborhood information and sort distance to calculate distance.	SENNE is able to handle both the low and high geometric distance between two classes in the feature space.	<ul style="list-style-type: none"><li>Assumes that the distribution of known classes remains unchanged.</li><li>Take long time for update.</li></ul>
<b>KENNE</b>	nearest neighbor-based hypersphere of all class ensemble to explore local neighborhood information.	KNNENS to reduce false positives for the new class. KNNENS does not require true labels to update the model.	<ul style="list-style-type: none"><li>Assumes that the distribution of known classes remains unchanged.</li></ul>

#### 3.6.3 Transfer Learning

In the realm of transfer learning, three prominent methods—CORAL, Melanie, and HE-CDTL—serve as closely related approaches to our proposed method. Correlation Alignment (CORAL) is an asymmetric transformation approach that aligns sub-space bases using second-order statistics. By employing a learned transforma-

### **3.6 Comparsion**

---

tion matrix, CORAL projects source instances into the target domain, thereby minimizing domain discrepancies and reducing negative knowledge transfer. Melanie addresses the challenge of non-stationary environments through an online ensemble learning approach. It incrementally trains models from both source and target domains, dynamically adjusting their weights to handle concept drift, and combines these models via a weighted-sum approach as shown in Fig. 3.5. As Shown in Fig. 3.6 This method can be extended to Concept Drift Transfer Learning (CDTL) by using an ensemble for chunk-based concept drift. HE-CDTL, designed explicitly for CDTL, leverages knowledge from source domains and historical time steps within the target domain to enhance learning performance. It utilizes a class-wise weighted ensemble for historical knowledge and implements AW-CORAL for extracting knowledge from source domains. The class-wise weighted ensemble allows individual classes to select historical knowledge independently, while AW-CORAL minimizes domain disparities and mitigates negative knowledge transfer. Extensive experiments have shown HE-CDTL to outperform baseline methods in addressing transfer learning challenges in the context of concept drift. Together, these methods provide a comprehensive framework for effective transfer learning in dynamic and evolving data environments.

Table3.3 compares three methods: CORAL, Melanie, and HE-CDTL. CORAL (Correlation Alignment) utilizes a learned transformation matrix and Singular Value Decomposition (SVD) to project source instances into the target domain, effectively minimizing domain discrepancy and reducing negative knowledge transfer. However, it faces challenges with non-stationary and heterogeneous data. Melanie (Multi-source Online Transfer learning for Non-stationary Environments) addresses online learning problems where data in source and target domains are generated from non-stationary environments. Its advantages include considering online problems but it too is limited by the complexities of online learning and data heterogeneity. HE-CDTL (Class-wise Weighted and Domain-wise Ensemble) minimizes domain shift by aligning second-order statistics of source and target distributions, leveraging historical knowledge to reduce disparities between domains. Despite its strengths, it relies on the quality of the source domain and also struggles with heterogeneous data.

### 3. STATE-OF-THE-ART

---

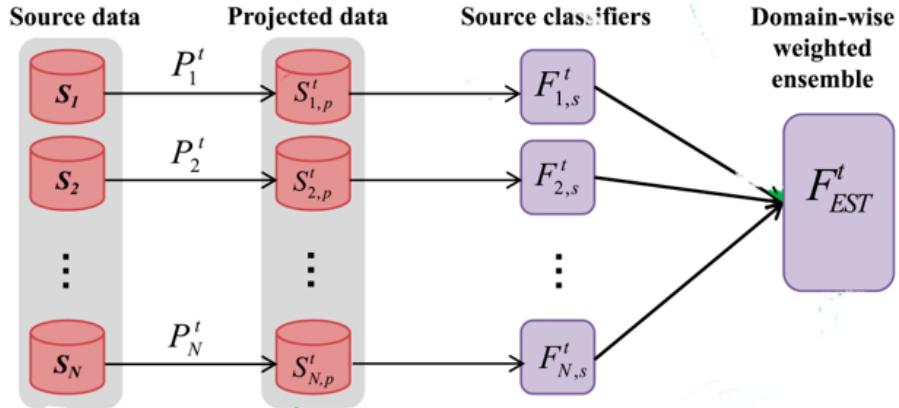


Figure 3.5: Coralation Alignment (CORAL) Overview.

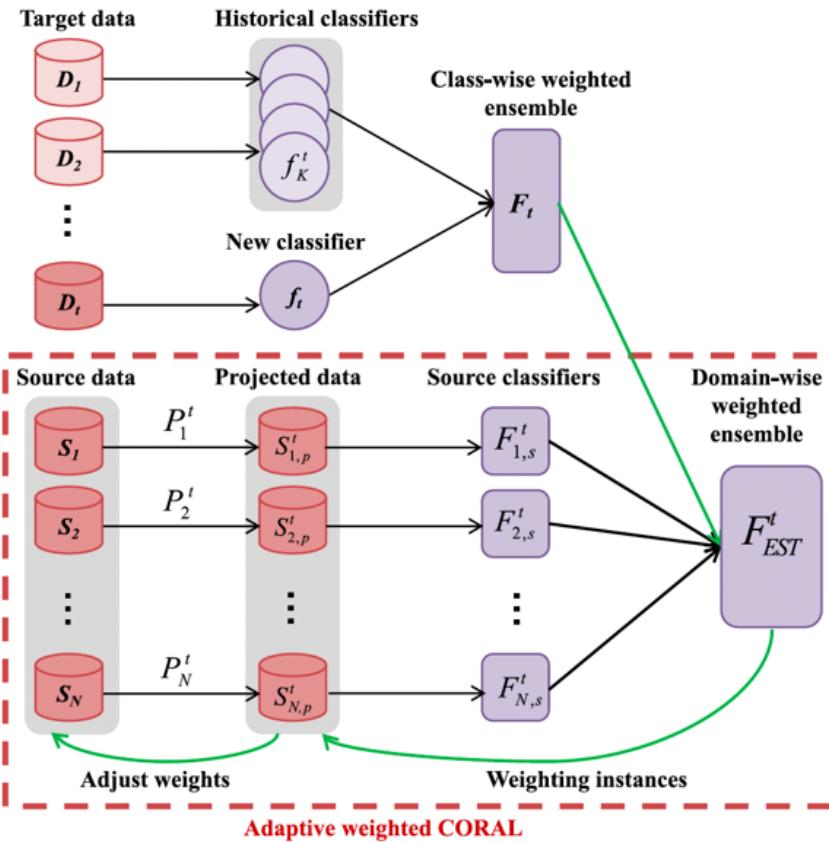


Figure 3.6: Concept Drift Transfer Learning (CDTL) Overview.

### 3.7 Remarks

---

**Table 3.3:** Comparison of CORAL, Melanie and CDTL Methods

Method	Theory	Advantages	Limitations
<b>CORAL</b>	Correlation Alignment (CORAL) uses a learned transformation matrix and Singular Value Decomposition (SVD) to project the source instances into the target domain.	CORAL can minimize domain discrepancy across source and target domains, meanwhile reducing the negative knowledge transfer.	<ul style="list-style-type: none"> <li>• Non-stationary environments.</li> <li>• Heterogenous multisource.</li> </ul>
<b>Melanie</b>	Multi-sourcE onLine TrAnsfer learning for Non-stationary Environments (Melanie). utilize the class-wise weighted .	It considers an online problem in which the data in source and target domains are generated from non-stationary environments.	<ul style="list-style-type: none"> <li>• Online Learning based only.</li> <li>• Heterogenous multisource.</li> </ul>
<b>MLSOL</b>	HE-CDTL uses the class-wise weighted and domain wise ensemble for historical knowledge and reduce the disparities between the source and target domains .	HE-CDTL minimizes domain shift by aligning the second-order statistics of source and target distributions.	<ul style="list-style-type: none"> <li>• Depend on Source Domain Quality.</li> <li>• Heterogenous multisource.</li> </ul>

### 3.7 Remarks

By comparing the literature on ensemble learning for classification tasks, the proposals in this thesis differ from other studies in several ways:

- As evident from our literature review on imbalanced streams, most studies have concentrated on generating synthetic samples while ignoring class overlap. *To address this challenge*, we propose an approach to generate non-overlapping classes in imbalanced streams.

### **3. STATE-OF-THE-ART**

---

- Oversampling techniques often perform inefficiently in the presence of concept drift. *To tackle this issue*, we introduce a methodology that selects the oversampling technique based on the current and historical distribution of the stream chunks.
- Our literature review on non-stationary environments reveals that most works focus on detecting emerging new classes while overlooking distribution changes. *To overcome this challenge*, we propose a combined approach utilizing Dynamic Ensemble Selection (DES) to select the best classifier for each chunk based on stream distribution, k-means clustering, and concept drift to address both emerging new class detection and distribution changes.
- In our literature review on transfer learning, we observed that most studies focus on homogeneous multisource transfer and neglect heterogeneous multisources in non-stationary environments. *To resolve this issue*, we propose a combined approach integrating Dynamic Ensemble Selection (DES), Concept Drift Transfer Learning (CDTL), eigenvector techniques, and concept drift to address heterogeneous transfer learning in non-stationary environments.

*You cannot teach a man anything;  
you can only help him discover it in  
himself.*

Galileo

CHAPTER

# 4

# Dynamic Classification Ensembles for Handling Imbalanced Multiclass Drifted Data Streams

In recent years, the explosion of high-speed data streams has presented new challenges for machine learning models. Three critical issues that have emerged are concept drift, class imbalance, and class overlap. Concept drift refers to the phenomenon where the statistical properties of a data generation process change over time [1][2]. This signifies that the underlying concepts, relationships between variables, or data distribution can change, leading to a fundamental shift in the nature of data. Dealing with concept drift poses a fundamental challenge in machine learning and data mining. This can cause models trained on historical data to become inadequate when applied to new data affected by concept drift, leading to a decline in the model performance [2]. To address this issue, concept drift detectors are used to identify changes in data stream distributions by leveraging information associated with classifier performance or the incoming data items themselves. These signals frequently prompt model updates, retraining, or substitution of an

## **4. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS**

---

old model with a new one. In addition, class imbalance [2][4], which is characterized by uneven class distribution, poses a challenge for traditional classifiers [5], particularly in multiclass scenarios where minority class samples are at risk of misclassification owing to their limited representation [6]. Addressing imbalanced data classification requires specialized techniques to ensure accurate minority class classification without compromising the performance of the majority class [7][8][9]. This challenge becomes more daunting when minority class instances are scattered in unknown configurations, thereby increasing the likelihood of overfitting during the learning process. To address this issue, three primary methods are employed in the context of imbalanced data classification, which are effective in both binary and multiclass imbalance scenarios [10]. The first approach involves sampling methods that address class imbalance by either reducing the number of majority class instances (undersampling) or generating artificial minority class instances (oversampling) [11][12][13]. The second and third groups encompass adaptive algorithms and hybrid methods, respectively. Adaptive algorithms include one-class and cost-sensitive classification [14]. Hybrid methods merge data preprocessing with classification techniques, often utilizing ensemble classifiers to effectively mitigate class imbalance and enhance classifier performance [15][16][19]. Class overlap occurs when instances from different classes inhabit the same region in the data space [17][18]. This overlap complicates the task of distinguishing between representative instances of various classes and posing performance challenges for traditional classifiers. This issue is commonly referred to as class overlap. Researchers have proposed class overlap undersampling techniques to address class imbalance problems [20]. These techniques aim to leverage local similarities among minority instances to identify potentially overlapping majority instances. Although these methods have demonstrated promising results in improving model performance on specific datasets, many of them rely heavily on nearest-neighbor approaches to detect overlapping regions around minority instances. This approach often neglects the global similarity within the overlapping domain, which can lead to local optimal values getting stuck during calculations. Furthermore, determining appropriate parameters for these models poses a significant challenge. If the parameter selection is too extensive, it may lead to the exclusion of valuable instances, while conservative parameters may overlook instances with overlap. This issue can significantly affect

---

classifier performance, particularly when handling streams containing both a minority class and instances with class overlap. Therefore, both class imbalance and class overlap present significant challenges in the realm of data stream analyses. Consequently, addressing class imbalance is crucial in multiclass learning, leading to research efforts that focus on both concept drift and class imbalance challenges. Researchers have explored techniques such as DES and multiclass oversampling to address these issues. Dynamic classifier ensembles offer the unique ability to adapt their composition based on data characteristics, making them valuable in situations with evolving data conditions [21]. The aim of classifier ensemble selection is to identify the optimal subset of classifiers from a larger ensemble. A prominent approach in classifier ensemble selection is the overproduce-and-select strategy. This selection process is guided by diverse criteria, including individual performance measures, diversity metrics, meta-learning techniques, and performance-estimation approaches. Such optimization is particularly crucial in scenarios in which striking a balance between accuracy and computational resource constraints is paramount. There are two distinct approaches: static and dynamic approaches. Static selection involves assigning classifiers to predefined feature partitions, whereas dynamic selection adaptively selects classifiers based on their competency [22]. Dynamic selection offers two choices: Dynamic Classifier Selection (DCS) and Dynamic Ensemble Selection (DES). DCS algorithms enable the selection of the most appropriate classifier for each data point, based on its local competencies. In contrast, DES focuses on selecting the optimal classifiers for each instance based on their competence within localized regions [23][24][25]. Competency assessment relies on a Dynamic SElection dataset (DSEL) containing labeled samples. Moreover, innovative techniques, such as the randomized reference classifier, introduce randomness into class supports to enhance adaptability in addressing the challenges related to imbalanced data. The main goal of this study is to formulate a precise classification approach that addresses changing conditions. Specifically, the proposed approach aims to address scenarios where there is an uneven distribution among several classes, overlapping instances of classes, and instances where the fundamental concept of data evolves. To address these challenges, we employed dynamic classifier ensembles. These ensembles utilize oversampling techniques, implemented either on a global or local scale, as a preprocessing step to

## **4. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS**

---

address class imbalance. Furthermore, we enhanced multiclass learning techniques to counteract class imbalance through method adaptation.

The remainder of this chapter is organized as follows: In Section 6.1, we present the motivations and the contributions. The proposed framework are discussed in detail in Section 4.2. The experimental results and the discussion are presented in Sections 6.3. Finally, the conclusions of this study and future research are discussed in Section 4.4.

### **4.1 Motivations and Contributions**

1. We introduce a classification approach that dynamically adjusts to multiclass imbalanced data, incorporates mechanisms for detecting concept drift, and optimizes classifier ensemble selection. The objective is to enhance the classification accuracy, specifically for multiclass imbalanced nonstationary streams.
2. Additionally, we propose an adaptive method for the class imbalance issue, considering the data distributions and historical instances of class imbalance. This is particularly relevant in cases where class overlap occurs within the multiclass and drifted data performance by selecting the most suitable oversampling method based on the unique characteristics of the data stream.

### **4.2 Proposed Methodology**

In this section, we present the primary phases of our study, comprising three distinct stages. Following this introduction, we delve into the synthetic data-generator method, providing a comprehensive breakdown of the four essential steps. Our proposal aims to develop a robust approach designed to overcome the challenging domain of multiclass classification for imbalanced and drifting data streams. In pursuit of this goal, our proposal addresses the four primary challenges inherent in constructing our approach.

- **Multiclass Imbalanced Streams:** This study focuses on addressing the widespread problem of imbalanced data streams in the context of multiple classes. We

## **4.2 Proposed Methodology**

---

aim to address this issue using well-known techniques, notably MLSMOTE and MLSOL.

- **Class Overlap:** We also address a critical challenge involving class overlapping, a factor known to substantially affect model performance [23][24]. To address this issue, we introduce an adaptive method that generates nonoverlapping synthetic instances, thereby enhancing the overall performance of the model.
- **Drifted Streams:** Our proposed approach integrates a concept drift detector to identify shifts in the underlying data distribution. This dynamic detection mechanism enables the model to promptly recognize changes and adjust its classifiers, thereby ensuring its effectiveness in handling drifting stream.
- **Classifier Performance:** To enhance the classifier performance, our approach employs Dynamic Ensemble Selection (DES). This technique creates a pool of classifiers and dynamically selects the most suitable classifier for each incoming data point, further improving classification accuracy and robustness.

### **4.2.1 Approach Overall Details**

Our proposed approach is designed with three distinct phases that work together to improve its performance in managing multiclass imbalanced and drifting data streams.

- **DES Phase (dynamic ensemble selection phase):** The first phase, known as the dynamic ensemble selection (DES) phase, is responsible for selecting the most appropriate classifier for the incoming data. This ensures that the selected classifier is well-suited for the current data chunk.
- **Drift detector phase:** The second phase of our approach is the drift detector phase, which operates in real-time to continuously monitor the data stream. Its primary function is to identify any signs of concept drift, which indicates shifts in the underlying data distribution over time.

## **4. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS**

---

- **Synthetic data generator phase:** The final phase of our approach is the synthetic data generator phase, which is dedicated to generating synthetic data for the minority classes. This step is crucial for addressing class imbalance by producing additional samples for underrepresented classes, thereby significantly enhancing the model’s ability to accurately classify instances from minority classes.

Specifically, as shown in Fig. 4.1, the DES phase retrieves the current data chunk from the stream and applies the DES technique to select the most suitable classifiers for the received chunk. The selected classifiers were then passed to the second phase, where they were employed to predict the class of each instance within the received data chunk. Simultaneously, detectors like ADWIND or DDM are employed to monitor any occurrence of concept drift. If the discrepancy between the class frequency and standard deviation of the current chunk is significant, as described in reference [33], and the imbalance ratio exceeds the average imbalance ratio, the current chunk is forwarded to the third phase, as indicated by the red rectangle in Fig. 1. In the third phase, our proposed method uses a set of equations 4.14.24.3 to identify minority classes. The first equation calculated the frequency of each class in the current chunk. The second equation determines the optimal frequency for each class based on the size of the chunk and the number of classes in the current chunk. Finally, the third equation designates the classes as minority classes if their frequency differs significantly from the standard deviation of the current chunk. As shown in Fig. 4.2, phase These identified minority classes are then fed into the synthetic data generator phase, which increases the minority class samples to balance any imbalanced chunks. This ensures optimal performance for the new classifiers. Algorithm 1 provides a comprehensive outline of the process of the proposed approach, which is the main contribution of our study and is designed to effectively address multiclass imbalanced and drifting data streams, uses streaming data as input, and systematically executes each step within the approach. The outcome of this process is the classification prediction generated using the proposed approach.


### 4.2.2 Synthetic Data Generator

Fig. 4.2 presents a comprehensive overview of the synthetic data generator phase, which is an essential component responsible for generating synthetic samples by considering both data distribution and historical chunk behaviors. This phase has several advantages and can perform a wide range of tasks.


- **Similar chunk analysis:** Initially, the phase analyzes the current chunk distribution and identifies a similar chunk from historical data. This analysis forms the basis for generating synthetic samples that align with prevailing distribution patterns.
- **Oversampling method selection:** This phase utilizes the knowledge of the oversampling technique applied to the identified similar chunk. Consequently, it employs an alternative oversampling technique, using MLSMOTE and MLSOL, to create the most effective synthetic data. This step is designed not only to optimize the current classification but also to preemptively address potential drifts in similar future chunks.
- **Class overlap validation:** This step involves generating synthetic samples for the minority classes to effectively address the issue of minority classes and consequently enhance the classifier performance. The process utilizes the K-Nearest Neighbor (KNN) algorithm, as applied in [25], to identify overlaps between newly generated data instances and existing instances. If overlaps are detected, the proposed approach iteratively removes these samples because their presence can potentially diminish the overall classifier performance [23][24]. Consequently, the proposed approach generates alternative samples to address this challenge and preserve the primary objectives of the synthetic data generator step.
- **Continuous refinement:** This process iterates until it successfully generates high-quality synthetic data that aligns with the data distribution, minimizes overlap, and mitigates potential concept drift. The generated data were subsequently utilized in the training phase to improve classifier accuracy.

#### 4. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS

---

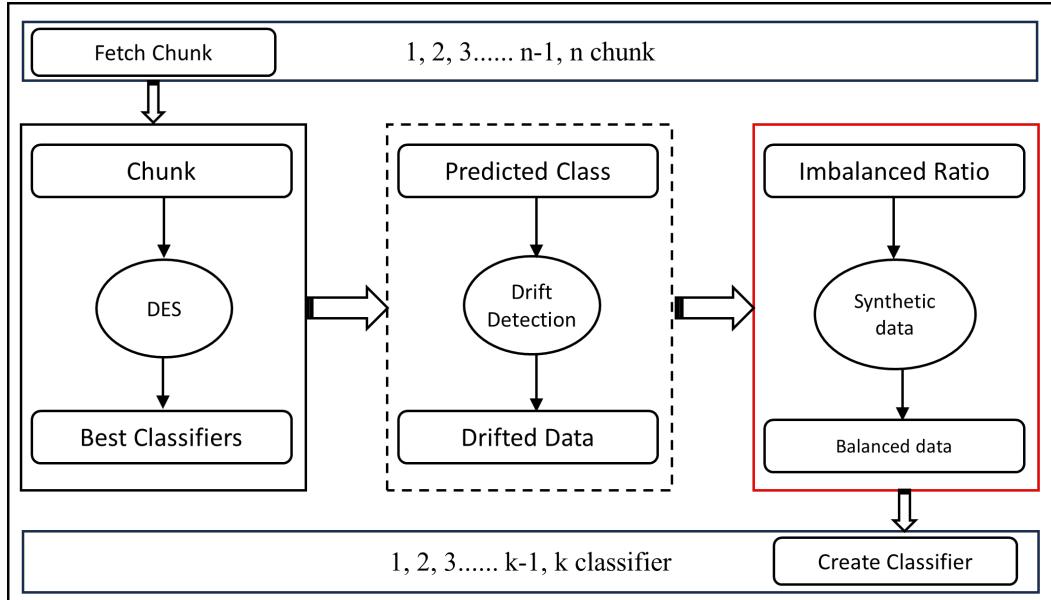

**Figure 4.1:** Proposed Approach Flow.

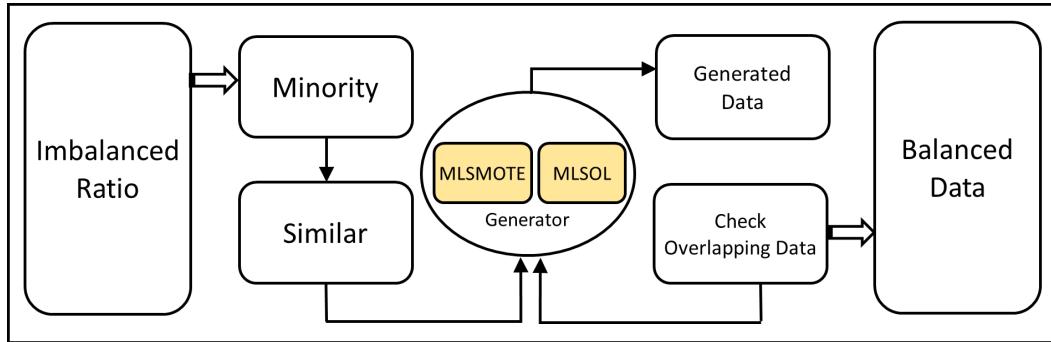

**Figure 4.2:** Synthetic Data Generator Flow.

$$frq_c = \sum_{i=1}^{\text{chunk size}} \begin{cases} 1, & \text{if } y_i = c \\ 0, & \text{otherwise} \end{cases}, \quad i = 1, 2, 3, \dots \text{chunk size} \quad (4.1)$$

$$\text{best } freq_n = \frac{|n|}{|C|} \quad (4.2)$$

$$\text{classes type}_{\text{chunk}} = \sum_{c=1}^C \begin{cases} \text{Minority}, & \text{if } diff(sd_c - frq_i) > \text{best } freq_{\text{chunk}}, \\ \text{Majority}, & \text{otherwise} \end{cases}, \quad c = 1, 2, 3, \dots C \quad (4.3)$$

## 4.2 Proposed Methodology

---



---

**Algorithm 1:** Proposed Framework Algorithm for Imbalanced Multi-Class Drifted Data Streams

---

**Input:** data stream, maximum classifiers pool size  $\kappa$   
**Output:** Prediction  $P$

```

 $\psi, \Psi, \Omega, \mu \leftarrow \emptyset;$ 
 $\omega \leftarrow 0;$ 
for stream have chunk do
    if  $a$  is the First chunk then
         $k \leftarrow \text{trainingNewClassifier}(a);$ 
         $P \leftarrow \text{getPrediction}(a, k);$ 
    else
         $k \leftarrow \text{DES}(a, \Psi);$ 
         $P \leftarrow \text{getPrediction}(a, k);$ 
         $\psi \leftarrow \text{conceptDriftDetector}(P);$ 
        if  $\psi > 0$  then
             $\Omega \leftarrow \text{get classes frequency according to Eq.1};$ 
             $\omega \leftarrow \text{best frequency according to Eq.2};$ 
             $\mu \leftarrow \text{get minority classes according to Eq.3};$ 
             $b \leftarrow \text{utilize } a \text{ and } \mu \text{ to get the synthetic data according to}$ 
             $\text{Algorithm 2};$ 
             $\text{trainingData} \leftarrow a + b;$ 
             $k \leftarrow \text{trainingNewClassifier}(\text{trainingData});$ 
             $\Psi \leftarrow \Psi + k;$ 
            if  $\Psi > \kappa$  then
                 $\text{removeWorstClassifier}(\Omega);$ 
     $P \leftarrow \text{getPrediction}(a, k);$ 
return  $P$ 

```

---

In Algorithm 2, also known as the Synthetic Data Generator, we input three essential elements: the minority class samples, the current data chunk, and the desired size for generating synthetic data. The primary objective of this algorithm is to produce synthetic data samples. To achieve this, we employ the KNN algorithm to identify any overlapping instances within the current chunk (Line 3). This algorithm utilizes two specific techniques, MLSMOTE [33] and MLSOL [108]. MLSMOTE was chosen for its introduction of randomness during instance generation, reducing its reliance on the local characteristics and distribution of the

## 4. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS

---

minority class. This randomization diminishes the likelihood of producing overlapping instances, particularly in cases where minority class instances are situated in overlapping regions. In contrast, MLSOL considers the local behavior of minority classes, resulting in synthetic points that closely resemble the minority class. This approach significantly improves the accuracy of the classifier (lines 4-10). Additionally, in this algorithm, specifically from lines 11 to 17, these lines are dedicated to generating synthetic instances that ensure non-overlap with existing classes. This procedure depends on the selected oversampling method and utilizes the KNN algorithm to guarantee that the generated instances do not overlap with the existing ones.

---

**Algorithm 2:** Synthetic data generator

---

**Input:** Minority classes  $\mu$ , current chunk  $a$ , sample size  $\eta$ , historical chunks  $h$   
**Output:** Generated data  $b$

```
b ← ∅;  
f ← MLSMSOTE;  
knn ← kNearestNeighbor(a);  
chunk ← similarChunk(a, h);  
f ← similarChunkOverSamplingMethod(chunk);  
if  $f = \text{MLSMSOTE}$  then  
    f ← MLSOL;  
else  
    f ← MLSMSOTE;  
while  $|b| < \eta$  do  
    p ← generateSyntheticPoint( $\mu, f$ );  
    similarPointsClass ← KNN.getKneighbor(b);  
    if  $\text{similarPointsClass} = \mu$  then  
        b ← b ∪ {p};  
return b;
```

---

### 4.3 Experimental Results

The objective of the experiments conducted in this study was to evaluate the efficacy of multiclass oversampling techniques in enhancing the performance of the

## **4.3 Experimental Results**

---

proposed method in imbalanced drifted multiclass classification streams. Our primary goal was to develop a novel approach that combines Dynamic Ensemble Selection (DES) to improve classification accuracy and robustness in such streams. These experiments yielded valuable insights that could further refine the performance of the proposed approach and its ability to effectively handle imbalanced data streams. These findings provide a better understanding of the capabilities of the proposed approach and offer insights into an optimal strategy for tackling minority class issues and concept drift in imbalanced data streams. This study contributes to the advancement of stream mining techniques for generating more accurate and robust classification models in dynamic data stream environments. By addressing the challenges posed by minority classes and concept drift, this study offers valuable insights for improving the performance of the proposed approach and enhancing the overall efficiency of stream mining. The two main questions to be answered are:

- *Q<sub>1</sub>*: What is the impact of reduced and consistent data on the performance of ensemble learning?
- *Q<sub>2</sub>*: Is it possible with the search capability of swarm intelligence to enhance the combination of classifiers?

### **4.3.1 Experimental setup**

The evaluation of the proposed method incorporated the utilization of various metrics such as recall, precision, specificity, f1 score, balanced accuracy score (BAC), and geometric mean score (G-mean) [34]. The experimental protocol utilized for evaluation was the test-then-train approach [35], where the classification classifier was trained on a specific data chunk and subsequently evaluated on the subsequent one. The chunk size was standardized for all utilized data streams to 2,000 instances. We employed four classification classifiers as base estimators: K-Nearest Neighbor (KNN), Support Vector Machine (SVM), Gaussian Naive Bayes (GNB), and Hoeffding Tree (HT), as implemented in scikit-learn [36]. A pool of classifiers was constructed with a maximum size of  $L = 8$ , where the DES selected the best

## **4. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS**

---

classifier for each chunk. If the pool surpassed the set threshold ( $L$ ), the classifier with the lowest performance was eliminated. The experiments were conducted using Python programming language, and the source code was publicly available on GitHub<sup>1</sup>. We conducted a comparison between multiclass oversampling techniques (MLSMOTE and MLSOL) and our proposed approach to demonstrate the effectiveness of our contribution. Additionally, we conducted these experiments using two different concept drift detectors, ADWIN [28] and DDM [27], to demonstrate the adaptability and robustness of our proposed approach across varying drift detectors.

### **4.3.2 Data Streams**

In this study, the proposed approach was assessed using various datasets including benchmark datasets, a real application stream dataset, and synthetic data streams. The Stream-learn Python library was used to conduct the evaluations [31]. Table 4.1 illustrates the benchmark dataset employed in this study, which consists of the Covertype dataset containing 40 features, seven classes, and 581,010 instances. For real application stream evaluation, the Sensor stream dataset was used, which consisted of five features, 58 classes, and 392,600 instances. This represents a real-world application scenario and provides valuable insights into the performance of the proposed approach in practical settings. Synthetic datasets were generated using Scikit-learn Python library to evaluate the performance of the proposed approach. The synthetic dataset was designed to simulate data streams and comprised 10 features and four classes divided into 200 chunks of 2,000 instances each. The performance of the proposed approach was systematically evaluated using these datasets and a stream-learn library. These evaluations provided insights into the effectiveness of the proposed approach in handling different types of data streams, including benchmark datasets, real application streams, and synthetic data streams.

---

<sup>1</sup>[https://github.com/Amadkour/dynamic\\_classification\\_ensembles\\_for\\_handling\\_imbalanced\\_multi-class\\_drifted\\_data\\_streams.git](https://github.com/Amadkour/dynamic_classification_ensembles_for_handling_imbalanced_multi-class_drifted_data_streams.git)

## 4.3 Experimental Results

---

Dataset	Number of Features	Number of Classes	Number of Instances
Covertype dataset <sup>1</sup>	40	7	581,010
Sensor Stream dataset <sup>2</sup>	5	58	392,600
Synthetic stream	8	3	200,000

**Table 4.1:** Characteristics of the datasets used in the experimentation.

### 4.3.3 Analysis of Experimental Results

The performance of the proposed framework was comprehensively assessed on multiple data streams, considering two distinct concept drift detectors, ADWIN and DDM. To ensure thorough evaluation, six key performance metrics—F1 score, recall, precision, G-mean, specificity, and balanced accuracy—were carefully presented using two visualization diagrams: radar and line. A radar diagram was strategically utilized to provide an overview that effectively depicted the performance of each algorithm across the six metrics. The mean value of each metric was calculated to present the overall performance of each method (MLSMOTE, MLSOL, PA). It is important to note that the PA is represented by red lines.


#### 4.3.3.1 Results on the Benchmark Stream

The results of the mentioned methods (MLSMOTE, MLSOL, PA) applied to the Covertype dataset are presented in Fig. 4.3 , utilizing ADWIN as the drift detector. The radar diagram shows that the metric values were between 0.8 and 1.0. MLSOL exhibited the highest precision, whereas MLSOTE and PA had nearly identical values. However, PA excels in other metrics, whereas MLSMOTE has the lowest values. The line diagram in Fig. 4.3 shows the classification accuracy across 100 data chunks using the specificity metric for the methods in each chunk. Notably, all methods exhibit suboptimal accuracy during the first 20 chunks. However, a noticeable improvement was observed beyond this initial phase. The key factor driving this improvement was the expansion of the classifier pool, which now encompasses a growing number of classifiers. This expansion enables the Dynamic Ensemble Selection (DES) technique to become more proficient in selecting the most suitable classifier for each incoming chunk. Consequently, accuracy experienced a significant boost in later chunks, reflecting the adaptability and effective-

## 4. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS

---

ness of the ensemble approach. From chunk 20 to the last chunk, PA achieved the highest accuracy, whereas MLSMOTE recorded the lowest accuracy. PA's superior performance of the PA is credited to its use of historical chunks to generate optimal nonoverlapping samples, thereby effectively training the pool classifiers. In Fig. 4.4 , the same dataset is employed with the DDM functioning as the drift detector. The radar plot illustrates results comparable to those of the prior experiment, whereas the line diagram underscores PA's supremacy in most chunks. However, it also reveals that all approaches demonstrate diminished performance, in contrast to Fig. 4.3 (ADWIN), suggesting that ADWIN surpasses DDM when utilized in the Covertype data stream.

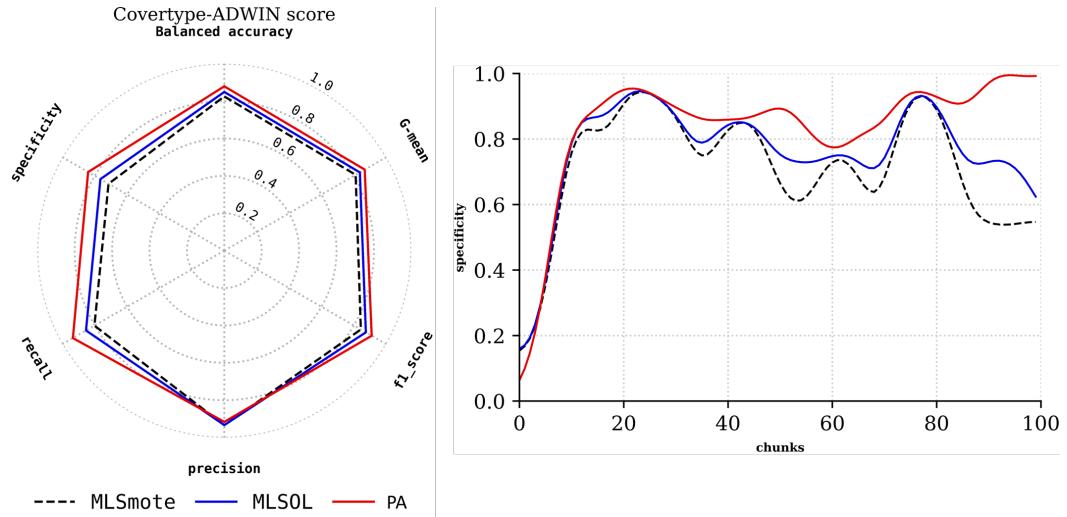


**Figure 4.3:** Synthetic Data Generator Flow.

### 4.3.3.2 Results on the Real Application Stream

Fig. 4.5 illustrates the outcomes of employing the three methods on the Sensor data stream using ADWIN as the drift detector. The radar graph depicts metric values ranging from 0.6 to 0.8, which indicate the pronounced drift and imbalance of the Sensor stream. In terms of the precision and recall metrics, the three methods exhibited almost identical values, whereas PA stood out in the other metrics. In contrast, MLSMOTE and MLSOL displayed similar values. By examining the line graph in Fig. 4.5 , it is evident that during the initial 30 chunks, PA's performance

### 4.3 Experimental Results

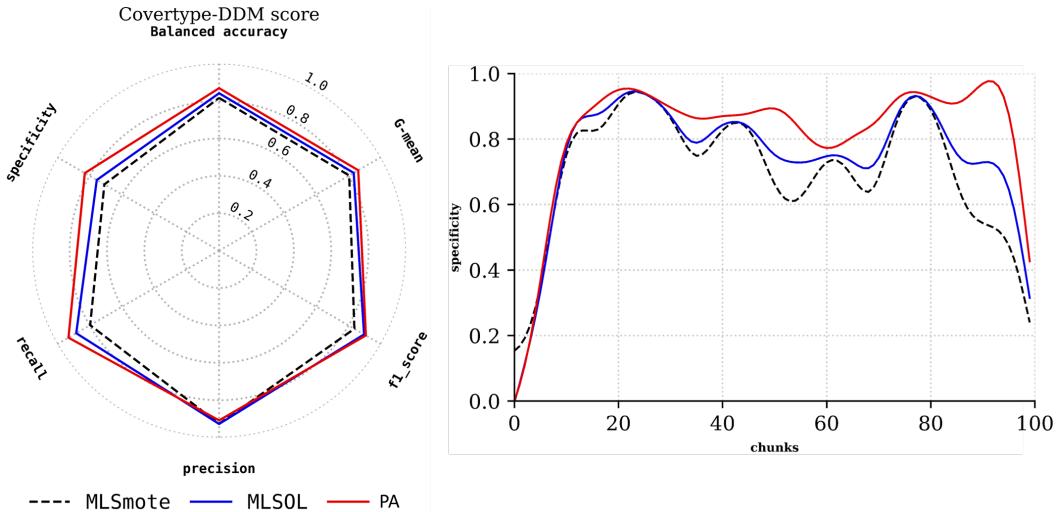

**Figure 4.4:** Synthetic Data Generator Flow.


of PA might be suboptimal in some instances because of the limited number of classifiers in the pool. However, after the first 30 chunks, the performance significantly improved with the addition of more classifiers. In the same graph, PA consistently achieved the highest performance across all chunks, whereas MLSMOTE exhibited lower performance in certain chunks, and MLSOL exhibited lower performance in the other chunks. In Fig. 4.6, using the same dataset with the DDM as the drift detector, the radar plot metrics indicate lower results compared to the previous experiment. Nonetheless, the line graph underscores PA's dominance of PA in most chunks, although all methods exhibit nearly identical performance across the entire set of chunks. Overall, the performance of all the methods in Fig. 4.6 is inferior to that in Fig. 4.5 (ADWIN), which highlights ADWIN's superiority of ADWIN over DDM when applied to the Sensor data stream.

#### 4.3.3.3 Results on the Synthetic Stream


The results of applying the same methods on the synthetic data stream using ADWIN as the drift detector are presented in Fig. 4.7. The radar diagram indicates metric values ranging from 0.6 to 0.8, suggesting that the synthetic stream is prone to frequent drifts. While MLSOL exhibited the highest precision, MLSOTE exhibited the lowest values. Conversely, PA performed well in other metrics, and

## 4. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS

---

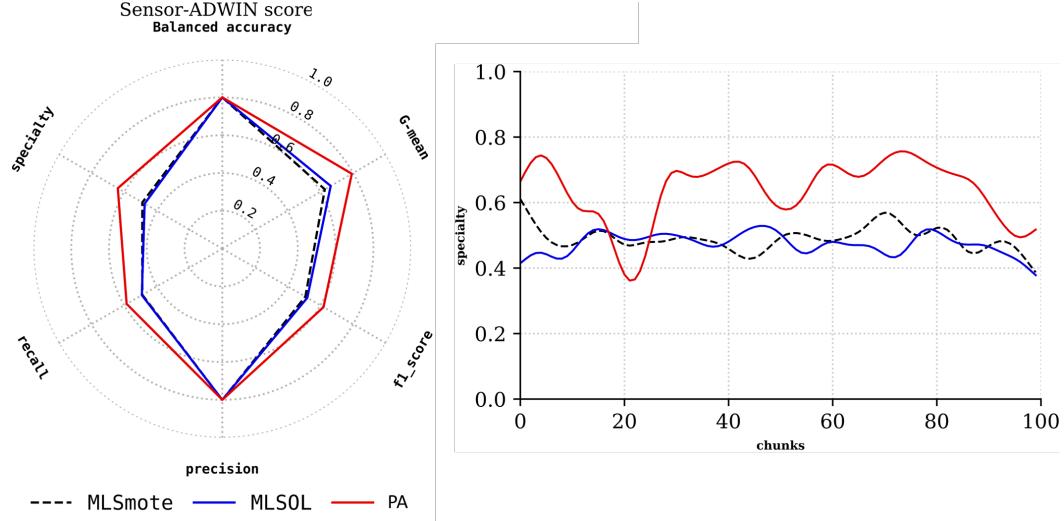

**Figure 4.5:** Synthetic Data Generator Flow.

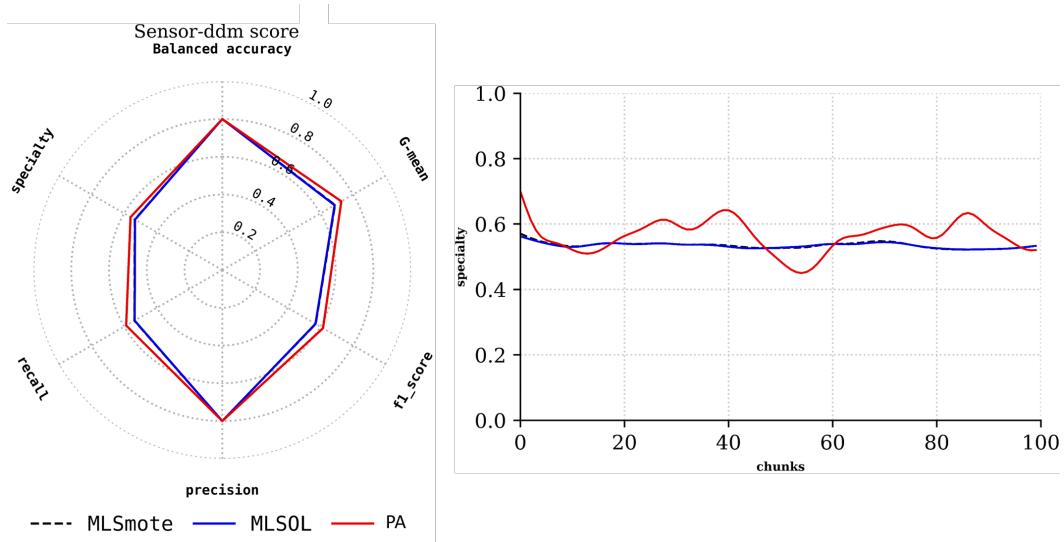


**Figure 4.6:** Synthetic Data Generator Flow.

MLSMOTE demonstrated the least favorable values. Upon examining the line diagram in Fig. 4.7, it becomes evident that during the initial ten chunks, the PA's performance might be suboptimal because of the limited number of classifiers in the pool. However, after the first ten chunks, the performance improved significantly with the inclusion of more classifiers. In the same diagram, PA consistently achieves the highest performance across all chunks, whereas MLSOL maintains

### 4.3 Experimental Results

satisfactory performance, and MLSMOTE exhibits lower performance throughout. In Fig. 4.8, using the same synthetic data stream but with the DDM as the drift detector, the radar plot metrics produce similar results to the previous experiment. However, the line diagram emphasizes the same outcomes as those in the previous experiment. Nevertheless, MLSOL and MLSMOTE achieved lower values than the previous experiment. These findings confirmed ADWIN’s superiority of ADWIN over DDM when applied to synthetic data streams. These results highlight the versatility and robustness of the algorithm, demonstrating its effectiveness in handling concept drift across diverse datasets, including the challenging synthetic dataset, Covertype dataset, and Sensor dataset, regardless of whether ADWIN or DDM is used as the concept drift detector.

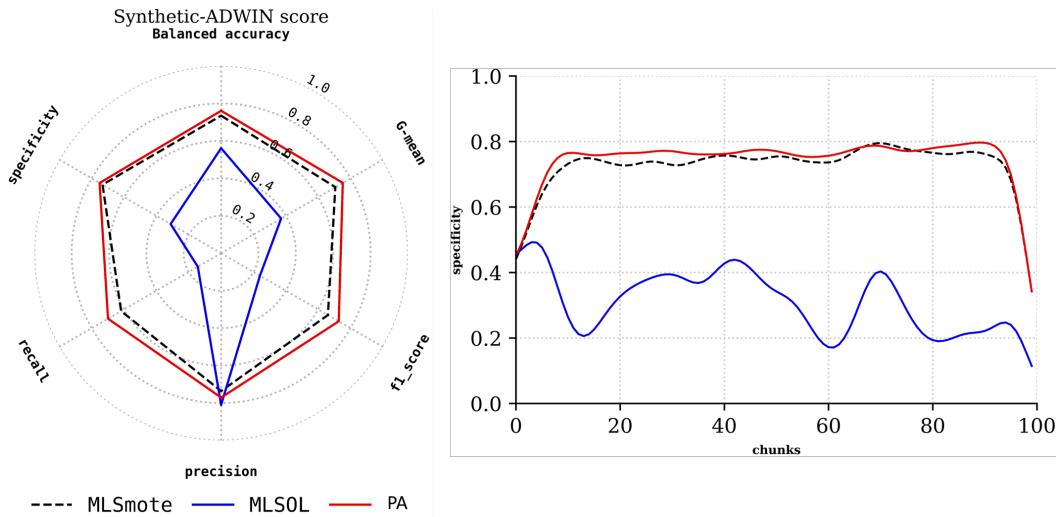


**Figure 4.7:** Synthetic Data Generator Flow.

#### 4.3.4 Analysis of Class Overlap Factor between Proposed Approach (PA), MLSMOTE, and MLSOL Techniques.

In our experimental study, we aimed to identify the critical factors that influence the selection of an optimal approach for minority classes in imbalanced drifted streams. These factors include various aspects, such as dataset characteristics, the choice of concept drift detectors, and the effectiveness of the algorithm in handling class overlap. To compare the overlapping class behavior of our proposed

## 4. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS

---

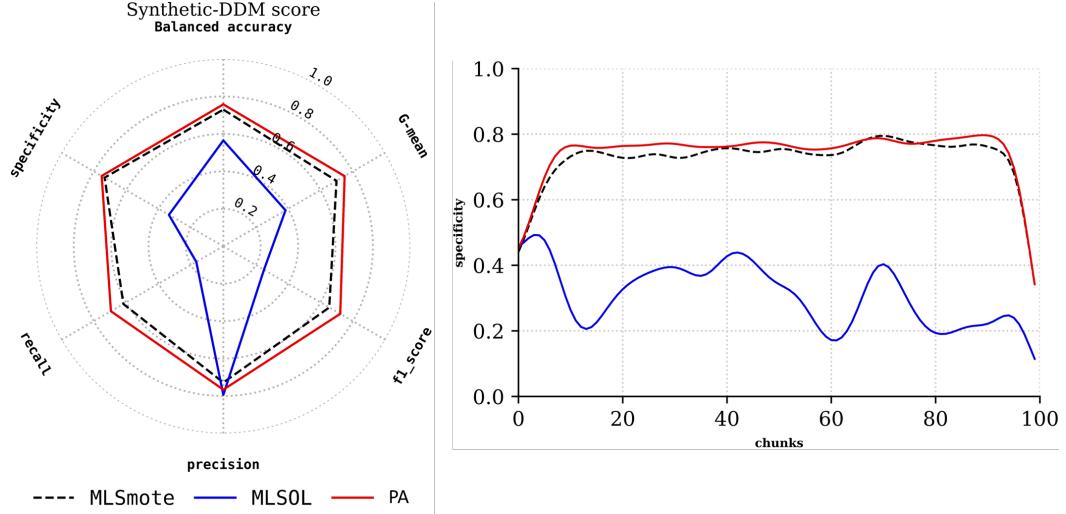


**Figure 4.8:** Synthetic Data Generator Flow.

approach (PA) with MLSMOTE and MLSOL, we systematically designed experiments organized into groups of ten chunks. The results were visualized in bar diagrams, contrasting PA with other methods (MLSMOTE and MLSOL). Figures 4.9.104.11 present ten groups, each with three bars representing MLSOTE, MLSOL, and PA, respectively. Each bar visually represents overlapped samples for ten chunks of several data streams, considering distinct concept drift detectors, specifically ADWIN and DDM. Fig. 4.9 shows two diagrams for the ADWIN and DDM detectors. In the ADWIN diagram, the third bar group (chunks 20-30) lacks overlapping samples because this chunk range does not have drifts, and no synthetic samples are generated for the training step. The sixth and tenth groups have the highest overlapped samples because these groups experience many drifts, leading to the generation of several samples and, consequently, the data indicates that MLSMOTE displays the highest number of overlapping samples across all groups, while PA exhibits very few, except for the last group (90-100), which has a small number of overlapping samples. However, the DDM diagram has more overlapping samples than the ADWIN diagram because the DDM detector detects fewer drifts than ADWIN. Specifically, the last value on the Y-axis of the ADWIN diagram is 3,000 samples, while the last value on the Y-axis of the DDM diagram is 2,000 samples. Fig. 4.10 and Fig. 4.11 display the overlapping samples of the three

### 4.3 Experimental Results


methods on the Sensor and synthetic data streams, respectively. In Fig. 4.10, the ADWIN diagram demonstrates fewer overlapped samples than in Fig. 4.10, indicating a lower number of drifts in the Sensor stream. The overall diagram indicates that our proposed approach achieves fewer overlapped samples than MLSOL and MLSMOTE, with MLSMOTE having the highest number of overlapped samples. In the DDM diagram of Fig. 10, the number of overlapped samples is lower than in Fig. 4.9, with our proposed approach consistently achieving the lowest number of overlapped samples across most group bars. In Fig. 4.11, the ADWIN and DDM diagrams exhibit the greatest number of overlapped samples compared to the earlier figures. This suggests that the synthetic stream underwent frequent drifts and was more susceptible to noise. Consequently, the last value on the Y-axis in both the ADWIN and DDM diagrams was recorded for 7,000 samples. Our proposed approach consistently achieves the lowest number of overlapped samples, whereas MLSMOTE consistently attains the highest number of overlapped samples across most group bars in both the ADWIN and DDM diagrams. In conclusion, our thorough examination of overlapping class instances across MLSMOTE, MLSOL, and our proposed approach consistently reveals minimal overlapped samples compared to other methods, regardless of whether DDM or ADWIN is employed as drift detectors

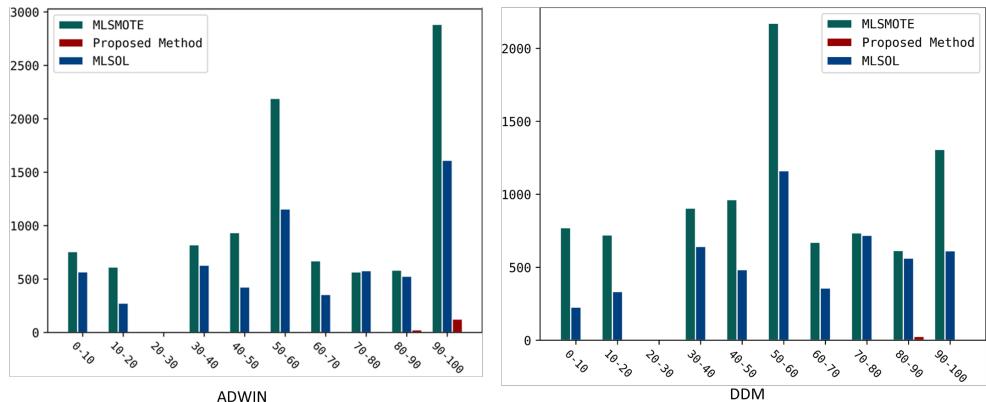


**Figure 4.9:** Synthetic Data Generator Flow.

## 4. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS

---

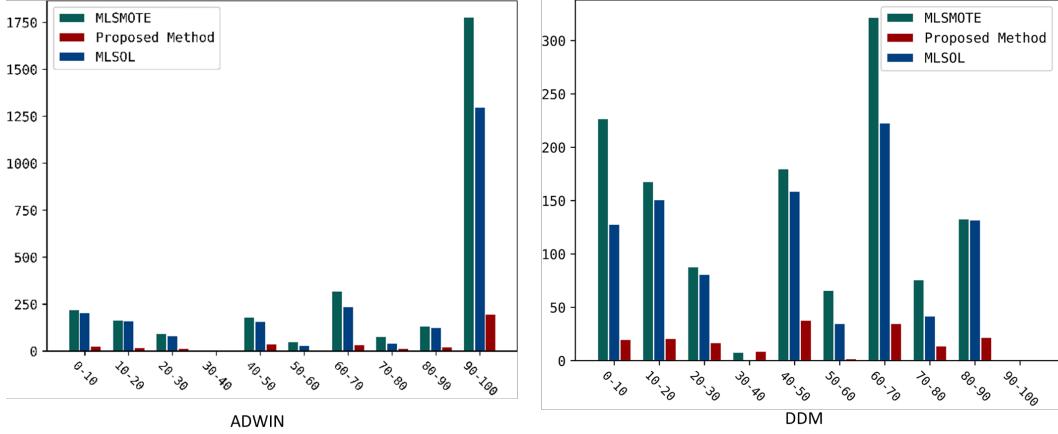

**Figure 4.10:** Synthetic Data Generator Flow.

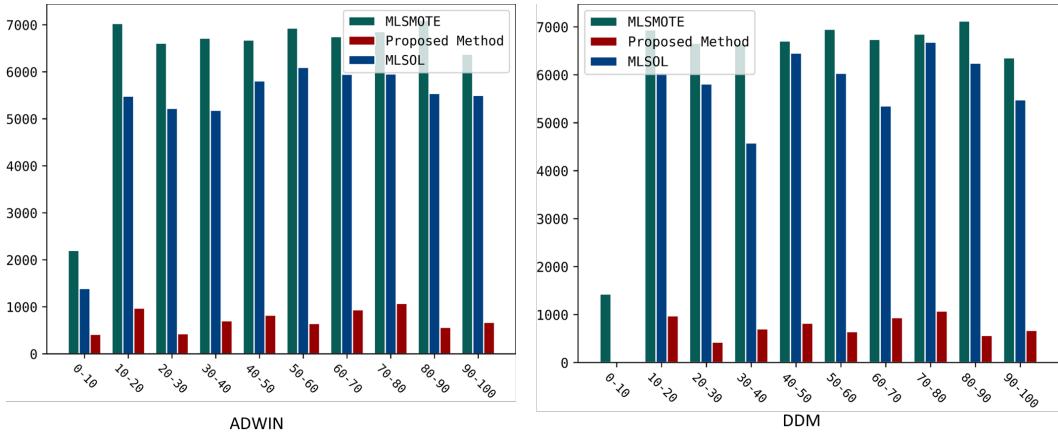

**Figure 4.11:** Synthetic Data Generator Flow.

### 4.3.5 Analyzing Runtime Factor Between the Proposed Approach, MLSMOTE, and MLSOL Techniques

The results of our experiments indicate that the choice of the best algorithm for multiclass imbalanced streams depends on various factors, including dataset characteristics, the concept drift detector used, the presence of an overlapping class problem, and the algorithm’s runtime demands. To investigate the runtimes of MLSMOTE, MLSOL, and our proposed approach, we conducted experiments, as shown in Table 4.2. Our findings reveal that our proposed approach is highly efficient, regardless of whether ADWIN or DDM is used as the concept drift detector.

### **4.3 Experimental Results**

---

Specifically, when ADWIN was used, the proposed approach algorithm took 8344 s to train and predict the Covertype stream for ensemble classifiers, whereas it took 8019 s when using the DDM detector. In contrast, MLSMOTE and MLSOL require more time for the same task. Notably, our proposed approach maintains efficiency, even when using the DDM concept detector. Additionally, our proposed approach demonstrates shorter processing times in the Sensor stream and synthetic data compared with other methods. Consistently, the DDM detector achieved less time across all experiments owing to its lower detection of drifts compared to the ADWIN detector. This is because there are fewer instances that trigger training for pool classifiers when using the DDM. The bold highlighting in Table 4.2 further emphasizes the efficiency of our proposed approach with both the ADWIN and DDM detectors across all dataset streams. Because our proposal generates fewer overlapped samples, leading to an overall decrease in the running time.

<b>Stream</b>	<b>Concept Drift Detector</b>	<b>MLSMOTE</b>	<b>MLSOL</b>	<b>PA</b>
Benchmark	ADWIN	9559	8655	<b>8344</b>
	DDM	8388	8031	<b>8019</b>
Real Application	ADWIN	1291	1310	<b>1102</b>
	DDM	585	607	<b>521</b>
Synthetic	ADWIN	12870	4866	<b>4834</b>
	DDM	12397	4958	<b>4687</b>

**Table 4.2:** Runtime of MLSMOTE, MLSOLE, and Proposed Approach (PA)

#### **4.3.6 Analyzing Non-parametric Tests between the Proposed Approach, MLSMOTE, and MLSOL Techniques**

We conducted a thorough series of statistical analyses encompassing 12 comparisons across three diverse datasets, three methods, and two drift detectors. These analyses were rigorously evaluated using a non-parametric test, specifically the Kruskal-Wallis test. The results of this test were striking, revealing substantial variations in the G-mean measurements across most experiments. Importantly, these differences were not due to random chance [37]. Upon closer examination of the

## 4. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS

---

assessments for the three methods, PA, MLSMOTE, and MLSOTE, as detailed in Table 4.3, we found compelling evidence supporting the acceptance of the null hypothesis ( $H_0$ ). This implies that the expected and observed data exhibited statistically significant disparities.  $H_0$  is rejected when significant differences are not observed and  $H_0$  is accepted if the P-value falls below the critical value. Underlining the significance of our analysis, the Kruskal-Wallis test was conducted with a 95% confidence level, and the P-value was rounded to the first three digits after the decimal point. Nevertheless, it is important to note that a similarity in the performances of the methods emerged in the third and fourth experiments, resulting in the rejection of  $H_0$ . This similarity can be attributed to the fact that the DDM detected fewer drifts in these experiments.

Dataset	Drift detector	Comparison	P-value	Critical value	$H_0$
Covertype stream	ADWIN	PA - MLSSMOTE	0.001	0.05	Accept
		PA - MLSOL	0.014	0.05	Accept
	DDM	PA - MLSSMOTE	0.361	0.05	Rejected
		PA - MLSOL	0.401	0.05	Rejected
Sensor stream	ADWIN	PA - MLSSMOTE	0.001	0.05	Accept
		PA - MLSOL	0.001	0.05	Accept
	DDM	PA - MLSSMOTE	0.001	0.05	Accept
		PA - MLSOL	0.001	0.05	Accept
Synthetic stream	ADWIN	PA - MLSSMOTE	0.001	0.05	Accept
		PA - MLSOL	0.001	0.05	Accept
	DDM	PA - MLSSMOTE	0.001	0.05	Accept
		PA - MLSOL	0.001	0.05	Accept

**Table 4.3:** Kruskal-Wallis test between MLSMOTE, MLSOLE, and Proposed Approach (PA)

## 4.4 Conclusion and Future Works

Our study in this chapter presents a comprehensive methodology designed to facilitate incremental learning in drifted streams, with a particular focus on addressing the challenges associated with imbalanced data streams including minority and

#### **4.4 Conclusion and Future Works**

---

overlapping classes. The proposed methodology integrates our proposed oversampling method, concept drift detection strategies, and Dynamic Ensemble Selection (DES) to select the most suitable ensemble classifier. Extensive experimentation across various datasets, including benchmark datasets, real application streams, and synthetic data, validated the effectiveness of our contribution. The critical role of the concept drift detector in our approach lies in its capacity to promptly detect concept drifts, allowing our methodology to adapt by training new base classifiers to maintain relevance and accuracy in real-time scenarios. Oversampling techniques were utilized to mitigate the minority class problem, and the KNN algorithm was employed to prevent the generation of overlapped class instances. The DES technique was utilized to intelligently select the best base classifiers to ensure optimal performance. Our evaluation approach employs various performance measures, showcasing its proficiency in addressing multiclass imbalanced stream problems, particularly its exceptional accuracy in classifying data streams with evolving class distributions. In addition to its accuracy and performance, our approach has several advantages, including adaptability, efficiency, and scalability. Dynamic model updates driven by incoming data instances enable continuous adaptation to changing data distributions, thereby ensuring reliability and relevance in real-time scenarios. However, it is essential to recognize the specific limitations of the proposed approach. One limitation is the extended time required to generate nonoverlapping synthetic instances. Moreover, the efficacy of our contribution depends on the accuracy of the MLSMOTE and MLSOL techniques. Consequently, future research efforts should be directed toward enhancing our contributions. Potential avenues for improvement include the development of advanced oversampling techniques to avoid generating overlapping synthetic instances. Additionally, meta-learning methods have been explored to calculate imbalanced multiclass ratios and minority classes.



*You cannot teach a man anything;  
you can only help him discover it in  
himself.*

Galileo

CHAPTER

# 5

# Addressing Emerging New Classes in Incremental Streams via Concept Drift Techniques

In various real applications, data streams have introduced new challenges to learning algorithms. Data streams are continuous with high volumes of data arriving rapidly and dynamically. This data deluge poses unprecedented challenges for learning algorithms because they must adapt to the dynamic nature of the data environment [1][2][3]. Among the various research areas in machine learning, sequential learning under data Streams with Emerging New Classes (SENC) has garnered considerable attention because of its practical relevance and unique challenges [109], [84], [86]. SENC refers to a scenario in which new classes that were not present during the initial training of a learning model emerged in the data stream. This poses a significant challenge for traditional learning approaches that are typically designed to handle fixed or predefined class distributions. The ability to effectively recognize and adapt to these novel classes in real-time is crucial for maintaining accurate and up-to-date models. Furthermore, the inherent limitations

## **5. ADDRESSING EMERGING NEW CLASSES IN INCREMENTAL STREAMS VIA CONCEPT DRIFT TECHNIQUES**

---

of data streams, such as limited memory and storage constraints, impose additional complexities in the learning process. Learning algorithms must operate efficiently within these resource constraints to ensure real-time processing and to avoid overwhelming computational overhead. To address the challenges presented by data streams containing emerging new classes, dynamic ensemble selection (DES) [23][74][20]. Dynamic ensemble selection involves utilizing multiple classifiers in machine learning to make collective predictions or classifications of data. Dynamic ensemble selection is distinguished by its ability to dynamically adapt the ensemble based on the characteristics of the data. Instead of relying on a fixed ensemble of classifiers, dynamic ensemble selection continuously assesses the performance of individual classifiers and selects the subset that demonstrates the highest competence for the current data. This adaptability enables the ensemble to enhance its performance over time by incorporating the most suitable classifiers for prevailing data conditions. Furthermore, if a classifier becomes ineffective owing to concept drift or the emergence of new classes, it can be excluded from the ensemble to prevent it from negatively affecting the overall performance. Adaptive Windowing (ADWIN) is another widely employed method to address concept drift. Concept drift refers to the phenomenon in which the statistical properties of data change over time, leading to a decline in the learning algorithm performance [33][72][70]. ADWIN continuously monitors incoming data and detects changes or drifts in data distribution. It achieves this by maintaining sliding windows of variable sizes and monitoring statistical measures such as the mean or variance within these windows. Upon detecting a significant change or drift, the ADWIN triggers an update in the ensemble or classifier configuration. This update may involve retraining the classifiers with new data or incorporating new classifiers that are better suited to the updated data distribution. By adapting the ensemble to changing data conditions, ADWIN ensures that the classifier system remains accurate and up-to-date even in the presence of concept drift or the emergence of new classes. The primary objective of utilizing these approaches, such as dynamic ensemble selection and ADWIN, is to establish a flexible and effective classification system that is capable of handling data streams containing emerging new classes. By dynamically adjusting the ensemble based on the data characteristics and detecting and adapting to concept drift, these approaches enable the system to maintain accurate predictions

## **5.1 Motivations and Contributions**

---

over time. Adaptability and responsiveness are crucial for addressing the unique challenges posed by the dynamic nature of data streams and the emergence of new classes within them.

The subsequent sections of this paper adhere to a well-structured organization. Section 5.2 introduces the proposed framework, providing intricate explanations of its constituents, including dynamic classifier ensembles, concept drift handling, and emergency class identification, and the adaptive proposed method of the emerging pool size. Section 5.3 outlines the experimental setup and presents the results, providing details regarding the employed datasets, evaluation metrics, and procedures. Finally, in Section 5.4, we offer concluding remarks, highlighting the main discoveries, examining their significance, and suggesting possible directions for future investigations.

### **5.1 Motivations and Contributions**

This research proposes efficient algorithms for classifying data streams in real-time scenarios, focusing on addressing the issues caused by emerging new classes in data distributions. We aim to develop novel algorithms that can effectively handle the emergence of new classes issue in dynamic data streams, achieve high accuracy of classification, and reduce the complexity of computations. The key contributions of this study are outlined as follows:

1. Our first contribution involves utilizing the ADWIN, DES, and K-means techniques in combination with the ensemble stratified bagging technique to detect and adapt to emerging new classes. This approach allows us to dynamically update the classification model to accommodate an evolving data environment.
2. The second contribution is the introduction of an adaptive method to adapt the emerging pool size depend on the stream distribution.

### **5.2 Proposed Methodology**

In this section, we outline the key stages of our research, which consist of three distinct steps designed to address the challenges of handling emerging new classes in

## **5. ADDRESSING EMERGING NEW CLASSES IN INCREMENTAL STREAMS VIA CONCEPT DRIFT TECHNIQUES**

---

changeable data streams. Our proposed approach aims to develop a robust framework capable of tackling these complex challenges through a comprehensive, three-step methodology.

1. **Emerging New Classes:** Our study addresses the widespread issue of emerging new classes in drifted streams using well-known techniques, including concept drift detection and K-means clustering.
2. **Drifted Streams:** To address changes in the data distribution, our approach integrates a concept drift detector that dynamically identifies shifts, allowing the model to promptly adapt its classifiers to maintain effectiveness.
3. **Classifier Performance:** Classifier Performance: We utilize Dynamic Ensemble Selection (DES) to boost classifier performance. This method involves constructing a pool of classifiers and dynamically choosing the most appropriate one for each new data point, thereby enhancing both accuracy and robustness.

### **5.2.1 Proposed Approach Flow**

Our proposed approach is composed of three main phases that work together to manage emerging new classes and drifting data streams effectively:

1. **Dynamic Ensemble Selection:** The initial phase, DES, identifies the most suitable classifier for each incoming data chunk to ensure optimal performance.
2. **Drift Detector Phase:** In this phase, the system continuously observes the data stream in real time to detect concept drift, indicating changes in the underlying data distribution.
3. **Emerging New Class Identifier Phase:** The final phase identifies unknown classes in drifted streams, creating new classifiers for emerging classes to improve the model's proficiency in accurately classifying new instances.

## **5.2 Proposed Methodology**

---

As depicted in Fig. 5.1, DES extracts the current data chunk and utilizes the DES technique to identify the most effective classifiers for that chunk (black box of Fig. 5.1). These classifiers are used in the second phase to predict class labels, while drift detectors like ADWIN or DDM monitor for concept drift. If a drift is detected (highlighted by the red rectangle), the chunk is forwarded to the third phase, where new classes are identified (see Fig. 5.2). The overall approach is implemented in Algorithm 3, which takes a data stream and a DES Pool threshold as inputs. Key components include training the initial ensemble (Lines 4-6), using DES to select the best classifier for the current chunk (Line 8), detecting drifted chunks (Line 10), creating new classifiers for emerging classes (Line 12), and removing the worst classifier if the DES Pool threshold is exceeded (Lines 14-16).

### **5.2.2 Emerging New Classes Phase Details**


In this section we present the Emerging new classes phase details. As shown in Fig.2, The emerging phase contains two primary steps:

1. **Emerging new classes identifier:** The emerging class detection step plays a crucial role in the proposed approach (the black rectangle of Fig. 5.2) by utilizing the K-means technique to clustering the drifted chunk into a set of clusters. And identifying new emerging classes by evaluating the distances between instances and their nearest class centroid. This process involves comparing the distance between an instance and the nearest class centroid with the maximum distance between class centroids ( $d_c$ ), as described in Eq.5.1 and Eq.5.2, where ED represents the Euclidean Distance method and  $c_i, c_j$  denotes the centroids of the current classes. If the calculated distance ( $d_x$ ) exceeds this threshold ( $d_c$ ), this indicates the presence of a new emerging class, denoted by EC in Eq. 5.3; otherwise, it is  $P_{DES}$  (prediction class of the new instance).
2. **Adaptive the Emerging classes pool size:** This critical step adapts the pool size based on the emergence rate of new classes and drift distribution, using statistical measures like standard deviation, first derivative, and average historical drift updates.

## 5. ADDRESSING EMERGING NEW CLASSES IN INCREMENTAL STREAMS VIA CONCEPT DRIFT TECHNIQUES


---

The Emerging New Classes phase is implemented in Algorithm 4, which utilizes drifted instances and current changes as inputs. Key steps include applying K-means (Line 1), calculating cosine similarity between centroids (Line 2), determining the maximum centroid distance (Line 3), setting the adaptive pool threshold (Lines 4-7), using KNN to find the nearest neighbor (Line 9), storing instances in the emerging pool if the distance exceeds the threshold (Lines 11-12), and creating a new classifier if the pool size surpasses the adaptive limit (Lines 14-17). A simulated scenario is illustrated in Figures 5.3 and 5.4. In Fig. 5.3 (a), the drifted chunk is divided into three clusters using the K-means algorithm. Fig. 5.3 (b) shows the calculation of the maximum distance between cluster centroids, which serves as a threshold for identifying new classes. The procedure for classifying instances is as follows: when a drifted instance is detected, it is considered a new class if the distance between the instance and its nearest centroid exceeds the maximum inter-centroid distance Fig. 5.4 (a). If the distance is within the threshold, the instance is classified as a known class Fig. 5.4 (b).

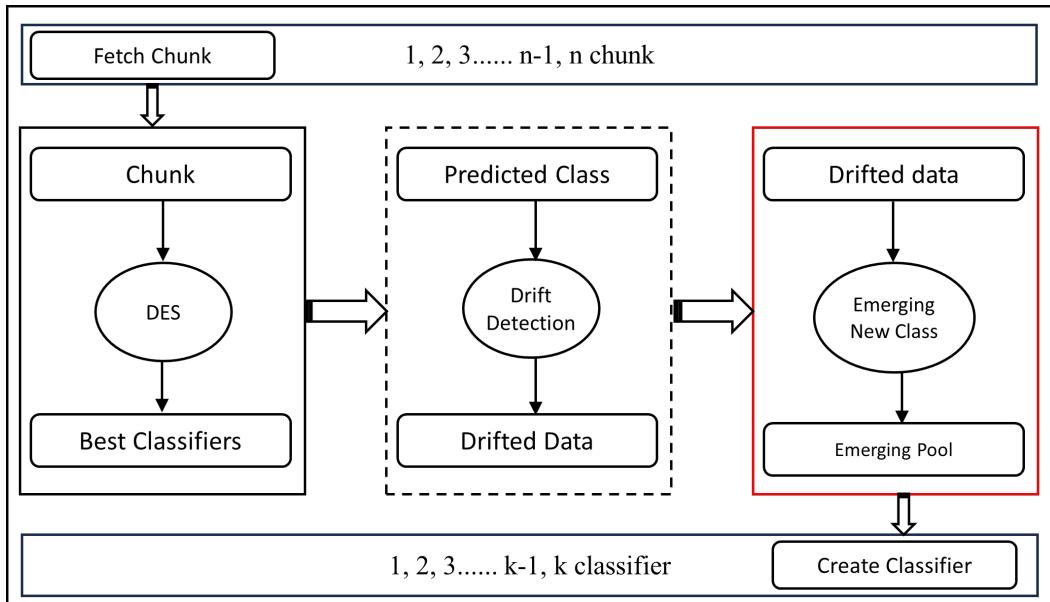

**Figure 5.1:** Proposed Approach Flow

$$d_c = \arg \max_d \sum_{i=1}^i \sum_{j=i+1}^i ED(c_i, c_j) \quad (5.1)$$

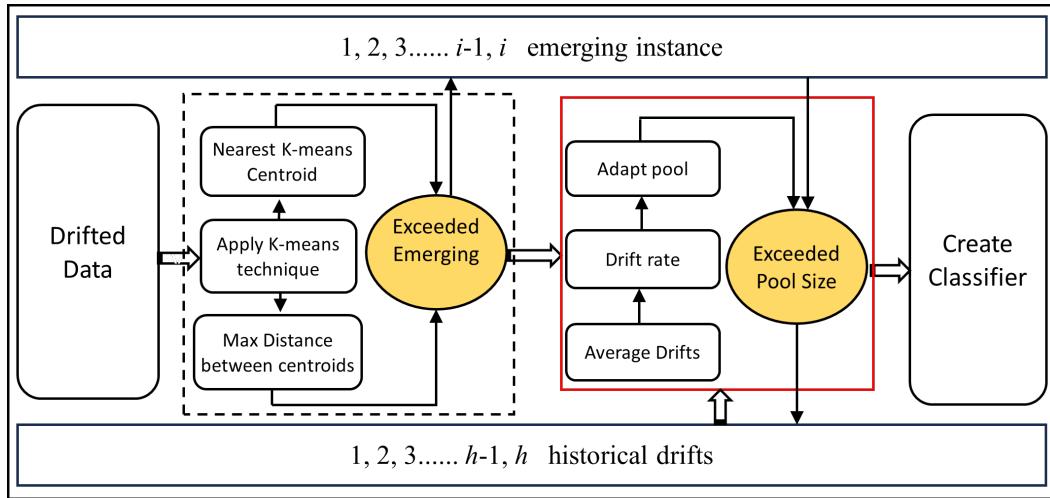

**Figure 5.2:** Emerging Phase Flow


$$d_x = \arg \min_i \sum_{i=1}^i ED(x, c_i) \quad (5.2)$$

$$p = \begin{cases} EC & \text{if } d_x > d_c \\ P_{DES} & \text{otherwise} \end{cases} \quad (5.3)$$

## 5.3 Experimental Results

The experiments conducted in this study were designed to assess the effect of concept drift on the performance of the proposed framework in detecting emerging new classes. The primary goal was to identify the machine learning algorithm in conjunction with DES, Dynamic Ensemble Selection technique, which improves the performance of classification when faced with the emergence of new classes. By conducting these experiments, valuable insights were gained, leading to potential enhancements in the effectiveness of the proposed approach in managing imbalanced data streams and its overall performance. These experiments provide valuable insights into the capabilities of the framework and shed light on the optimal approach for handling emerging new classes in the presence of concept drift. The results provide valuable guidance for selecting the most suitable classification

## 5. ADDRESSING EMERGING NEW CLASSES IN INCREMENTAL STREAMS VIA CONCEPT DRIFT TECHNIQUES

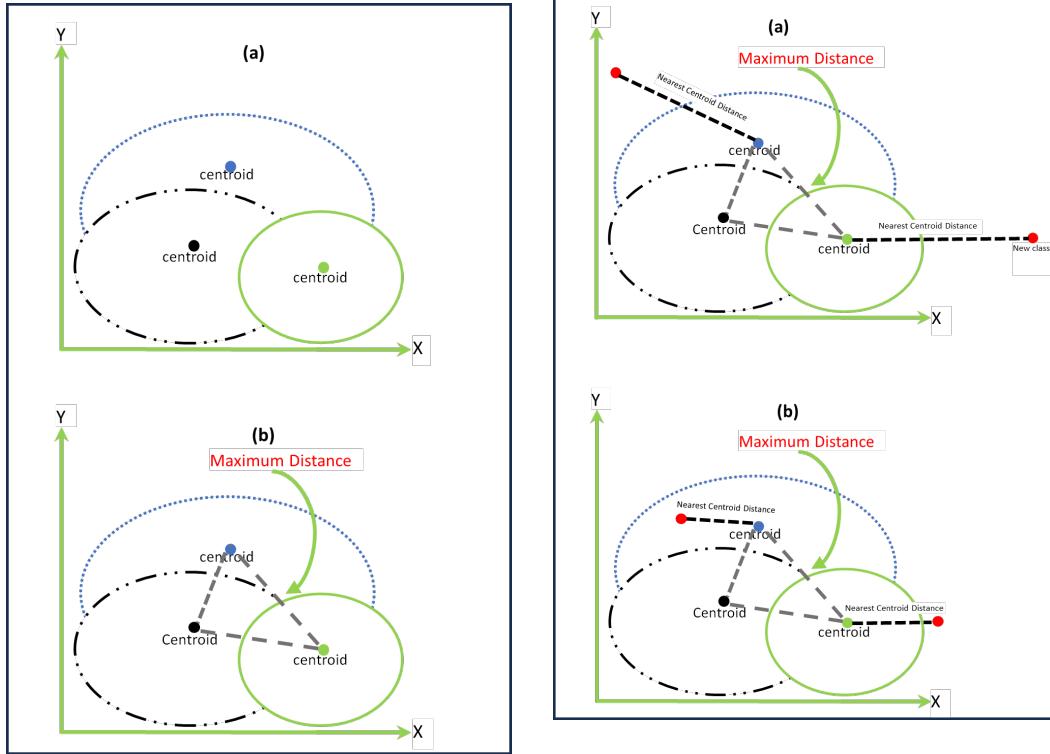

**Figure 5.3:** Steps Example for a Dataset with Two Features ( $x, y$ ) and Three Classes (Blue, Black, Green). (a) Use the K-means algorithm to cluster the current chunk. (b) Determine the maximum distance between the class centroids

**Figure 5.4:** Steps Example for new points (red points) with Two Features ( $x, y$ ). (a) Identify new incoming instances (represented by red points) as potential new classes. (b) Determine if the new instance is part of a nearby existing class or belongs to an emerging new class.

machine learning algorithm and DES configuration aims to enhance both classification accuracy and robustness. The experiments detailed in this study offer crucial insights into improving the proposed approach's performance and tackling challenges related to emerging new classes and concept drifts in incremental drifted streams. These insights are instrumental in advancing stream mining techniques and developing more precise and resilient classification models for dynamic and evolving data-stream environments. The two main questions to be answered are:

- $Q_1$ . How does the emergence of new classes in data streams affect the stability and

performance of ML models?

- $Q_2$ . how can ML models be adapted to accommodate such changes?
- $Q_3$ . how to employ concept drift to solve the emerging new classes problem?

#### 5.3.1 Experimental Setup

The evaluation of the proposed approach involves a comparison with SENCForest [85], SENNE [1], and KENNES [88]. The evaluation utilizes several metrics, including recall, precision, F1 score [66], BAC [68], and G-mean [67]. The procedure for experimentation followed a test-then-train technique [110], where the classifier is first trained on a specific chunk and then evaluated on the subsequent chunk. Each chunk was standardized to 2000 instances. Four different classification models served as base estimators: Gaussian Naive Bayes (GNB) technique, K-Nearest Neighbors (KNN), the Support Vector Classifier (SVC), and the Hoeffding Tree (HT), all features are implemented using scikit-learn [111]. We establish an ensemble classifier pool with a set limit of  $L = 8$ , wherein each ensemble consists of  $N = 4$  base models. While these constraints remained fixed across all our experiments, the threshold for the pool classifier in each approach was maintained at eight. Consequently, if the threshold is surpassed, the least-performing classifier is systematically eliminated. ADWIN [72] and DDM [33] are employed as concept drift detectors as implemented in the River library<sup>1</sup>, to identify concept drifts, as they are considered more accurate techniques for use in incremental data streams [33][72][70][69]. This configuration was applied consistently across all approaches to ensure fair engagement. The experiments were conducted using Python, and the source code is available publicly on GitHub<sup>2</sup>.

#### 5.3.2 Data Streams

In this section, the performance of the proposed approach (PA), was evaluated using several datasets, including synthetic data streams, a real-world application stream,

---

<sup>1</sup><https://riverml.xyz/0.21.0/introduction/basic-concepts/>

<sup>2</sup>[https://github.com/Amadkour/transfer\\_learning\\_with\\_concept\\_drift.git](https://github.com/Amadkour/transfer_learning_with_concept_drift.git)

## 5. ADDRESSING EMERGING NEW CLASSES IN INCREMENTAL STREAMS VIA CONCEPT DRIFT TECHNIQUES

---

and benchmark datasets. To conduct the evaluations, the stream-learn and River python libraries [111] were used. As detailed in Table 5.1, the Covertype dataset stream is used as the benchmark dataset in the study. This dataset comprises 52 features, 7 classes, and a total of 581,010 instances. It serves as a standard benchmark dataset widely used in stream mining research. For the evaluation of real application streams, the Sensor stream dataset was utilized. This dataset includes 5 features, 58 classes, and 392,600 instances in total, reflecting a real-world application scenario. Synthetic dataset stream was generated using the scikit-learn Python package [111]. This synthetic stream was generated to mimic data streams and assess the performance of the proposed method. It included 10 features and four classes, divided into 200 chunks, each with a size of 2,000. The effectiveness of the proposed method was rigorously assessed using these datasets along with a stream-learn library. This thorough evaluation offered important insights into how well the approach manages various types of data streams, encompassing benchmark datasets, synthetic data streams, and real-world application streams.

### 5.3.3 Compared Approaches

In the following section, we present a comparative analysis between our proposed GNB methodology and three established benchmark techniques, detailed as follows:

1. **SENCForest [85]:** The SENCForest method employs anomaly detection techniques to identify new classes and is founded on entirely random trees. It constructs isolation trees for both classification and detection by subsampling from each class, utilizing 20 random trees and a subsample size of 20. Although it can operate with incomplete or no label information, it frequently suffers from elevated false positive rates and suboptimal runtime efficiency in practical applications.
2. **SENNE [86]:** Utilizing a hypersphere ensemble mechanism, SENNE calculates scores to identify both new and known classes. It operates with a buffer capacity of 100 and sets a new class-score threshold of 0.5.

3. **KENNES [88]:** The KNNENS method addresses the dual challenge of detecting new classes and classifying known classes within a unified framework. It was configured with a buffer size of 100 and a new class score threshold of 0.5.

#### **5.3.4 Examination of Experimental Findings**

This section offers an in-depth analysis of the proposed approach’s (PA) performance across various data streams. To ensure a thorough evaluation, five performance metrics—recall, F1 score, precision, recall, G-mean, and BAG—are displayed through two types of visual diagrams: radar and line charts. The radar chart effectively summarizes the performance of each algorithm by highlighting their performance across the six key metrics. Additionally, to evaluate the overall performance of each method—including PA, SENCForest, SENNE, and KENNES—the average value for each metric was computed. Additionally, a line diagram using the G-mean metric was used to compare these methods for each chunk across 200 chunks. A radar diagram provided a detailed and nuanced evaluation of the proposed approach’s performance across various experimental scenarios.


##### **5.3.4.1 Results On The Benchmark Dataset**

This experiment aimed to evaluate the performance of the proposed framework on the Covertype data stream using different buffer sizes with ADWIN as the concept drift detector. The findings are visually represented using scatter plots in Fig. 5.5, which contains four subplots for emerging buffer sizes of 5, 10, 20, and adaptive sizes, respectively. In Fig. 5.5(b), the G-mean accuracy of SENCForest, SENNE, KENNES, and PA is shown across 200 chunks, specifically focusing on a buffer size of 5 instances for emerging new classes. At first, all methods exhibit less-than-ideal accuracy in the initial 20 chunks. However, a marked improvement is observed after this period, as the classifier pool grows. This growth bolsters the DES, dynamic ensemble selection, technique, allowing it to choose the most suitable classifiers for subsequent chunks. Consequently, there are significant gains in accuracy from chunk 20 onward, PA consistently achieved the highest accuracy, while KENNES and SENNE recorded the lowest. Additional experiments

## 5. ADDRESSING EMERGING NEW CLASSES IN INCREMENTAL STREAMS VIA CONCEPT DRIFT TECHNIQUES

---

with buffer sizes of 10 and 20, shown in Fig. 5.5(b) and Fig. 5.5(c), revealed slightly lower accuracy compared to the buffer size of 5, likely due to fewer updates when using larger buffer sizes. Finally, the adaptive buffer size experiment in Fig. 5.5(d) highlights the PA algorithm's superior performance across all chunks, with the adaptive emerging pool size delivering the best results.

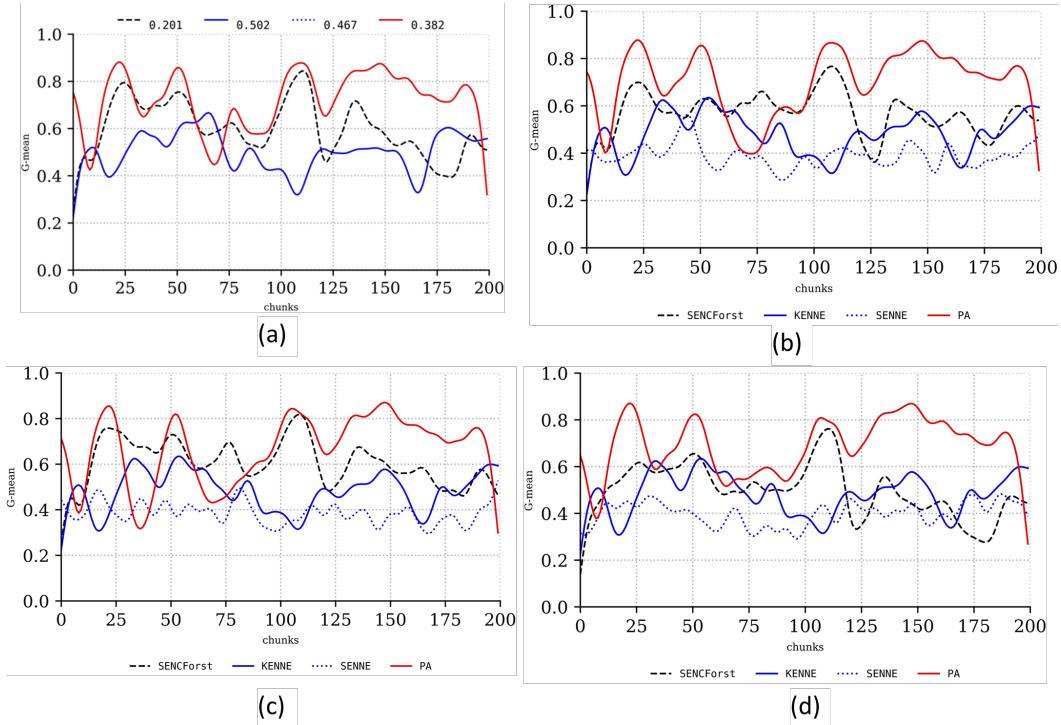


**Figure 5.5:** Covertype stream for various emerging buffer sizes: (a) buffer size of 5, (b) buffer size of 10, (c) buffer size of 20, and (d) our adaptive buffer size.

### 5.3.4.2 Results On Real Application Stream

This experiment focused on assessing the accuracy of SENCForest, SENNE, KENNES, and PA across 200 chunks of a sensor data stream, utilizing varying buffer sizes similar to the previous experiment. The results, shown in Fig. 5.6, were visualized using scatter plots. Fig. 5.6 (a) displays the classification accuracy for each algorithm with a buffer size of 5. The PA algorithm achieved the highest performance overall, except for chunks 43 to 48, where some instances were incorrectly assumed as outliers rather than emergent. In contrast, SENCForest and SENNE had

### 5.3 Experimental Results

the lowest accuracy. Additional experiments with buffer sizes of 10 and 20 (Fig. 5.6(b) and Fig. 5.6(c)) demonstrated reduced accuracy compared to the buffer size of 5, attributed to fewer updates with larger buffer sizes. The adaptive buffer size experiment in Fig. 5.6(d) reaffirmed the effectiveness of the PA algorithm, which outperformed others across all chunks, with the adaptive emerging pool size providing optimal results.

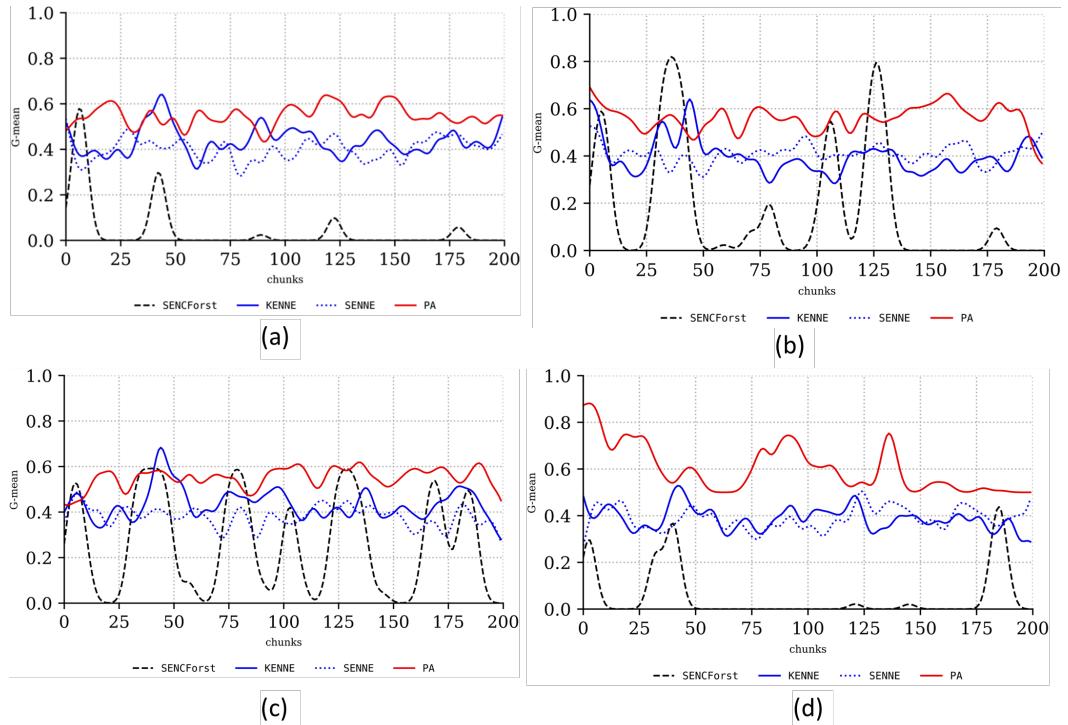

**Figure 5.6:** Sensor stream for various emerging buffer sizes: (a) buffer size of 5, (b) buffer size of 10, (c) buffer size of 20, and (d) our adaptive buffer size.


#### 5.3.4.3 Results On Synthetic Stream

This experiment aimed to assess the performance of the previously tested methods on a synthetic data stream. Results, depicted in Fig. 5.7, were analyzed using radar and scatter plots. Fig. 5.7(a) shows the performance of various algorithms using a buffer size of 5, with the radar plot highlighting PA's superior performance. Scatter plots illustrate that PA consistently delivered the highest accuracy when applied to the synthetic stream with buffer sizes of 5, 10, and 20, as shown in Fig. 5.7(a), Fig.

## 5. ADDRESSING EMERGING NEW CLASSES IN INCREMENTAL STREAMS VIA CONCEPT DRIFT TECHNIQUES

---

5.7(b), and Fig. 5.7(c), respectively. Fig. 5.7(d) demonstrates that the adaptive pool size yielded the best accuracy on the synthetic stream, underscoring the adaptability and efficiency of the PA algorithm.

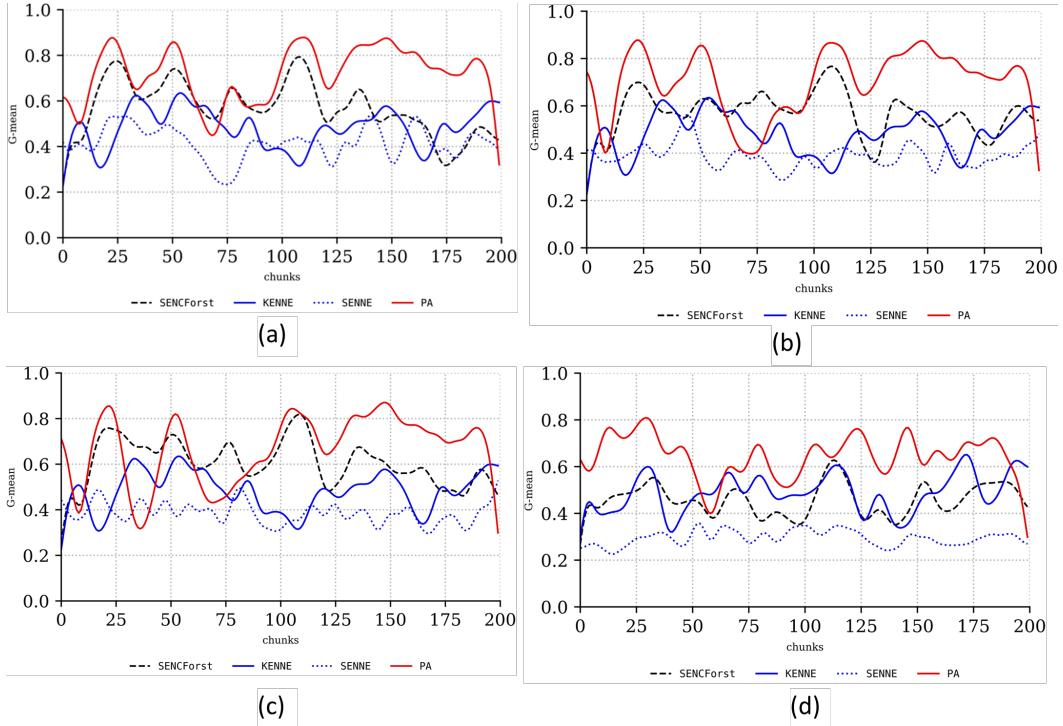


**Figure 5.7:** Synthetic stream for various emerging buffer sizes: (a) buffer size of 5, (b) buffer size of 10, (c) buffer size of 20, and (d) our adaptive buffer size.

### 5.3.5 Runtime Analysis Of The Best Algorithms

Our experimental results revealed that selecting the optimal algorithm for detecting emerging new classes is influenced by various factors, including dataset characteristics, buffer length, and the algorithm's runtime requirements. We conducted a series of experiments to evaluate the runtime performance of different algorithms and observed that the PA algorithm demonstrated outstanding efficiency. Specifically, with the adaptive pool size approach, the PA algorithm trained bagging classifiers 150 times within 2131 seconds when using the Covertype stream, outperforming others despite SENCForest achieving the lowest runtime but with fewer updates

### 5.3 Experimental Results

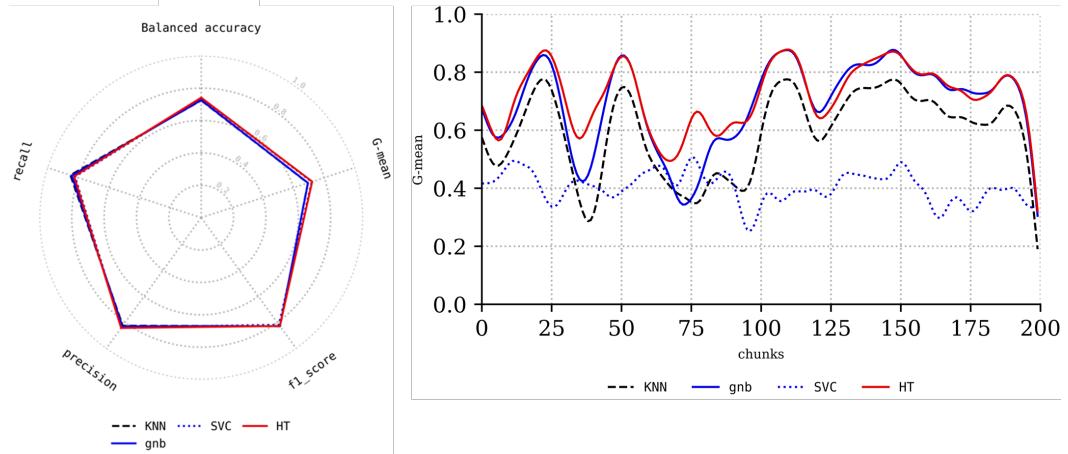

**Figure 5.8:** Covertype stream for concept drift detector (ADWIN, DDM) via several metrics (recall, precision, balanced accuracy,  $\text{-mean}$ , and  $f1_{score}$ )

compared to PA as shown in Table 5.2. On the Sensor stream, PA delivered the best runtime for 66 updates, while SENCForest, KENNES, and SENNE required more time to complete the same or fewer iterations. Similarly, PA exhibited superior runtime performance on the Synthetic stream. These results underscore the PA algorithm’s efficiency, making it an ideal choice for time-constrained scenarios. The superior runtime performance of PA is further highlighted in bold in Table 5.2.


#### 5.3.6 Comparison between GNB, KNN, and HT, SVC

In this section, we compare various algorithms (KNN, SVC, GNB, and HT) as base classifiers for the bagging technique. The comparison, illustrated in Fig.5.8, focuses on the Covertype dataset stream, where GNB (blue line) and HT (red line) consistently achieve the highest scores across most chunks. Both classifiers also excel in radar plots across key performance metrics, including accuracy, precision, recall, and F1-score. Based on these results, GNB and HT emerge as the most suitable base classifiers for the bagging technique. We further compared GNB and HT in terms of runtime and update frequency, as shown in Table 5.3. The results indicate that GNB has the best runtime performance, while HT demonstrates superior accuracy, likely due to its higher number of updates compared to GNB, as reflected in Table 5.3 and Fig. 5.8.

## 5. ADDRESSING EMERGING NEW CLASSES IN INCREMENTAL STREAMS VIA CONCEPT DRIFT TECHNIQUES

### 5.3.7 Comparison between ADWIN and DDM

In this section, we compare two concept drift detection methods: the Drift Detection Method (DDM) [33] and the Adaptive Window (ADWIN) [33] [72]. These methods are widely recognized for their excellent performance in handling incremental drifted streams [33][72][70][69]. As shown in Fig. 5.9, using the Covertype stream with GNB as the base classifier, ADWIN consistently outperforms DDM in both radar and line plots across all performance metrics, including accuracy. Furthermore, when comparing their runtime and update frequency, as presented in Table 5.4, ADWIN proves to be the superior detector for drifted streams. It identifies the highest number of drifts (139) in the least amount of time (272 seconds), demonstrating its efficiency and effectiveness.

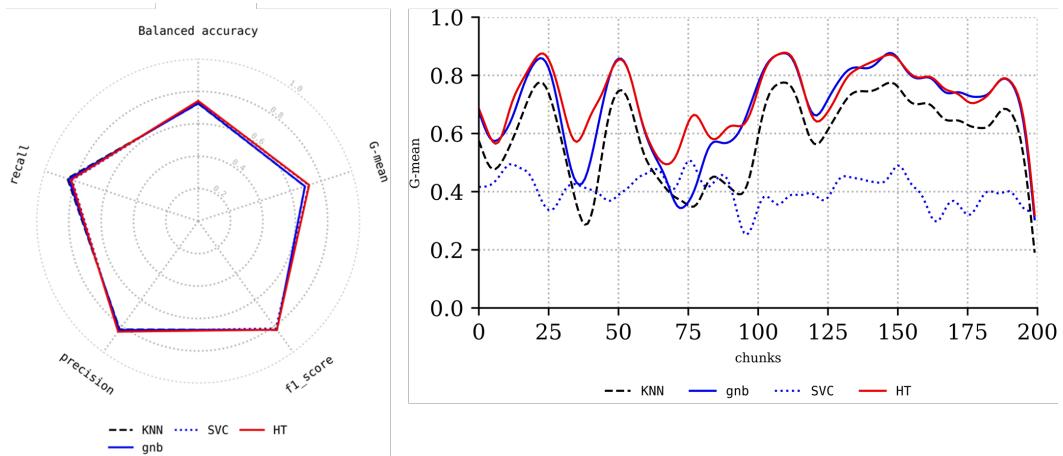

**Figure 5.9:** Covertype stream for concept drift detector (ADWIN, DDM) via several metrics (recall, precision, balanced accuracy, mean, and  $f1_{score}$ )

## 5.4 Conclusion And Future Directions

Our research introduces an extensive framework designed for incremental learning within data streams with emerging new classes. By integrating concept drift detection using the ADWIN algorithm, the K-means technique, Gaussian Naive Bayes (GNB) as the base classifier, and ensemble stratified bagging, our approach effectively addresses the challenges associated with this problem. Comprehensive

## **5.4 Conclusion And Future Directions**

---

testing on real-world application streams, benchmark datasets, and synthetic data demonstrates the effectiveness of our approach. The ADWIN algorithm is crucial in our approach, enabling timely detection of concept drifts and new classes, making it highly recommended for incremental streams due to its superior accuracy and lower runtime. This feature enables the proposed method to develop new base classifiers, maintaining their relevance and precision in real-time situations. The use of ensemble stratified bagging further enhances predictive performance and robustness by combining the outputs of various base classifiers. Dynamic Ensemble Selection (DES) is employed to select the best classifiers, ensuring optimal performance. Evaluated through various performance metrics, our approach effectively addresses SENC challenges, demonstrating exceptional performance in the precise classification of changeable streams with changing class distributions, especially when employing GNB as the base classifier. Beyond its notable accuracy and performance, our approach provides key benefits such as adaptability, efficiency, and scalability. By updating the model dynamically in response to incoming data instances, our approach can continuously adjust to evolving data distributions, thereby maintaining its reliability and relevance in real-time situations. The integration of concept drift detection and ensemble stratified bagging techniques strengthens the framework's ability to handle dynamic data environments and emerging new classes. Future work can explore further enhancements, such as investigating advanced concept drift detection algorithms, exploring alternative ensemble strategies, and incorporating deep learning techniques. Additionally, our framework can be expanded to address a broader range of real-world applications.

## 5. ADDRESSING EMERGING NEW CLASSES IN INCREMENTAL STREAMS VIA CONCEPT DRIFT TECHNIQUES

---

---

**Algorithm 3:** Proposed Approach Flow

---

**Input:** data stream, classifier threshold  $\kappa$

**Data:** current chunk  $a$ , classifier  $k$ , classifiers pool  $\Psi$ , drifted pool  $\psi$

**Output:** prediction  $p$

$\psi \leftarrow \phi$

$\Psi \leftarrow \phi$

**for** *stream has chunk* **do**

**if** *a is the first chunk* **then**

$k \leftarrow \text{trainingNewClassifier}(a)$

$P \leftarrow \text{getPrediction}(a, k)$

**else**

$k \leftarrow \text{DES}(a, \Psi)$

$P \leftarrow \text{getPrediction}(a, k)$

$\psi \leftarrow \text{conceptDriftDetector}(P)$

**if**  $\psi > 0$  **then**

$k \leftarrow$   
            utilize  $a$  and  $\psi$  to get new classes according to Algorithm 4

$\Psi \leftarrow \Psi + k$

**if**  $|\Psi| > \kappa$  **then**

                removeWorstClassifier( $a$ )

**end**

$p \leftarrow \text{getPrediction}(a, k)$

**end**

**end**

**end**

**return**  $p$

---

---

**Algorithm 4:** Emerging Phase Flow
 

---

**Input:** current chunk  $a$ , drifted pool  $\psi$ , historical drifts  $h$

**Data:** current chunk  $a$ , classifier  $k$ , Stream Emerging New Classes SENC,  
SENC Pool  $\Psi$ , K-means centroids  $\lambda$ , centroid distance  $\Phi$ , maximum  
centroid distance  $dc$ , chunk distance  $i$ , Nearest neighbor  $n$ , historical  
drifts  $h$ , average historical drifts  $\mu$

**Output:** classifier  $k$

```

 $\lambda \leftarrow \text{apply Kmeans}(a)$ 
 $\Phi \leftarrow \text{apply cosine similarity}(\lambda)$ 
 $dc \leftarrow \max(\Phi)$ 
 $\mu \leftarrow \frac{\sum h}{|h|}$ 
 $\sigma \leftarrow \text{std}(\psi)$ 
 $\Delta \leftarrow \text{first derivative}(h)$ 
\leftarrow \mu + \Delta \times \sigma
for  $\psi$  has instance do
     $n \leftarrow \text{apply KNN}(\lambda, i)$ 
     $d \leftarrow \text{apply cosine similarity}(i, n)$ 
    if  $d \geq dc$  then
         $\Psi \leftarrow \Psi + i$ 
    end
    if  $|\Psi| \geq threshold$  then
         $k \leftarrow \text{trainingNewClassifier}(a)$ 
         $h \leftarrow h + \psi$ 
         $\Psi \leftarrow \phi$ 
    end
end
return  $k$ 

```

---

## 5. ADDRESSING EMERGING NEW CLASSES IN INCREMENTAL STREAMS VIA CONCEPT DRIFT TECHNIQUES

---

Data stream	Features	Classes	Instances	Chunk Size
Sensor stream <sup>1</sup>	5	58	392600	2000
Covertype stream <sup>2</sup>	52	7	581010	2000
Synthetic stream	10	4	200000	2000

**Table 5.1:** The datasets utilized in the experimentation exhibited various characteristics.

Stream	Algorithm	Training Times	Time (seconds)
Covertype	SENCForest	142	<b>1997</b>
	SENNE	5	2167
	KENNES	3	1742
	PA	150	2131
Sensor	SENCForest	23	1244
	SENNE	17	3825
	KENNES	152	2109
	PA	66	<b>1075</b>
Synthetic	SENCForest	12	107
	SENNE	26	224
	KENNES	149	202
	PA	47	<b>91</b>

**Table 5.2:** Running time of SENCForest, SENNE, KENNES, and PA.

Algorithm	KNN	SVC	GNB	HT
Training Times	140	150	<b>139</b>	148
Time (seconds)	586	878	<b>291</b>	1169

**Table 5.3:** Running time of KNN, SVC, GNB, and HT as a base classifier.

## **5.4 Conclusion And Future Directions**

---

<b>Algorithm</b>	<b>ADWIN</b>	<b>DDM</b>
Training Times	139	55
Time (seconds)	272	545

**Table 5.4:** RUNNING TIME ADWIN and DDM as a drift detector.



*You cannot teach a man anything;  
you can only help him discover it in  
himself.*

Galileo

CHAPTER

# 6

# Dynamic Classification Ensembles for Handling Imbalanced Multiclass Drifted Data Streams

Transfer learning plays a pivotal role in addressing the intricate challenges posed by dynamic data streams and inherent concept drifts. Transfer learning aims to enhance a model’s learning performance within a target domain by leveraging the knowledge gleaned from the source domains [4][112]. This research domain focuses extensively on addressing target tasks that grapple with limited or unlabeled data, with a dual emphasis on amplifying positive knowledge transfer and alleviating negative knowledge transfer [112]. To facilitate the transfer of valuable knowledge, researchers have developed diverse techniques, including methodologies aimed at reducing the domain gap, such as instance re-weighting [113][114][101] and feature matching [95][101]. Conversely, strategies for mitigating negative knowledge transfer often involve down weighting irrelevant data sources [112]. Although a substantial body of transfer learning research has focused on static environments, where data in each domain are assumed to conform

## **6. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS**

---

to the same distribution, real-world scenarios, including financial data analysis, energy demand prediction, and climate data analysis, often involve dynamic environments. Within these dynamic contexts, the concept drift problem [50][105] emerges as data distributions evolve over time. Dynamic environment transfer learning requires continuous adaptation to concept drift and adaptive utilization of valuable knowledge from source domains within each distinct environment. These new challenges in transfer learning, particularly within dynamic environments, represent a profound departure from traditional transfer learning paradigms that do not inherently address concept drift and the dynamic nature of evolving data. To overcome these challenges, Dynamic Ensemble Selection (DES) [23][74][20], ADWIN, and Streaming Ensemble Algorithm (SEA) have become prominent in the scientific literature [33][72][70]. Dynamic ensemble selection employs multiple classifiers within the realm of machine learning to make collective predictions or classifications, and leverage data characteristics. Its key feature is its dynamic adaptability, as it continuously evaluates the performance of individual classifiers and selects a subset that demonstrates the highest competence within the prevailing data conditions. This adaptability empowers the ensemble to progressively enhance its performance by incorporating best-fitting classifiers for the existing data context. Moreover, ineffective classifiers can be excluded from the ensemble in scenarios marked by concept drift, thereby protecting the overall performance from detrimental effects. Adaptive Windowing (ADWIN) is another widely used method designed to address the challenges of concept drift [70]. Concept drift refers to the phenomenon in which the statistical properties of data change over time, leading to a decline in the learning algorithm performance. ADWIN monitors incoming data by maintaining sliding windows of variable sizes and evaluating statistical attributes, such as the mean or variance within these windows. Upon detecting substantial shifts or drifts, the ADWIN initiates adjustments to the ensemble or classifier configuration. These adjustments may involve retraining classifiers with fresh data, or incorporating new classifiers that are better suited to the updated data distribution. Additionally, the Streaming Ensemble Algorithm (SEA) is an integral component for addressing these dynamic challenges [33][72][70]. SEA is specifically designed to manage data streams and inherent concept drifts. This is achieved by adapting the ensemble of classifiers in real time as new data arrives.

## **6.1 Motivations and Contributions**

---

SEA's adaptability of SEA ensures that the ensemble remains robust and accurate even in the face of shifting data conditions and the emergence of new classes. This study proposes efficient algorithms for classifying data streams in real-time scenarios, focusing on addressing the challenges posed by heterogeneous transfer learning in data distributions. The goal is to develop a novel algorithm (Heterogeneous Transfer Learning) that can effectively handle nonstationary data streams, achieve high classification accuracy, and minimize computational complexity. The subsequent sections of this paper adhere to a well-structured organization. Section 2 comprehensively reviews the relevant literature on concept drift and transfer learning. Section 3 introduces the proposed approach, providing intricate explanations of its constituents, including dynamic classifier ensembles, concept drift handling, and heterogeneous multi-source transformation. Section 4 outlines the experimental setup and presents the results, providing details regarding the employed datasets, evaluation metrics, and procedures. Finally, in Section 5, we offer concluding remarks, summarizing the key findings, discussing their implications, and proposing potential avenues for future research.

### **6.1 Motivations and Contributions**

This paper presents a novel contribution to real-time streaming scenarios by addressing the challenges of heterogeneous multisource streams, with key contributions that can be summarized as follows:

1. The primary innovation involves incorporating a concept drift detection method in conjunction with an ensemble classifier, enabling real-time adaptation and refinement of the proposed approach in response to transfer learning in non-stationary environments. This methodology ensures continuous evolution of the classification model in accordance with the changing data landscape.
2. The second significant advancement is the introduction of a precise weighting method to assess the significance of each local classifier within the ultimate classifier.
3. The third significant contribution is the development of an innovative approach that employs the eigenvector technique to facilitate the transfer of knowledge from heterogeneous source domains to the target domain.

## **6. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS**

---

### **6.2 Proposed Methodology**

In this section, we introduce the Heterogeneous Transfer Learning (HTL) algorithm tailored for non-stationary environments. HTL adeptly assimilates knowledge from both heterogeneous and homogeneous sources, operating within the framework of data streams subject to concept drift. Leveraging an online learning inductive parameter transfer strategy, HTL achieves seamless knowledge transfer. We delineate the core components and workflow of the HTL algorithm. To address the challenges intrinsic to our approach, we focus on three key aspects:

- **Heterogeneous Sources:** Traditional transfer learning methods often assume homogeneity in the data distribution across source and target domains. However, in real-world scenarios, data sources may vary significantly in terms of feature space. HTL addresses this challenge by allowing knowledge transfer from sources with different dimensionalities. This means that the algorithm can effectively learn from diverse dimensionality sources, enabling a more comprehensive knowledge transfer process.
- **Drifted Streams:** In dynamic environments, data distributions may change over time, leading to concept drift. This phenomenon poses a significant challenge for machine learning algorithms, as models trained on historical data may become obsolete as the underlying data distribution shifts. HTL incorporates a concept drift detector that continuously monitors the incoming data stream. Upon detecting a shift in the data distribution, the algorithm adapts its classifiers accordingly to ensure continued effectiveness in handling drifting streams. This dynamic adjustment mechanism allows HTL to maintain high performance even in the presence of concept drift.
- **Classifier Performance:** Classifier performance is crucial for the overall effectiveness of the transfer learning process. HTL employs Dynamic Ensemble Selection (DES) to enhance classifier performance. DES creates a diverse ensemble of classifiers, each trained on different subsets of the data. When presented with a new data point, DES dynamically selects the most suitable classifiers from the ensemble based on its performance on similar chunk. This adaptive selection process ensures that the most appropriate classifier

## **6.2 Proposed Methodology**

---

is chosen for each data point, leading to improved classification accuracy and robustness. By leveraging DES, HTL maximizes the utility of available classifiers, resulting in superior performance in non-stationary environments with heterogeneous data sources.

### **6.2.1 HTL Overall Details**

The aim of this section is to harness knowledge from diverse dimensional multi-source domain streams. Following a similar framework to CDTL [1], this approach employs a class-wise and domain-weighted strategy. However, HTL enhances the weight function of CDTL in a class-wise manner, as demonstrated in Equation 1. This equation factors in both correct and incorrect predictions for each classifier class, with K representing the number of classifiers in the current chunk, C denoting the number of classes in the current chunk, and i indicating the current chunk. The components of HTL operate synergistically, as depicted in Fig. 6.1, encompassing three phases:

- **Dynamic Ensemble Selection phase (DES Phase):** The primary objective DES phase is to identify the optimal classifier for incoming data. This is crucial for ensuring that the selected classifier effectively aligns with the unique characteristics of the current data segment.
- **Drift detector phase:** After the DES phase, our method advances to the drift detector phase, where it operates in real-time to continually monitor the data stream. This phase employs ADWIN and DDM techniques, which play a pivotal role in swiftly identifying any signs of concept drift. These techniques are designed to detect changes in the underlying data distribution over time, thus enabling the algorithm to adapt to evolving data patterns.
- **Feature Scaling** The concluding phase of our approach is featuring scaling, operating in real-time to harmonize the diverse dimensionalities of the multi-source streams with the target dimensionality. Leveraging the eigen vector technique, this phase facilitates the transformation of data into a unified dimensionality, essential for creating new classifiers tailored to the target and domain streams. By ensuring compatibility with the learning framework,

## **6. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS**

---

this process enhances the algorithm's effectiveness in handling diverse dimensionality streams.

### **6.2.2 Classifier Creation Details**

Fig. 6.2 provides a comprehensive overview of the classifier creation phase, a crucial component responsible for generating new classifiers based on the current chunk of the target domain, previous classifiers, and source domain classifiers. This phase offers several advantages and performs three tasks.

- **Source Projection:** This step involves projecting the source domain classifiers onto the current chunk of the target domain. The projection likely employs the source weight function, as described in CDTL [1], to assign a weight to each classifier based on its relevance to the current chunk of data. This weighting mechanism ensures that classifiers from the source domains contribute appropriately to the creation of the new classifier for the target domain.
- **Class-Wise Weights:** This block computes class-specific weights for each classifier using Equations 1 and 2. The process involves analyzing the current chunk of the target stream (denoted as  $D$ ) and considering both correct and incorrect predictions made by each classifier. These weights are crucial for determining the significance of individual classifiers across different classes. The equations facilitate the calculation of weights that reflect the classifiers' performance on specific classes, enabling the creation of a well-balanced ensemble classifier.
- **Classifier Combination:** In this phase, the class-wise weights, along with the current chunk of data and the projected source domain classifiers, are combined to derive the final classifier. The combination process follows the details outlined in Eq. 3, where historical classifiers (denoted as  $H$ ), projected data classifiers (denoted as  $P$ ), and the classifier of the current chunk (denoted as  $K$ ) are integrated. This integration ensures that the resulting classifier incorporates contributions from both historical and projected data sources, leveraging the strengths of each to enhance predictive performance.

## **6.2 Proposed Methodology**

---

The resulting classifier is then utilized to make predictions based on the data chunk, effectively leveraging the insights gleaned from both historical and current data sources.

### **6.2.3 HTL Detailed Algorithm**

As illustrated in Algorithm 5, the HTL algorithm involves several stages, beginning with training a classifier for the target stream and proceeding through various steps related to heterogeneous multisource preprocessing, classifier weighting, concept drift detection, and classifier management to ensure the accuracy and adaptability of the final classifier. In this section, detailed explanations of each individual step within the HTL algorithm are provided.

- **Converting heterogeneous multisource to homogeneous multisource:** In the initial step, the algorithm unifies the various data sources that might have different characteristics (heterogeneous multisource). This is achieved using eigenvectors and the feature count of the current chunk (line 7).
- **Training a new classifier for the first target chunk:** In line 8, the new classifier is trained specifically for the first chunk of the target stream. This classifier was used to predict the initial chunk of the target stream.
- **Calculate heterogeneous multi-source weights:** The algorithm computes the weights for each heterogeneous data source. These weights are determined based on the characteristics of the data from each source and the target classifier. This weighting process helps prioritize more relevant data sources (line 9).
- **Calculating class-wise weights:** In line 27, the algorithm calculates class-wise weights using Equations 1 and 2. These weights were essential for determining the contribution of each class to the final classifier.
- **Converting homogeneous multisource to projected data source:** Line 11 involves using the weights calculated in the third step to transform the homogeneous multisource representation to a projected data source. This transformation likely uses the source weight function of CDTL [1].

## **6. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS**


---

- **Prediction of the current chunk:** In line 16, the algorithm determines the output class using Equation 3.
- **Monitoring for concept drift:** The algorithm continuously monitors the accuracy of its predictions to detect any concept drift, a situation in which the underlying data distribution changes, potentially leading to a degradation in model performance. Line 19 has been used for this purpose.
- **Updating the Projected Multi-source classifiers:** Lines 29–32 are dedicated to updating the classifiers associated with the projected multi-source. It is necessary to adapt to changes in the data or to maintain the accuracy and relevance of the classifiers over time.
- **Managing the pool of classifiers:** If the pool of classifiers exceeds a predefined maximum size threshold, lines 23 and 24 indicate that a new classifier is trained, and the worst-performing classifier is removed. This process helps to maintain a manageable and effective set of classifiers.


The heterogeneous Transfer Learning (HTL) algorithm represents a significant advancement in addressing the complexities of nonstationary environments prone to concept drift. By integrating heterogeneous and homogeneous sources within dynamic data streams, HTL demonstrates remarkable adaptability and effectiveness. Through its meticulously designed workflow, HTL can efficiently handle the challenges posed by evolving data landscapes. From the initial reception of environmental data to the nuanced processing of new data chunks and vigilant monitoring of concept drift, HTL embodies a comprehensive approach to knowledge transfer and adaptation. Owing to its ability to compute class-specific weights and leverage vital classifiers, HTL offers a robust solution for navigating nonstationary environments with confidence and precision.

$$\text{classWeight}_{k,c,\mathcal{D}} = \sum_{i=1}^{|\mathcal{D}|} \frac{|\text{prediction}_i = c|}{|\mathcal{D}|} \times \frac{|\text{prediction}_i \neq c|}{|\mathcal{D}|} \quad \text{where } k \in K, \text{ and } c \in C \quad (6.1)$$

## 6.2 Proposed Methodology

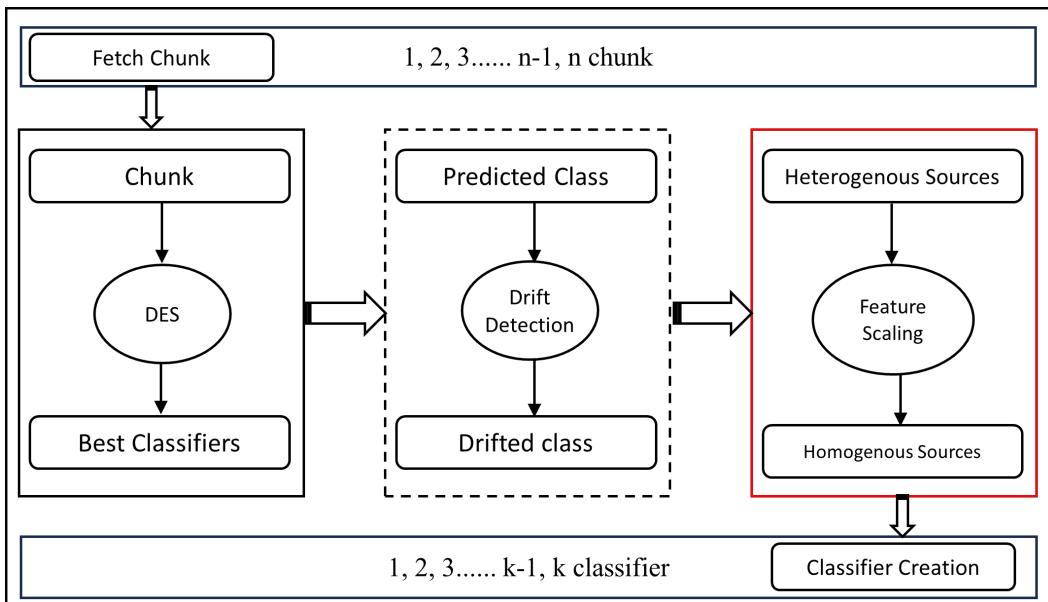

**Figure 6.1:** Proposed Approach Flow.

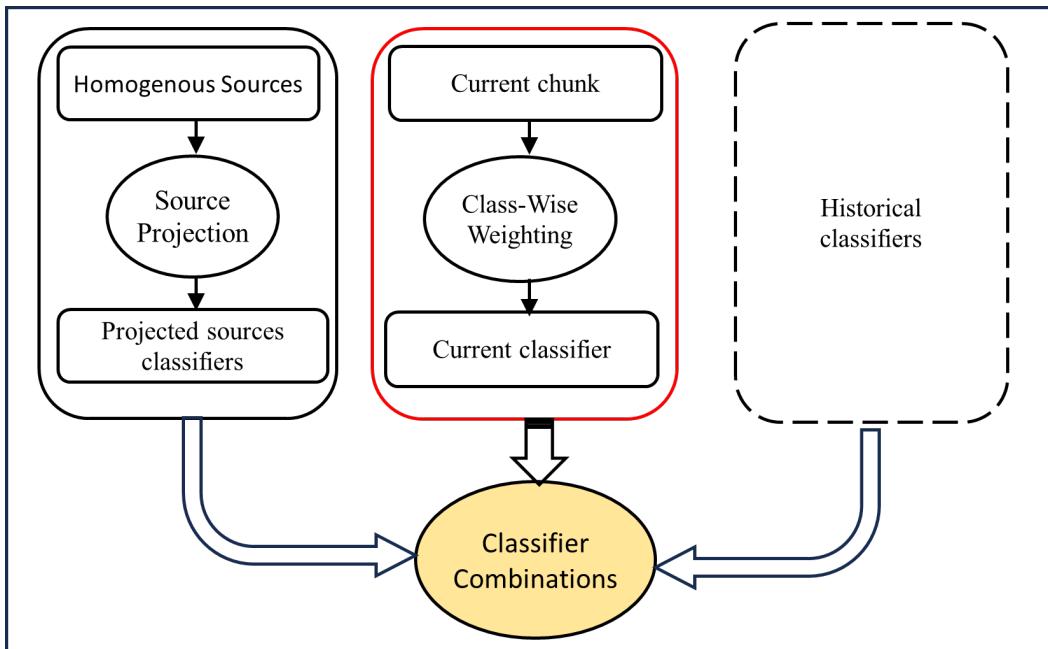

**Figure 6.2:** Classifier Creation Approach

$$\text{classifierWeight} = \sum_{k \in K} \sum_{c \in C} \text{classWeight}_{k,c,\mathcal{D}} \quad \text{where } \mathcal{D} = 1, 2, 3 \dots N \quad (6.2)$$

## **6. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS**

---

$$\text{Prediction}_{p,l,k,\text{chunk}} = \sum_p \text{prediction}_{\text{chunk}}^p + \sum_l \text{prediction}_{\text{chunk}}^l + \text{prediction}_{\text{chunk}}^k \quad (6.3)$$

## 6.2 Proposed Methodology

---



---

**Algorithm 5:** Emerging Phase Flow

---

**Input:** Target domain stream  $stream$ , heterogeneous multi-source domain  $\Psi$ , pool of classifiers, threshold  $\ell$

**Data:** Current chunk  $a$ , classifiers  $k$ , source classifiers  $\psi$ , projected source domain  $S$ , target domain weights  $\omega$ , source domain weights  $\lambda$

**Output:** Prediction

**for** stream have chunk **do**

**if**  $a$  is the First chunk **then**

$\Psi \leftarrow convertSourcesToTargetDim(\Psi, a)$

$k \leftarrow trainingNewClassifier(a)$

$\lambda \leftarrow SourcesDomainWeights(\Psi, k)$

$\omega \leftarrow classWiseWeights(K, a)$

$S \leftarrow projectedSourceDomain(\Psi, \lambda)$

**for** source in  $S$  **do**

$newClassifier \leftarrow trainingNewClassifier(source)$

$\psi \leftarrow \psi \cup newClassifier$

$prediction \leftarrow getPrediction(a, k, \psi, \lambda, \omega)$

**else**

$prediction \leftarrow getPrediction(a, k, \psi)$

$driftResult \leftarrow conceptDriftDetector(prediction)$

**if**  $driftResult$  have drift **then**

$newClassifier \leftarrow trainingNewClassifier(a)$

$k \leftarrow k \cup newClassifier$

**if** size( $K$ )  $\geq \ell$  **then**

$removeWorstClasssifier(k)$

$\lambda \leftarrow SourcesDomainWeights(\Psi, k)$

$\omega \leftarrow classWiseWeights(K, a)$

$S \leftarrow projectedSourceDomain(\Psi, \lambda)$

**for** source in  $S$  **do**

$newClassifier \leftarrow trainingNewClassifier(source)$

$\psi \leftarrow \psi \cup newClassifier$

$prediction \leftarrow getPrediction(a, k, \psi, \lambda, \omega)$

**return** prediction

---

## **6. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS**

---

### **6.3 Experimental Results**

In this section, the proposed HTL, CORAL [95], and CDTL [1], and Melanie [2] algorithms are compared. Three subsections are introduced: the first section focuses on the experimental setup; second, a discussion on data streams to apply our experiments on heterogeneous and homogeneous source domains, including a comparison to evaluate the runtime factor between all methods; and finally, a comparison is made between online learning and chunk-based concept drift. The two main questions to be answered are:

- $Q_1$ . How does the Heterogeneous sources in data streams affect the stability and performance of Transfer Learning Technique?
- $Q_2$ . What approaches or techniques can be employed in heterogeneous transfer learning to facilitate knowledge transfer across diverse sources and domains?

#### **6.3.1 Experimental setup**

The evaluation of Heterogeneous Taxonomy Learning (HTL) involves a comparison with CORAL [95], CDTL [1], and Melanie [2] which employs multiple metrics such as precision, recall, F1 score [66], BAC [68], and G-mean [67]. The experimental protocol employed for evaluation followed the test-then-train approach [110], where the classification model is trained on a specific data chunk and subsequently evaluated on the next chunk. The chunk size was standardized to 2000 instances. Four different classification models were used as base estimators: k-Neighbors (KNN) algorithm, Support Vector Machine (abbreviated as SVM), Gaussian Naive Bayes abbreviated as (GNB), and Hoeffding Tree (abbreviated as HT), as implemented in scikit-learn [36]. We establish an ensemble classifier pool with a set limit of  $L = 8$ , wherein each ensemble consists of  $N = 4$  base models. While these constraints remained fixed across all our experiments, the threshold for the pool classifier in each approach was maintained at eight. Consequently, if the threshold is surpassed, the least-performing classifier is systematically eliminated. This configuration was applied consistently across all approaches to ensure fair engagement. The experiments were carried out using the Python programming

## 6.3 Experimental Results

---

language, with the source code publicly accessible on GitHub<sup>1</sup>. When dealing with heterogeneous multisource streams, it is often impractical or not applicable to truly heterogeneous experiences. Consequently, the eigenvector technique was utilized in all related approaches. This decision stems from the fact that the algorithms in related work primarily focus on homogeneous source domains and do not address the challenges posed by heterogeneous multi-source data. Therefore, heterogeneous experiments were conducted.

### 6.3.1.1 Data Streams

In this study, the performance of the proposed approach was evaluated using various datasets, including synthetic data streams, a real application stream, and dataset benchmark datasets. To conduct the evaluations, the stream-learn Python library [111][? ] was used. As detailed in Table 1, the benchmark dataset employed in the study is the Covertype dataset. This dataset comprises 52 features, 7 classes, and a total of 581,010 instances. It serves as a standard benchmark dataset widely used in stream mining research. For the evaluation of real application streams, the Sensor Stream dataset was utilized. This dataset includes 5 features, 58 classes, and a total of 392,600 instances, representing a real-world application scenario. Synthetic datasets were generated using the scikit-learn Python package. This synthetic dataset was created to simulate data streams and evaluate the performance of the framework. The synthetic datasets consisted of 10 features and four classes and were divided into 200 chunks. Each chunk had a size of 2,000. The performance of the proposed framework was systematically evaluated using these datasets and a stream-learn library. These evaluations provided valuable insights into the effectiveness of the framework in handling different types of data streams, including benchmark datasets, real application streams, and synthetic data streams.

### 6.3.1.2 Compared Approaches

In the subsequent section, we introduce the established benchmark techniques as outlined below:

---

<sup>1</sup>[https://github.com/Amadkour/transfer\\_learning\\_with\\_concept\\_drift.git](https://github.com/Amadkour/transfer_learning_with_concept_drift.git)

## 6. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS

---

Dataset	Number of Features	Number of Classes	Number of Instances
Covertype dataset <sup>1</sup>	40	7	581,010
Sensor Stream dataset <sup>2</sup>	5	58	392,600
Synthetic stream-52	52	5	200,000
Synthetic stream-8	8	4	200,000

**Table 6.1:** Characteristics of the datasets used in the experimentation.

- **AW- CORAL [95]:** The AW- CORAL (Adaptive Weighted CORrelation ALignment) method is a simple domain adaptation technique designed to align the distributions of both source and target features without supervision. This is accomplished by aligning second-order statistics, focusing specifically on covariance, to match the distributions between the domains.
- **HE-CDTL [95]:** The HE-CDTL approach tackles Concept Drift Transfer Learning (CDTL) by integrating knowledge from source domains and historical time steps in the target domain to improve learning performance. HE- CDTL features class-wise weighted ensemble for independent selection of historical knowledge by each class, and AW-CORAL to mitigate domain discrepancy and reduce negative knowledge transfer.
- **Melanie [2]:** Multisource Online Transfer Learning for Non-stationary Environments, known as Melanie, represents the inaugural method capable of transferring knowledge across various data streaming sources in non-stationary environments. Melanie constructs numerous sub-classifiers to grasp diverse facets from distinct source and target concepts dynamically. It identifies sub-classifiers that align closely with the prevailing target concept, assembling them into an ensemble for predicting instances originating from the target concept.

While Melanie extends online learning through chunk-based learning akin to CDTL, it exhibits two limitations:

- utilizing a global weight for each classifier, disregarding performance variation across different locations of a data chunk

## **6.3 Experimental Results**

---

- combining learned classifiers from these domains directly with the target classifier, which may impede effective knowledge transfer due to domain discrepancies. Hence, we compare the proposed approach (HTL) with AW-CORAL [95] and HE-CDTL yang2021concept.

### **6.3.2 Analysis of Experimental Results**

This section presents a comprehensive evaluation of the performance of the proposed approach across multiple data streams. To guarantee a thorough assessment, five performance metrics—F1 score, precision, recall, G-mean, and BAG—were presented using two visualization diagrams: radar and line. A radar chart was cleverly utilized to provide a comprehensive summary, precisely demonstrating the performance of each algorithm across the six key metrics. By calculating the average value of each metric, the overall performance of each approach (HTL, CORAL, and CDTL) was determined. On the other hand, the line diagram utilizes the G-mean metric to compare these methods for each chunk across 100 chunks. A line diagram was used in the first five experiments, whereas a combination of radar and line diagrams was employed in the last two experiments. This approach ensured a detailed and nuanced evaluation of the performance of the proposed approach in diverse experimental scenarios.


#### **6.3.2.1 Results on Target Domains Dataset without Source Domain**

Fig. 6.3 showcases the results of applying the aforementioned methods to the Covertype dataset, where no stream is utilized as a source domain. The line diagram specifically highlights the classification accuracy measured by the G-mean metric across 100 data chunks for each method. Notably, all methods display sub-optimal accuracy during the initial 10 chunks. However, a significant improvement is evident in subsequent phases. This improvement can be attributed to the expansion of the classifier pool, encompassing an increasing number of classifiers. This expansion allows the DES technique to become more adept at selecting the most appropriate classifier for each incoming chunk. Consequently, accuracy experiences a notable upsurge in later chunks, underscoring the adaptability and efficacy of the ensemble approach. From chunk 20 to the final chunk, HTL consistently

## **6. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS**

---

achieves the highest accuracy across most chunks. In contrast, CORAL shows lower performance in certain chunks, while CDTL displays lower performance in others. The superior performance of HTL can be credited to its utilization of the proposed weighting method, which assigns a weight to each historical classifier. This approach contributes to the effective training of the pool classifiers, thereby enhancing the overall performance of the approach.

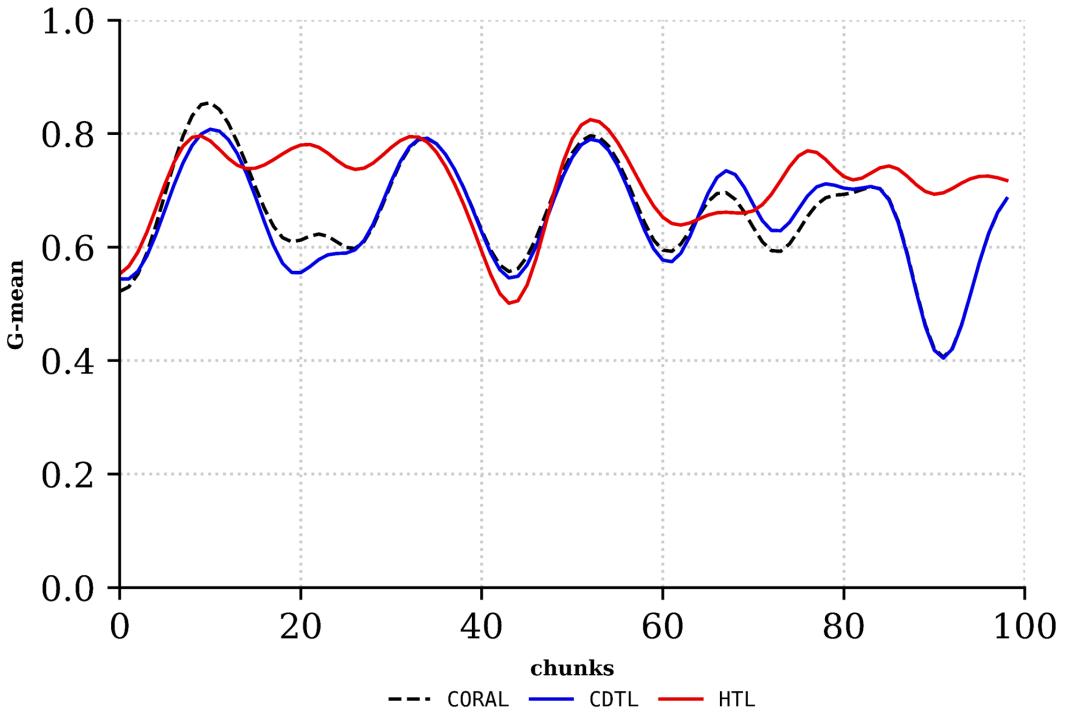


**Figure 6.3:** Result of the Covertype Stream as the Target Domain without the Presence of the Source Domain.

### **6.3.2.2 Results on the Homogeneous Source Domains Dataset**

Fig. 6.4 depicts the results of applying the compared methods to the Covertype data stream as the target domain and Synthetic-52 as a homogenous source domain, which has the same dimensionality as the Covertype stream (52 features and seven classes). Upon examining the line diagram, it becomes evident that HTL's performance in the first eight chunks may be suboptimal due to the insufficient number of classifiers available. However, following the initial eight chunks, the

### 6.3 Experimental Results

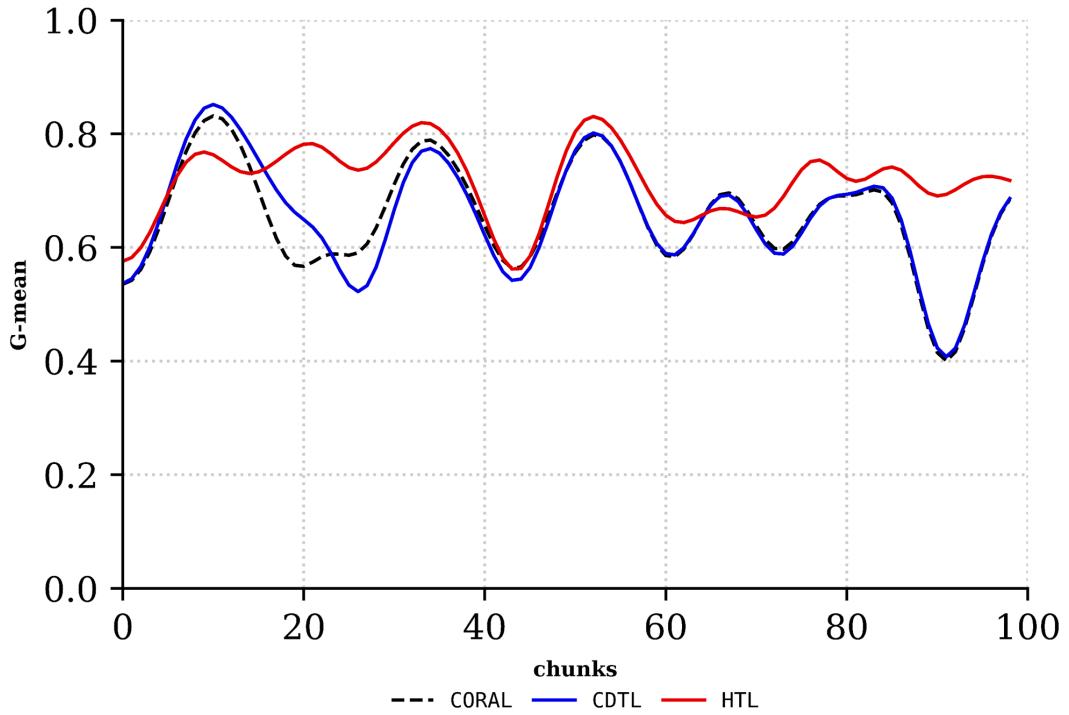

**Figure 6.4:** Result of the Covertype Stream as the Target Domain and Homogeneous Source Domains.


addition of more classifiers results in an improvement in HTL’s performance. In contrast, CDTL maintains satisfactory performance throughout the chunks, while MLSMOTE consistently displays lower performance. It is important to note that HTL consistently achieves the highest performance across all chunks in the diagram. Notably, the CDTL and HTL methods in Fig. 6.4 demonstrated superiority over the same methods in Fig. 6.3. This is attributed to the experiment shown in Fig. 6.4, which incorporates Synthetic-52 as a source domain, thereby enhancing the performance of the methods. In contrast to the experiment in Fig. 6.3, which lacks a source domain.

#### 6.3.2.3 Results on One Heterogeneous Source Domain

In this experiment, the Synthetic-8 stream was utilized as a heterogeneous source domain. Considering the nature of the HTL algorithm, which can operate with heterogeneous sources, specific adjustments were implemented to enable CORAL and

## 6. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS


---

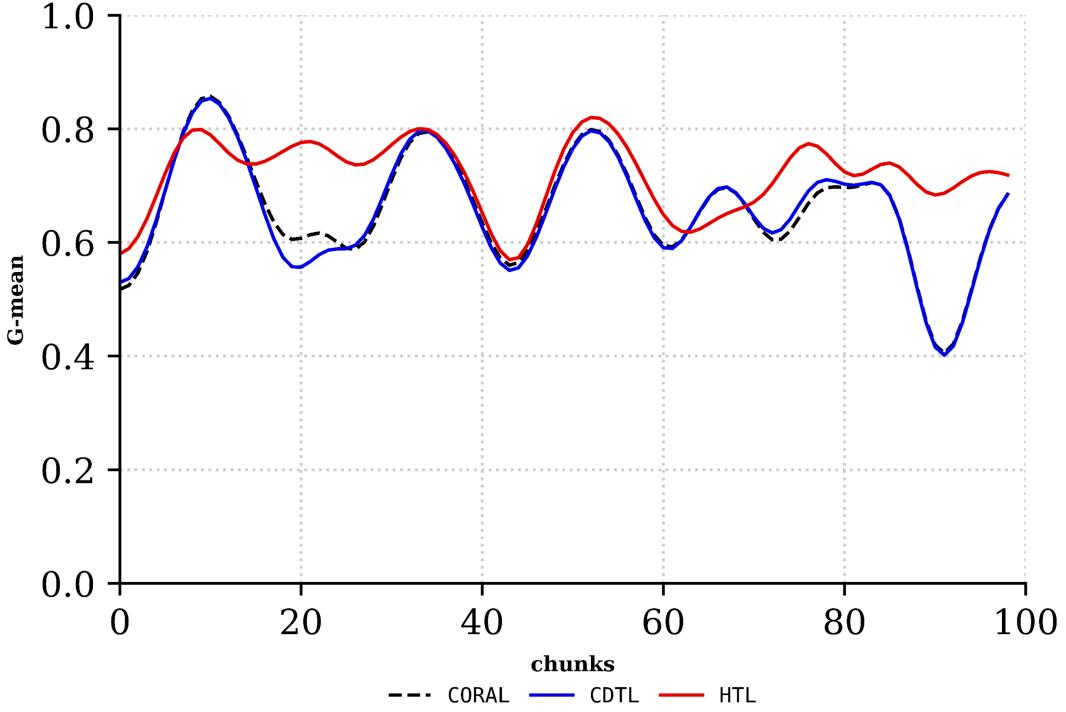

**Figure 6.5:** Result of the Covertype Stream as the Target Domain and One Heterogeneous Source Domain.

CDTL, which typically do not operate with such sources, to function in a heterogeneous domain environment. The eigenvector technique was applied to CORAL and CDTL to facilitate compatibility with the heterogeneous sources. Fig. 6.5 shows the results of applying the compared methods to the Covertype data stream as the target domain, with Synthetic-8 acting as the heterogeneous source domain. Synthetic-8 has a different dimensionality (eight features and four classes) compared with the Covertype stream. An analysis of the line diagram reveals that the performance of the compared approaches may vary across different chunks depending on the source domain and the positive knowledge it contributes. HTL consistently outperforms, achieving the highest performance across almost all chunks, whereas CDTL and CORAL show lower performance.

### 6.3 Experimental Results

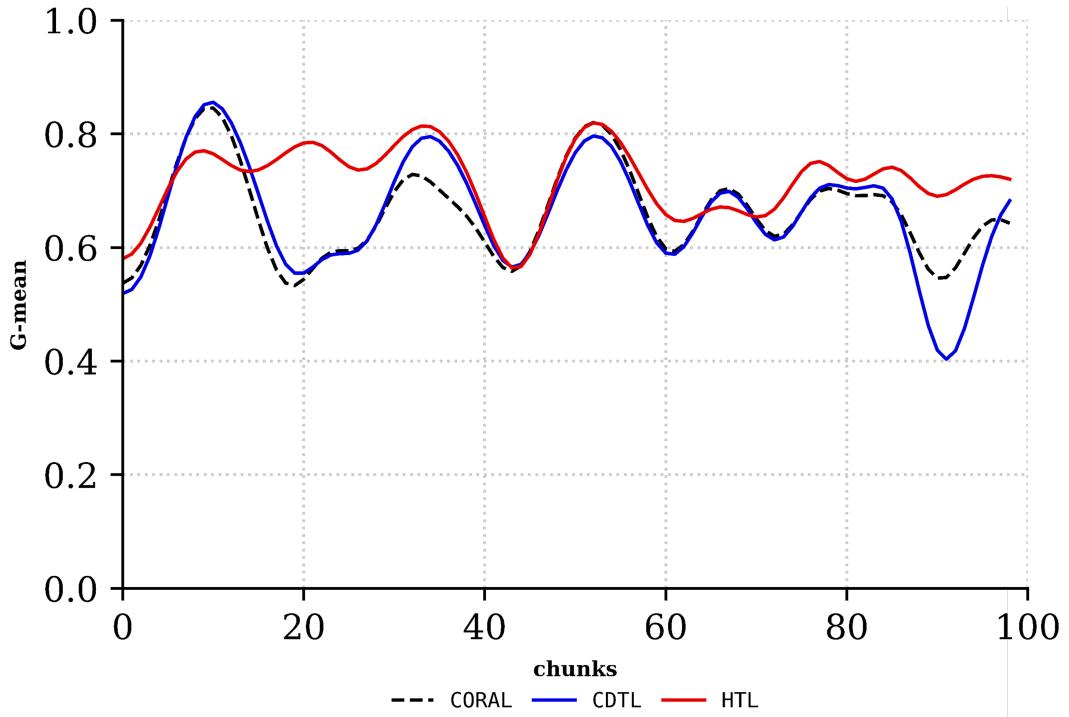


**Figure 6.6:** Result of the Covertype Stream as the Target Domain and Multiple Heterogeneous Source Domains.

#### 6.3.2.4 Results on All Heterogeneous Source Domains Stream and Covertype Stream as the Target Domain


Fig. 6.7 presents the results of applying the compared methods to the Covertype data stream as the target domain, with the Synthetic-8, Synthetic-52, and Sensor streams serving as heterogeneous source domains. From the analysis, the performance in this figure exceeds that in Fig. 6.7. This improvement is likely due to the larger number of source domains in this experiment, which leads to an incremental increase in positive knowledge with each added source domain, consequently improving method performance. In Fig. 6.8, the same experimental setup was employed, but the target domain was switched from the cover type to the sensor stream. Additionally, the Covertype stream was included as one of the source domains in this configuration. This modification was intended to evaluate the performance of the HTL across the various target streams. Fig. 6.8 shows that the performance of all methods might be lower than that of the Covertype

## 6. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS

---

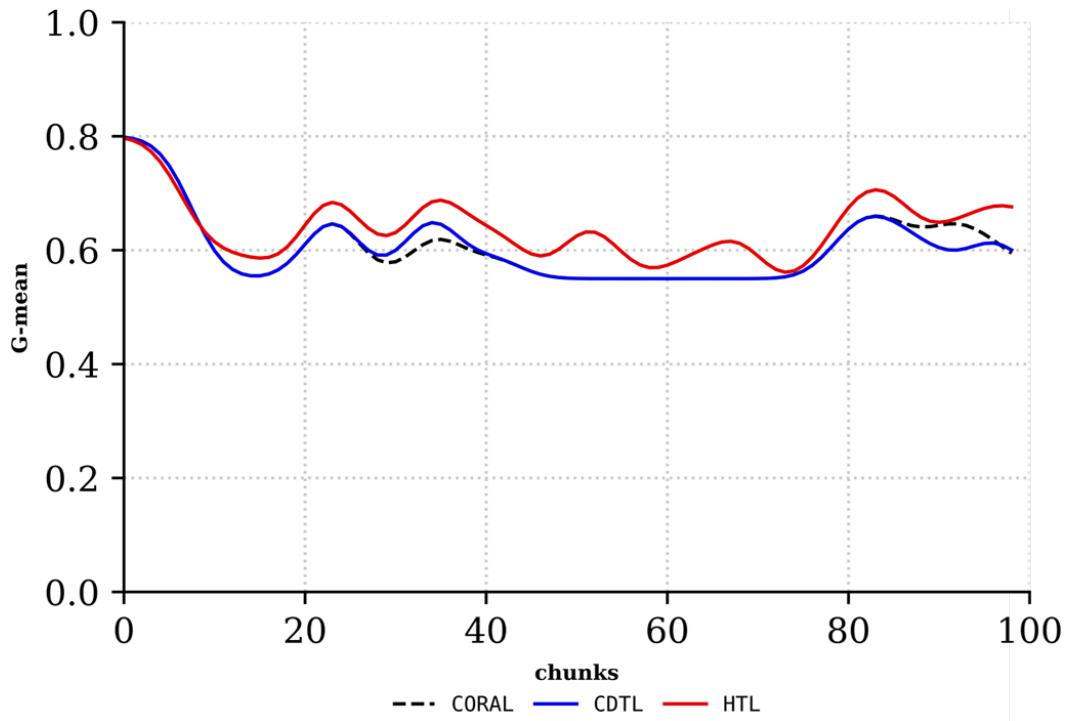


**Figure 6.7:** Result of the Sensor Stream as the Target Domain and Multiple Heterogeneous Source Domains.

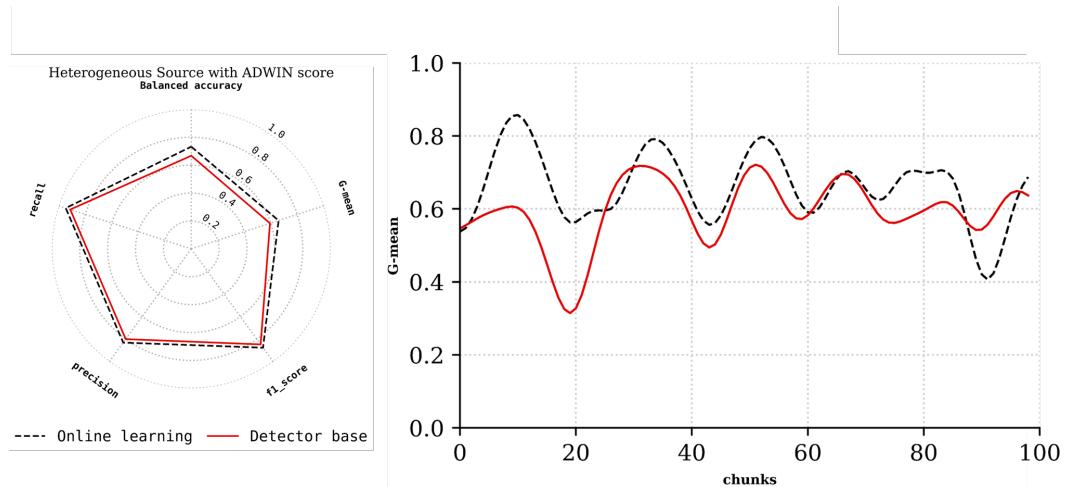

**Figure 6.8:** Online learning and detector chunk-based result in Covertype stream via ADWIN detector

### 6.3 Experimental Results

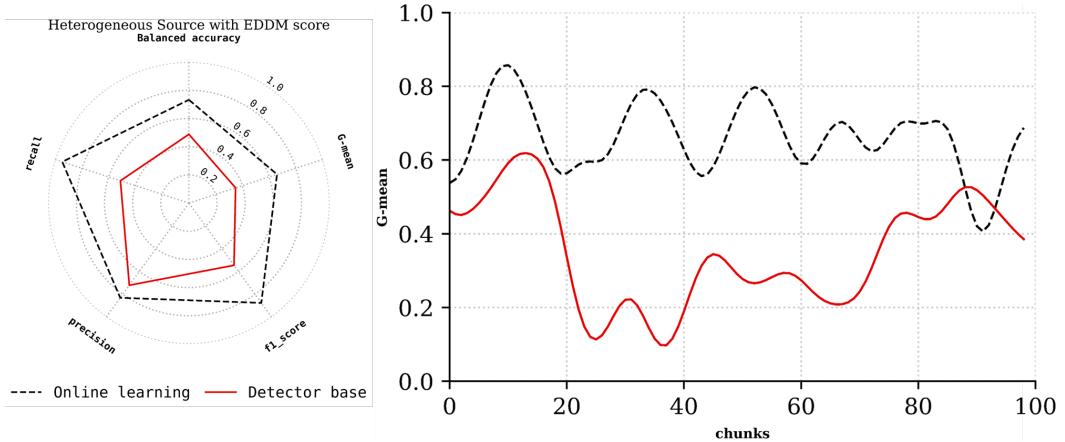

**Figure 6.9:** Online learning and detector chunk-based result in Covertype stream via DDM detector

stream, mainly because of the increased noise in the sensor stream and numerous drifts. However, HTL consistently outperforms, achieving the highest performance across all chunks, whereas CORAL and CDTL display nearly identical values in most chunks.

#### 6.3.2.5 Results on One Heterogeneous Source Domain

This section presents the overall performances of the compared methods (CORAL, CDTL, and HTL) across five key performance metrics: F1 score, precision, recall, G-mean, and BAG. Table 2 showcases the performance of each method across different experiments for the five metrics. The table illustrates the average value of each metric, which represents the overall performance of each method for 100 chunks. The emphasis on the bold highlighting in the table underscores the superiority of the HTL algorithm in various source domain configurations. In the first experiment (without the source domain), CORAL showed the best performance in terms of precision, while HTL demonstrated the best performance in the other metrics. Furthermore, in most experiments, HTL outperformed the other methods across most metrics, except for the recall metric in the third experiment, in which CDTL achieved the best performance. Notably, each subsequent experiment demonstrated improved performance compared with the previous experiment. This trend arose from the incremental nature of the source domain in each experiment.

## **6. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS**

---

The incremental addition of the source domain enhances the positive knowledge of each experiment, leading to an increased performance of the compared methods in most experiments.

<b>Experiment</b>	<b>Metric</b>	<b>CORAL</b>	<b>CDTL</b>	<b>HTL</b>
Without source domain	BAC	0.723	0.723	<b>0.725</b>
	G-mean	0.652	0.654	<b>0.717</b>
	F1-score	0.875	0.874	<b>0.890</b>
	Precision	0.827	0.823	<b>0.851</b>
	Recall	<b>0.950</b>	0.944	0.939
Homogenous source domain	BAC	0.731	0.730	<b>0.755</b>
	G-mean	0.658	0.653	<b>0.717</b>
	F1-score	0.876	0.875	<b>0.858</b>
	Precision	0.830	0.829	<b>0.851</b>
	Recall	0.950	0.950	<b>0.953</b>
Single heterogeneous source domain	BAC	0.732	0.732	<b>0.757</b>
	G-mean	0.661	0.657	<b>0.717</b>
	F1-score	0.875	0.875	<b>0.859</b>
	Precision	0.835	0.835	<b>0.851</b>
	Recall	0.947	0.950	<b>0.953</b>
Multi-source heterogeneous domain (Covertype stream)	BAC	0.732	0.732	<b>0.757</b>
	G-mean	0.661	0.661	<b>0.717</b>
	F1-score	0.875	0.875	<b>0.859</b>
	Precision	0.835	0.835	<b>0.851</b>
	Recall	0.947	0.950	<b>0.953</b>
Multi-source heterogeneous domain (Sensor stream)	BAC	0.998	0.998	<b>0.998</b>
	G-mean	0.971	0.971	<b>0.992</b>
	F1-score	0.997	0.997	<b>0.997</b>
	Precision	0.998	0.998	<b>0.998</b>
	Recall	0.998	0.998	<b>0.998</b>

**Table 6.2:** The Comprehensive Performance of CORAL, CDTL, and HTL Across All Previous Experiments

### **6.3.3 4.3. Analysis Runtime between CORAL, CDTL, and HTL Techniques**

Our experimental results highlight that the selection of the optimal algorithm for handling heterogeneous transfer learning is influenced by various factors. These

### 6.3 Experimental Results

---

factors include the dataset characteristics and runtime requirements of the algorithm. In the experiments, the focus was on analyzing the runtimes of different algorithms, and the results were insightful. Notably, the HTL algorithm was exceptionally efficient. For example, when considering the training of the first experience (homogeneous source domain), the HTL algorithm completed 100 iterations within 304 seconds. In contrast, the CORAL and CDTL algorithms require more time to achieve the same number of training iterations. Furthermore, the HTL algorithm consistently demonstrated remarkable efficiency, particularly when the source domain settings were absent, single heterogeneous, or multisource heterogeneous. These findings highlight the superior runtime performance of the HTL algorithm, positioning it as an attractive choice for scenarios with stringent time constraints. The bold highlighting in Table 3 further accentuates the efficiency of the HTL algorithm across various source domain settings, including homogeneous, absent, single heterogeneous, and multi-source heterogeneous settings, making it a compelling option for applications where time efficiency is of paramount importance.

Experience	Target domain	Source Domain	CORAL	CDTL	HTL
without source domain	Covertype	None	312	312	<b>304</b>
Homogenous source domain	Covertype	Synthetic-52	6165	614	<b>606</b>
Single heterogeneous source domain	Covertype	Synthetic-8	6060	4703	<b>4475</b>
Multi-source heterogeneous domain	Covertype	Sensor, Synthetic-52, and Synthetic-8	23011	14043	<b>13824</b>
Multi-source heterogeneous domain	Sensor	Covertype, Synthetic-52, and Synthetic-8	14524	3052	<b>3005</b>

**Table 6.3:** Runtimes (in seconds) for CORAL, CDTL, and HTL

#### 6.3.4 4.4. Analysis accuracy and runtime of HTL for online learning and chunk-based concept drift

We conducted a thorough series of statistical analyses encompassing 12 comparisons across three diverse datasets, three methods, and two drift detectors. These analyses were rigorously evaluated using a non-parametric test, specifically the Kruskal-Wallis test. The results of this test were striking, revealing substantial variations in the G-mean measurements across most experiments. Importantly, these differences were not due to random chance [37]. Upon closer examination of the

## **6. DYNAMIC CLASSIFICATION ENSEMBLES FOR HANDLING IMBALANCED MULTICLASS DRIFTED DATA STREAMS**

---

assessments for the three methods, PA, MLSMOTE, and MLSOTE, as detailed in Table 4.3, we found compelling evidence supporting the acceptance of the null hypothesis ( $H_0$ ). This implies that the expected and observed data exhibited statistically significant disparities.  $H_0$  is rejected when significant differences are not observed and  $H_0$  is accepted if the P-value falls below the critical value. Underlining the significance of our analysis, the Kruskal-Wallis test was conducted with a 95% confidence level, and the P-value was rounded to the first three digits after the decimal point. Nevertheless, it is important to note that a similarity in the performances of the methods emerged in the third and fourth experiments, resulting in the rejection of  $H_0$ . This similarity can be attributed to the fact that the DDM detected fewer drifts in these experiments.

<b>Technique</b>	<b>Runtime</b>	<b>Learning Times</b>
Online Learning	3102	100
ADWIN detector	2257	63
EDMM detector	1948	40

**Table 6.4:** Runtimes (in seconds) for Online Learning, ADWIN, and EDMM drift detector

*Everything is theoretically impossible, until it is done.*

Robert A. Heinlein

CHAPTER

# 7

# Conclusions and Future Work

In this chapter, we presented a comprehensive methodology for incremental learning in data streams, particularly addressing the complexities of imbalanced data, including minority and overlapping classes 7.1, Emerging new classes in the incremental drifted streams 7.3 and the heterogeneous transfer learning in the drifted streams 7.3.

## 7.1 Imbalanced multiclass stream

Our approach integrates a novel oversampling technique, concept drift detection, and Dynamic Ensemble Selection (DES) to identify the most suitable ensemble classifier. Extensive experimentation across various datasets, including benchmarks, real-world streams, and synthetic data, demonstrated the effectiveness of our methodology. A key feature of our approach is the rapid detection of concept drifts, which allows the system to adapt quickly by training new base classifiers, ensuring continued relevance and accuracy in real-time scenarios. We addressed the minority class problem through advanced oversampling, while the KNN algorithm was employed to prevent the creation of overlapping class instances. The

## **7. CONCLUSIONS AND FUTURE WORK**

---

DES technique played a crucial role in selecting the most effective classifiers, optimizing overall performance.

The results of our evaluation, based on multiple performance metrics, show that our methodology is particularly effective in handling multiclass imbalanced stream challenges. It excels in maintaining high accuracy as class distributions evolve. Beyond accuracy, the approach is marked by its adaptability, efficiency, and scalability. The capability for dynamic model updates driven by incoming data allows for continuous adaptation to changing data distributions, ensuring the model's reliability and relevance in real-time applications.

However, our methodology does have certain limitations. The time required to generate non-overlapping synthetic instances is significant, and the approach's success heavily depends on the accuracy of MLSMOTE and MLSOL techniques. Future research should focus on developing more advanced oversampling techniques that avoid overlapping synthetic instances. Additionally, exploring meta-learning methods to better assess imbalanced multiclass ratios and minority class identification could further improve the approach.

### **7.2 Imbalanced multiclass stream**

we introduced in this section, a robust framework for incremental learning in data streams with emerging new classes. By integrating the ADWIN algorithm for concept drift detection, K-means clustering, and Gaussian Naive Bayes (GNB) as the base classifier within an ensemble stratified bagging framework, our method effectively tackles the challenges posed by such dynamic data streams. The ADWIN algorithm is particularly important, enabling the prompt detection of concept drifts and new classes, which is critical for training new classifiers and maintaining accuracy over time.

The use of ensemble stratified bagging combined with DES significantly enhances predictive performance and robustness. Our evaluations confirm that the framework is highly effective in classifying data streams with evolving distributions, especially when GNB serves as the base classifier. In addition to its high accuracy, the framework's strengths lie in its adaptability, efficiency, and scalabil-

ity. The dynamic updates to the model, based on incoming data, ensure continuous adaptation to shifting data patterns, supporting real-time reliability and relevance.

Looking ahead, future work could explore several avenues for improvement. These include the development of advanced concept drift detection algorithms, the exploration of alternative ensemble strategies, and the incorporation of deep learning techniques. Additionally, expanding the framework to address a broader range of real-world applications and refining the selection and prediction methods for classifiers will be crucial for further enhancing the methodology's effectiveness.

## **7.3 Heterogeneous transfer learning**

This study introduces a comprehensive Approach for incremental learning in data streams, particularly focusing on heterogeneous transfer learning. The framework effectively addresses the challenges associated with this context by integrating concept drift detection through the ADWIN algorithm, employing eigenvectors, and utilizing ensemble classifiers. The efficacy of this approach was validated through extensive experiments on a variety of datasets, including benchmark datasets, real-world application streams, and synthetic data.

A key strength of this approach is the pivotal role played by the ADWIN algorithm, which enables the timely detection of concept drifts and changes in data patterns. This allows the framework, referred to as HTL, to adapt by training new base classifiers, ensuring their continued relevance and accuracy in real-time scenarios. The use of ensemble classifiers further enhances predictive performance and robustness by aggregating predictions from multiple base classifiers. Dynamic Ensemble Selection (DES) is utilized to select the most suitable base classifiers, optimizing overall performance.

Our thorough evaluation using various performance measures confirms the approach's effectiveness in addressing the challenges of heterogeneous multisource domains. The framework excels in accurately classifying data streams with evolving class distributions, particularly when leveraging ADWIN as the drift detector, eigenvectors for knowledge transfer across heterogeneous domains, and DES for classifier selection.

## **7. CONCLUSIONS AND FUTURE WORK**

---

Beyond its strong accuracy and performance, the framework offers significant advantages in terms of adaptability, efficiency, and scalability. The ability to update the model dynamically, based on incoming data instances, ensures continuous adaptation to changing data distributions, maintaining the framework's reliability and relevance in real-time scenarios.

Looking ahead, future research could focus on further enhancing this approach. Potential improvements include developing advanced concept drift detection methods, refining classifier selection by focusing on positive target and multisource classifiers, and incorporating deep learning techniques to predict future drifts and optimize classifier performance. These advancements could further bolster the framework's capability to manage complex, evolving data streams in diverse real-world applications.

# Bibliography

- [1] C. Yang, Y.-m. Cheung, J. Ding, and K. C. Tan, “Concept drift-tolerant transfer learning in dynamic environments,” *IEEE Transactions on Neural Networks and Learning Systems*, vol. 33, no. 8, pp. 3857–3871, 2021.
- [2] B. Dong, Y. Gao, S. Chandra, and L. Khan, “Multistream classification with relative density ratio estimation,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 33, no. 01, 2019, pp. 3478–3485.
- [3] J. Shan, H. Zhang, W. Liu, and Q. Liu, “Online active learning ensemble framework for drifted data streams,” *IEEE transactions on neural networks and learning systems*, vol. 30, no. 2, pp. 486–498, 2018.
- [4] S. J. Pan and Q. Yang, “A survey on transfer learning,” *IEEE Transactions on knowledge and data engineering*, vol. 22, no. 10, pp. 1345–1359, 2009.
- [5] F. Zhuang, Z. Qi, K. Duan, D. Xi, Y. Zhu, H. Zhu, H. Xiong, and Q. He, “A comprehensive survey on transfer learning,” *Proceedings of the IEEE*, vol. 109, no. 1, pp. 43–76, 2020.
- [6] S. Wang, L. L. Minku, and X. Yao, “A systematic study of online class imbalance learning with concept drift,” *IEEE transactions on neural networks and learning systems*, vol. 29, no. 10, pp. 4802–4821, 2018.
- [7] Y. Sun, A. K. Wong, and M. S. Kamel, “Classification of imbalanced data: A review,” *International journal of pattern recognition and artificial intelligence*, vol. 23, no. 04, pp. 687–719, 2009.

## BIBLIOGRAPHY

---

- [8] F. Charte, A. J. Rivera, M. J. del Jesus, and F. Herrera, “Addressing imbalance in multilabel classification: Measures and random resampling algorithms,” *Neurocomputing*, vol. 163, pp. 3–16, 2015.
- [9] ———, “Mlsmote: Approaching imbalanced multilabel learning through synthetic instance generation,” *Knowledge-Based Systems*, vol. 89, pp. 385–397, 2015.
- [10] Z. Daniels and D. Metaxas, “Addressing imbalance in multi-label classification using structured hellinger forests,” in *Proceedings of the AAAI conference on artificial intelligence*, vol. 31, no. 1, 2017.
- [11] B. Liu and G. Tsoumakas, “Making classifier chains resilient to class imbalance,” in *Asian Conference on Machine Learning*. PMLR, 2018, pp. 280–295.
- [12] N. Japkowicz, C. Myers, M. Gluck *et al.*, “A novelty detection approach to classification,” in *IJCAI*, vol. 1. Citeseer, 1995, pp. 518–523.
- [13] V. López, A. Fernández, J. G. Moreno-Torres, and F. Herrera, “Analysis of preprocessing vs. cost-sensitive learning for imbalanced classification. open problems on intrinsic data characteristics,” *Expert Systems with Applications*, vol. 39, no. 7, pp. 6585–6608, 2012.
- [14] M.-L. Zhang, Y.-K. Li, H. Yang, and X.-Y. Liu, “Towards class-imbalance aware multi-label learning,” *IEEE Transactions on Cybernetics*, vol. 52, no. 6, pp. 4459–4471, 2020.
- [15] N. V. Chawla, A. Lazarevic, L. O. Hall, and K. W. Bowyer, “Smoteboost: Improving prediction of the minority class in boosting,” in *Knowledge Discovery in Databases: PKDD 2003: 7th European Conference on Principles and Practice of Knowledge Discovery in Databases, Cavtat-Dubrovnik, Croatia, September 22-26, 2003. Proceedings 7*. Springer, 2003, pp. 107–119.

---

## BIBLIOGRAPHY

- [16] S. Wang, H. Chen, and X. Yao, “Negative correlation learning for classification ensembles,” in *The 2010 international joint conference on neural networks (IJCNN)*. IEEE, 2010, pp. 1–8.
- [17] M. Galar, A. Fernandez, E. Barrenechea, H. Bustince, and F. Herrera, “A review on ensembles for the class imbalance problem: bagging-, boosting-, and hybrid-based approaches,” *IEEE Transactions on Systems, Man, and Cybernetics, Part C (Applications and Reviews)*, vol. 42, no. 4, pp. 463–484, 2011.
- [18] R. M. Cruz, R. Sabourin, and G. D. Cavalcanti, “Dynamic classifier selection: Recent advances and perspectives,” *Information Fusion*, vol. 41, pp. 195–216, 2018.
- [19] U. Bhowan, M. Johnston, M. Zhang, and X. Yao, “Evolving diverse ensembles using genetic programming for classification with unbalanced data,” *IEEE Transactions on Evolutionary Computation*, vol. 17, no. 3, pp. 368–386, 2012.
- [20] L. I. Kuncheva, “Clustering-and-selection model for classifier combination,” in *KES'2000. Fourth International Conference on Knowledge-Based Intelligent Engineering Systems and Allied Technologies. Proceedings (Cat. No. 00TH8516)*, vol. 1. IEEE, 2000, pp. 185–188.
- [21] T. Woloszynski and M. Kurzynski, “A probabilistic model of classifier competence for dynamic ensemble selection,” *Pattern Recognition*, vol. 44, no. 10-11, pp. 2656–2668, 2011.
- [22] R. Lysiak, M. Kurzynski, and T. Woloszynski, “Optimal selection of ensemble classifiers using measures of competence and diversity of base classifiers,” *Neurocomputing*, vol. 126, pp. 29–35, 2014.
- [23] R. M. Cruz, R. Sabourin, and G. D. Cavalcanti, “Meta-des. oracle: Meta-learning and feature selection for dynamic ensemble selection,” *Information fusion*, vol. 38, pp. 84–103, 2017.

## BIBLIOGRAPHY

---

- [24] G. Widmer and M. Kubat, “Learning in the presence of concept drift and hidden contexts,” *Machine learning*, vol. 23, pp. 69–101, 1996.
- [25] N. Lu, J. Lu, G. Zhang, and R. L. De Mantaras, “A concept drift-tolerant case-base editing technique,” *Artificial Intelligence*, vol. 230, pp. 108–133, 2016.
- [26] J. Gama, I. Žliobaité, A. Bifet, M. Pechenizkiy, and A. Bouchachia, “A survey on concept drift adaptation,” *ACM computing surveys (CSUR)*, vol. 46, no. 4, pp. 1–37, 2014.
- [27] V. Losing, B. Hammer, and H. Wersing, “Knn classifier with self adjusting memory for heterogeneous concept drift,” in *2016 IEEE 16th international conference on data mining (ICDM)*. IEEE, 2016, pp. 291–300.
- [28] A. Storkey, “When training and test sets are different: characterizing learning transfer,” 2008.
- [29] S. Ramírez-Gallego, B. Krawczyk, S. García, M. Woźniak, and F. Herrera, “A survey on data preprocessing for data stream mining: Current status and future directions,” *Neurocomputing*, vol. 239, pp. 39–57, 2017.
- [30] J. A. Silva, E. R. Faria, R. C. Barros, E. R. Hruschka, A. C. d. Carvalho, and J. Gama, “Data stream clustering: A survey,” *ACM Computing Surveys (CSUR)*, vol. 46, no. 1, pp. 1–31, 2013.
- [31] A. Dries and U. Rückert, “Adaptive concept drift detection,” *Statistical Analysis and Data Mining: The ASA Data Science Journal*, vol. 2, no. 5-6, pp. 311–327, 2009.
- [32] C. Alippi and M. Roveri, “Just-in-time adaptive classifiers—part i: Detecting nonstationary changes,” *IEEE Transactions on Neural Networks*, vol. 19, no. 7, pp. 1145–1153, 2008.
- [33] J. Gama, P. Medas, G. Castillo, and P. Rodrigues, “Learning with drift detection,” in *Advances in Artificial Intelligence–SBIA 2004: 17th Brazilian Symposium on Artificial Intelligence, São Luis, Maranhão, Brazil, September 29–October 1, 2004. Proceedings 17*. Springer, 2004, pp. 286–295.

---

## BIBLIOGRAPHY

- [34] L. Bu, C. Alippi, and D. Zhao, “A pdf-free change detection test based on density difference estimation,” *IEEE transactions on neural networks and learning systems*, vol. 29, no. 2, pp. 324–334, 2016.
- [35] T. D. S. K. S. Venkatasubramanian and K. Yi, “An information-theoretic approach to detecting changes in multi-dimensional data streams.”
- [36] I. Frias-Blanco, J. del Campo-Ávila, G. Ramos-Jimenez, R. Morales-Bueno, A. Ortiz-Diaz, and Y. Caballero-Mota, “Online and non-parametric drift detection methods based on hoeffding’s bounds,” *IEEE Transactions on Knowledge and Data Engineering*, vol. 27, no. 3, pp. 810–823, 2014.
- [37] M. Yamada, A. Kimura, F. Naya, and H. Sawada, “Change-point detection with feature selection in high-dimensional time-series data,” in *Twenty-Third International Joint Conference on Artificial Intelligence*, 2013.
- [38] S. H. Bach and M. A. Maloof, “Paired learners for concept drift,” in *2008 Eighth IEEE International Conference on Data Mining*. IEEE, 2008, pp. 23–32.
- [39] A. Bifet and R. Gavalda, “Learning from time-changing data with adaptive windowing,” in *Proceedings of the 2007 SIAM international conference on data mining*. SIAM, 2007, pp. 443–448.
- [40] S. Xu and J. Wang, “Dynamic extreme learning machine for data stream classification,” *Neurocomputing*, vol. 238, pp. 433–449, 2017.
- [41] D. Liu, Y. Wu, and H. Jiang, “Fp-elm: An online sequential learning algorithm for dealing with concept drift,” *Neurocomputing*, vol. 207, pp. 322–334, 2016.
- [42] D. Han, C. Giraud-Carrier, and S. Li, “Efficient mining of high-speed uncertain data streams,” *Applied Intelligence*, vol. 43, pp. 773–785, 2015.
- [43] S. G. Soares and R. Araújo, “An adaptive ensemble of on-line extreme learning machines with variable forgetting factor for dynamic system prediction,” *Neurocomputing*, vol. 171, pp. 693–707, 2016.

## BIBLIOGRAPHY

---

- [44] B. F. Manly and D. Mackenzie, “A cumulative sum type of method for environmental monitoring,” *Environmetrics: The official journal of the International Environmetrics Society*, vol. 11, no. 2, pp. 151–166, 2000.
- [45] Y. Sun, K. Tang, Z. Zhu, and X. Yao, “Concept drift adaptation by exploiting historical knowledge,” *IEEE transactions on neural networks and learning systems*, vol. 29, no. 10, pp. 4822–4832, 2018.
- [46] N. C. Oza and S. Russell, “Experimental comparisons of online and batch versions of bagging and boosting,” in *Proceedings of the seventh ACM SIGKDD international conference on Knowledge discovery and data mining*, 2001, pp. 359–364.
- [47] A. Bifet, G. Holmes, B. Pfahringer, R. Kirkby, and R. Gavalda, “New ensemble methods for evolving data streams,” in *Proceedings of the 15th ACM SIGKDD international conference on Knowledge discovery and data mining*, 2009, pp. 139–148.
- [48] F. Chu and C. Zaniolo, “Fast and light boosting for adaptive mining of data streams,” in *Advances in Knowledge Discovery and Data Mining: 8th Pacific-Asia Conference, PAKDD 2004, Sydney, Australia, May 26-28, 2004. Proceedings 8.* Springer, 2004, pp. 282–292.
- [49] H. M. Gomes, A. Bifet, J. Read, J. P. Barddal, F. Enembreck, B. Pfahringer, G. Holmes, and T. Abdessalem, “Adaptive random forests for evolving data stream classification,” *Machine Learning*, vol. 106, pp. 1469–1495, 2017.
- [50] P. Li, X. Wu, X. Hu, and H. Wang, “Learning concept-drifting data streams with random ensemble decision trees,” *Neurocomputing*, vol. 166, pp. 68–83, 2015.
- [51] J. Z. Kolter and M. A. Maloof, “Dynamic weighted majority: An ensemble method for drifting concepts,” *The Journal of Machine Learning Research*, vol. 8, pp. 2755–2790, 2007.

---

## BIBLIOGRAPHY

- [52] R. Elwell and R. Polikar, “Incremental learning of concept drift in non-stationary environments,” *IEEE transactions on neural networks*, vol. 22, no. 10, pp. 1517–1531, 2011.
- [53] D. Brzezinski and J. Stefanowski, “Reacting to different types of concept drift: The accuracy updated ensemble algorithm,” *IEEE transactions on neural networks and learning systems*, vol. 25, no. 1, pp. 81–94, 2013.
- [54] P. Zhang, X. Zhu, and Y. Shi, “Categorizing and mining concept drifting data streams,” in *Proceedings of the 14th ACM SIGKDD international conference on Knowledge discovery and data mining*, 2008, pp. 812–820.
- [55] Y. Sun, K. Tang, L. L. Minku, S. Wang, and X. Yao, “Online ensemble learning of data streams with gradually evolved classes,” *IEEE Transactions on Knowledge and Data Engineering*, vol. 28, no. 6, pp. 1532–1545, 2016.
- [56] J. B. Gomes, M. M. Gaber, P. A. Sousa, and E. Menasalvas, “Mining recurring concepts in a dynamic feature space,” *IEEE Transactions on Neural Networks and Learning Systems*, vol. 25, no. 1, pp. 95–110, 2013.
- [57] Z. Ahmadi and S. Kramer, “Modeling recurring concepts in data streams: a graph-based framework,” *Knowledge and Information Systems*, vol. 55, pp. 15–44, 2018.
- [58] M. Pratama, J. Lu, and G. Zhang, “Evolving type-2 fuzzy classifier,” *IEEE Transactions on Fuzzy Systems*, vol. 24, no. 3, pp. 574–589, 2015.
- [59] P. Domingos and G. Hulten, “Mining high-speed data streams,” in *Proceedings of the sixth ACM SIGKDD international conference on Knowledge discovery and data mining*, 2000, pp. 71–80.
- [60] G. Hulten, L. Spencer, and P. Domingos, “Mining time-changing data streams,” in *Proceedings of the seventh ACM SIGKDD international conference on Knowledge discovery and data mining*, 2001, pp. 97–106.

## BIBLIOGRAPHY

---

- [61] H. Yang and S. Fong, “Incrementally optimized decision tree for noisy big data,” in *Proceedings of the 1st International Workshop on Big Data, Streams and Heterogeneous Source Mining: Algorithms, Systems, Programming Models and Applications*, 2012, pp. 36–44.
- [62] ——, “Countering the concept-drift problems in big data by an incrementally optimized stream mining model,” *Journal of Systems and Software*, vol. 102, pp. 158–166, 2015.
- [63] L. Rutkowski, L. Pietruczuk, P. Duda, and M. Jaworski, “Decision trees for mining data streams based on the mcdiarmid’s bound,” *IEEE Transactions on Knowledge and Data Engineering*, vol. 25, no. 6, pp. 1272–1279, 2012.
- [64] L. Rutkowski, M. Jaworski, L. Pietruczuk, and P. Duda, “A new method for data stream mining based on the misclassification error,” *IEEE transactions on neural networks and learning systems*, vol. 26, no. 5, pp. 1048–1059, 2014.
- [65] I. Frias-Blanco, J. del Campo-Avila, G. Ramos-Jimenez, A. C. Carvalho, A. Ortiz-Díaz, and R. Morales-Bueno, “Online adaptive decision trees based on concentration inequalities,” *Knowledge-Based Systems*, vol. 104, pp. 179–194, 2016.
- [66] Y. Sasaki *et al.*, “The truth of the f-measure. teach tutor mater, 1 (5), 1–5,” 2007.
- [67] M. Kubat, S. Matwin *et al.*, “Addressing the curse of imbalanced training sets: one-sided selection,” in *Icml*, vol. 97, no. 1. Citeseer, 1997, p. 179.
- [68] K. H. Brodersen, C. S. Ong, K. E. Stephan, and J. M. Buhmann, “The balanced accuracy and its posterior distribution,” in *2010 20th international conference on pattern recognition*. IEEE, 2010, pp. 3121–3124.
- [69] M. Baena-García, J. del Campo-Ávila, R. Fidalgo, A. Bifet, R. Gavalda, and R. Morales-Bueno, “Early drift detection method,” in *Fourth international workshop on knowledge discovery from data streams*, vol. 6. Citeseer, 2006, pp. 77–86.

---

## BIBLIOGRAPHY

- [70] A. H. Madkour, A. Elsayed, and H. Abdel-Kader, “Historical isolated forest for detecting and adaptation concept drifts in nonstationary data streaming,” *IJCI. International Journal of Computers and Information*, vol. 10, no. 2, pp. 16–27, 2023.
- [71] C. H. Tan, V. C. Lee, and M. Salehi, “Information resources estimation for accurate distribution-based concept drift detection,” *Information Processing & Management*, vol. 59, no. 3, p. 102911, 2022.
- [72] J. N. Adams, S. J. van Zelst, T. Rose, and W. M. van der Aalst, “Explainable concept drift in process mining,” *Information Systems*, vol. 114, p. 102177, 2023.
- [73] E. S. Page, “Continuous inspection schemes,” *Biometrika*, vol. 41, no. 1/2, pp. 100–115, 1954.
- [74] K. Jackowski, B. Krawczyk, and M. Woźniak, “Improved adaptive splitting and selection: the hybrid training method of a classifier based on a feature space partitioning,” *International journal of neural systems*, vol. 24, no. 03, p. 1430007, 2014.
- [75] T. Yin, C. Liu, F. Ding, Z. Feng, B. Yuan, and N. Zhang, “Graph-based stock correlation and prediction for high-frequency trading systems,” *Pattern Recognition*, vol. 122, p. 108209, 2022.
- [76] J. Ren, Y. Wang, Y.-m. Cheung, X.-Z. Gao, and X. Guo, “Grouping-based oversampling in kernel space for imbalanced data classification,” *Pattern Recognition*, vol. 133, p. 108992, 2023.
- [77] V. C. Nitesh, “Smote: synthetic minority over-sampling technique,” *J Artif Intell Res*, vol. 16, no. 1, p. 321, 2002.
- [78] H. Han, W.-Y. Wang, and B.-H. Mao, “Borderline-smote: a new over-sampling method in imbalanced data sets learning,” in *International conference on intelligent computing*. Springer, 2005, pp. 878–887.

## BIBLIOGRAPHY

---

- [79] C. Bunkhumpornpat, K. Sinapiromsaran, and C. Lursinsap, “Safe-level-smote: Safe-level-synthetic minority over-sampling technique for handling the class imbalanced problem,” in *Advances in knowledge discovery and data mining: 13th Pacific-Asia conference, PAKDD 2009 Bangkok, Thailand, April 27-30, 2009 proceedings 13*. Springer, 2009, pp. 475–482.
- [80] T. Maciejewski and J. Stefanowski, “Local neighbourhood extension of smote for mining imbalanced data,” in *2011 IEEE symposium on computational intelligence and data mining (CIDM)*. IEEE, 2011, pp. 104–111.
- [81] Y. Gao, S. Chandra, Y. Li, L. Khan, and T. Bhavani, “Saccos: A semi-supervised framework for emerging class detection and concept drift adaptation over data streams,” *IEEE Transactions on Knowledge and Data Engineering*, vol. 34, no. 3, pp. 1416–1426, 2020.
- [82] M. Masud, J. Gao, L. Khan, J. Han, and B. M. Thuraisingham, “Classification and novel class detection in concept-drifting data streams under time constraints,” *IEEE Transactions on knowledge and data engineering*, vol. 23, no. 6, pp. 859–874, 2010.
- [83] A. Haque, L. Khan, and M. Baron, “Sand: Semi-supervised adaptive novel class detection and classification over data stream,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 30, no. 1, 2016.
- [84] X. Mu, F. Zhu, J. Du, E.-P. Lim, and Z.-H. Zhou, “Streaming classification with emerging new class by class matrix sketching,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 31, no. 1, 2017.
- [85] X. Mu, K. M. Ting, and Z.-H. Zhou, “Classification under streaming emerging new classes: A solution using completely-random trees,” *IEEE Transactions on Knowledge and Data Engineering*, vol. 29, no. 8, pp. 1605–1618, 2017.
- [86] Y.-N. Zhu and Y.-F. Li, “Semi-supervised streaming learning with emerging new labels,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 34, no. 04, 2020, pp. 7015–7022.

---

## BIBLIOGRAPHY

---

- [87] X.-Q. Cai, P. Zhao, K.-M. Ting, X. Mu, and Y. Jiang, “Nearest neighbor ensembles: An effective method for difficult problems in streaming classification with emerging new classes,” in *2019 IEEE international conference on data mining (ICDM)*. IEEE, 2019, pp. 970–975.
- [88] J. Zhang, T. Wang, W. W. Ng, and W. Pedrycz, “Knnens: A k-nearest neighbor ensemble-based method for incremental learning under data stream with emerging new classes,” *IEEE transactions on neural networks and learning systems*, vol. 34, no. 11, pp. 9520–9527, 2022.
- [89] M. Long, J. Wang, G. Ding, J. Sun, and P. S. Yu, “Transfer feature learning with joint distribution adaptation,” in *Proceedings of the IEEE international conference on computer vision*, 2013, pp. 2200–2207.
- [90] ———, “Transfer joint matching for unsupervised domain adaptation,” in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2014, pp. 1410–1417.
- [91] Q. Sun, R. Chattopadhyay, S. Panchanathan, and J. Ye, “A two-stage weighting framework for multi-source domain adaptation,” *Advances in neural information processing systems*, vol. 24, 2011.
- [92] W. Dai, Q. Yang, G.-R. Xue, and Y. Yu, “Boosting for transfer learning,” in *Proceedings of the 24th international conference on Machine learning*, 2007, pp. 193–200.
- [93] Y. Freund, R. E. Schapire *et al.*, “Experiments with a new boosting algorithm,” in *icml*, vol. 96. Citeseer, 1996, pp. 148–156.
- [94] Y. Yao and G. Doretto, “Boosting for transfer learning with multiple sources,” in *2010 IEEE computer society conference on computer vision and pattern recognition*. IEEE, 2010, pp. 1855–1862.
- [95] B. Sun, J. Feng, and K. Saenko, “Return of frustratingly easy domain adaptation,” in *Proceedings of the AAAI conference on artificial intelligence*, vol. 30, no. 1, 2016.

## BIBLIOGRAPHY

---

- [96] Y. Zhu, F. Zhuang, J. Wang, G. Ke, J. Chen, J. Bian, H. Xiong, and Q. He, “Deep subdomain adaptation network for image classification,” *IEEE transactions on neural networks and learning systems*, vol. 32, no. 4, pp. 1713–1722, 2020.
- [97] M. Long, Y. Cao, Z. Cao, J. Wang, and M. I. Jordan, “Transferable representation learning with deep adaptation networks,” *IEEE transactions on pattern analysis and machine intelligence*, vol. 41, no. 12, pp. 3071–3085, 2018.
- [98] J. Wang, Y. Chen, W. Feng, H. Yu, M. Huang, and Q. Yang, “Transfer learning with dynamic distribution adaptation,” *ACM Transactions on Intelligent Systems and Technology (TIST)*, vol. 11, no. 1, pp. 1–25, 2020.
- [99] B. Fernando, A. Habrard, M. Sebban, and T. Tuytelaars, “Unsupervised visual domain adaptation using subspace alignment,” in *Proceedings of the IEEE international conference on computer vision*, 2013, pp. 2960–2967.
- [100] K. Pearson, “Liii. on lines and planes of closest fit to systems of points in space,” *The London, Edinburgh, and Dublin philosophical magazine and journal of science*, vol. 2, no. 11, pp. 559–572, 1901.
- [101] S. J. Pan, I. W. Tsang, J. T. Kwok, and Q. Yang, “Domain adaptation via transfer component analysis,” *IEEE transactions on neural networks*, vol. 22, no. 2, pp. 199–210, 2010.
- [102] M. M. Rahman, C. Fookes, M. Baktashmotlagh, and S. Sridharan, “Correlation-aware adversarial domain adaptation and generalization,” *Pattern Recognition*, vol. 100, p. 107124, 2020.
- [103] E. Zhong, W. Fan, J. Peng, K. Zhang, J. Ren, D. Turaga, and O. Verscheure, “Cross domain distribution adaptation via kernel mapping,” in *Proceedings of the 15th ACM SIGKDD international conference on Knowledge discovery and data mining*, 2009, pp. 1027–1036.

---

## BIBLIOGRAPHY

- [104] Z. Cao, M. Long, J. Wang, and M. I. Jordan, “Partial transfer learning with selective adversarial networks,” in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2018, pp. 2724–2732.
- [105] Z. Cao, K. You, M. Long, J. Wang, and Q. Yang, “Learning to transfer examples for partial domain adaptation,” in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2019, pp. 2985–2994.
- [106] L. Li, Z. Wan, and H. He, “Dual alignment for partial domain adaptation,” *IEEE transactions on cybernetics*, vol. 51, no. 7, pp. 3404–3416, 2020.
- [107] D. M. Powers, “Evaluation: from precision, recall and f-measure to roc, informedness, markedness and correlation,” *arXiv preprint arXiv:2010.16061*, 2020.
- [108] A. Liu, Y. Song, G. Zhang, and J. Lu, “Regional concept drift detection and density synchronized drift adaptation,” in *IJCAI International Joint Conference on Artificial Intelligence*, 2017.
- [109] Q. Da, Y. Yu, and Z.-H. Zhou, “Learning with augmented class by exploiting unlabeled data,” in *Proceedings of the AAAI conference on artificial intelligence*, vol. 28, no. 1, 2014.
- [110] B. Krawczyk, L. L. Minku, J. Gama, J. Stefanowski, and M. Woźniak, “Ensemble learning for data stream analysis: A survey,” *Information Fusion*, vol. 37, pp. 132–156, 2017.
- [111] P. Ksieniewicz and P. Zyblewski, “Stream-learn—open-source python library for difficult data stream batch analysis,” *Neurocomputing*, vol. 478, pp. 11–21, 2022.
- [112] Z. Wang, Z. Dai, B. Póczos, and J. Carbonell, “Characterizing and avoiding negative transfer,” in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2019, pp. 11 293–11 302.
- [113] B. Zadrozny, “Learning and evaluating classifiers under sample selection bias,” in *Proceedings of the twenty-first international conference on Machine learning*, 2004, p. 114.

## BIBLIOGRAPHY

---

- [114] C. Cortes, M. Mohri, M. Riley, and A. Rostamizadeh, “Sample selection bias correction theory,” in *International conference on algorithmic learning theory*. Springer, 2008, pp. 38–53.