


Cache | Docs | HERY

To be able to have an efficient querying system caching is essentials.

Entity data is cached in an [SQLite](#) DB that is saved to the root of the collection's storage directory (e.g.: `amadla.cache`).

Here is an example what it looks like inside the cache DB:

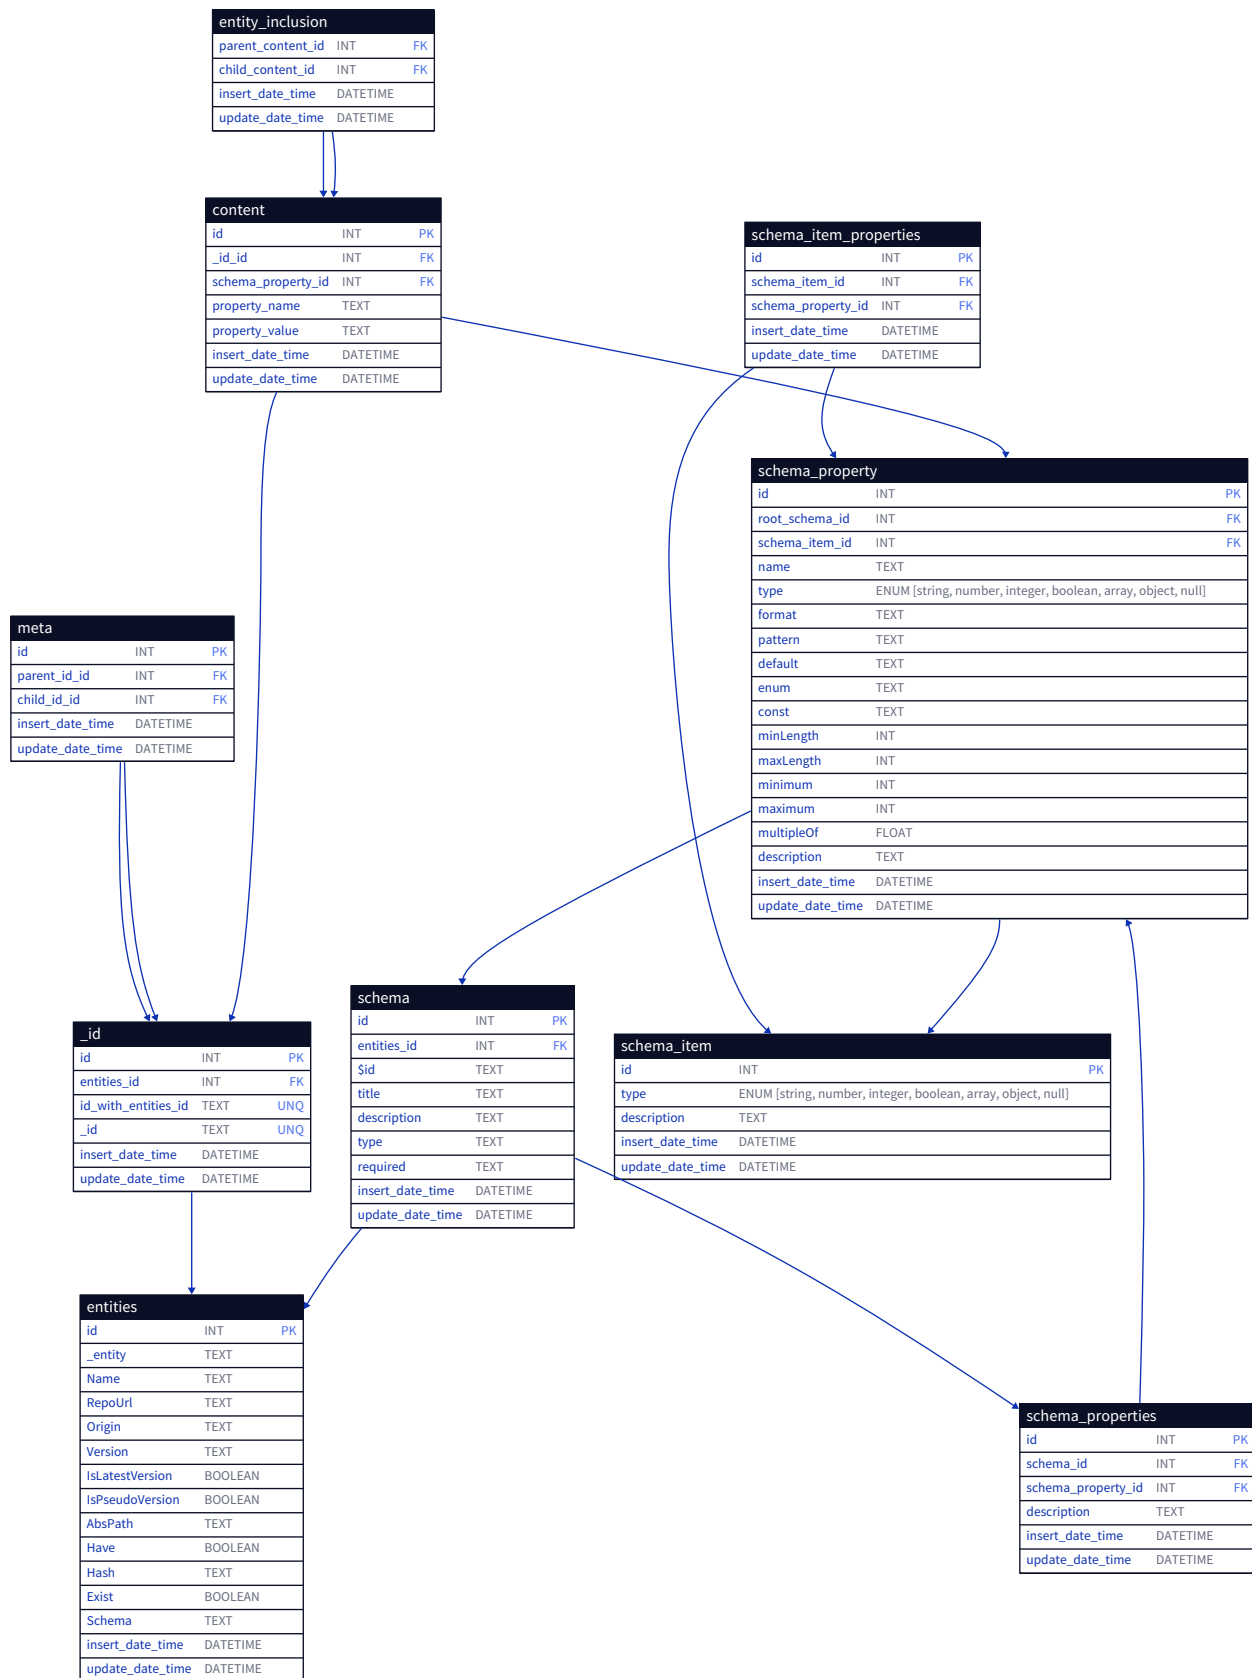

[!NOTE] hery -cli does not support other DBs, and it comes with its own SQLite.

Queries

```
.tables
.schema <table name>
.help
```

```
SELECT * FROM entities;
SELECT * FROM meta;
SELECT * FROM body;
SELECT * FROM body_merged;
```

Internals

Tables

entities

entities table contains the definition of a entity with a specific version.

Column Name	Column Type	Description	Example
_entity	TEXT	Contains the entities URI (not unique)	github.com/AmadlaOrg/EntityApplication/WebServer@v1
Name	TEXT	Just the name of the entity (not unique)	WebServer
RepoUrl	TEXT	The full URL to the repository containing the entity	https://github.com/AmadlaOrg/EntityApplication
Origin	TEXT	Contains the partial path of the entity (from the domain directory to the root	github.com/AmadlaOrg/EntityApplication

Column Name	Column Type	Description	Example
		directory of the entity)	
Version	TEXT	The entity version (not unique in the context of the table but for the entities yes)	
IsLatestVersion	BOOLEAN	If the entity with this version is latest then this true (not unique in the context of the table but for the entities yes)	
IsPseudoVersion	BOOLEAN	Sometimes there a no fix version, if that is the case then this is set to true (not unique in the context of the table but for the entities yes)	
AbsPath	TEXT {constraint: unique}	The full system path to the entity files (unique)	
Have	BOOLEAN	This flag indicates that the content of the entity is	

Column Name	Column Type	Description	Example
		on the local machine	
Hash	TEXT	This the hash of the content (files, etc) for quick comparison and validation	
Exist	BOOLEAN	This flag indicates that the entitie's repository was found	
Schema	TEXT	The entire JSON-Schema content	
insert_date_time	DATETIME	Is the date when this row was added	
update_date_time	DATETIME	Is the latest date of when this row was updated	

[!NOTE] [JSON](#) is used for the storage of the cache because it then does not need to be transformed from [YAML](#) to [JSON](#).

[_id](#)

Is chief when it comes to entity data. `entities` is just for defining the entity and the `_id` table is for the data for that entity. There can be multiple `_id` for an entity. In other words there can be multiple data sets for an entity.

`_id` is a string that must match the pattern `^[a-zA-Z0-9_\-: /]+$` . If omitted, a UUID v4 is auto-generated as the default value. Custom IDs are allowed as long as they match the pattern.

Column Name	Column Type	Description	Example
entities_id	INT {constraint: foreign_key}		
id_with_entities_id	TEXT {constraint: unique}	Only there to avoid caching collisions in the caching (it merges the entities_id with _id)	1-d4b783-f448-483c-8111-380d6082ae1c
_id	TEXT	To uniquely identifying each entity content (not unique in the caching, only unique for an entity type and version)	97d4b783-f448-483c-8111-380d6082ae1c or a custom ID
insert_date_time	DATETIME	Is the date when this row was added	
update_date_time	DATETIME	Is the latest date of when this row was updated	

meta

Links the parent _id of an entity to the entity it is the meta of.

Column Name	Column Type	Description	Example
id	INT {constraint: primary_key}	The id in a table typically serves as the primary key, uniquely identifying each row in the table. It ensures that no two rows have the same value in the id column, enabling efficient indexing and relationships between tables. (unique)	1
entities_id	INT {constraint: foreign_key}		
insert_date_time	DATETIME	Is the date when this row was added	
update_date_time	DATETIME	Is the latest date of when this row was updated	

entity_inclusion

Column Name	Column Type	Description	Example
id	INT {constraint: primary_key}	The id in a table typically serves as the primary key, uniquely identifying each row in the table. It ensures that no two rows have the same value in the id column, enabling efficient indexing and relationships between tables. (unique)	1
insert_date_time	DATETIME	Is the date when this row was added	
update_date_time	DATETIME	Is the latest date of when this row was updated	

body

Column Name	Column Type	Description	Example
id	INT {constraint: primary_key}	The id in a table typically serves as the primary key, uniquely identifying each row in the table. It ensures that no two rows have the same value in the id column, enabling efficient indexing and relationships between tables. (unique)	1
_id_id	INT {constraint: foreign_key}		
schema_property_id	INT {constraint: foreign_key}		
property_name	TEXT		
property_value	TEXT	Simple string or JSON if there is other dimension to the content	
insert_date_time	DATETIME	Is the date when this row was added	
update_date_time	DATETIME	Is the latest date of when this row was updated	

schema

Column Name	Column Type	Description	Example
id	INT {constraint: primary_key}	The id in a table typically serves as the primary key, uniquely identifying each row in the table. It ensures that no two rows have the same value in the id column, enabling efficient indexing and relationships between tables. (unique)	1
insert_date_time	DATETIME	Is the date when this row was added	
update_date_time	DATETIME	Is the latest date of when this row was updated	

schema_properties

Column Name	Column Type	Description	Example
id	INT {constraint: primary_key}	The id in a table typically serves as the primary key, uniquely identifying each row in the table. It ensures that no two rows have the same value in the id column, enabling efficient indexing and relationships between tables. (unique)	1

Column Name	Column Type	Description	Example
insert_date_time	DATETIME	Is the date when this row was added	
update_date_time	DATETIME	Is the latest date of when this row was updated	

schema_property

Column Name	Column Type	Description	Example
id	INT {constraint: primary_key}	The id in a table typically serves as the primary key, uniquely identifying each row in the table. It ensures that no two rows have the same value in the id column, enabling efficient indexing and relationships between tables. (unique)	1
insert_date_time	DATETIME	Is the date when this row was added	
update_date_time	DATETIME	Is the latest date of when this row was updated	

schema_item

Column Name	Column Type	Description	Example
id	INT {constraint: primary_key}	The id in a table typically serves as the primary key, uniquely identifying each row in the table. It ensures that no two rows have the same value in the id column, enabling efficient indexing and relationships between tables. (unique)	1
insert_date_time	DATETIME	Is the date when this row was added	
update_date_time	DATETIME	Is the latest date of when this row was updated	

schema_item_properties

Column Name	Column Type	Description	Example
id	INT {constraint: primary_key}	The id in a table typically serves as the primary key, uniquely identifying each row in the table. It ensures that no two rows have the same value in the id column, enabling efficient indexing and relationships between tables. (unique)	1
insert_date_time	DATETIME	Is the date when this row was added	
update_date_time	DATETIME	Is the latest date of when this row was updated	

schema_defs

Column Name	Column Type	Description	Example
id	INT {constraint: primary_key}	The id in a table typically serves as the primary key, uniquely identifying each row in the table. It ensures that no two rows have the same value in the id column, enabling efficient indexing and relationships between tables. (unique)	1
insert_date_time	DATETIME	Is the date when this row was added	
update_date_time	DATETIME	Is the latest date of when this row was updated	