

1.13.7.2. Switches without long-press detection support (MSL feature flag not set)

This switch (with feature flags states MS & !MSL) SHALL NOT generate LongPress and LongRelease events and therefore it SHALL generate a sequence of two events for one interaction cycle, irrespective of how long the switch is pressed, in the order given and illustrated below, based on whether the MSM, AS and MSR flags are set.

- Any press length:
 1. Generate InitialPress
 2. If the MSR feature flag is set and the AS feature flag is NOT set, generate ShortRelease after the previous event, when the release is detected.
 3. If the MSM feature flag is set, generate MultiPressComplete(1) after the previous event(s).

NOTE

Even after a "long" period being pressed, the release event is never LongRelease. A device without the MSL feature flag SHALL NOT generate the LongPress and LongRelease events.

Presses, feature flags: MS & !MSL

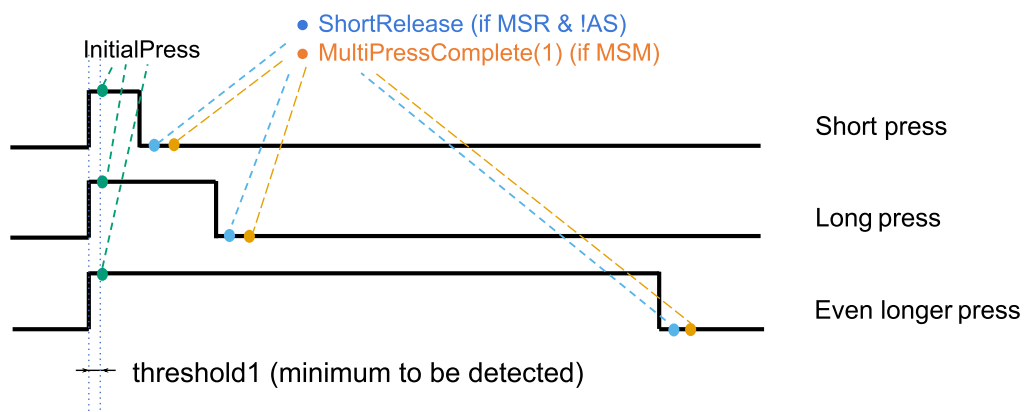


Figure 4. Switch device without MSL feature flag not set (single press case)

1.13.7.3. Switches with most basic MS-only feature flag set, not (MSR | MSL | MSM | AS)

This switch (with feature flags states MS & !MSR & !MSL & !MSM & !AS) SHALL generate a single InitialPress event for one interaction cycle, irrespective of how long the switch is pressed, as illustrated in the figure below.

A device with this set of feature flags SHALL NOT generate any of the ShortRelease, LongPress and LongRelease events.