

4.14.1.1. Protocol Overview

The Passcode-Authenticated Session Establishment (PASE) protocol aims to establish the first session between a Commissioner and a Commissionee using a known passcode provided out-of-band. The pairing is performed using [Section 3.10, “Password-Authenticated Key Exchange \(PAKE\)”](#) and relies on a [Password-Based Key Derivation Function \(PBKDF\)](#) where the passcode is used as password.

This session establishment protocol provides a means to:

1. Communicate PBKDF parameters.
2. Derive PAKE bidirectional secrets.

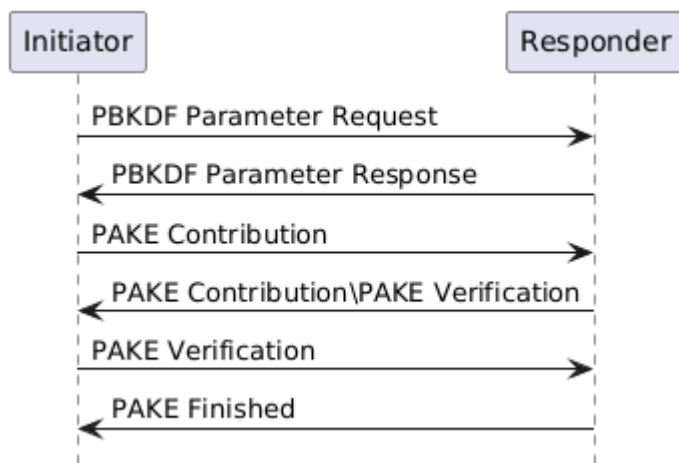


Figure 14. Overview of the PASE Protocol

The Commissioner is the Initiator and the Commissionee is the Responder.

It is assumed that the initiator has somehow obtained the passcode and that the responder has the relevant `Crypto_PAKEValues_Responder` corresponding to the passcode before starting a PASE session establishment protocol.

4.14.1.2. Protocol Details

Message format

All PASE messages SHALL be structured as specified in [Section 4.4, “Message Frame Format”](#).

All PASE messages are sent using an [Unsecured Session](#):

- The [Session ID](#) field SHALL be set to 0.
- The [Session Type](#) bits of the [Security Flags](#) SHALL be set to 0.
- In the PASE messages from the initiator, [S Flag](#) SHALL be set to 1 and [DSIZ](#) SHALL be set to 0.
- In the PASE messages from the responder, [S Flag](#) SHALL be set to 0 and [DSIZ](#) SHALL be set to 1.

For each PASE message, the [application payload](#) is the TLV encoding of the message structure as defined below:

Table 24. PASE Messages