

sioner.

The Commissioner SHALL commission the Commissionee using the steps outlined in the [Concurrent connection commissioning flow](#).

After commissioning is complete, the Commissionee Fabric Synchronizing Administrator’s Aggregator will now be accessible on the Fabric administrated by the Commissioner.

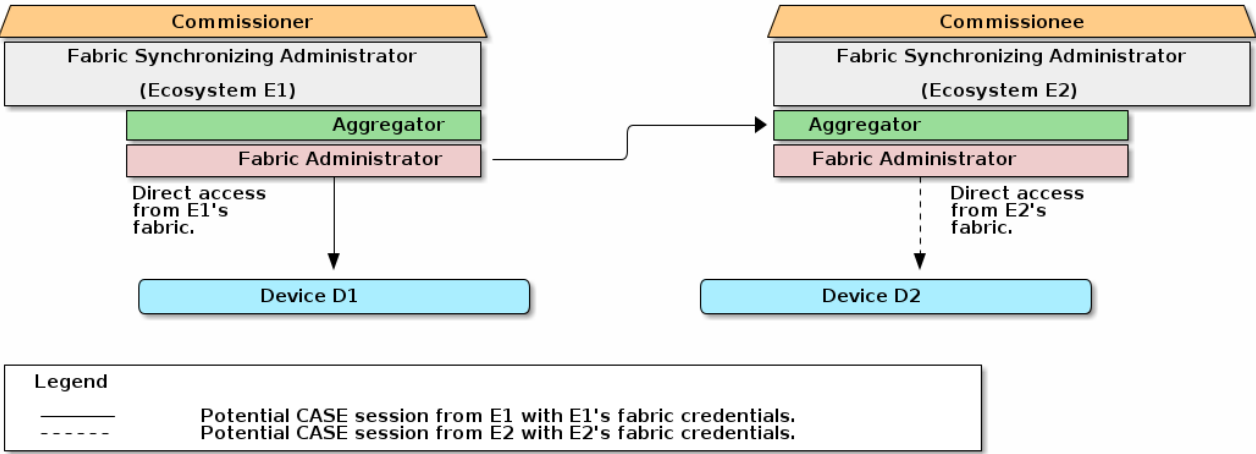


Figure 114. Fabric Synchronization Setup - Forward Commissioning Complete.

Reverse Commissioning

After the Commissioner has finished commissioning the Commissionee, the Commissioner SHOULD initiate Reverse Commissioning using the Commissioner Control Cluster.

NOTE

A Commissionee Fabric Synchronizing Administrator MAY choose to require reverse commissioning before enabling Fabric Synchronization.

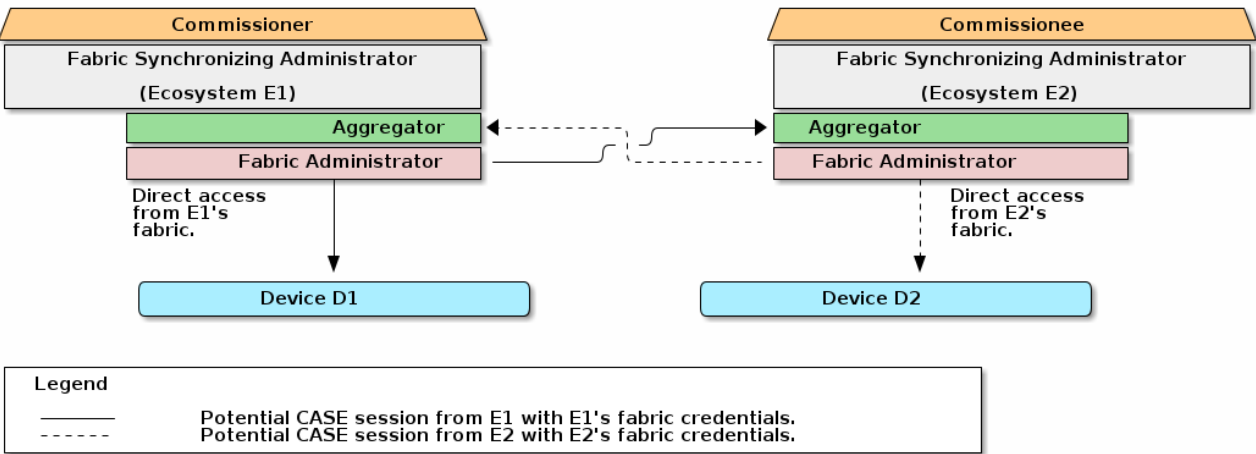


Figure 115. Fabric Synchronization Setup - Reverse Commissioning Complete.

Fabric Synchronization Configuration

After or before commissioning (and optionally Reverse Commissioning,) the device-appropriate interfaces for the Fabric Synchronization feature SHALL ask the user for consent to synchronize