


13. Application Notes

13.1. Example of List Control

This shows an example when you change a Device's input to USB, browse a USB memory which has folders/files as shown below and playback the target file "File b09.wav" in the Folder B

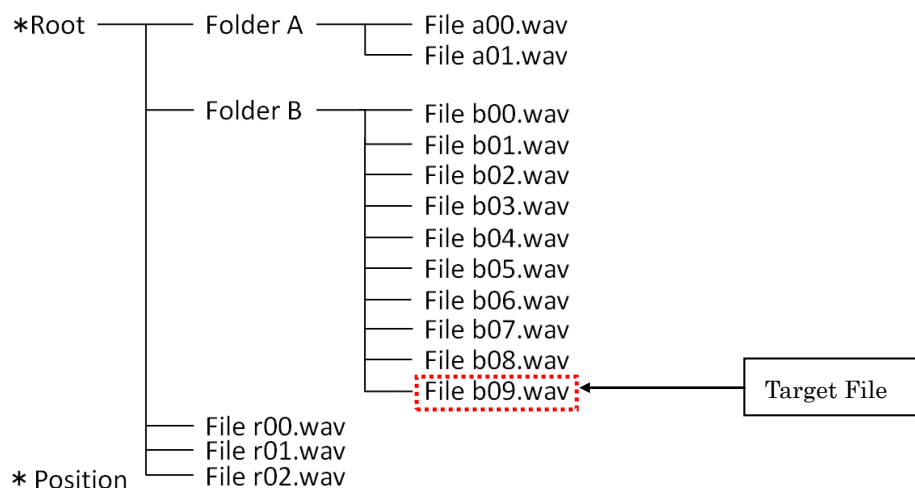

13.1.1. Preparation before start browsing

Send "prepare_input_change" to a Device in order to let it do necessary process before the input change

Request

`http://{host}/YamahaExtendedControl/v1/main/prepareInputChange?input=usb`

Response

```
{
  "response_code":0
}
```

If input change is expressly necessary, send "setInput" to do so.

Request

`http://{host}/YamahaExtendedControl/v1/main/setInput?input=usb&mode=autoplay_disabled`

Response

```
{
  "response_code":0
}
```

13.1.2. Retrieving list information (In case max line number is less than or equal to 8)

Use "getListInfo" command to get list information

Here shows how to get it at the root layer

Request

`http://{host}/YamahaExtendedControl/v1/netusb/getListInfo?input=usb&index=0&size=8&lang=en`