

Quantum circuit design via dynamic Pauli constraints

James R. Wootton, Merlin Incerti-Medici, Daniel Bultrini, and Pierre Fromholz

Moth, Arlesheim, Switzerland

(Dated: May 22, 2026)

We introduce a novel software-oriented model of quantum computation motivated by the practical constraints of near-term quantum hardware. In this model, gates are specified by constraints expressed in terms of Pauli observables, with each disjoint layer of gates accompanied by a pairwise or k -local quantum state tomography of the device. We prove that the model is equivalent to the coupling-graph-restricted circuit model and hence universal for BQP, with a polynomial overhead: simulating a depth- D circuit on N qubits requires at most $O(D^2 N \log N)$ complexity. The model formalizes an idiom shared by existing work that ranges from quantum imaginary time evolution for the study of quantum systems to the use of quantum computers for procedural generation in games. It therefore provides a natural interface for designing quantum software entirely in terms of physically observable quantities, relevant for the NISQ era and into fault-tolerance.

I. INTRODUCTION

Quantum hardware has now been available from cloud services for a decade [1], allowing anyone to submit a quantum circuit to a wide range of QPUs. Nevertheless, these will remain limited to near-term *NISQ* hardware for the next few years [2–4], meaning that noisy gates and limited gate connectivity remain important constraints for the design of quantum software.

One response is to base algorithms on what NISQ devices do *naturally*: quantum dynamics. Qubits are quantum systems that evolve and interact; if a task can be framed as a dynamical process on qubits, it can already be run on real hardware with the reasonable expectation that noise will not destroy the results [5, 6]. This is especially true when we work with the natural observables of the device: Pauli expectation values for single qubits or directly coupled groups of qubits on the QPU.

This principle underlies multiple independent lines of work, with two serving as the primary inspiration. One is the non-variational algorithm for quantum imaginary time evolution (QITE) [7], in which ground and excited states of a Hamiltonian are found by repeatedly measuring Pauli expectation values and applying correction unitaries derived from them to drive toward a target state. The other is **QuantumGraph** [8, 9], a framework that builds quantum algorithms around pairwise tomography of a multi-qubit register and the manipulation of Pauli expectation values. In this approach, the user never specifies or receives state vectors. Instead, they work entirely with quantities that can actually be estimated from hardware: $\langle X \rangle$, $\langle Y \rangle$, $\langle Z \rangle$ per qubit, and their pairwise correlators. Gates are defined by where these values should go rather than by what matrix should be applied.

Additionally there is the family of feedback-based quantum algorithms, beginning with FALQON [10] and extended to ground-state preparation [11]: each successive layer’s gate parameter is set deterministically from a Pauli-observable measurement on the current state, with no classical optimization loop. Finally there is the shadow-enhanced greedy quantum eigensolver (SEGQE) [12], in which classical shadows of the

current state are used in classical post-processing to estimate the energy reduction induced by each candidate gate from a discrete pool, with the gate of largest estimated reduction greedily appended at each step.

All four of these frameworks share the same underlying idiom: observe Pauli expectation values, compare with the target, deduce and apply to the state the gates that get them there. Here we introduce a model of quantum computation that formalizes this idiom, establishes its computational standing, and argues for its particular suitability as an interface for creative quantum software. We refer to this as the *Motte model*, illustrated in Fig 1.

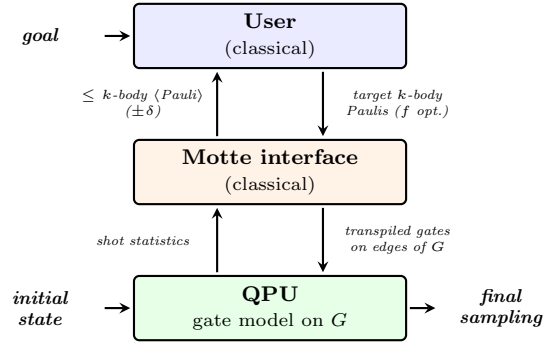


FIG. 1. Generic structure of the Motte model. The user works in the Pauli-expectation vocabulary; the classical interface deduces the gate; the QPU executes it. Repeated for D circuit-depth layers before a final Z -basis measurement.

The motivation for this model is the idea that it could provide a more intuitive framework for the design of certain quantum algorithms. It is therefore not a model in the sense of a novel approach toward designing quantum hardware, but rather for the design of quantum software. Applications of this model vary as the motivational examples show, from studies of quantum systems via QITE [7], to creative applications such as procedural content generation for computer games [8, 9].

This motivation is founded on the idea that local Pauli expectation values are a more manageable set of variables than a multi-qubit statevector [13], and driving toward

target values is a more intuitive heuristic for designing software than the application of rotations. Game designers do not think in $SU(4)$ when managing the stats of NPCs in a game. Musicians might ask producers to “make this louder and more distorted” rather than specifying a quantum channel. In such cases, a more imperative form of algorithm design can be useful, leaving the system to translate these commands into quantum operations. The Motte model formalizes exactly this interface.

This paper is organized as follows. The model is defined in Sec. II, presenting it as a novel interface for quantum software. We detail the core iterative process behind the interface in which each step begins with a local Pauli tomography of the circuit so far, with the results provided to the user. The user then specifies new target values for selected Pauli expectation values, which implicitly define the next layer of operations applied to the circuit. In Sec. III we then address the computational power of the model. We show that it is sufficiently expressive to emulate the circuit model with only polynomial overhead. This demonstrates that the Motte model is fully capable of any quantum computation. In Sec. IV we expand on how QITE and `QuantumGraph` are used in practice. Unlike the constructions used to establish universality, which demonstrate computational power through an atypical use of the model, these examples illustrate the intended use of the interface.

II. THE MOTTE MODEL

A. Definition of the model

The Motte model is defined on a QPU of N qubits with a simply connected coupling graph $G = (V, E)$, $|V| = N$. At the beginning of each computation, the N qubits are initialized to the state $|0\rangle^{\otimes N}$. The QPU is assumed to be noiseless. The device is accessed through the following interface.

1. **Tomography:** A k -body tomography of all qubits can be performed at any time, with the resulting $\leq k$ -body Pauli expectation values reported to the user (or more often, a classical process defined by the user). This is done up to a user-specified statistical noise (sampling error) δ .
2. **Iterative circuit construction:** Gates are specified by providing a set of at most k -body target Pauli expectation values. The iteration U applied to the circuit maps the eigenstates of the stated tomography to those of the density matrix that corresponds to the targets. The iteration is the principal matrix power U^f instead when a fractional power $f \in [0, 1]$ is provided. Two-qubit gates are restricted to adjacent pairs $(j, k) \in E$.
3. **Measurement:** Projective measurement of all qubits in the Z basis. Mid-circuit measurement

is not supported.

B. Realization of the model

There is no natural physical system that implements the above model. Nevertheless, it is worth noting that two approaches do come close to a physical implementation. One is QND-driven imaginary-time evolution, a theoretical proposal which closes a measure-decide-apply loop using weak collective measurements [14]. The other is quantum feedback control [15], experimentally realized in cavity QED [16], which more generally conditions a Hamiltonian drive on a continuous measurement record.

We therefore consider that there is always a standard gate model quantum computer with the same number of qubits and coupling map under the hood, with the Motte model simply providing the interface. Within this context, we can then detail the specific implementations of the Motte model paradigm, as well as their complexity.

1. Tomography

The number of k -body Pauli expectation values on N qubits is $\binom{N}{k}(4^k - 1)$. If each were given a separate measurement setting, an upper bound of $O(N^k)$ settings would be required, however the complexity will typically be much lower. On a graph where each qubit has bounded connectivity, the number of k -node connected subgraphs is $O(N)$, each requiring $O(4^k) = O(1)$ settings for finite k , giving $O(N)$ total settings. For $k = 2$ the bound tightens further: a fully connected graph requires only $O(\log N)$ settings [17] when performing simultaneous measurement of commuting Pauli pairs, while a bipartite graph requires $O(1)$ settings since all edges can be measured in a single round [17]. In each case the accuracy δ requires $O(\delta^{-2})$ shots per setting.

2. Gates via eigenstate transformation

The hardware-native gates (most often single- and two-qubit gates only) applied at each step are determined jointly by the user-supplied target expectation values and the results of the most recent tomography. From k -body expectation values one can construct all $\leq k$ -qubit reduced density matrices (RDMs). Given tomography and target RDMs with distinct eigenvalues, a k -qubit unitary that maps the j th eigenstate of the former to the j th eigenstate of the latter is unique and well-defined up to the choice of phases for each vector of the initial eigenbasis.

For two-qubit gates performed in this way, it is necessary to specify the procedure when degeneracies exist in the eigenvalues of the target state. The unitary described above would then map initial degenerate subspaces to target degenerate subspaces. Each eigenstate

of the tomography-inferred RDM is then projected onto each degenerate subspace and the set is reorthogonalized. The order of the lists of initial and target states is then unique and defines the relevant unitary.

When constructing gates this way, the user-supplied expectation values can be regarded as a constraint on the existing state rather than a uniquely specified target state. For example, for a target of $\langle Z \otimes Z \rangle = +1$, the two eigenstates with highest eigenvalue would be rotated to the closest possible states that exist within this subspace. The new state would then be as aligned to the $\langle Z \otimes Z \rangle = +1$ target as possible.

3. Gates via density matrix transformation

The above-mentioned phase ambiguity can be resolved by working one level higher in the tomographic hierarchy, with m -qubit gates determined with a tomography on $k = m + 1$ qubits. This form of gate is primarily motivated by the arguments to be made in the next section, and so a full specification of this form of gate can be found in Sec. IIIB 2.

4. Gates via QITE

A third realization of the gate-specification procedure arises from QITE [7]. Consider a geometric ℓ -local Hamiltonian $H = \sum_m h_m$, where each of the M terms h_m acts on at most ℓ neighbouring qubits of the coupling graph G . Ground and thermal states of H are approached through imaginary-time evolution $e^{-\beta H}|\Psi\rangle/\|e^{-\beta H}|\Psi\rangle\|$, which is approximated via a first-order Trotter decomposition into $n = \beta/\Delta\tau$ rounds, each consisting of one application of each non-unitary factor $e^{-\Delta\tau h_m}$ (a step). The QITE algorithm replaces each such factor with a unitary derived from Pauli tomography of the current state [7], instantiating precisely the measure-decide-apply idiom of the Motte model: the user supplies a local Hamiltonian term h_m and the number of steps n acting as the inverse of the fraction f of Sec. IIA, and the interface determines and applies the gate that advances the state one imaginary-time step.

The gate applied at each step is a unitary $e^{-i\Delta\tau A_m}$ supported on a *domain* of $k \geq \ell$ qubits surrounding the support of h_m , where

$$A_m = \sum_I a_m^{(I)} \sigma_I$$

is a Hermitian operator expanded in the Pauli basis $\{\sigma_I\}$ restricted to those k qubits. The existence of A_m is guaranteed by Uhlmann's theorem [18] if $k = \mathcal{O}(C^d)$ with C the finite correlation length of the target state on a d -dimensional lattice [19].

The coefficients $a_m^{(I)}$ are determined classically by solving a dependent linear system involving only the Pauli ex-

pectation values on the k -qubit domain around the support of h_m : the k -(body) tomography. Then, the circuit for $e^{-i\Delta\tau A_m}$ only involves the k qubits in the domain.

Unlike the other two interfaces, the target of QITE is only implicitly set by the user through h_m or H , but, like the other two, a single step reconstruction only involves a succession of k -qubit unitaries completely deduced from a preceding k -tomography.

When the available k is smaller than ℓ or the correlation length due to hardware constraints, the linear system is solved over a truncated Pauli basis and the resulting gate is no longer an exact imaginary-time step. This corresponds to the *inexact* QITE regime of Ref. [7]: $k = 1$ yields a mean-field-like approximation, and increasing k gives successively better approximations. This truncation is compatible with the Motte model: a computation with fixed $k < k_{\text{exact}}$ remains internally consistent and continues to drive the state toward lower energy, though no longer along the exact imaginary-time trajectory.

C. Differences with variational algorithms

As an iterative and adaptive approach to evolve toward a target, the Motte model has surface similarities to variational quantum algorithms (VQAs) such as the variational quantum eigensolver [20] and the Quantum Approximate Optimization Algorithm (QAOA) [21]. All rely on a hybrid quantum-classical procedure to minimize a global cost function.

In general, VQAs utilize a parameterized circuit ansatz of depth D which is run multiple times to evaluate the cost function and potentially also parameter gradients. A classical optimizer is then used to iteratively update gate parameters to minimize the cost function. In contrast, though the Motte model could similarly be considered as 'optimizing' unitaries, they are constructed analytically rather than variationally through the mapping of the tomography to the Pauli constraints.

Furthermore, in VQAs the optimization over the often high-dimensional and global parameter space is hindered by issues such as complex optimization landscapes and barren plateaus. These issues are also often worse in the presence of noise [22] and under the limitation of finite sampling, which then causes further issues for the classical optimizer. The Motte model instead trades the advantages and disadvantages of a classical optimizer and parameter-dependent complexity in favour of a complexity that increases with the number of iterations.

The question of whether VQAs could show quantum advantage is also still open [23], even though the ansatz behind QAOA is universal when the evolution times of the Hamiltonians are used as explicitly programmed instructions rather than the heuristic optimization of parameters [24]. As we will show, the Motte model also admits this programmed-instruction universality, with QITE giving evidence in favour of the harder claim of quantum advantage when using the Motte model as in-

tended.

III. EQUIVALENCE TO THE CIRCUIT MODEL

The Motte model is useful as a model of quantum computation only if it has the computational power to achieve quantum advantage. To demonstrate that this is the case, we will now show that the Motte model on any connected coupling graph G is computationally equivalent to the standard quantum circuit model on G [25], with polynomial overhead. This is done by showing that the circuit model can efficiently emulate the Motte model and vice-versa. Since SWAP routing allows any connected graph to emulate any other with polynomial overhead [26], it follows that the Motte model is trivially universal for BQP.

A. Emulation of the Motte model by the circuit model

The Motte model is imagined as an interface through which quantum computation can be performed, and a novel framework for constructing quantum software, rather than a new form of quantum hardware. As such, we consider that any Motte model device is an underlying circuit model quantum computer. The circuit model can therefore emulate the Motte model by construction.

The assumption that a model of quantum computing is in fact the circuit model under the hood is not unique to the Motte model. It follows naturally from the fact that noiseless gates are assumed for BQP, as well as the fact that all known practically realizable fault-tolerant methods use the circuit model with quantum error correction. This is most evident for the topological model, where the non-abelian anyons emerge directly from the error correction substrate of a quantum circuit [27]. For measurement-based quantum computation, fault-tolerance can be realized via emulation of the circuit model via a surface code based approach [28]. For the adiabatic model, the requirement to maintain a gap that can become arbitrarily small is not compatible with noisy systems [29], but emulation via a fault-tolerant circuit would be straightforward [30]. In all cases, fault-tolerance comes from emulation by or emulation of the circuit model.

B. Emulation of the circuit model by the Motte model

We now determine if and when the Motte model interface is compatible with universal quantum computation, and the complexity overhead required. We adopt a strategy of ‘proof by hack’. This is a proof by construction in which we suppose that we were given a Motte model device but need to run a standard quantum circuit. How

can we most straightforwardly hack the Motte model to emulate the circuit model?

Any circuit model computation can be represented in terms of a universal gate set of single- and two-qubit gates on a connected coupling graph [31]. We can therefore restrict to these. Given a circuit of such gates, the question is then how to implement them through the Motte model interface.

Within the majority of this section, the process considered concerns three parties: the user, the underlying circuit model quantum computer, and the classical computer that interfaces between the quantum computer and the user. The latter two together constitute the Motte computer. Adding gates to the circuit consists of the following steps.

1. The quantum computer runs a tomography of the circuit so far and supplies the results to the user.
2. The user chooses a method with which the interface computer will deduce the required gates (typically the same for each step).
3. Using their own classical computer, the user reconstructs the matrix representation of the k -qubit RDMs for all qubits that will be targeted by their desired gate U .
4. The user’s classical computer then applies the matrix representation of U to the RDM and deduces the resulting tomography. This tomography is the new target supplied to the interface computer. Since this requires only classical computation on single- or two-qubit matrices, the computational cost is $O(1)$ per matrix.
5. The interface computer reconstructs the matrix representation of both the initial and target RDMs and diagonalizes them. The eigenvalues are used to identify pairs of corresponding initial and target eigenstates.
6. The interface computer deduces the unitary $\tilde{U}$ which provides an equivalent transformation of eigenstates to U . It then transpiles the matrix representation of $\tilde{U}$ to quantum gates and adds it to the circuit.

The details of equivalence with the circuit model depend on the method chosen by the user for the interface computer to reconstruct U , as well as the value of k .

We now first consider the case of gates via eigenstate transformation alone, and show that there is no straightforward path to emulation. We then show that gates via density matrix transformation alone are sufficient for a tomography with $k = 3$. In addition, we show that combining gates via different methods at $k = 2$ is sufficient to emulate the circuit model. We then consider a small extension of standard QITE to best fit within the Motte model paradigm, provide an explicit example of its implementation and discuss its universality.

1. Gates via eigenstate transformation

Let us first consider the use of gates via eigenstate transformation with $k = 2$ only, which represents the current implementation of the `QuantumGraph` package.

As described above, single- and two-qubit gates can be added by taking the given single- or two-qubit tomography, deducing the resulting RDM and then transforming it via the matrix representation of the desired gate.

By diagonalizing both the initial and target RDMs, the interface computer will determine the initial eigenstates $|\alpha_j\rangle$ and target eigenstates $|\bar{\alpha}_j\rangle$. However, note that $|\bar{\alpha}_j\rangle = e^{i\theta_j}U|\alpha_j\rangle$: the deduced target eigenstates do not simply reflect the action of U , but will also have an arbitrary phase $e^{i\theta_j}$ due to the phase ambiguity when recovering from a density matrix. Equivalently we can say that

$$|\bar{\alpha}_j\rangle = UV|\alpha_j\rangle \quad \forall j,$$

where $V = \sum_j e^{i\theta_j}|\alpha_j\rangle\langle\alpha_j|$ is a unitary diagonal in the initial eigenbasis.

Using the method of eigenstate transformation, the interface computer constructs the proposed unitary $\tilde{U}$ with

$$\tilde{U} = \sum_j e^{i\theta_j}|\bar{\alpha}_j\rangle\langle\alpha_j| = UV.$$

However, this is not U , but U up to the effect of the arbitrary phases on each eigenstate. Since this will not be the desired operation in general, these ambiguous phases lead to an error which prevents a straightforward emulation of the circuit model. Whether more complex methods to achieve an emulation are possible in this case, or for gates via eigenstate transformation with higher values of k , is left for future work.

2. Gates via density matrix transformation

Gates via density matrix transformation are specifically designed to resolve the phase ambiguity in the case of a user who wishes to hack the Motte model into applying a predefined unitary. As seen above, the action of an m -qubit unitary on 2^m orthogonal rays (rather than vectors) is not enough to reconstruct U . However, 2^m non-orthogonal rays are sufficient as long as they span the m -qubit space and the overlap graph defined by pairs of rays with non-zero overlap is connected.

Specifically, for any set of states $\{|\alpha_j\rangle\}$ of the tomographic RDM there are corresponding states $|\bar{\alpha}_j\rangle = e^{i\theta_j}U|\alpha_j\rangle$ after U and an arbitrary global phase are applied. Let $|\alpha_0\rangle$ be a state with non-zero overlap with all $|\alpha_j\rangle$. Then,

$$\frac{\langle\bar{\alpha}_0|\bar{\alpha}_j\rangle}{\langle\alpha_0|\alpha_j\rangle} = \frac{\langle\alpha_0|U^\dagger e^{-i\theta_0} e^{i\theta_j} U|\alpha_j\rangle}{\langle\alpha_0|\alpha_j\rangle} = e^{i(\theta_j - \theta_0)}. \quad (1)$$

This then determines the relative phases $e^{i(\theta_j - \theta_0)}$ between each $U|\alpha_j\rangle$ and the reference $|\alpha_0\rangle$. U can therefore be completely determined up to the irrelevant global phase $e^{i\theta_0}$.

Since eigenstates of RDMs are always orthogonal, obtaining a set of states with a connected overlap graph for the required m -qubit subspace necessitates moving beyond the m -qubit RDM. For the $(m+1)$ -qubit RDM eigenstates will take one of two possible forms with respect to the bipartition between the m -qubit space and the extra qubit: either they will be product states, or they will be entangled. Product eigenstates will take the form $|\psi_j\rangle = |\alpha_j\rangle \otimes |\beta_j\rangle$, where $|\alpha_j\rangle$ acts on the m -qubit space and $|\beta_j\rangle$ on the extra qubit. Entangled eigenstates will yield a pair of Schmidt basis states $|\alpha_{j,0}\rangle$ and $|\alpha_{j,1}\rangle$ on the m -qubit space.

The 2^{m+1} eigenstates of the $(m+1)$ -qubit RDM therefore yield a set of at least 2^{m+1} states on the m -qubit space, which will be uniquely defined and ordered as long as the eigenvalues and Schmidt coefficients are distinct. As eigenstates of a density matrix they will necessarily span the entire m -qubit space, and since there are more than 2^m they will necessarily not all be orthogonal. Since the only enforced orthogonalities are between the Schmidt basis states of the same eigenstate, all other pairwise overlaps are generically non-zero, ensuring the overlap graph is connected for generic density matrices.

The requirement for distinct eigenvalues and Schmidt coefficients, and the generic overlaps required to ensure a sufficiently large connected component, are not restrictive. This is because these eigenstates and eigenvalues must be present only in the stated tomography and supplied target rather than the actual state. Statistical noise will mean that the eigenstates of the tomography-inferred RDM are almost certainly not the exact eigenstates, while any degeneracy will almost certainly be lifted. We can therefore assume that the eigenstates and Schmidt coefficients will always be distinct and the overlap graph is well-connected for the tomography-inferred RDMs without loss of generality. This will provide the range of states required. In the unlikely case that this does not occur, the tomography can simply be repeated.

To summarize, the process of reconstructing an m -qubit gate via an $(m+1)$ -qubit tomography is for the interface computer to first construct and diagonalize the initial and target $(m+1)$ -qubit RDMs. It then determines either the product basis state or Schmidt basis states of each eigenstate on the m -qubit space on which the gate is applied. The corresponding initial and target pairs of states are identified via the distinct eigenvalues and Schmidt coefficients. The target states differ from the initial states by the action of U , but also by an arbitrary phase due to their reconstruction from an RDM. These phases can be determined up to a trivial global phase by Eq. 1, using one state as a reference. The phases can then be removed from the final states held by the interface computer, allowing it to reconstruct the exact U up to an overall global phase.

For gates constructed in this way, emulation becomes straightforward for $k = 3$. This is because two-qubit gates ($m = 2$) can be exactly reproduced with $k = m + 1 = 3$, allowing the user to simply write in the circuit directly.

3. Combined gates at $k = 2$

Universality can be achieved via arbitrary single-qubit gates and a single entangling two-qubit gate [32]. This can be achieved via the Motte model for $k = 2$ if gates via eigenstate transformation and gates via density matrix transformation are combined. The latter allows perfect implementations of any single-qubit gates by using a second ancilla qubit (see Sec. IIIB2), providing the required single-qubit gates. This second qubit is passive: it is used only to enlarge the tomographic RDM, and the constructed two-qubit unitary acts as $U \otimes I$ across the partition, so no uncomputation is required. Two-qubit gates then use the eigenstate transformation method at the cost of the phase ambiguity in an eigenbasis influenced by statistical noise. Nevertheless, if we allow for a Motte model device to report to the user the unitaries that it applies, these imperfections become known biases rather than random noise and the unitaries will supply the required entangling resource. Some relative phases can be optionally corrected using the single-qubit gate perfect implementation.

This becomes more precise if we allow for transformations to be set as a template and reused. For example, if the initial state is $\langle Z \otimes I \rangle = \langle I \otimes X \rangle (= \langle Z \otimes X \rangle) = 1$ and the target is $\langle Z \otimes Z \rangle = \langle X \otimes X \rangle = 1$, the transformation will have the canonical effect of the CNOT with variations due to tomography and phase. Allowing the user to repeat this whenever a similar effect is desired allows for a unique and known entangled gate, for which constructive techniques for universality are known [33]. Like the eigenstate-transformation hack of Sec. III A, this remains a proof-by-construction: the user is hijacking the Motte interface to obtain a known unitary rather than using the model as intended.

4. State preparation universality for gates via QITE

Since equivalence with the circuit model has already been demonstrated with $k = 2$ and $k = 3$ for the above methods, for gates via QITE we will instead consider a related problem: efficient state preparation [34]. Indeed, this is a problem more related to the intended usage of the Motte model.

By construction, QITE with domain k can prepare any state that arises as a ground state of an ℓ -local Hamiltonian whose imaginary-time trajectory from the initial state stays within correlation length k . When $k = 2$, this imposes both that the correlation length and Hamiltonian locality satisfy $C, \ell \leq 2$. For states that have larger

C , inexact QITE is the only option and convergence to the true ground state is not guaranteed. Furthermore, though each round is guaranteed to be polynomial, the number of rounds required to reach convergence may not be efficient. QITE is therefore not a guaranteed and efficient method for arbitrary state preparation as soon as $k < N$ (the standard regime for useful QITE).

However, this statement applies only to QITE as described in Ref. [7], for which the Hamiltonian is fixed. Instead, the Motte model also allows for the target to change from step to step. For the case of QITE, this means applying the method to a constantly adapting Hamiltonian. We call this adapt-H QITE (unrelated and not to be mistaken with adapt-QITE [35]).

Both in QITE and adapt-H QITE, one infinitesimal step of the process moves $|\psi\rangle$ along the direction $-(h_m - \langle h_m \rangle)|\psi\rangle$: it is the projection of $h_m|\psi\rangle$ onto the tangent space at $|\psi\rangle$, and the direction is the one that minimizes h_m by varying correlations up to a distance of k . But even considering only the $k(>1)$ -domain around h_m , Pauli-string h_m is always multiply degenerate as soon as h_m involves more than one qubit. We understand that lack of convergence for standard inexact QITE is due to the likely possibility of getting stuck in one of these degenerate minima induced by degeneracy when only correlations larger than the domain lift the degeneracy. By now varying h_m over all 2-local Hermitian operators on adjacent pairs, the issue does not occur by construction, at the cost of increased complexity: finding other useful h_m to adjust the adapted imaginary time evolution trajectory and avoid or exit the problematic inexact non-converging trajectories. We consider that the user is providing all useful h_m , effectively ignoring the extra complexity cost of finding them in the following. Allowing for all h_m , the set of reachable infinitesimal directions is

$$\text{span} \{ (P - \langle P \rangle) |\psi\rangle \}, \quad (2)$$

where P are the 2-local Pauli operators on edges of G . For a connected graph G and a generic state $|\psi\rangle$, this span is $O(N)$ -dimensional and does not exhaust the entire tangent space at $|\psi\rangle$ in projective Hilbert space. Instead, universality follows from Lie-bracket closure over composed steps. A more detailed and rigorous demonstration is provided in App. A.

5. Worked example: GHZ state preparation

As an example of the Motte model emulating a quantum circuit, consider the preparation of a three qubit GHZ state via a Hadamard and two chained CNOT gates.

Specifically, we consider the target state for which

$$\langle Z \otimes Z \otimes I \rangle = \langle Z \otimes I \otimes Z \rangle = \langle I \otimes Z \otimes Z \rangle = \langle X \otimes X \otimes X \rangle = 1,$$

with all other expectation values zero. This is done from

the initial $|000\rangle$ state, for which

$$\langle P_2 \otimes P_1 \otimes P_0 \rangle = 1,$$

for any $P_j = I$ or Z and with all other expectation values zero.

We will specifically consider gates via density matrix transformation, and so use a $k = m + 1$ qubit tomography to apply an m -qubit gate. Since the tomography is exact only up to an accuracy δ , the user will not be given the ideal values as above, but rather approximations that can be assumed to be unique for each Pauli.

The first gate to recover is the Hadamard on the rightmost qubit. The two-qubit tomography of the resulting state (obtained by analytic computation or performed on a circuit model computer) verifies:

$$\forall P \in \{I, X, Y, Z\}, \quad \begin{cases} \langle P \otimes Z \rangle \leftrightarrow \langle P \otimes X \rangle, \\ \langle P \otimes Y \rangle \rightarrow -\langle P \otimes Y \rangle \end{cases}$$

The user therefore manipulates the tomographic expectation values accordingly and uses the result as an input.

Since the tomographic expectation values are all unique, it is evident to the interface computer that the user applied the transformation above, and therefore a Hadamard gate, and adds this gate to the circuit. Indeed, for the case of Clifford gates, inspection of the expectation values is sufficient to deduce the gate without the need for diagonalization of the RDMs.

The tomography is then rerun, with the results supplied to the user. Again the user receives a set of uniquely valued expectation values, all an approximation up to a δ error on their true values. They apply the transformations corresponding to a CNOT controlled on the rightmost qubit and targeted on the middle qubit, such that

$$\forall P \in \{I, X, Y, Z\}, \quad \langle P \otimes I \otimes X \rangle \leftrightarrow \langle P \otimes X \otimes X \rangle.$$

Again the interface computer uses this to deduce the required transformation and appends the required gate to the circuit. The result is a circuit to construct the Bell pair $(|00\rangle + |11\rangle)/\sqrt{2}$ on the middle and rightmost qubit.

After repeating the tomography, the same process is used to apply a CNOT controlled on the middle qubit and targeted on the leftmost. This is done by the user applying transformations such that

$$\forall P \in \{I, X, Y, Z\}, \quad \langle I \otimes X \otimes P \rangle \leftrightarrow \langle X \otimes X \otimes P \rangle,$$

and the interface computer again deducing and appending the required transformation.

The same process would be applied for the case of a four-qubit GHZ state and higher. The fact that the number of qubits would exceed $k = 3$ would not be an impediment since $k = m + 1$ is sufficient to uniquely determine an m -qubit gate.

C. Polynomial overhead

The overall complexity of emulating a quantum circuit of N qubits and depth D will not simply be $O(ND)$, as

for the bare circuit model. This is due to the need to re-run the tomography as the circuit is constructed, with a system-wide tomography each time the circuit depth is increased. Running $O(D)$ circuits each of depth $O(D)$ then results in an $O(D^2)$ complexity in D . A factor upper bounded by $O(N^k \delta^{-2})$ is also introduced for the number of shots required for the tomography. This results in an overall complexity of $O(D^2 N \times N^k \delta^{-2}) = O(D^2 N^{k+1} \delta^{-2})$. For the minimal case of $k = 2$, this reduces to $O(D^2 \delta^{-2} N \log N)$. Since these are polynomial, BQP membership is preserved.

D. Effects of noise

In considering noise we must distinguish between *tomographic noise* and *state-evolution noise*. The former comes from the fact that expectation values will be inexact for any finite number of statistical samples, and is therefore inherent to the method. It can also incorporate measurement noise, which causes 0 to be misreported as 1 and vice-versa. State-evolution noise covers effects such as gate imperfections and decoherence.

When adding a quantum operation within the Motte model, it is important to consider two factors that we will call *gate correctness* and *intention correctness*. Gate correctness concerns whether the gate applied in the circuit is that which the user requested, given the tomography results they were given and the targets they supplied. Intention correctness concerns whether the gate applied does what the user wants.

An important property of the Motte model is that tomographic noise affects only intention correctness, and not gate correctness: Even if the tomography supplied to the user is misleading due to noise, if the corresponding targets differ by a unitary U , this can be perfectly recovered by the interface computer and applied to the QPU.

Furthermore, tomographic noise can have a helpful effect on gate correctness. Correctly reconstructing the desired transformation means being able to correctly identify corresponding pairs of initial and final eigenvectors from the tomography-inferred RDMs. Degenerate eigenvalues can obscure this information, but noise-perturbed tomography will make such collisions vanishingly rare.

On the other hand, both forms of noise do have a deleterious effect on intention correctness. An extreme example would be that the state is already that desired by the user, but the tomography incorrectly reports a false initial state. The user would then supply the target expectation values and gates would be applied to the QPU accordingly. These then have the unintended effect of moving the state away from the target.

Though this work focuses on matters of complexity and universality, and so neglects state-evolution noise for the most part, it is worth noting that the Motte model can be expected to have a degree of robustness against it. Since the intended use-case is to continually update the user's

representation of the state and drive toward a target, it allows the computation to be continually corrected even when noise steers it away. Though the idealized version of the Motte model therefore requires a fault-tolerant quantum computer to be implemented, use on NISQ hardware is nevertheless appropriate.

E. Summary

Let us consider the standard Motte model to be that for which all three methods of gate addition are available to the user. In this case, the model is universal for BQP at $k = 2$. Since this value of k allows for the most efficient tomography, and since the proof is valid even for finite δ , the required complexity is $O(D^2 N \log N)$.

For the case of only gates via density matrix transformation, $k = 3$ is required. For both the variant in which only gates via eigenstate transformation are allowed and that for which only gates via (non-adapt-H) QITE are allowed, the value of k at which full circuit-model equivalence is achieved is unknown.

IV. APPLICATIONS OF THE MOTTE MODEL

A. Quantum imaginary time evolution

The QITE algorithm of Ref. [7] is itself an application of the Motte model. QITE finds ground and thermal states of a Hamiltonian $H = \sum_m h_m$ by simulating imaginary-time evolution, requiring exponentially less space and time per iteration than classical ITE and avoiding the deep ancilla-heavy circuits needed by phase estimation. Each step drives the state toward the ground state via a small correction unitary derived from current Pauli expectation values. It is used mainly in chemistry and nuclear physics [36–38].

B. Quantum-native procedural generation

QuantumGraph [8] demonstrated the same idiom in a creative context. To procedurally generate geopolitical maps in the style of *Civilization*, one qubit is assigned per nation. The expectation values $\langle X \rangle$, $\langle Y \rangle$, $\langle Z \rangle$ encode policy dimensions (aggression, expansion, defense); the Bloch-sphere constraint $\sum_i \langle \sigma_i \rangle^2 \leq 1$ automatically enforces a policy budget without explicit classical rules. Pairwise correlators encode inter-nation relationships, and the monogamy of entanglement ensures that nations in conflict concentrate decisions on each other. Between turns, quantum gates update the Pauli values; the final map is sampled from the projective measurement distribution. This is precisely the Motte model interface, predating its formal statement. The same approach has since been applied to level generation in the game *Quantum Backrooms* [9].

Both applications have been demonstrated on real quantum hardware at scales exceeding 50 qubits. Examples include the map-generation algorithm of **QuantumGraph** that was executed on the 53-qubit IBM Rochester device in 2020 [8], and the implementation of *Quantum Backrooms* on the `ibm_miami` device in 2026 [9]. These demonstrations establish that the Motte model idiom is not merely a theoretical construct: it has been exercised on state-of-the-art hardware from the early NISQ era to the present day.

V. CONCLUSION

The Motte model is a formally universal, BQP-equivalent model of quantum computation whose defining feature is that target expectation values are specified and state information is handled entirely in terms of Pauli expectation values, quantities that are both physically natural and hardware-accessible. Though dependent on tomography to add gates to the circuit, a key property which we call *gate correctness* is that the unitary applied by the device is determined by the tomographic report in a well-defined way (exactly at $k = 3$, up to a reported phase ambiguity at $k = 2$). The iteration is therefore self-correcting against tomographic-stage noise, statistical sampling plus moderate readout error, though not against state-evolution noise in the underlying gates and dynamics, which lies beyond the present scope. The price is a polynomial overhead relative to bare circuit execution, a consequence of mandatory per-depth tomography.

The model formalizes an idiom that has already produced working algorithms, namely QITE for quantum chemistry and **QuantumGraph** for procedural generation. Together they provide the conceptual framework needed to extend this idiom as hardware scales toward the fault-tolerant era.

Beyond the two motivating applications described here, concrete use-cases for the Motte model remain sparse. This is less a reflection of the model’s limitations than of the hardware era in which its idiom was developed: **QuantumGraph** was demonstrated on a 53-qubit device at a time when such devices were exceptional, but interesting applications of the interface would require a large range of Pauli expectation values to work from. That situation has now changed. QPUs of 50 or even 100 qubits and beyond are routinely available to all via cloud services, and devices of this scale are being operated as a matter of course. The Motte model provides a principled interface for exploring what can be done with this hardware: one whose defining properties, hardware-native Pauli constraints, gate correctness under tomographic noise, and a vocabulary of physically observable quantities, are well matched to the devices now available. The search for applications will now begin in earnest.

ACKNOWLEDGMENTS

The authors would like to thank Spencer Topel and João Ferreira for discussions and for exploring use-cases

of QuantumGraph. JRW would like to thank Junye Huang for discussions. The name of the model honors Motta *et al.* [7], whose QITE algorithm is one of the primary motivations for the model, as well as the name of the company where this line of work continues: *Moth*.

-
- [1] A. W. Cross, L. S. Bishop, J. A. Smolin, and J. M. Gambetta, arXiv:1707.03429 [quant-ph] (2017).
 - [2] J. Preskill, *Quantum* **2**, 79 (2018).
 - [3] IBM Quantum, IBM quantum roadmap: Path to fault-tolerant quantum computing (2025), targets fault-tolerant quantum computing (*Quantum Starling*) by 2029.
 - [4] Quantinuum, Quantinuum unveils accelerated roadmap to achieve universal fault-tolerant quantum computing by 2030 (2024).
 - [5] Y. Kim, A. Eddins, S. Anand, *et al.*, *Nature* **618**, 500 (2023).
 - [6] S. Boixo, V. N. Smelyanskiy, A. Shabani, S. V. Isakov, M. Dykman, V. S. Denchev, H. Neven, *et al.*, *Nature Physics* **14**, 595 (2018).
 - [7] M. Motta, C. Sun, A. T. K. Tan, M. J. O’Rourke, E. Ye, A. J. Minnich, F. G. S. L. Brandão, and G. K.-L. Chan, *Nature Physics* **16**, 205 (2020).
 - [8] J. R. Wootton, in *Proceedings of the IEEE Conference on Games 2020* (2020).
 - [9] P. Fromholz, S. Topel, and J. R. Wootton, Quantum backrooms: Level generation with utility-scale quantum hardware (2025), in preparation.
 - [10] A. B. Magann, K. M. Rudinger, M. D. Grace, and M. Sarovar, *Physical Review Letters* **129**, 250502 (2022), arXiv:2103.08619 [quant-ph].
 - [11] J. B. Larsen, M. D. Grace, A. D. Baczewski, and A. B. Magann, Feedback-based quantum algorithm for ground state preparation of the fermi-hubbard model (2023), arXiv:2303.02917 [quant-ph].
 - [12] J. Erle and B. Koczor, A shadow enhanced greedy quantum eigensolver (2026), arXiv:2602.17615 [quant-ph].
 - [13] Z. C. Seskir, P. Migdał, C. Weidner, A. Anupam, N. Case, N. Davis, C. Decaroli, İ. Ercan, C. Foti, P. Gora, K. Jankiewicz, B. R. La Cour, J. Yago Malo, S. Maniscalco, A. Naeemi, L. Nita, N. Parvin, F. Scafirimuto, J. F. Sherson, E. Surer, J. Wootton, L. Yeh, O. Zabello, and M. Chiofalo, *Optical Engineering* **61**, 10.1117/1.oe.61.8.081809 (2022).
 - [14] M. Kondappan, M. Chaudhary, E. O. Ilo-Okeke, V. Ivannikov, and T. Byrnes, *Physical Review A* **107**, 10.1103/physreva.107.042616 (2023).
 - [15] H. M. Wiseman and G. J. Milburn, *Quantum Measurement and Control* (Cambridge University Press, 2009).
 - [16] C. Sayrin, I. Dotsenko, X. Zhou, B. Peaudecerf, T. Rybarczyk, S. Gleyzes, P. Rouchon, M. Mirrahimi, H. Amini, M. Brune, J.-M. Raimond, and S. Haroche, *Nature* **477**, 73–77 (2011).
 - [17] G. García-Pérez, M. A. C. Rossi, B. Sokolov, E.-M. Borrelli, and S. Maniscalco, *Physical Review Research* **2**, 10.1103/physrevresearch.2.023393 (2020).
 - [18] A. Uhlmann, *Reports on Mathematical Physics* **9**, 273 (1976).
 - [19] M. B. Hastings and T. Koma, *Communications in Mathematical Physics* **265**, 781 (2006).
 - [20] A. Peruzzo, J. McClean, P. Shadbolt, M.-H. Yung, X.-Q. Zhou, P. J. Love, A. Aspuru-Guzik, and J. L. O’Brien, *Nature Communications* **5**, 4213 (2014).
 - [21] E. Farhi, J. Goldstone, and S. Gutmann, arXiv preprint arXiv:1411.4028 (2014), arXiv:1411.4028.
 - [22] M. Larocca, S. Thanasilp, S. Wang, K. Sharma, J. Biamonte, P. J. Coles, L. Cincio, J. R. McClean, Z. Holmes, and M. Cerezo, *Nature Reviews Physics* **7**, 174 (2025).
 - [23] M. Cerezo, M. Larocca, D. García-Martín, N. L. Diaz, P. Braccia, E. Fontana, M. S. Rudolph, P. Bermejo, A. Ijaz, S. Thanasilp, E. R. Anschuetz, and Z. Holmes, *Nature Communications* **16**, 7907 (2025).
 - [24] S. Lloyd, arXiv preprint arXiv:1812.11075 (2018), arXiv:1812.11075.
 - [25] J. Wootton, Circuit model of quantum computation (2024).
 - [26] R. Beals, S. Brierley, O. Gray, A. W. Harrow, S. Kutin, N. Linden, D. Shepherd, and M. Stather, *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences* **469**, 10.1098/rspa.2012.0686 (2013).
 - [27] L. Chen, Y. Ren, R. Fan, and A. Jaffe, *npj Quantum Information* **11**, 10.1038/s41534-025-01063-4 (2025).
 - [28] R. Raussendorf and J. Harrington, *Physical Review Letters* **98**, 10.1103/physrevlett.98.190504 (2007).
 - [29] M. S. Sarandy and D. A. Lidar, *Physical Review Letters* **95**, 10.1103/physrevlett.95.250503 (2005).
 - [30] E. Farhi, J. Goldstone, S. Gutmann, and M. Sipser, Quantum computation by adiabatic evolution (2000), arXiv:quant-ph/0001106 [quant-ph].
 - [31] A. Barenco, C. H. Bennett, R. Cleve, D. P. DiVincenzo, N. Margolus, P. Shor, T. Sleator, J. A. Smolin, and H. Weinfurter, *Physical Review A* **52**, 3457 (1995).
 - [32] J.-L. Brylinski and R. Brylinski, in *Mathematics of Quantum Computation*, edited by R. Brylinski and G. Chen (Chapman & Hall/CRC, 2002) pp. 101–116.
 - [33] M. J. Bremner, C. M. Dawson, J. L. Dodd, A. Gilchrist, A. W. Harrow, D. Mortimer, M. A. Nielsen, and T. J. Osborne, *Phys. Rev. Lett.* **89**, 247902 (2002).
 - [34] N. J. Ward, I. Kassal, and A. Aspuru-Guzik, *The Journal of Chemical Physics* **130**, 10.1063/1.3115177 (2009).
 - [35] N. Gomes, A. Mukherjee, F. Zhang, T. Iadecola, C.-Z. Wang, K.-M. Ho, P. P. Orth, and Y.-X. Yao, *Advanced Quantum Technologies* **4**, 10.1002/qute.202100114 (2021).
 - [36] K. Yeter-Aydeniz, R. C. Pooser, and G. Siopsis, Practical quantum computation of chemical and nuclear energy levels using quantum imaginary time evolution and lanczos algorithms (2019).
 - [37] N. Gomes, F. Zhang, N. F. Berthussen, C.-Z. Wang, K.-M. Ho, P. P. Orth, and Y. Yao, *Journal of Chemical Theory and Computation* **16**, 6256 (2020).

- [38] H. Nishi, T. Kosugi, and Y.-i. Matsushita, npj Quantum Information **7**, 10.1038/s41534-021-00409-y (2021).
 [39] S. Lloyd, Science **273**, 1073 (1996).

Appendix A: Adapt-H QITE's universality

We present here a more rigorous argument for the universality of Adapt-H QITE, introduced in Sec. III B 3.

1. The tangent space

A pure state of N qubits lives on the unit sphere of $\mathcal{H} = (\mathbb{C}^2)^{\otimes N}$, or, modulo the irrelevant global phase, in projective Hilbert space $\mathbb{P}(\mathcal{H})$. At a point $|\psi\rangle$, the *tangent space* T_ψ is

$$T_\psi = \{ |\delta\psi\rangle \in \mathcal{H} : \langle\psi|\delta\psi\rangle = 0 \},$$

i.e. the orthogonal complement of $|\psi\rangle$. Its complex dimension is $2^N - 1$. Intuitively, T_ψ collects the directions in which $|\psi\rangle$ can move while preserving normalisation to first order.

2. The QITE step as a tangent-space projection

A single QITE infinitesimal step on the Hamiltonian term h_m with imaginary-time increment $\Delta\tau$ produces the normalised state

$$|\psi'\rangle = \frac{e^{-\Delta\tau h_m} |\psi\rangle}{\sqrt{c}}, \quad c = \langle\psi|e^{-2\Delta\tau h_m}|\psi\rangle.$$

Expanding to first order in $\Delta\tau$,

$$|\psi'\rangle = |\psi\rangle - \Delta\tau (h_m - \langle h_m \rangle) |\psi\rangle + \mathcal{O}(\Delta\tau^2),$$

so the infinitesimal motion is

$$|\delta\psi\rangle = -\Delta\tau (h_m - \langle h_m \rangle) |\psi\rangle.$$

Writing $P_\psi^\perp = \mathbb{1} - |\psi\rangle\langle\psi|$ for the projector onto T_ψ , we have

$$(h_m - \langle h_m \rangle) |\psi\rangle = (\mathbb{1} - |\psi\rangle\langle\psi|) h_m |\psi\rangle = P_\psi^\perp h_m |\psi\rangle.$$

The QITE direction is therefore exactly the orthogonal projection of $h_m |\psi\rangle$ onto T_ψ . The non-unitary part of imaginary-time evolution, the component along $|\psi\rangle$ itself, which would push the state off the unit sphere, is removed by the renormalisation factor $1/\sqrt{c}$, leaving only the tangent component.

The unitary $e^{-i\Delta\tau A_m}$ that QITE actually applies is determined so that

$$-i A_m |\psi\rangle = -(h_m - \langle h_m \rangle) |\psi\rangle,$$

i.e. its infinitesimal action on $|\psi\rangle$ reproduces the projected imaginary-time direction. The linear system derived from k -body tomography is precisely the practical means of solving this equation for A_m .

3. Why one step does not span T_ψ

It would be tempting to argue universality as follows: “vary h_m over e.g. all 2-local Hermitians, sweep out all tangent directions, conclude that adaptive-H QITE can move $|\psi\rangle$ wherever we like.” However, this would be wrong.

Let $\mathcal{L}_2$ denote the real vector space of 2-local Hermitian operators supported on edges of the coupling graph G . As h ranges over $\mathcal{L}_2$, the QITE-reachable tangent directions form

$$\mathcal{R}_\psi = \{ P_\psi^\perp h |\psi\rangle : h \in \mathcal{L}_2 \}.$$

But $\dim_{\mathbb{R}} \mathcal{L}_2 = \mathcal{O}(N)$ (there are $4^2 - 1 = 15$ Hermitian Pauli generators per edge with $\mathcal{O}(N)$ edges for graph G where locality makes sense, plus $\mathcal{O}(N)$ single-qubit terms), whereas $\dim_{\mathbb{R}} T_\psi = 2(2^N - 1)$. Hence

$$\dim \mathcal{R}_\psi \leq \mathcal{O}(N) \ll \dim T_\psi = \mathcal{O}(2^N).$$

A single QITE step can only move along an $\mathcal{O}(N)$ -dimensional sliver of T_ψ , exponentially smaller than the full tangent space.

Universality of adaptive-H QITE cannot, therefore, come from “freely choosing the direction of motion at each step.” It must come from *composing* many steps, especially steps that do not commute.

4. Universality via Lie-algebra closure

Consider the set of states reachable by sequences of QITE infinitesimal steps with adaptively chosen $h_m \in \mathcal{L}_2$. This is the orbit of the initial state $|\psi_0\rangle$ under the Lie group $\mathcal{G}$ generated by the unitaries $\{e^{-itA(h)} | h \in \mathcal{L}_2, t \in \mathbb{R}\}$, where $A(h)$ denotes the operator that QITE constructs for the term h .

The Lie algebra $\mathfrak{g}$ of $\mathcal{G}$ is the smallest Lie subalgebra of $\mathfrak{su}(2^N)$ containing the infinitesimal generators $\{iA(h) : h \in \mathcal{L}_2\}$ and *closed under the commutator*. Even when the generators span only an $\mathcal{O}(N)$ -dimensional subspace, iterated commutators populate the rest:

$$[iA_1, iA_2], \quad [[iA_1, iA_2], iA_3], \quad \dots$$

For 2-local Pauli generators on a connected graph G , this closure is well known to equal the full $\mathfrak{su}(2^N)$: this is precisely the Lie-algebraic content of universality of single- and two-qubit gates [39]. Concretely, brackets such as

$$[[X_j Y_k, Z_k Z_l], Y_j X_k] \propto Z_j Z_l$$

generate Pauli strings on non-adjacent pairs, and iteration produces arbitrary multi-qubit Pauli operators.

Hence $\mathcal{G} = SU(2^N)$ (modulo global phase), and its orbit through any pure $|\psi_0\rangle$ is all of $\mathbb{P}(\mathcal{H})$.

Conclusion (universality). *Adaptive-H QITE with $k = 2$ on a connected coupling graph is universal for state*

preparation: every pure N -qubit state can be reached. The mechanism is identical to that of universal gate sets: Lie-bracket closure of low-dimensional generators, only re-parametrised through the Hamiltonian rather than the unitary itself.

5. Cost: universality is not efficiency

Any target state can be approached arbitrarily closely by some sequence of QITE micro-steps, but the length of that sequence may scale exponentially with N . Specifically, any two-qubit gate involving connected qubits according to G within error ϵ will take $\mathcal{O}(1/\epsilon)$ adapt-H QITE steps (first-order Trotter-step error [39]). Within one step (between one adaptation of H and the next), $\mathcal{O}(\text{poly } N)$ operations are needed (including measurements and solving of the linear systems, but not the tran-

spilation). So in total, the complexity is $\mathcal{O}(\text{poly } N/\epsilon)$. A circuit with $M = \mathcal{O}(\text{poly } N)$ gates with the same connectivity as G will therefore have a complexity of $M \times \mathcal{O}(\text{poly } N/\epsilon)$ adapt-QITE operations up to a precision bounded by $\mathcal{O}(M\epsilon)$. If we want a precision of ϵ , we need to divide the initial precision by M , leading to a full complexity that is polynomial in N once again. It follows that:

- States preparable by polynomial-depth circuits (equivalently, states whose preparation trajectory passes through bounded correlation length) admit polynomial-cost adaptive-H QITE protocols.
- Haar-typical states require sequences of exponential length and cannot be prepared efficiently.

The bounded- k Motte parameter and QITE's domain k together set the per-step cost (polynomial in N , exponential in k); the total cost is set by the trajectory.