



Inland Revenue  
Te Tari Taake

Inland Revenue

## Build pack: Return Service— Portfolio Investment Entities

**Date:** 11/03/2020  
**Version:** v0.8

## Contents

<b>1 Overview.....</b>	<b>3</b>
1.1 This solution .....	3
1.2 Intended audience.....	3
1.3 Related services .....	3
1.3.1 Identity and Access Services (required) .....	3
1.3.2 Intermediation Service (recommended) .....	3
1.4 Prerequisites.....	4
1.4.1 Mutual Transport Layer Security and certificates .....	4
<b>2 Solution design .....</b>	<b>5</b>
2.1 Architecture.....	5
2.2 Service scope .....	5
2.3 Messaging .....	5
2.4 Security .....	7
<b>3 Operations .....</b>	<b>10</b>
3.1 File.....	12
3.1.1 FileBody structures.....	13
3.1.1.1 Annual PIE Reconciliation (ANN) .....	15
3.1.1.2 Annual PIE Certificates (CER) .....	16
3.1.1.3 Line item amendments .....	21
3.1.1.4 Periodic PIE Return (without reconciliation) .....	22
3.2 RetrieveStatus .....	26
3.3 RetrieveReturn.....	28
<b>4 End points, schemas and WSDLs.....</b>	<b>32</b>
4.1 End points.....	32
4.2 Schemas .....	32
4.3 WSDLs.....	33
<b>5 Responses.....</b>	<b>34</b>
5.1 Generic gateway response codes .....	34
5.2 Generic returns response codes .....	36
5.3 Portfolio Investment Entity-specific response codes .....	37
<b>6 Glossary.....</b>	<b>39</b>
<b>7 Change log .....</b>	<b>41</b>

## 1 Overview

### 1.1 This solution

Inland Revenue has a suite of digital services available for consumption by our service providers that support efficient, electronic business interactions with Inland Revenue. The Portfolio Investment Entity (PIE) Return Service described in this build pack document forms part of a suite of Gateway Services.

This is a stand-alone document intended to provide the technical details required to support the end-to-end onboarding Gateway Services. It describes the architecture of the technical solution, schemas, end points, sample payloads to view, and also its interaction with other build packs that cover different aspects of Gateway Services.

---

Before you continue, please be sure to consult  
<http://www.ird.govt.nz/software-providers/>  
for the products that use this Service, business-level context and use cases,  
links to relevant policy, and information on how to integrate with  
Inland Revenue's products and services.

---

### 1.2 Intended audience

The solution outlined in this document is intended to be used by technical teams and development staff. It describes the technical interactions, including responses, provided by the PIE Return Service.

The reader is assumed to have a suitable level of technical knowledge in order to comprehend the information provided. A range of technical terms and abbreviations are used throughout this document, and while most of these will be understood by the intended readers, a [glossary](#) is provided at the end.

### 1.3 Related services

The following application programming interfaces (APIs) complement this Gateway Service. Further details can be found at <https://www.ird.govt.nz/software-providers/>

#### 1.3.1 Identity and Access Services (required)

The Identity and Access Services (IAS) are used to authenticate access. Authentication tokens will need to be retrieved via IAS prior to making calls to the Return Service.

This Return Service build pack was written using information from version 1.5 of the IAS build pack.

#### 1.3.2 Intermediation Service (recommended)

The Intermediation Service build pack supports software providers with the process of linking tax intermediaries (such as tax agents) to their clients so intermediaries can act on their behalf through the Return service.

## 1.4 Prerequisites

Party	Requirement	Description
<b>Service provider/ financial institution</b>	Acquire a X.509 certificate from a competent authority for the Test and Production environments	This is required when using mutual TLS with cloud-based service providers or financial institutions.  NOTE: The same certificate cannot be used for the Test and Production environments.

### 1.4.1 Mutual Transport Layer Security and certificates

Mutual Transport Layer Security (TLS) is implemented for the PIE Return Service. This requires the use of a publicly-issued X509 certificate from one of the trusted Certificate Authorities. Inland Revenue does not issue certificates to external vendors for web service security implementations.

Inland Revenue has the following minimum requirements for accepting public X509 keys:

1. Minimum Key Length: 2048
2. Signature Algorithm: SHA256[RSA]
3. Self-signed certificates are not accepted
4. Certificates issued by a private/internal Certificate Authority are not accepted.

In general, shorter-lived certificates offer a better security posture since the impact of key compromise is less severe but there is no minimum requirement for certificate expiry periods.

Below is a list for examples of Certificate Authority providers with no recommendations or rankings incorporated. It is recommended that a business researches which Certificate Authority meets their requirements.


- [Comodo](#)
- [GeoTrust](#)
- [DigiCert](#)
- [GlobalSign](#)
- [Symantec](#)
- [Thawte](#)
- [IdenTrust](#)
- [Entrust](#)
- [Network Solutions](#)
- [RapidSSL](#)
- [Entrust Datacard](#)
- [GoDaddy](#).

## 2 Solution design

### 2.1 Architecture

Inland Revenue is offering a suite of web services in order to facilitate interactions with via software packages. The Gateway Services suite will be used by approved software vendors to facilitate everything from registration activities, filing returns, making payments and other service offerings in order to allow customers to interact with Inland Revenue.

The diagram below illustrates the flow of data from the customer to Inland Revenue.

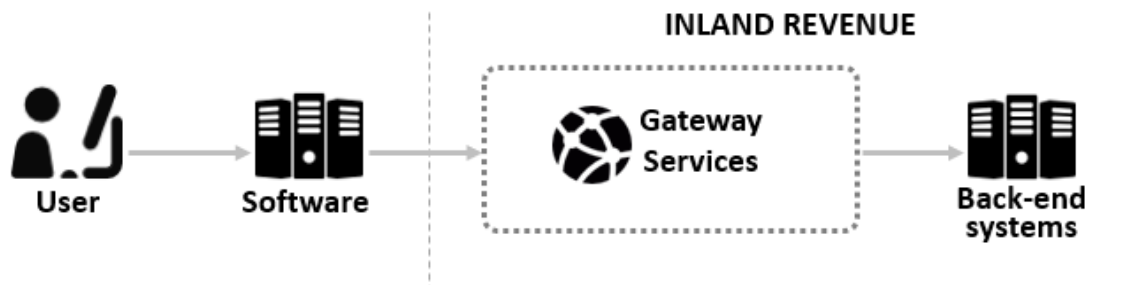

The WSDLs for the Gateway Services define an 'any' XML request and response structure, which then relies on a group of XSDs to define the data structure of those requests and responses. Each request and response type will define a lower, 'wrapper' element.

Any malformed XML will instantly be rejected by the Gateway Services prior to any schema validation.

### 2.2 Service scope

The PIE Return Service supports the following operations:

- **File:** This service is used to submit a return to Inland Revenue for a customer.
- **RetrieveStatus:** This service is used by software to return a status for a particular return.
- **RetrieveReturn:** This service retrieves a previously submitted return and the values associated to that return.

### 2.3 Messaging

All SOAP messages require a SOAP header containing an **Action:** parameter and a SOAP body containing a structured XML payload. Please refer to the WSDL for the correct soapAction.

The Gateway Services allow the consumption of any structured XML payload but will be validated against the Inland Revenue-published XSDs.

This is a late binding validation, performed after authentication has been reviewed. The message structure of these services is a simple request/response. The XML request will be checked for well-formed XML before the schema

validation. Responses to these requests will be in XML format as well and will be defined in the same schemas that define the requests.

Any XML submissions in the SOAP body that do not meet the provided schemas will not be accepted by the Gateway Services. Incorrect namespaces will also fail validation against the published schemas.

### Example SOAP request structure

```
<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope"
  xmlns:a="http://www.w3.org/2005/08/addressing">
  <soap:Header>
    <a:Action>https://services.ird.govt.nz/GWS/Returns/Return/Operation</a:
      Action>
    </soap:Header>
  <soap:Body>
    <rc:fileHeader>...</rc:fileHeader>
    <rc:fileBody>
      <rc:standardFields>
      <rc:formFields xsi:type="r:FormFieldsType">
        <...tax specific fields...>
      </rc:formFields>
    </rc:fileBody>
  </r:fileRequest>
  </soap:Body>
</soap:Envelope>
```

### Example SOAP response structure

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
  xmlns:a="http://www.w3.org/2005/08/addressing">
  <s:Header>
    <a:Action s:mustUnderstand="1">
      https://services.ird.govt.nz/GWS/Returns/Return/FileResponse
    </a:Action>
  </s:Header>
  <s:Body>
    <FileResponse xmlns="https://services.ird.govt.nz/GWS/Returns/">
      <FileResult
        xmlns:b="https://services.ird.govt.nz/GWS/Returns/:types/FileResponse"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <b:FileResponseWrapper>
          <fileResponse
            xmlns="urn:www.ird.govt.nz/GWS/types/Common.v2">
            <statusMessage>
              <statusCode>0</statusCode>
              <errorMessage/>
            </statusMessage>
          </fileResponse>
        </b:FileResponseWrapper>
      </FileResult>
    </FileResponse>
  </s:Body>
</s:Envelope>
```

---

## 2.4 Security

Gateway Services requests are access-controlled using an OAuth token that identifies the user making the request. Users will authenticate using their Inland Revenue myIR credentials. For instructions on how to acquire an OAuth token, review the Identity and Access build pack. The OAuth access token is required in the HTTP header for all service requests.

Authorisation for using the Gateway Services is defined in the permissions set in myIR. Permissions will reflect those granted in myIR. For example, if a user does not have permission to file a return online, they will not be able to file a return via Gateway Services either. This applies to users who are granted access as staff inside an organisation.

The Gateway Services use an HTTPS transport layer, with HTTP1.1 transport protocol supported.

The Gateway Services also use the SOAP version 1.2 protocol.

The SOAP Service contract is published using WSDL version 1.1.

Regarding transport layer security (TLS), note that while TLS1.3 is now an industry standard, it is not yet widely adopted, as doing so requires upgrades to perimeter security devices and software. Inland Revenue will upgrade to TLS1.3 once it is adopted widely enough, and where practical, external software partners should also anticipate upgrading to this version. TLS1.0 and TLS1.1 are not supported by myIR or Gateway Services.

Inland Revenue requires the following ciphers and key strengths to be used:

<b>Encryption:</b>	Advanced Encryption Standard (AES)	FIPS 197	256-bit key
<b>Hashing:</b>	Secure Hash Algorithm (SHA-2)	FIPS 180-3	SHA-256

There will be two end points, which are summarised in the bullet points below (the table immediately afterwards provides more detail):

1. There is an end point to which service providers' centralised **cloud** locations can connect. This will involve mutual TLS certificates that need to be exchanged during the onboarding phase. On the cloud end point Inland Revenue has controls to shield service providers from issues caused by heavy usage from other providers.
2. For service providers connecting from **desktops**, there is a separate end point that does not use mutual TLS. For this Service, certificates do not need to be exchanged during onboarding. On the desktop end point Inland Revenue has less ability to shield consumers of the Service from heavy usage by others.

	End point for cloud-based connections	End point for desktop connections
<b>Purpose</b>	<ul style="list-style-type: none"> <li>Primary preferred end point to connect to from service providers for Gateway Services</li> </ul>	<ul style="list-style-type: none"> <li>Additional transitory end point provided to facilitate connecting from desktops which might be high volumes of sources addresses, transient DHCP addresses, not realistically associated with client-side TLS certificates, not individually onboarded to setup certificate trust</li> </ul>
<b>Client application type</b>	<ul style="list-style-type: none"> <li>Cloud applications and financial institutions</li> </ul>	<ul style="list-style-type: none"> <li>Desktop/native applications</li> <li>For connecting from multiple decentralised clients</li> </ul>
<b>Constraints</b>	<ul style="list-style-type: none"> <li>Only for source locations with client-side TLS certificates</li> <li>On the cloud end point Inland Revenue has controls to shield service providers from issues caused by heavy usage from other providers</li> </ul>	<ul style="list-style-type: none"> <li>Less scalable</li> <li>Subject to tighter security controls</li> <li>On the desktop end point Inland Revenue has less ability to shield consumers of the Service from heavy usage by others</li> <li>OAuth2 refresh tokens will not be offered to desktop clients</li> </ul>
<b>Mutual TLS</b>	<ul style="list-style-type: none"> <li>Inland Revenue explicitly trusts the certificate the service provider associates with the TLS connection as client for Mutual TLS connections and uses it to identify the service provider in conjunction with the web service identification below</li> </ul>	<ul style="list-style-type: none"> <li>Server-side certificates only</li> </ul>
<b>Minimum TLS version</b>	<ul style="list-style-type: none"> <li>1.2</li> </ul>	<ul style="list-style-type: none"> <li>1.2</li> </ul>
<b>URL</b>	<ul style="list-style-type: none"> <li>Contains ../gateway/..</li> </ul>	<ul style="list-style-type: none"> <li>Contains ../gateway2/..</li> </ul>
<b>Port</b>	<ul style="list-style-type: none"> <li>4046</li> </ul>	<ul style="list-style-type: none"> <li>443 (Default https port)</li> </ul>



	End point for cloud-based connections	End point for desktop connections
<b>Web service consumer identification</b>	<ul style="list-style-type: none"> <li>To be identified in web service calls—each cloud application will be given client_id/client_secret credentials during onboarding to allow it to call this end point</li> </ul>	<ul style="list-style-type: none"> <li>Desktop clients will be given different client_id/client_secret credentials to cloud application clients</li> </ul>
<b>Firewalling in production</b>	<ul style="list-style-type: none"> <li>No IP address restrictions</li> <li>Access limited by certificate enrolment</li> </ul>	<ul style="list-style-type: none"> <li>No IP address restrictions</li> </ul>
<b>Firewalling in non-production environments</b>	<ul style="list-style-type: none"> <li>No IP address restrictions</li> <li>Access limited by certificate enrolment</li> </ul>	<ul style="list-style-type: none"> <li>Firewalled—IP whitelisting needed</li> </ul>

**Delegated permissions:** The Services will allow one to retrieve all of the data for a customer that the calling user (as represented by the OAuth token) has access to. There may be additional accounts this identity does not have access to, those will not be mentioned. If an account or data in it is targeted by the request parameters but the user does not have permission an error will be returned. This access will depend on delegation permissions set up in myIR.

### 3 Operations

---

#### IMPORTANT

The end points, schemas and WSDLs listed here are subject to change.

For the authoritative definitions, please visit

<https://www.ird.govt.nz/software-providers/>

---

The structures of all Gateway Service operations are intended to produce the most efficient requests and responses. Any common structures and fields will be used across many schemas and tax types through an intentional inheritance method. The section below describes the structure of each operation and the scenarios in which certain fields will be used in XML requests and responses.

This section contains schema aliases:

- cmn: Common.v2.xsd
- rc: ReturnCommon.v2.xsd
- r: returnSpecific.xsd (for example ReturnPIEa.v1.xsd)

**NOTE:** Some requests and responses live in ReturnCommon.v2.xsd but can still be generated from an inheriting return-specific XSD. This could mean the schemaLocation could be different, depending on where the payload was generated from. Any method of generating these payloads is accepted. This applies to the fileResponse XML directly below.

The response structure for all File requests will use the two default service response fields: **statusCode** and **errorMessage**. The identifier for this XML is fileResponse in the ReturnCommon namespace.

The response structure for all File requests will have the **gatewayId** field populated. The gatewayId is a unique identifier passed back in the responseBody, assuming the response code for the request is zero (refer to [Chapter 5 Responses](#)). The gatewayId should be recorded and can be used by technical teams for troubleshooting. The gatewayId will not appear in search results when searching myIR. The gatewayId is also not available to Inland Revenue's front line staff (such as in the telephone contact centre) to search on.

For example:

```
<fileResponse
xmlns="urn:www.ird.govt.nz/GWS:types/ReturnCommon.v2">
  <StatusMessage
xmlns="urn:www.ird.govt.nz/GWS:types/Common.v2">
    <statusCode>0</statusCode>
    <errorMessage></errorMessage>
  </StatusMessage>
  <responseBody>
    <gatewayId>0000 002J ZJ5N 6</gatewayId>
  </responseBody>
</fileResponse>
```

All operations for the Return Service will contain two standard header fields:  
**softwareProviderData** and **identifier**.

The **identifier** field is common across all Gateway Services but refers to different parties in different services. In all cases it is the party with delegated permissions to whom an OAuth token is provided. If the value cannot be resolved to a known context, or if it can but the provided OAuth token does not have the necessary delegated permissions then the error code 4 "unauthorised delegation" is returned. Please refer to individual operations for the nature of the identifier expected in this parameter in any given context.

For example:

```
<cmn:softwareProviderData>
  <cmn:softwareProvider>SoftwareProvider</cmn:softwareProvider>
  <cmn:softwarePlatform>SoftwarePlatform</cmn:softwarePlatform>
  <cmn:softwareRelease>v1</cmn:softwareRelease>
</cmn:softwareProviderData>
<cmn:identifier
IdentifierValueType="ACCIRD">012345678</cmn:identifier>
<cmn:accountType>PIE</cmn:accountType>
```

Field	Description
<b>softwareProvider</b>	The company that developed the software
<b>softwarePlatform</b>	The field value will be provided by Inland Revenue during the onboarding process
<b>softwareRelease</b>	The version of the software package
<b>IdentifierValueType</b>	The ID type being submitted. This can be ACCIRD or IRD. The value submitted for this field should contain only digits, with no dashes. IRD numbers that are eight digits must be padded with a leading zero.
<b>identifier</b>	The value submitted for this field should contain only digits, with no dashes. IRD numbers that are eight digits must be padded with a leading zero.
<b>accountType</b>	The account type being submitted (PIE)

Proper use:

- The only softwareProviderData fields users will be able to input are the ones that were provided to Inland Revenue at the time of on-boarding.
- The identifier is that of the owner or institution on whose behalf the operations are being performed.

### 3.1 File

The File operation will be used to submit all returns, regardless of the tax type. Note that the request and response structure is the same for all tax types.

Base structure:

```
<r:fileRequest namespaces...>
  <rc:fileHeader>...</rc:fileHeader>
  <rc:fileBody>
    <rc:standardFields>
      <rc:formFields xsi:type="r:FormFieldsType">
        <...tax specific fields...>
      </rc:formFields>
    </rc:fileBody>
  </r:fileRequest>
```

Field	Description
<b>fileHeader</b>	The standard header for File requests across all tax types
<b>fileBody</b>	The standard body structure for File requests across all tax types
<b>standardFields</b>	A group of fields standard across all tax types
<b>formFields</b>	A wrapper that will contain tax form-specific fields

<FileHeader> structure:

```
<r:fileRequest namespaces...>
  <rc:fileHeader>
    <cmn:softwareProviderData>
      <cmn:softwareProvider>SoftwareProvider</cmn:softwareProvider>
      <cmn:softwarePlatform>SoftwarePlatform</cmn:softwarePlatform>
      <cmn:softwareRelease>v1</cmn:softwareRelease>
    </cmn:softwareProviderData>
    <cmn:identifier IdentifierValueType="IRD">123047710</cmn:identifier>
    <cmn:accountType>PIE</cmn:accountType>
    <rc:periodEndDate>2021-03-31</rc:periodEndDate>
    <rc:majorFormType>PIE</rc:majorFormType>
    <rc:minorFormType>ANN</rc:minorFormType>
  </rc:fileHeader>
  <rc:fileBody>
    <rc:standardFields>
      <rc:formFields xsi:type="r:FormFieldsType">
        <...tax specific fields...>
      </rc:formFields>
    </rc:fileBody>
  </r:fileRequest>
```

Field	Requirement	Description
<b>periodEndDate</b>	Required	The period in which a return exists or the period for which it is being submitted. PRD – periods only allowed from 01/04/2020 ANN/CER - periods only allowed from 31/03/2021
<b>majorFormType</b>	Required	The form type (PIE)
<b>minorFormType</b>	Required	Minor Form type (ANN [annual], CER [Certificate] or PRD [periodic])

Proper uses:

- The major and minor form types will be used together to determine the submission form.

Example scenario:

- Attempting to submit a PIE Annual Return for the 2021-March period.  

```
<cmn:accountType>PIE</cmn:accountType>
<rc:periodEndDate>2021-03-31</rc:periodEndDate>
<rc:majorFormType>PIE</rc:majorFormType>
<rc:minorFormType>ANN</rc:minorFormType>
```

### 3.1.1 FileBody structures

FileBody is simply the wrapper of standardFields and formFields. The standard fields will be constant in every fileBody, along with most formFields—additional details for the FileBody will be provided in the following sub-sections.

The **<StandardFields>** structure is used in ANN, CER, and PRD file requests:

```
<r:fileRequest namespaces...>
  <rc:fileHeader>...</rc:fileHeader>
  <rc:fileBody>
    <rc:standardFields>
      <rc:amendmentRequest>
        <rc:isAmended>>false</rc:isAmended>
        <rc:amendReason></rc:amendReason>
        <rc:amendDetails></rc:amendReason>
      </rc:amendmentRequest>
    </rc:standardFields>
    <rc:formFields xsi:type="r:FormFieldsType">
      <...tax specific fields...>
    </rc:formFields>
  </rc:fileBody>
</r:fileRequest>
```

Field	Requirement	Description
<b>isAmended</b>	Required	This allows for a return to be filed as an amendment. NOTE: If isAmended=true

Field	Requirement	Description
		then amendReason and amendDetails are required.
<b>amendReason</b>	Optional	This is attached to the amendmentRequest as the reason for the amendment and is required when isAmended is true. This can be either KEY (incorrect amount), MATH (calculation error), OTHER, or TRNSPO (transposition error).
<b>amendDetails</b>	Optional	This allows for any further details on the amendmentRequest and is required when isAmended is true
<b>creditTransferRequest</b>	Optional	<b>This is not supported for PIE</b>
<b>isNilReturn</b>		
<b>isFinalReturn</b>		

Proper uses:

- Most standard submissions will require isNilReturn to be *false*, isFinalReturn to be *false*, and isAmended to be *false*.
- When attempting to amend a PIE return, supply the following fields similar to this:

```
<rc:isAmended>true</rc:isAmended>
<rc:amendReason>KEY</rc:amendReason>
<rc:amendDetails>Explanation of the reason for
amending.</rc:amendDetails>
```

### 3.1.1.1 Annual PIE Reconciliation (ANN)

<fileBody> structure:

```
<r:fileRequest namespaces...>
  <rc:fileHeader> ... </rc:fileHeader>
  <rc:fileBody>
    <rc:standardFields> ... </rc:standardFields>
    <rc:formFields xsi:type="r:FormFieldsType">
      <r:submissionKey/>
      <r:totalCertificates/>
      <r:totalIncomeLoss/>
      <r:totalTaxCreditOnInvestorIncome/>
      <r:netTaxPaidOnInvestorIncome/>
      <r:taxableIncomeLowMid/>
      <r:netTaxPaidOnInvestorIncomeLowMid/>
      <r:totalTaxCreditOnInvestorIncomeLowMid/>
      <r:zeroExitedTaxableIncome/>
      <r:zeroRateTotalForeignTaxCredits/>
      <r:zeroRateTotalOtherTaxCredits/>
      <r:zeroRateTotalICTaxCredits/>
      <r:zeroRateTotalIRWTTaxCredits/>
      <r:zeroRateTaxPaymentExitedInvestors/>
    </rc:formFields>
  </rc:fileBody>
</r:fileRequest>
```

Field	Requirement	Description
<b>submissionKey</b>	Optional	This field is required on amendments. This field is used to determine the corresponding return submission.
<b>totalCertificates</b>	Optional	The number of certificates associated with the return
<b>totalIncomeLoss</b>	Optional	Total income or loss
<b>totalTaxCreditOnInvestorIncome</b>	Optional	Total tax credits used for investors on low/mid/top rate
<b>netTaxPaidOnInvestorIncome</b>	Optional	PIE tax paid (credited) on investors' income (loss) at low/mid/top rate
<b>TaxableIncomeLowMid</b>	Optional	Taxable income (loss) at low/mid rate
<b>netTaxPaidOnInvestorIncomeLowMid</b>	Optional	PIE tax paid (credited) on investors' income

Field	Requirement	Description
		(loss) at low/mid rate
<b>totalTaxCreditOnInvestorIncomeLowMid</b>	Optional	Total tax credits on investors' income (loss) at low/mid rate
<b>zeroExitedTaxableIncome</b>	Optional	Zero-rated exited investors' taxable income (loss)
<b>zeroRateTotalForeignTaxCredits</b>	Optional	Total zero-rated attributed foreign tax credits
<b>zeroRateTotalOtherTaxCredits</b>	Optional	Total zero-rated attributed other tax credits
<b>zeroRateTotalICTaxCredits</b>	Optional	Total zero-rated attributed imputation credits
<b>zeroRateTotalIRWTTaxCredits</b>	Optional	Total zero-rated attributed RWT credits
<b>zeroRateTaxPaymentExitedInvestors</b>	Optional	Zero-rated exited investors' tax payment for exit period

### 3.1.1.2 Annual PIE Certificates (CER)

**<fileBody>** structure:

```

<r:fileRequest namespaces...>
  <rc:fileHeader> ... </rc:fileHeader>
  <rc:fileBody>
    <rc:standardFields> ... </rc:standardFields>
    <rc:formFields xsi:type="r:FormFieldsType">
      <r:submissionKey/>
      <r:isReverseReplace/>
      <r:lineItems>
        <r:referenceId/>
        <r:amendType/>
        <r:issuerIRD/>
        <r:investorName/>
        <r:investorIRD/>
        <r:investorDOB/>
        <r:investorCertID/>
        <r:investorEmail/>
        <r:investorPhone/>
        <r:jointInvestor/>
        <r:certPeriodEndDate/>
        <r:contactAddress/>
        <r:country/>
      </r:lineItems>
    </rc:formFields>
  </rc:fileBody>
</r:fileRequest>

```



```

    <r:homeCountryTaxFilerNumber/>
    <r:nfidtaCountry/>
    <r:noTaxFileNumber/>
    <r:accountHolders>
      <rc:irdNumber/>
      <rc:dateOfBirth/>
      <rc:name/>
      <rc:address/>
      <rc:phone/>
      <rc:email/>
      <rc:country/>
    </r:accountHolders>
    <r:incomeInformation>
      <rc:grossAmount/>
      <rc:deductedAmount/>
      <rc:rate/>
      <r:rateChanged/>
      <r:unitsAtYearEnd/>
      <r:totalTaxCredits/>
      <r:taxableIncomeLowMid/>
      <r:netTaxPaidOnInvestorIncomeLowMid/>
      <r:totalTaxCreditOnInvestorIncomeLowMid/>
      <r:zeroRateExitedTaxableIncome/>
      <r:zeroRateTotalForeignTaxCredits/>
      <r:zeroRateTotalOtherTaxCredits/>
      <r:zeroRateTotalICTaxCredits/>
      <r:zeroRateTotalIRWTTaxCredits/>
      <r:zeroRateTaxPaymentExitedInvestors/>
    </r:incomeInformation>
  </r:lineItems>
</rc:formFields>
</rc:fileBody>
</r:fileRequest>

```

Field	Requirement	Description
<b>submissionKey</b>	Optional	This field is required on amendments. This field is used to determine the line items to update.
<b>isReverseReplace</b>	Optional	If "isAmended=true", the isReverseReplace flag can be used to reverse all previously sent line items and replace with line items in the current submission. Using reverse/replace is supported, but is a heavy operation as it requires a full resubmission of the full form. A more efficient update is to use the lineItemAmendType (see description below).
<b>lineItems</b>	At least one	Repeating element for line item details—can have between 1 and 5,000 repeating elements
<b>referenceId</b>	Required	Unique reference field created by the software provider. Must be

Field	Requirement	Description
		submitted on initial file, then used as the unique line item identifier for amended lines.
<b>amendType</b>	Optional [A, U, D]	If "IsAmended=true", the "amendType" indicator can be used to signify an add, update, or delete. This operation requires a <b>referenceID</b> in order to correctly target the exact record to update. The <b>referenceID</b> fields are supplied along with the file operation, allowing software providers and financial institutions to use their own internal keys to reference specific line items.
<b>issuerIRD</b>	Required	IRD number of the PIE or PIP
<b>investorName</b>	Required	Name of investor
<b>investorIRD</b>	Required	IRD number of investor
<b>investorDOB</b>	Optional	Date of birth of investor
<b>investorCertID</b>	Required	An ID assigned by the MRP to uniquely identify the certificate. This may be a sequential number or other unique identifier, particularly relevant if more than one certificate is being filed for any single investor. The certificate number will show that it isn't a duplicate or amendment.
<b>investorEmail</b>	Optional	Investor email address
<b>investorPhone</b>	Optional	Investor phone number
<b>jointInvestor</b>	Optional	Determines if investor is a joint investor
<b>certPeriodEndDate</b>	Required	Monthly—end of each month for periods that have exited investors or optional payments. Annually—31 March for all remaining investors and March exitors. Quarterly—30 June, 30 September, 31 December and 31 March.
<b>contactAddress</b>	Optional	Contact address
<b>country</b>	Optional	Country of residence for a notified foreign investor. ISO 3166 alpha-2 standard country code.
<b>homeCountryTaxFilerNumber</b>	Optional	Equivalent of the notified foreign investor's tax file number in the country or territory where they reside for tax purposes

Field	Requirement	Description
<b>nfidtaCountry</b>	Optional	This is a flag signifying whether the home country of the notified foreign investor (NFI) has a double taxation agreement (DTA) with New Zealand. The following values are accepted: <ul style="list-style-type: none"> <li>• NFIDTA</li> <li>• NFINONDTA</li> <li>• NFINONE</li> </ul>
<b>noTaxFileNumber</b>	Optional	Flag signifying that the notified foreign investor did not provide a <b>homeCountryTaxFilerNumber</b>
<b>accountHolders</b>	Optional	Repeating element for joint account holder details-can have between 0 and 500 repeating elements
<b>incomeInformation</b>	At least one	Repeating element for income details-can have between 1 and 10 repeating elements

<**accountHolders**> fields:

Field	Requirement	Description
<b>irdNumber</b>	Optional	Joint account holder IRD number
<b>dateOfBirth</b>	Optional	Joint account holder date of birth
<b>name</b>	Optional	Joint account holder name
<b>phone</b>	Optional	Joint account holder phone number
<b>email</b>	Optional	Joint account holder email address
<b>country</b>	Optional	Joint account holder country. ISO 3166 alpha-2 standard country code.

<**incomeInformation**> fields:

Field	Requirement	Description
<b>incomeType</b>	Optional	This will automatically be calculated to 'PIE'. No need to supply a value.
<b>grossAmount</b>	Required	Total income (loss). The taxable income or loss for the investors. Include a zero-rated investor.
<b>deductedAmount</b>	Optional	Net tax paid. Total of net tax position for the investor with a PIR greater than zero.
<b>rate</b>	Optional	Latest notified investor rate used by MRP for the income

Field	Requirement	Description
		<p>year. Must be one of the following values:</p> <ul style="list-style-type: none"> <li>• 0</li> <li>• 10.5</li> <li>• 17.5</li> <li>• 28</li> </ul> <p><b>NOTE:</b> If rate is omitted from payload it will be assumed rate is 0.</p>
<b>rateChanged</b>	Optional	<p>If there has been a rate change, the information for each rate needs to be identified so that any shortfall relating to that income can be assessed.</p> <p>If there was no change then this field can be omitted, on an investor basis.</p>
<b>unitsAtYearEnd</b>	Optional	Units held year end. The total asset value of the PIE at end of tax year.
<b>totalTaxCredits</b>	Optional	Total of all various tax credits (FTC, IC, MAC, FDP and RWT) for an investor who had a low, mid and/or top PIR used in a final tax calculation
<b>TaxableIncomeLowMid</b>	Optional	Taxable income or loss for an investor who had tax calculated during the year at two or more of the rates greater than zero
<b>netTaxPaidOnInvestorIncomeLowMid</b>	Optional	PIE tax paid or credited for the investor who had tax calculated during the year at two or more of the rates greater than zero
<b>totalTaxCreditOnInvestorIncomeLowMid</b>	Optional	Total tax credits for the investor who had tax calculated during the year at two or more of the rates greater than zero. Total of the various tax credits (FTC, IC, MAC, FDP and RWT) attributed to the attribution period in which the low and/or mid PIR(s) were used in a final tax calculation.
<b>zeroRateExitedTaxableIncome</b>	Optional	Taxable income or loss for investors that have had zero

Field	Requirement	Description
		and any other rate applied during the year
<b>zeroRateTotalForeignTaxCredits</b>	Optional	Total FTCs attributed to the investor who had the 0% PIR applied
<b>zeroRateTotalOtherTaxCredits</b>	Optional	Total of all FDP tax credits and Māori authority credits (MAC) attributed to the investor who had the 0% PIR applied
<b>zeroRateTotalICTaxCredits</b>	Optional	Total of all imputation credits (IC) attached to dividends attributed to the investor who had the 0% PIR applied
<b>zeroRateTotalRWTTaxCredits</b>	Optional	Total of all RWT credits attributed to the investor who had the 0% PIR applied
<b>zeroRateTaxPaymentExitedInvestors</b>	Optional	If an exited investor, in a quarterly MRP, has any units/interests left at the end of the exit period, the MRP will pay the value of the units/interests as tax

### 3.1.1.3 Line item amendments

The **amendType** is used to determine how incoming amendment records should be processed. These values are not reflected in the **retrieveReturn** operation and are only used for **file/amend**. As well as specifying an **amendType**, a **referenceId** must be provided to target a unique certificate.

Amend type	Code	Description
Add	A	The incoming record is new
Update	U	The incoming record is an update to an existing record
Delete	D	The incoming record should delete an existing record

Line item amendments must be submitted using the CER operation with **isAmended** set to true and must include a valid **amendReason** and include **amendDetails**. A **submissionKey** must always be provided when updating (U) or deleting (D) line items, and the **submissionKey** must correspond to the line items you are attempting to amend. The only case in which a **submissionKey** is not required on a CER amendment is when the only **amendType** included in the payload is Add (A), or in other words, you are only adding new line items. In this case you do not need to provide a **submissionKey**, and instead upon successful submission you will receive a new **submissionKey** that must be kept track of.

Please note that you can submit multiple CER amendments if there are line items with separate submission keys that need amending. Once all CER amendments have been successfully submitted, please submit an amended ANN operation to complete the amendment.

### 3.1.1.4 Periodic PIE Return (without reconciliation)

<FileBody> structure:

```
<r:fileRequest namespaces...>
  <rc:fileHeader> ... </rc:fileHeader>
  <rc:fileBody>
    <rc:standardFields> ... </rc:standardFields>
    <rc:formFields xsi:type="r:FormFieldsType">
      <r:submissionKey/>
      <r:includeAprilToFeb/>
      <r:totalInvestmentValue/>
      <r:grossIncome/>
      <r:deductibleExpenses/>
      <r:netLossIncome/>
      <r:netLossLandIncome/>
      <r:formationLoss/>
      <r:landLossBroughtForward/>
      <r:landLossClaimed/>
      <r:totalIncome/>
      <r:totalLoss/>
      <r:incomeRetained/>
      <r:incomeExitedInvestors/>
      <r:investorExpenses/>
      <r:totalIncomeToAttribute/>
      <r:totalLossToAttribute/>
      <r:incomeAttributedZero/>
      <r:incomeAttributedLow/>
      <r:incomeAttributedMid/>
      <r:incomeAttributedTop/>
      <r:lossAttributedZero/>
      <r:lossAttributedLow/>
      <r:lossAttributedMid/>
      <r:lossAttributedTop/>
      <r:foreignTaxCredit/>
      <r:otherTaxCredit/>
      <r:imputationCredit/>
      <r:residentWithholdingTax/>
      <r:taxLiability/>
      <r:taxPaymentExitedInvestors/>
      <r:incomeAttributedNFI/>
      <r:taxPaidNFI/>
    </rc:formFields>
  </rc:fileBody>
</r:fileRequest>
```

Field	Requirement	Description
<b>submissionKey</b>	Optional	This field is required on amendments and is used to determine the line items to update
<b>includeAprilToFeb</b>	Optional	Special dispensation has been granted for monthly PIE filers to be exempt from filling in certain required return fields on their

Field	Requirement	Description
		<p>monthly returns between the months of April and February, provided they declared the entire year's value in these fields on their March return.</p> <p>The March return will process its validation rules based on an aggregate of figures for all the monthly returns across the entire year, not just the March return</p>
<b>totalInvestmentValue</b>	Optional	Once a year—total value of the investment assets an MRP has at the end of the return period or from the statement of financial position
<b>grossIncome</b>	Optional	The gross income or loss of the MRP for the return period. Exclude any income or loss from a land class investment
<b>deductibleExpenses</b>	Optional	Expenditure incurred by the MRP during the return period, or allowable annual expenditure attributed to the period
<b>netLossIncome</b>	Optional	Net income or loss after deducting expenses
<b>netLossLandIncome</b>	Optional	If the MRP has an investment class that qualifies as a land class, the net income or loss should be recorded here. A land class loss can only be offset against land class income
<b>combinedLossIncome</b>	Optional	The combined income or loss amount for the different investment classes (if more than one) during the return period
<b>formationLoss</b>	Optional	The amount of the formation loss used
<b>landLossBroughtForward</b>	Optional	The land class loss carried forward to this return period
<b>landLossClaimed</b>	Optional	Where there is residual land income after deduction of any formation loss then land losses brought forward may be claimed
<b>landLossCarryForward</b>	Optional	The land class loss amount to be carried forward to the next return period
<b>totalIncome</b>	Optional	Total taxable income of MRP for all classes for the return period

Field	Requirement	Description
<b>totalLoss</b>	Optional	Total taxable loss of the MRP for all classes for the return period
<b>incomeRetained</b>	Optional	This is the income or loss the MRP attributes to itself, such as non-vested income or loss, reserves or hybrid benefit fund PIEs
<b>incomeExitedInvestors</b>	Optional	For quarterly MRPs, this is the income or loss attributed for an exit period to an investor(s)
<b>investorExpenses</b>	Optional	This is the adjustment for expenses less credits charged at the investor level. This could be a debit or credit. Show expenses as positive and credits as negative. If credits exceed expenses charged then enter amount as a negative
<b>totalIncomeToAttribute</b>	Optional	Income to attribute across the four PIRs. "Taxable income" less "Investor fees less credits for fees"
<b>totalLossToAttribute</b>	Optional	Loss to attribute across the four PIRs. "Taxable income" less "Investor fees less credits for fees"
<b>incomeAttributedZero</b>	Optional	The amount is a component of the "Total income to attribute"
<b>incomeAttributedLow</b>	Optional	The amount is a component of the "Total income to attribute"
<b>incomeAttributedMid</b>	Optional	The amount is a component of the "Total income to attribute"
<b>incomeAttributedTop</b>	Optional	The amount is a component of the "Total income to attribute"
<b>lossAttributedZero</b>	Optional	The amount is a component of the "Total loss to attribute"
<b>lossAttributedLow</b>	Optional	The amount is a component of the "Total loss to attribute"
<b>lossAttributedMid</b>	Optional	The amount is a component of the "Total loss to attribute"
<b>lossAttributedTop</b>	Optional	The amount is a component of the "Total loss to attribute"
<b>foreignTaxCredit</b>	Optional	Totals used for non-zero-rated investor as part of arriving at "Tax payable or credit due"
<b>otherTaxCredit</b>	Optional	Totals used for non-zero-rated investor as part of arriving at "Tax payable or credit due". Include Māori authority credits



Field	Requirement	Description
<b>imputationCredit</b>	Optional	Totals used for non-zero-rated investor as part of arriving at "Tax payable or credit due"
<b>residentWithholdingTax</b>	Optional	Totals used for non-zero-rated investor as part of arriving at "Tax payable or credit due"
<b>taxLiability</b>	Optional	Accumulation of all tax calculations for each investor for each investor class, including tax on income or loss retained
<b>taxPaymentExitedInvestors</b>	Optional	If an exited investor, in a quarterly MRP, has any units/interests left at the end of the exit period, the MRP will pay the value of the units/interests as tax. The investor is then allowed a credit in their income tax return for this payment made by the MRP
<b>netTaxPayable</b>	Optional	No need to supply a value. This value will automatically be calculated to taxLiability plus taxPaymentExitedInvestors. Show tax payable as positive and credit due as negative
<b>incomeAttributedNFI</b>	Optional	Total income of the PIE attributed to notified foreign investors
<b>taxPaidNFI</b>	Optional	Tax paid on NFI income. Tax calculated at the various PIRs for variable-rate PIEs on <b>incomeAttributedNFI</b>

### 3.2 RetrieveStatus

The retrieveStatus operation will allow the status of a given return to be queried. The request and response structures are the same for all investment income tax types.

**<retrieveFormInfoRequest>** structure:

```
<rc:retrieveFormInfoRequest
xmlns:cmn="urn:www.ird.govt.nz/GWS:types/Common.v2"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:rc="urn:www.ird.govt.nz/GWS:types/ReturnCommon.v2"
xsi:schemaLocation="urn:www.ird.govt.nz/GWS:types/ReturnPIEa.v1">
  <cmn:softwareProviderData>
    <cmn:softwareProvider>SoftwareProvider</cmn:softwareProvider>
    <cmn:softwarePlatform>SoftwarePlatform</cmn:softwarePlatform>
    <cmn:softwareRelease>v1</cmn:softwareRelease>
  </cmn:softwareProviderData>
  <cmn:identifier IdentifierValueType="ACCIRD">123456789</cmn:identifier>
  <cmn:accountType>PIE</cmn:accountType>
  <rc:periodEndDate>2019-03-31</rc:periodEndDate>
  <rc:majorFormType>PIE</rc:majorFormType>
  <rc:submissionKey>1425976960</rc:submissionKey>
</rc:retrieveFormInfoRequest>
```

Field	Requirement	Valid values
<b>accountType</b>	Required	PIE
<b>periodEndDate</b>	Required	The period in which a return exists or the period for which it is being submitted
<b>majorFormType</b>	Required	PIE
<b>minorFormType</b>	Optional	If supplied, will be used to filter to a single form type: <ul style="list-style-type: none"> <li>• ANN (annual)</li> <li>• PRD (periodic)</li> </ul>
<b>submissionKey</b>	Optional	Example: 1425976960

**<retrieveStatusResponse>** structure:

```
<rc:retrieveStatusResponse xmlns="urn:www.ird.govt.nz/GWS:types/ReturnCommon.v2">
  <statusMessage xmlns="urn:www.ird.govt.nz/GWS:types/Common.v2">
    <statusCode>0</statusCode>
    <errorMessage/>
  </statusMessage>
  <responseBody>
    <returnStatus>
      <status code="PRCD">Ontime-processed</status>
      <submissionKey>1425976960</submissionKey>
      <minorFormType>PRD</minorFormType>
    </returnStatus>
  </responseBody>
</rc:retrieveStatusResponse>
```

Field	Requirement	Valid values
<b>submissionKey</b>	Optional	Submission key, if it exists on the return. Example: 1425976960
<b>minorFormType</b>	Required	<ul style="list-style-type: none"> <li>• ANN (annual)</li> <li>• PRD (periodic)</li> </ul>

Status	Description
<b>Default assessment</b>	This status is displayed when the return is a default assessment
<b>Expected</b>	This status is displayed when the return has generated return expectation
<b>Late-processing</b>	This status is displayed when the return is received late and processing
<b>Late-processed</b>	This status is displayed when the return is processed late
<b>Optional</b>	This status is displayed when the return is not required to be filed, but the customer may choose to file anyway
<b>Ontime-processing</b>	This status is displayed when the return is received on time and processing
<b>Ontime-processed</b>	This status is displayed when the return is processed on time
<b>Overdue</b>	This status is displayed when the return is overdue
<b>Submitted</b>	This status is displayed when the return is submitted
<b>Under review</b>	This status is displayed when the return is included in audit

### 3.3 RetrieveReturn

The retrieveReturn operation allows for any previous submission for annual reconciliation, certificates or periodic return to be viewed.

**<retrieveFormInfoRequest>** structure:

```
<rc:retrieveFormInfoRequest xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:cmn="urn:www.ird.govt.nz/GWS:types/Common.v2"
  xmlns:rc="urn:www.ird.govt.nz/GWS:types/ReturnCommon.v2">
  <cmn:softwareProviderData>
    <cmn:softwareProvider>SoftwareProvider</cmn:softwareProvider>
    <cmn:softwarePlatform>SoftwarePlatform</cmn:softwarePlatform>
    <cmn:softwareRelease>v1</cmn:softwareRelease>
  </cmn:softwareProviderData>
  <cmn:identifier IdentifierValueType="ACCIRD">123452305</cmn:identifier>
  <cmn:accountType>PIE</cmn:accountType>
  <rc:periodEndDate>2019-04-30</rc:periodEndDate>
  <rc:majorFormType>PIE</rc:majorFormType>
  <rc:minorFormType>PRD</rc:minorFormType>
  <rc:submissionKey>1425976960</rc:submissionKey>
</rc:retrieveFormInfoRequest>
```

Field	Requirement	Valid values
<b>accountType</b>	Required	PIE
<b>periodEndDate</b>	Required	The period in which a return exists or the period for which it is being submitted
<b>majorFormType</b>	Required	PIE
<b>minorFormType</b>	Required	ANN, CER or PRD
<b>submissionKey</b>	Conditional	Example: 829927040 <ul style="list-style-type: none"> <li>• ANN = Optional</li> <li>• CER = Required</li> <li>• PER = Optional</li> </ul>

**<retrieveReturnResponse>** structure for minorFormType ANN:

```
<rc:retrieveReturnResponse xmlns:cmn="urn:www.ird.govt.nz/GWS:types/Common.v2"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:r="urn:www.ird.govt.nz/GWS:types/ReturnPIEa.v1"
  xmlns:rc="urn:www.ird.govt.nz/GWS:types/ReturnCommon.v2"
  xsi:schemaLocation="urn:www.ird.govt.nz/GWS:types/ReturnPIEa.v1
  ReturnPIEa.v1.xsd">
  <cmn:statusMessage>
    <cmn:statusCode>0</cmn:statusCode>
    <cmn:errorMessage/>
  </cmn:statusMessage>
  <rc:responseBody xsi:type="r:RetrieveReturnResponseBodyType">
```

```

    <rc:standardFields>
  </rc:standardFields>
  <r:formFields>
    <r:totalCertificates/>
    <r:totalIncomeLoss/>
    <r:totalTaxCreditOnInvestorIncome/>
    <r:netTaxPaidOnInvestorIncome/>
    <r:taxableIncomeLowMid/>
    <r:netTaxPaidOnInvestorIncomeLowMid/>
    <r:totalTaxCreditOnInvestorIncomeLowMid/>
    <r:zeroExitedTaxableIncome/>
    <r:zeroRateTotalForeignTaxCredits/>
    <r:zeroRateTotalOtherTaxCredits/>
    <r:zeroRateTotalICTaxCredits/>
    <r:zeroRateTotalRWTTaxCredits/>
    <r:zeroRateTaxPaymentExitedInvestors/>
  </r:formFields>
</rc:responseBody>
</rc:retrieveReturnResponse>

```

**Note:** ANN Retrieve Return will pull back all zeros for the summary values until the return has been processed.

**<retrieveReturnResponse>** structure for minorFormType CER:

```

<rc:retrieveReturnResponse xmlns:cmn="urn:www.ird.govt.nz/GWS:types/Common.v2"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:r="urn:www.ird.govt.nz/GWS:types/ReturnPIEc.v1"
  xmlns:rc="urn:www.ird.govt.nz/GWS:types/ReturnCommon.v2"
  xsi:schemaLocation="urn:www.ird.govt.nz/GWS:types/ReturnPIEc.v1
    ReturnPIEc.v1.xsd">
  <cmn:statusMessage>
    <cmn:statusCode>0</cmn:statusCode>
    <cmn:errorMessage/>
  </cmn:statusMessage>
  <rc:responseBody xsi:type="r:RetrieveReturnResponseBodyType">
    <rc:standardFields>
  </rc:standardFields>
  <r:formFields>
    </r:submissionKey>
    <r:lineItems>
      <r:referenceId>
      <r:issuerIRD>
      <r:investorName>
      <r:investorIRD>
      <r:investorDOB>
      <r:investorCertID>
      <r:investorEmail>
      <r:investorPhone>
      <r:jointInvestor>
      <r:certPeriodEndDate>
      <r:contactAddress>
      <r:country>
      <r:homeCountryTaxFilerNumber>
      <r:nfidtaCountry>
      <r:noTaxFileNumber>
      <r:accountHolders>
      <rc:irdNumber>
    </r:lineItems>
  </r:formFields>
</rc:responseBody>
</rc:retrieveReturnResponse>

```

```
<rc:dateOfBirth>
<rc:name>
<rc:address>
<rc:phone>
<rc:email>
<r:country>
</r:accountHolders>
<r:incomeInformation>
  <rc:incomeType>
  <rc:grossAmount>
  <rc:deductedAmount>
  <rc:rate>
  <r:rateChanged>
  <r:unitsAtYearEnd>
  <r:totalTaxCredits>
  <r:taxableIncomeLowMid>
  <r:netTaxPaidOnInvestorIncomeLowMid>
  <r:totalTaxCreditOnInvestorIncomeLowMid>
  <r:zeroRateExitedTaxableIncome>
  <r:zeroRateTotalForeignTaxCredits>
  <r:zeroRateTotalOtherTaxCredits>
  <r:zeroRateTotalICTaxCredits>
  <r:zeroRateTotalRWTTaxCredits>
  <r:zeroRateTaxPaymentExitedInvestors>
</r:incomeInformation>
<r:lineItems>
</r:formFields>
</rc:responseBody>
</rc:retrieveReturnResponse>
```

<retrieveReturnResponse> structure for minorFormType PRD:

```
<rc:retrieveReturnResponse xmlns:cmn="urn:www.ird.govt.nz/GWS:types/Common.v2"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:r="urn:www.ird.govt.nz/GWS:types/ReturnPIEp.v1"
xmlns:rc="urn:www.ird.govt.nz/GWS:types/ReturnCommon.v2"
xsi:schemaLocation="urn:www.ird.govt.nz/GWS:types/ReturnPIEp.v1 ReturnPIEp.v1.xsd">
  <cmn:statusMessage>
    <cmn:statusCode>0</cmn:statusCode>
    <cmn:errorMessage/>
  </cmn:statusMessage>
  <rc:responseBody xsi:type="r:RetrieveReturnResponseBodyType">
    <rc:standardFields>
    </rc:standardFields>
    <r:formFields>
      <r:includeAprilToFeb/>
      <r:totalInvestmentValue/>
      <r:grossIncome/>
      <r:deductibleExpenses/>
      <r:netLossIncome/>
      <r:netLossLandIncome/>
      <r:combinedLossIncome/>
      <r:formationLoss/>
      <r:landLossBroughtForward/>
      <r:landLossClaimed/>
      <r:landLossCarryForward/>
      <r:totalIncome/>
      <r:totalLoss/>
      <r:incomeRetained/>
      <r:incomeExitedInvestors/>
      <r:investorExpenses/>
      <r:totalIncomeToAttribute/>
      <r:totalLossToAttribute/>
      <r:incomeAttributedZero/>
      <r:incomeAttributedLow/>
      <r:incomeAttributedMid/>
      <r:incomeAttributedTop/>
      <r:lossAttributedZero/>
      <r:lossAttributedLow/>
      <r:lossAttributedMid/>
      <r:lossAttributedTop/>
      <r:foreignTaxCredit/>
      <r:otherTaxCredit/>
      <r:imputationCredit/>
      <r:residentWithholdingTax/>
      <r:taxLiability/>
      <r:taxPaymentExitedInvestors/>
      <r:netTaxPayable/>
      <r:incomeAttributedNFI/>
      <r:taxPaidNFI/>
    </r:formFields>
  </rc:responseBody>
</rc:retrieveReturnResponse>
```

---

## 4 End points, schemas and WSDLs

---

### IMPORTANT

The end points, schemas and WSDLs listed here are subject to change.

For the authoritative definitions, please visit

<https://www.ird.govt.nz/software-providers/>

---

### 4.1 End points

Onboarding instructions are available at <https://www.ird.govt.nz/software-providers/>.

### 4.2 Schemas

All schemas for the Return Service import a Common.v2.xsd which has some data types specific to Inland Revenue. This Common.v2.xsd will be used in other Gateway Services outside of the /Returns/ namespace so it must be kept up-to-date, without numerous redundant versions remaining.

The ReturnCommon.v2.xsd imports the Common.v2.xsd and creates data types to be used across all tax types and return types. ReturnCommon.v2.xsd also includes two request elements and two response elements. These requests are retrieveFormInfoRequest and retrieveFilingObligationsRequest, while the responses are retrieveFilingObligationsResponse and retrieveStatusResponse. The reason for adding root-level elements in the ReturnCommon.v2.xsd is due to the fact that these request and response structures will never change, regardless of the tax type. This allows Inland Revenue to keep a uniform request and response structure across all current and future tax types.

Importing from ReturnCommon.v2.xsd will be schemas that require more fine-grained detail. These will primarily define the request for the File operation, the response for RetrieveReturn and the response for Prepop.



---

### 4.3 WSDLs

The Returns Gateway Service has one WSDL, which has a target namespace of <https://services.ird.govt.nz/GWS>Returns> and can be found at <https://services.ird.govt.nz:4046/gateway/GWS>Returns/?singleWsd>

**Note:** The Production URL above will not work until you have onboarded with Inland Revenue.

All WSDL messages follow this naming convention:

```
Return_<operation>_InputMessage or Return_<operation>_OutputMessage.
```

```
<wsdl:portType name="Return">
  <wsdl:operation name="File">
  <wsdl:operation name="Prepop">
  <wsdl:operation name="RetrieveStatus">
  <wsdl:operation name="RetrieveFilingObligations">
  <wsdl:operation name="RetrieveReturn">
</wsdl:portType>
<wsdl:service name="Return">
```

Portfolio Investment Entity (return submissions for ANN, CER and PRD) only supports the following operations:

- File
- RetrieveStatus
- RetrieveReturn.

A development version of the WSDL is provided with this build pack. For easier WSDL consumption, the `<xs:any>` structure has been replaced with a reference to the corresponding element in the corresponding investment income schema. For example, this will allow any tools that consume the WSDL to automatically pull in the data structures from the XSD. To use this, ensure the WSDL provided by Inland Revenue is in the same directory as Common.xsd and PIE schema (ie ReturnPIE.v1.xsd).

**Note:** The WSDL hosted at the end point above will not contain these XSD references, only the static WSDL provided at <https://www.ird.govt.nz/software-providers/>.

## 5 Responses

The response message from the Gateway Services will always include a status code and status message. These values will describe the successes or failures of a web service call. Following the status message will be the responseBody, which will return the data for the given operation.

### 5.1 Generic gateway response codes

The following response codes are common to all Gateway Service calls. The operations on the Return Service all have framework security validation applied at the account level, as reflected in the code descriptions below:

Standard codes	Standard message	Description
<b>-1</b>	An unknown error has occurred	This error will be logged by the Gateway Services and evaluated the next business day
<b>0</b>		0 indicates a successful web service call. Note: 0 does not display a standard message.
<b>1</b>	Authentication failure	Authentication failure means the token provided is not a valid token
<b>2</b>	Missing authentication token(s)	No OAuth token in HTTP header
<b>3</b>	Unauthorised access	The logon making the call does not have access to make the request on behalf of the client
<b>4</b>	Unauthorised delegation	Access is not permitted for the requester to perform this operation for the submitted identifier. This code will be returned in any of these situations: <ul style="list-style-type: none"> <li>The submitted cmn:identifier has an invalid value.</li> <li>The identifier type (IdentifierValueType attribute on cmn:identifier) supplied is invalid.</li> <li>The AccountType supplied does not exist for that identifier.</li> <li>All the values above are valid but the provided OAuth token does not have delegated access to that Customer or Account.</li> </ul>

Standard codes	Standard message	Description
<b>5</b>	Unauthorised vendor	The vendor provided is not authorised to use these suite of services
<b>7</b>	Account type not supported	<p>This code will be returned for queries on account types not supported in any Gateway Services web services (PIE is the only type supported here).</p> <p>For specific services some of the account types above may not be supported—please see the related documentation and the service-specific response codes below.</p>
<b>20</b>	Unrecognised XML request	The XML submitted is not recognisable and no schema can be determined
<b>21</b>	XML request failed validation	The XML structure did not meet the definition laid out by the schemas published by Inland Revenue
<b>22</b>	Invalid payload IRD	Any IRD number submitted as a part of the payload body will have a modulus check done against it. Invalid IRD numbers that do not pass this check will get this error code.
<b>(none)</b>	(non xml)	In some scenarios where the request message does not have a well-formed XML structure, is not valid or does not adhere to the SOAP protocol formats, the framework will generate a parsing exception that is not wrapped in XML, nor has a response status code.
<b>HTTP Status 429</b>	(SOAP fault) UnAuthorised	When maximum concurrency has been exceeded by the service provider, this SOAP fault will be returned

## 5.2 Generic returns response codes

The following response codes are common to all Returns Gateway Service calls:

Standard codes	Standard message	Description
<b>100</b>	Invalid request data	Could not extract data from XML payload
<b>101</b>	Unable to file return	An error has occurred while filing return. This may be due to invalid information in the specific return form fields.
<b>102</b>	ID/Account type not valid	The account type/ID submitted does not exist
<b>103</b>	No return found	No return exists on the selected filing period
<b>104</b>	Invalid filing period	The periodEndDate did not match a valid filing period for the account. <b>Filing periods prior to 01/04/20 will receive this response code.</b>
<b>105</b>	No filing obligations found	No valid filing obligations were found. <b>Only used for services with filing obligations, not used for PIE.</b>
<b>106</b>	Operation not available for major form type	The operation performed does not exist for the major form type submitted
<b>107</b>	Duplicate return	There is already a return for this period. An amendment to a return that has already been submitted must be submitted with isAmended as true.
<b>109</b>	Invalid Amend Reason	When amending a return there must be a valid amend reason
<b>132</b>	Reverse/replace can only be used for an amendment	Cannot reverse and replace a schedule without marking the payload as an amendment
<b>140</b>	Invalid minor form type	Invalid minor form type
<b>140</b>	Invalid minor form type	Invalid minor form type
<b>144</b>	Return being submitted	The return has been submitted and queued for processing. The return will be processed in near-real time.
<b>145</b>	Return held for processing	The return is not visible because it is in a non-amendable error.
<b>150</b>	Credit transfer requests are not supported	Credit transfer requests are not supported for the form type

### 5.3 Portfolio Investment Entity-specific response codes

The following response codes are specific to Portfolio Investment Entity Gateway Service calls:

Standard codes	Standard message	Description
<b>984</b>	Provided country code does not exist	The country code must be a value 2-digit ISO2A country code
<b>986</b>	No return found for supplied submission key on this period	No return found for supplied submission key on this period
<b>987</b>	AmendType must be provided for amend line items	AmendType must be provided for amend line items
<b>993</b>	Supplied Reference ID conflicts with another active record	The provided reference ID conflicts with another record's reference ID. Note that once provided, the reference ID may not be changed. This only applies to CER—not ANN or PRD.
<b>994</b>	Could not find associated line item for amendment operation	Could not find an associated line item for the amendment operation. Please verify the reference IDs provided. Note that line items cannot be amended once deleted.
<b>997</b>	Submissionkey must be provided on amendment	Submissionkey must be provided. Only required for CER amendments
<b>998</b>	Non-distinct reference IDs provided	If reference IDs are provided on line items, they must be unique
<b>1001</b>	Reverse/replace is not valid for this form type	Including Reverse/replace is not valid for this form type
<b>1002</b>	Certificates must exist on the return prior to submitting Annual Reconciliation	Certificates must exist on the return prior to submitting and processing the Annual Reconciliation
<b>1003</b>	Submissionkey must be provided on Certificates Retrieve Return	Submissionkey must be provided on Certificates Retrieve Return
<b>1004</b>	The provided IssuerIRD must match the account IRD number	The provided IssuerIRD must match the account IRD number
<b>1005</b>	The provided InvestorIRD is invalid.	The provided InvestorIRD on line item is invalid.
<b>1006</b>	The provided accountHolders irdNumber is invalid	The provided irdNumber on lineItem under accountHolders is invalid.
<b>1007</b>	The provided accountHolders country code does not exist	The country code must be a value 2-digit ISO2A country code.
<b>1008</b>	incomeInformation rate is invalid	incomeInformation rate must be 0, 10.5, 17.5, or 28.

Standard codes	Standard message	Description
<b>1009</b>	Joint account holders not present on certificate when jointInvestor boolean marked as true	Joint account holders are not present on certificate when jointInvestor boolean marked as true. Please mark jointInvestor as 'false' if joint account holders should be not be included on this certificate.
<b>1010</b>	Joint account holders present on certificate when jointInvestor boolean marked as false	Joint account holders present on certificate when jointInvestor boolean marked as false. Please mark jointInvestor as 'true' if joint account holders should be included on this certificate.
<b>1011</b>	Amendment not allowed for PIE return not originally submitted through Gateway Services	Amendment not allowed for Annual Reconciliation and Certificates on existing PIE Return with source that is not Gateway Services.
<b>1012</b>	Retrieve return not allowed for PIE return not originally submitted through Gateway Services	Retrieve return not allowed for Annual Reconciliation and Certificates on existing PIE Return with source that is not Gateway Services.

## 6 Glossary

Acronym/term	Definition
<b>ACC, ACCID</b>	Accident Compensation Corporation (and ID number)
<b>ANN</b>	Annual PIE reconciliation
<b>API</b>	Application Programming Interface—a set of functions and procedures that allow applications to access the data or features of another application, operating system or other service
<b>Authentication</b>	The process that verifies the identity of the party attempting to access Inland Revenue
<b>Authorisation</b>	The process of determining whether a party is entitled to perform the function or access a resource
<b>End points</b>	A term used to describe a web service that has been implemented
<b>FIPS</b>	Federal Information Processing Standard—a suite of IT standards from the US Federal Government
<b>Gateway</b>	Inland Revenue’s web services gateway
<b>GWS</b>	Gateway Services—the brand name for the suite of web services that Inland Revenue is providing. The Return Service is a Gateway Service.
<b>HTTP, HTTPS</b>	Hyper Text Transmission Protocol (Secure)—the protocol by which web browsers and servers interact with each other. When implemented over TLS1.2 HTTP becomes HTTPS.
<b>IAMS</b>	Identity and Access Management—a logical component that performs authentication and authorisation. Physically it is a set of discrete hardware and software products, plug-ins and protocols. Usually implemented as separate External IAMS (XIAMS) and Internal IAMS.
<b>IAS</b>	Identity and Access
<b>IP</b>	Internet Protocol—the principal communication protocol in the Internet protocol suite for relaying datagrams across networks
<b>IRD</b>	Inland Revenue Department (ie IRD number)
<b>MRP</b>	Multi-Rate PIE
<b>MSD</b>	NZ Ministry of Social Development
<b>NZBN</b>	New Zealand Business Number
<b>NZISM</b>	NZ Information Security Manual—the security standards and best practices for Government agencies. Maintained by the NZ Government Communications Security Bureau (GCSB).
<b>OAuth</b>	An HTTPS based protocol for authorising access to a resource, currently at version 2
<b>Payloads</b>	This refers to the data contained within the messages that are exchanged when a web service is invoked. Messages consist of a header and a payload.

Acronym/term	Definition
<b>PIP</b>	Portfolio Investor Proxy
<b>PRD</b>	Periodic PIE return without reconciliation
<b>Schemas</b>	An XML schema defines the syntax of an XML document, in particular of a payload. The schema specifies what a valid payload must or can contain, as well as validating the payload.
<b>SHA</b>	Secure Hashing Algorithm. There is a family of them that provide different strengths. SHA-2 is currently favoured over SHA-1, which has been compromised.
<b>SOAP</b>	Simple Object Access Protocol—a set of standards for specifying web services. GWS uses SOAP version 1.2
<b>SSL</b>	Secure Sockets Layer certificates—used to establish an encrypted connection between a browser or user’s computer and a service or website
<b>START</b>	Simplified Taxation and Revenue Technology—IR’s new core tax processing application. It is an implementation of the GenTax product from FAST Enterprises.
<b>TLS1.2</b>	Transport Layer Security version 1.2—the protocol that is observed between adjacent servers for encrypting the data that they exchange. Prior versions of TLS and all versions of SSL have been compromised and are superseded by TLS1.2.
<b>URL</b>	Universal Resource Locator—also known as a web address
<b>WSDL</b>	Web Service Definition Language—an XML definition of a web service interface
<b>X.509 certificate</b>	An international standard for encoding and describing a digital certificate. In isolation a public key is just a very large number, the X.509 certificate to which it is bound identifies whose key it is, who issued it, when it expires etc. When a counterparty’s X.509 digital certificate is received, the recipient takes their public key out of it and store the key in their own keystore. The recipient can then use this key to encrypt and sign the messages that they exchange with this counterparty.
<b>XIAMS</b>	External IAMS—an instance of IAMS that authenticates and authorises access by external parties, for example customers, trading partners etc, as opposed to internal parties such as staff
<b>XML</b>	Extensible Mark-up Language—a language used to define a set of rules used for encoding documents in a format that can be read by humans and machines
<b>XSD</b>	XML Schema Definition—the current standard schema language for all XML data and documents



## 7 Change log

This table lists all changes that have been made to this build pack document since version 0.8 was released (most recent changes listed first).

Version	Date of change	Document section	Description
<b>V0.8</b>	11/03/20	3.1.1.3	Added line item amendment details
	03/03/20	5.3	Added response code 1011, 1012.
	28/02/20	5.3	Added response code 987.
	27/02/20	5.3	Add response codes 1009, 1010.
	25/02/20	3.2	Removed return statuses: Late-Received, Ontime-Received, Posted, Processed, Submission-Received.
	24/02/20	5.2	Added response code 145.
	19/02/20	3.1.1.2	Updated incomeInformation 'rate' field to optional. Added list of valid values. Add note saying value will be assumed to be 0 if not passed in.
		5.3	Added error code 1008 – rate is invalid.
	17/02/20	3.1.1.2 3.3	Removed field accountPercentage from File and Retrieve Return.
	12/02/20	5.3	Added error codes 1004, 1005, 1006, 1007
	07/02/20	3.1	Updated line item country code and account holders country code description to say ISO2A.
	05/02/20	5.3	Added error code 984
	23/01/20	3.1.1.4	Updated the description for the following fields to no longer state fields are not included in payload: <ul style="list-style-type: none"> <li>landLossCarryForward</li> <li>combinedLossIncome</li> </ul>
	17/01/20	3.1	PeriodEndDate – updated description to show dates for which gateway will begin accepting PIE returns filed.
		3.1.1.2	Updated description for the following fields, replacing 'PIE or PIP' with 'investor'. <ul style="list-style-type: none"> <li>investorName</li> <li>investorIRD</li> <li>investorDOB</li> </ul>
	16/01/20	3.1.1.2	Updated nfidtaCountry field to show list of accepted values.

Version	Date of change	Document section	Description
		3.3	Updated CER Retrieve Return to show proper retrieve return example form.
		5.2	Added not to response code 105 stating it is not used for PIE.
	15/01/20	5.2	Added response code 140 – invalid minor form type.
		5.3	Added response code 1003 to be returned when Retrieve Return for Certificates is submitted without including Submissionkey.
	10/01/20	3.3	Retrieve Return – updated submission key for ANN to show Optional instead of Required.
		5.3	Removed response code 1003.
	08/01/20	3.1.1.2	Updated InvestorName and InvestorIRD to be required fields instead of optional due to START requirements.
		5.3	Added response code 1003.
	06/01/20	3.2	Added minorFormType to RetrieveStatus
		3.3	Make submission key conditional by form type
	12/12/19	3.2	Removed the following statuses from the return status table: <ul style="list-style-type: none"> <li>• New</li> <li>• Amended</li> <li>• Converted Penalty</li> <li>• Processing</li> <li>• Posted</li> </ul>
	11/12/19	3.1.1.4	<ul style="list-style-type: none"> <li>• re-added netTaxPayable to field table with description as not needed.</li> <li>• re-added landLossCarryForward to field table with description as not needed.</li> <li>• re-added combinedLossIncome to field table with description as not needed.</li> </ul>
		5.3	<ul style="list-style-type: none"> <li>• Removed field isReverseReplace from PIE ANN file request.</li> <li>• Added response code 1001 – Reverse replace is not valid for this form type.</li> </ul>
		3.1.1.1	<ul style="list-style-type: none"> <li>• Removed invalid field 'externalID' from PIE ANN sample payload</li> <li>• Removed field 'isReverseReplace' from ANN fields table and sample payload as</li> </ul>

Version	Date of change	Document section	Description
			it is not a valid field for PIE Annual Reconciliation.
		3.1.1.2	<ul style="list-style-type: none"> <li>Removed word 'employee' from description for referenceId in PIE CER.</li> <li>Added valid range of repeating values to descriptions for accountHolder and incomeInformation.</li> </ul>
	10/12/19	3.1.1.1	Removed the following fields from PIE Annual file request form: <ul style="list-style-type: none"> <li>accountCeaseDate</li> <li>accountCeaseExplain</li> </ul>
	09/12/19	3.1.1.4	Removed the following fields from PIE Periodic file request form: <ul style="list-style-type: none"> <li>netTaxPayable</li> <li>landLossCarryForward</li> <li>combinedLossIncome</li> </ul>
		3.1.1.4	<ul style="list-style-type: none"> <li>Updated PER fields table and payload to have field submissionKey</li> </ul>
		3.1.1.2	<ul style="list-style-type: none"> <li>Updated sample CER payload to match build pack fields and schema</li> </ul>
	28/11/19	3.1.1	<ul style="list-style-type: none"> <li>Added isNilReturn and isFinalReturn to Standard Fields section and added description saying both are not supported for PIE.</li> </ul>
		3.1.1.3, 3.1.1.4	<ul style="list-style-type: none"> <li>Added section 3.1.1.3 – line item amendments. Updated PIE Periodic to section 3.1.1.4</li> </ul>
		3.1.1.2	<ul style="list-style-type: none"> <li>Moved the following fields from lineItems to incomeInformation: taxableIncomeLowMid, netTaxPaidOnInvestorIncomeLowMid, totalTaxCreditOnInvestorIncomeLowMid, zeroRateExitedTaxableIncome, zeroRateTotalForeignTaxCredits, zeroRateTotalOtherTaxCredits, zeroRateTotalICTaxCredits, zeroRateTotalRWTTaxCredits, zeroRateTaxPaymentExitedInvestors</li> <li>netTaxPaidOnIncome has been removed from lineitems as it existed on incomeinformation as deductedAmount. Updated description in incomeinformation.</li> <li>totalTaxCreditsOnIncome has been removed from lineitems as it existed in</li> </ul>

Version	Date of change	Document section	Description
			<p>incomeinformation as totalTaxCredits. Updated dscription in incomeinformation.</p> <ul style="list-style-type: none"> <li>totalIncomeLoss has been removed from lineitems as it existed in incomeinformation as grossAmount. Updated description in incomeinformation.</li> <li>rateAtYearEnd has been removed from lineitems as it existed as rate in incomeinformation. Updated description in incomeInformation.</li> <li>updated unitsHeld in incomeInformation to unitsAtYearEnd. Removed unitsAtYearEnd from lineitems. Updated description in incomeInformation.</li> <li>rateChanged existed in both incomeInformation and lineitems. Removed from lineItems, updated description in incomeInformation.</li> <li>Added jointInvestor</li> <li>Added investorEmail</li> <li>Added investorPhone</li> <li>Removed residentialAddressLine1, residentialAddressLine2, residentialAddressLine3, residentialAddressLine4.</li> <li>Added ContactAddress</li> <li>Changed certificates / certificate structure to be just lineItems (stay consistent with investment income)</li> </ul>
	27/11/19	3.1.1.1, 3.1.1.2, 3.1.1.3	<ul style="list-style-type: none"> <li>Removed references to isNilReturn and isFinalReturn as there were inconsistencies in the build pack.</li> </ul>
	26/11/19	3.2 – Retrieve Status	<ul style="list-style-type: none"> <li>Added submissionKey as Optional field to sample payload and fields table.</li> </ul>
	26/11/19	3.3 – Retrieve Return	<ul style="list-style-type: none"> <li>Added submissionKey as Required field to sample payload and fields table</li> </ul>
	26/11/19	3.1.1.2 – Annual Reconciliation Certificates	<ul style="list-style-type: none"> <li>Updated country code description to include ISO 3166 alpha-3 standard country code.</li> <li>Updated rateAtYearEnd to Required</li> <li>Updated issuer IRD to Required</li> <li>Updated investorCertID to Required</li> </ul>

---

Version	Date of change	Document section	Description
			<ul style="list-style-type: none"><li>Updated certPeriodEndDate to Required</li><li>Updated all other fields to Optional.</li></ul>
	26/11/19		<ul style="list-style-type: none"><li>V0.8 released</li></ul>