
Q

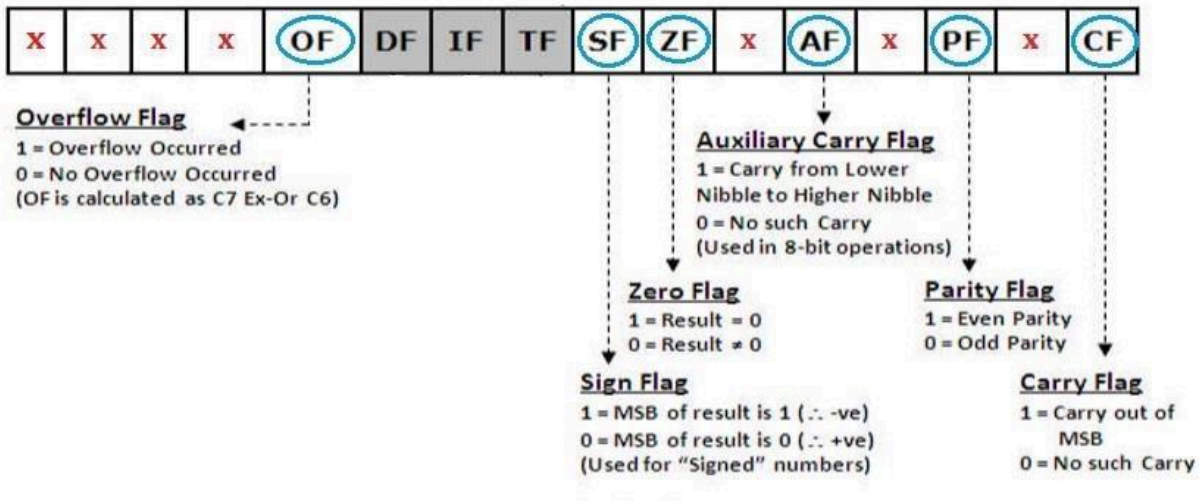

1. MOV AX, ABCDh
   MOV BX, 9876h
   ADD AX, BX

ABCD: 1010 1011 1100 1101
9876: 1001 1000 0111 0110

---

1 0100 0100 0100 0011

Ok

1. AF = 1; // lower nibble to upper nibble there is a carry 1
2. OF = 1; // there is carry bit 1 from 16th bit to 17th bit
3. CF = 1 ; // there is a carry bit at the result
4. ZF = 0 ; // the result or the answer is not a zero
5. PF = 0 // there are odd number of 1s in the LSB 8 bits
6. SF = 0 // Result's MSB bit is 0 therefore its a positive number

Do it yourself:

MOV AX, ABCCh
MOV BX, 9876h
ADD AX, BX

ABCC: 1010 1011 1100 1100
9876: 1001 1000 0111 0110

AF =
OF =
CF =
ZF =
PF =
SF =