


Next JS Assignment 7


- Enable logging in next js config to experience the memoization using fetch variations ['force-cache'/'no-store']




- Create a revalidate action to purge the caching using revalidate tag.

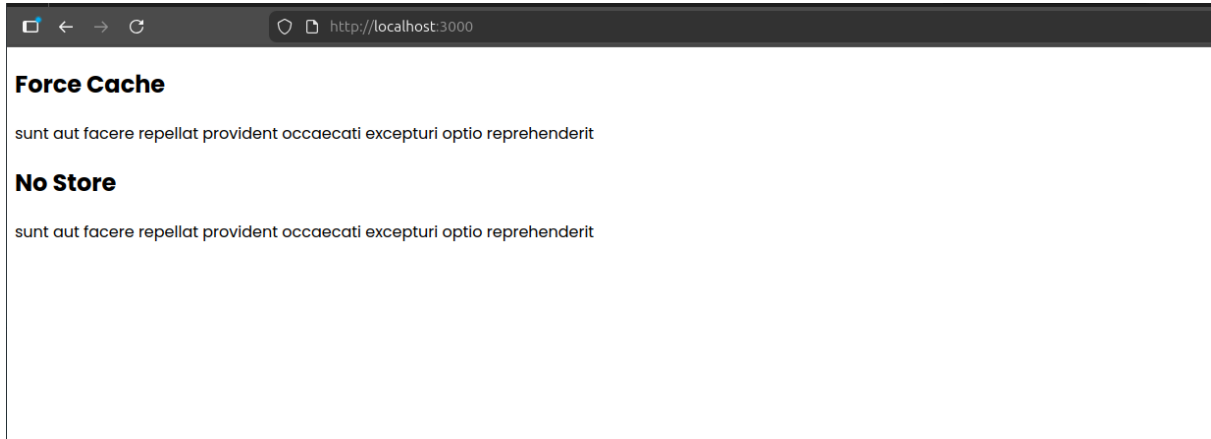


- Create a pop-up component and a button , pop-up component should be imported dynamically and should open on button click.

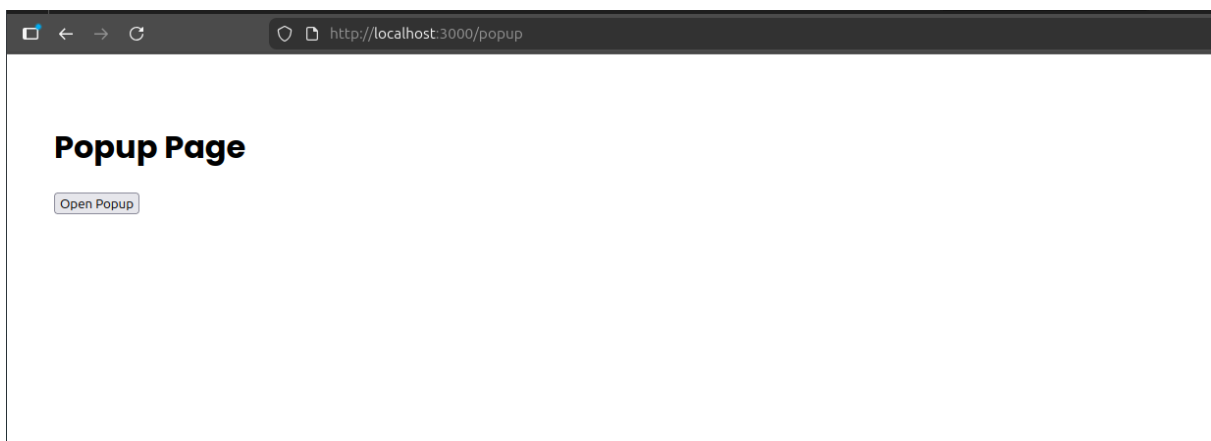

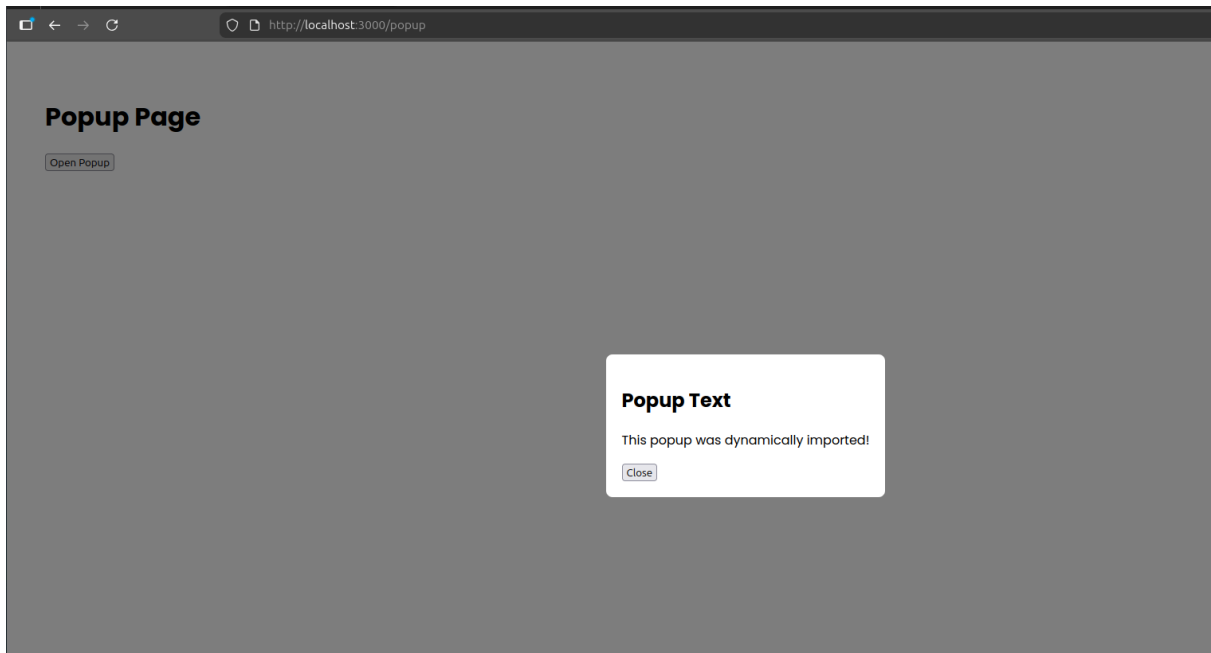

- Use a dummy api that provides images and use next image component to render it.

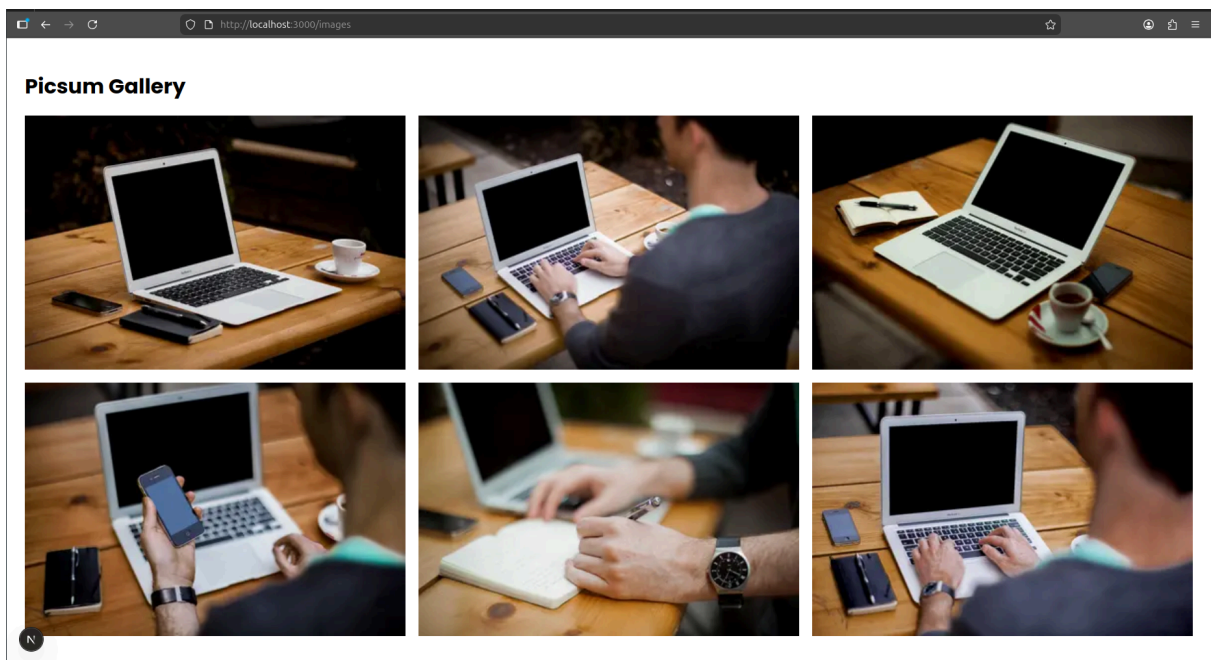

- Change the font of pages implementing next/font.

```

layout.tsx X page.tsx .../app 1 Popup.tsx page.tsx .../popup css globals.css TS actions.
next-app-router > app > layout.tsx > ...
1  import type { Metadata } from "next";
2  import "../globals.css";
3
4  import { Poppins } from "next/font/google"; 647 (gzipped: 378)
5
6
7  const poppins = Poppins({
8    subsets: ["latin"],
9    weight: ["400", "500", "700"],
10 });
11

```

- Install bundle analyzer and review the bundle of your project.

