Township: Technical Design Document

Repository	https://github.com/AmanSingh-tech/township
Live app	Not deployed publicly. Runs locally with `docker compose up --build` (see deployment.md).
Client	Company A, Pune: 2,400 flats in 28 towers
Author, date	Aman Kumar Singh, 4 November 2026

1. Context

Bills are made in Excel, payments are matched to flats by hand before Tally, complaints arrive by phone and 28 WhatsApp groups, and visitors go into paper registers. The brief puts the cost at ₹83.57 lakh a year. It targets on-time payments up from 70% to 90%, 80% less time spent matching payments, and reopened complaints down from 25% to under 8%.

Core build, shipped end to end in 8 screens, on the brief's sample data (its three flats are reproduced exactly and tested):

Screen	Role	Purpose
Sign in	All	Mobile number and a one-time code, linked to a flat
Resident home	Resident	Dues, open complaints and today's visitors; every action within two taps
Bills and test payment	Resident	Area × rate, late interest, test checkout, numbered receipt, ledger
Raise a complaint, complaint status	Resident	Text and photo; AI category and urgency; timeline; rating on closure
Help desk queue	Help desk	Auto-assignment, status updates, one-tap category change
Bank matching	Accounts	Bank CSV in; confident credits post, unclear ones are queued
Committee report	Committee	Collections, dues ageing, complaint times; signed and frozen monthly

Also built as optional depth: family and tenant members, notices, gate tablets with photos and guest codes (working offline), amenity booking with fees, and a Tally export. Out of scope, as in the brief: accounting beyond maintenance, CCTV and barriers, a marketplace.


2. Assumptions

Given by the brief: ₹6.50 per sq ft a month, late fees under the bye-laws, visitor photos deleted after 90 days, English, Marathi and Hindi, and mocked payments and messages. Where the brief is silent, I assumed the following. Each is a setting or a single function.

#	Assumption
A1	"Days overdue" counts from the oldest unpaid due date, so T12-0408 (47 days) also owes the next month: ₹12,788 plus ₹216 interest.
A2	Late fee means simple interest on overdue principal at 21% a year (the model bye-law ceiling). Payments clear interest first, then the oldest bill.
A3	Bills are raised on the 1st and due on the 10th. Opening arrears carry no interest in the app.
A4	Bank statements are CSV exports. UPI narrations carry the payer name, UPI ID and UTR, and sometimes a flat number.

A5	A credit posts automatically only on a flat number or registered UPI ID, a score of 80 or more and a lead of 30 over the next flat.
A6	Response targets are 15 min (critical), 2 h (high), 8 h (medium) and 24 h (low). The duty manager is one configured number.
A7	Roles beyond the core two: accounts, committee, admin and guard. Money decisions need two different people.
A8	Receipts are numbered without gaps per financial year, e.g. `RCT/2026-27/00001`.
A9	One server is enough: about 8 requests a second at the bill-day peak (most bills are paid in the first 10 days).

3. Architecture

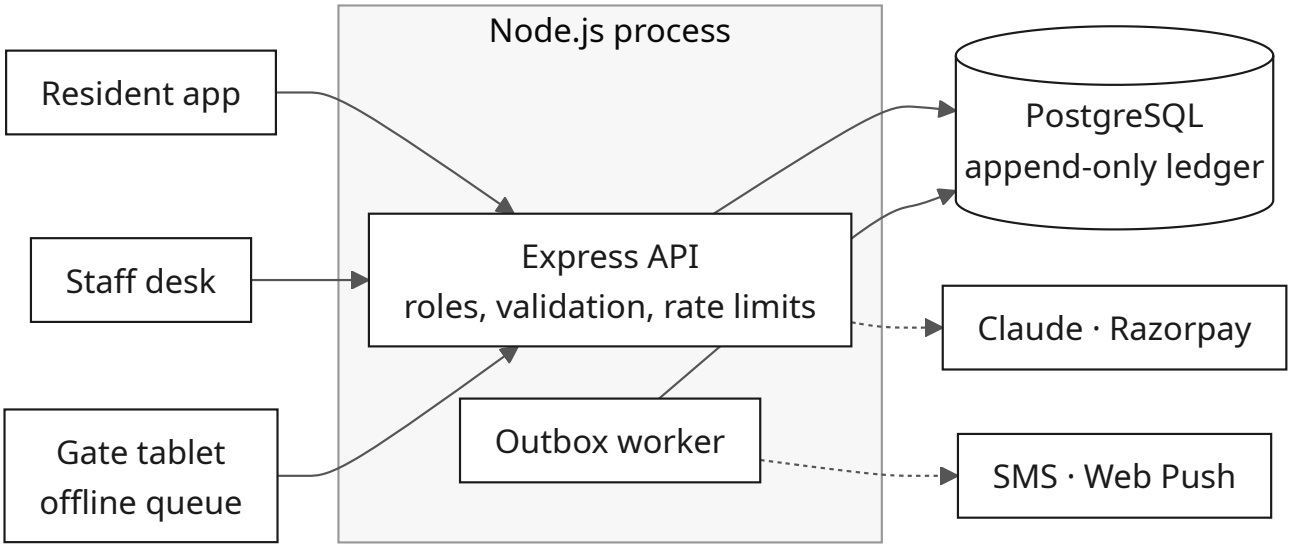

React and Vite on the client; Node 20, Express and PostgreSQL 16 on the server; one Docker image. Dotted lines are paid services, mocked when no credentials are set.

Decisions

> **ADR-1 · One modular service, not microservices**
>
> **Context:** one township peaks at about 8 requests a second. **Decision:** a single Node process with clear modules (billing, matcher, complaints, notify). **Consequences:** one deploy and no network failures between services; the load test shows 270–300 requests a second on one process.

> **ADR-2 · PostgreSQL, with the ledger append-only in the database**
>
> **Context:** the committee needs a report it can trust. **Decision:** bills and payments write ledger lines in one transaction; triggers block updates and deletes, and the app's database role cannot disable them. **Consequences:** corrections are new adjustment lines, and an integrity check (`cli verify`) can prove the books balance.


> **ADR-3 · Payment matching by explained rules, not a model**
>
> **Context:** a wrong match puts money on the wrong flat. **Decision:** score each credit with reasons; post only on strong, unambiguous evidence; queue everything else for a person, with a second person approving. **Consequences:** every post is repeatable and auditable; the share posted automatically grows as UPI IDs are remembered.

> **ADR-4 · Complaint triage by LLM, with a rule above it and a local fallback**
>
> **Context:** a wrong category is cheap to fix; a missed gas leak is not. **Decision:** safety words escalate by rule first; Claude classifies with a fixed schema; a local keyword model is used without a key or on any error. **Consequences:** a complaint is never blocked by the network, and the AI is never the last word on safety.

> **ADR-5 · Messages through a database outbox**
>
> **Context:** a crash must not lose a visitor alert or send one for a rolled-back payment. **Decision:** messages are written in the same transaction as their cause and sent by a worker, urgent first (`SKIP LOCKED`). **Consequences:** no extra queue to run; a visitor alert behind 4,200 bill alerts goes out in 0.9 s.

> **ADR-6 · An installable web app with one-time-code sign-in**
>
> **Context:** residents open the app for seconds and forget passwords. **Decision:** a web app installed from the browser, with push alerts; sign-in by a code to the registered number; guards use a PIN on a paired tablet. **Consequences:** no app store, and one codebase for phones and gate tablets.

4. Data model

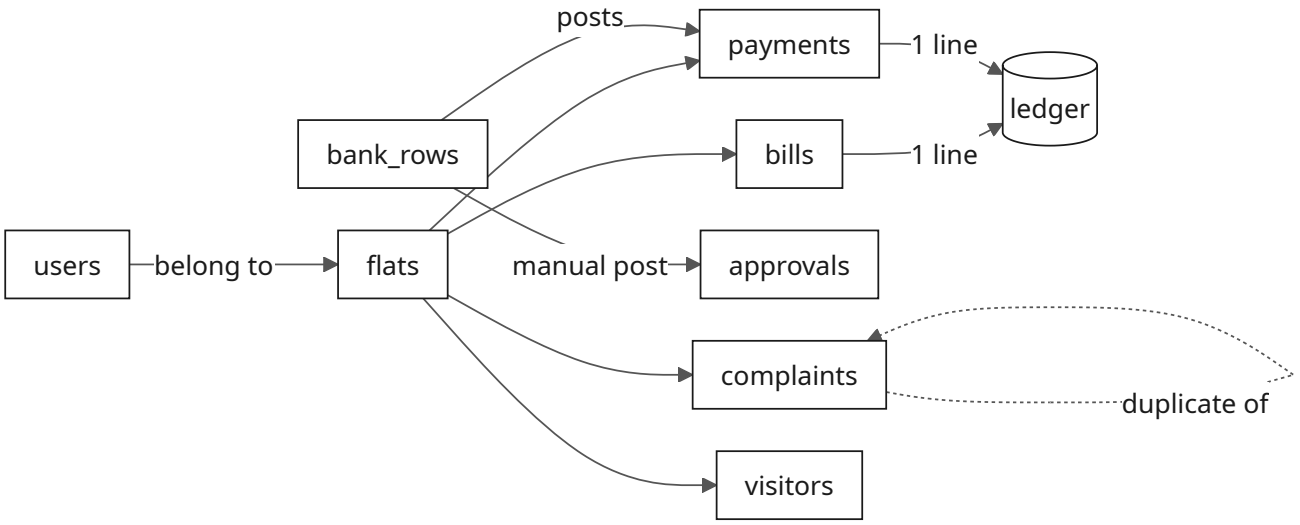


There are 34 tables in total; the core is shown. A flat's balance is always the sum of its ledger, never a stored number.

Rule	Enforced by
The books can't be rewritten	Triggers on `ledger`, `payments`, `audit_log`, `report_signoffs`, and a restricted app role
One bill per flat per month	`UNIQUE (flat_id, period)`, so a retried bill run can't double-bill
A gateway payment is recorded once	`UNIQUE gateway_payment_id`, so the callback and webhook are both safe
Nobody approves their own request	`CHECK (decided_by <> requested_by)`
Money is whole rupees	Integer columns with non-negative checks


5. Main flows

Bank statement matching (the hard part)

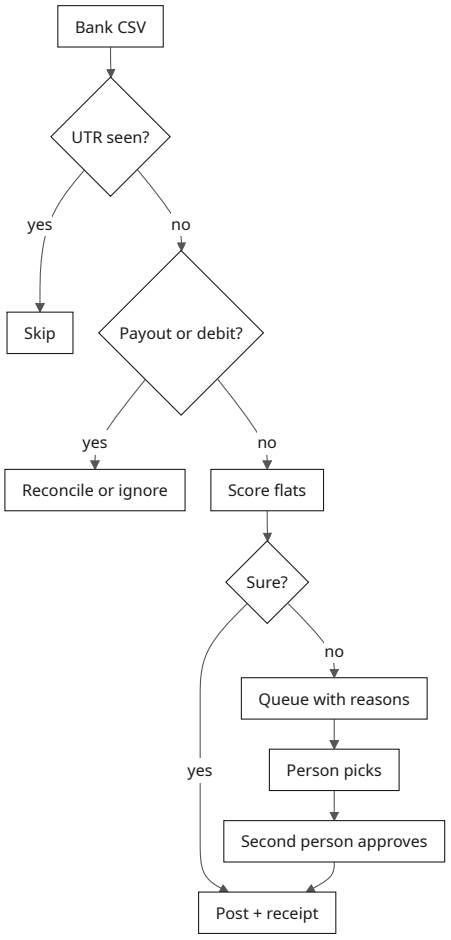

"Sure" means a flat number or registered UPI ID, a score of 80 or more, a lead of 30 or more, and no other flat with strong evidence. Re-uploading a statement posts nothing new.

Complaint triage

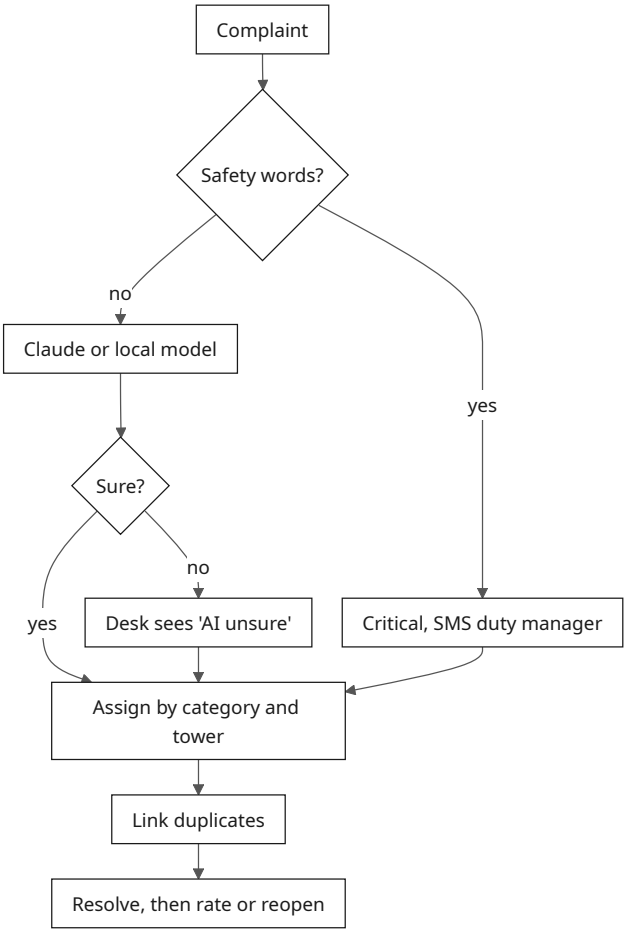

"Sure" means the model's confidence is 0.6 or more. Safety words are fire, gas, lift stuck and shock, in three languages.


Payment: the server creates the gateway order for the amount it computes; after checkout it verifies the signature and fetches the payment from the gateway, then writes the payment, ledger line, receipt number and alert in one transaction. A signed webhook covers residents who close the app mid-payment. **Gate:** entries are saved on the tablet while offline and sent with client ids when the network returns, so nothing is duplicated.

6. AI and automation

The brief requires	Built as
Match bank rows by amount, reference and UPI ID	An evidence score: flat number in the reference +60, registered UPI ID +50, amount equals dues +30, payer name +15; far above dues −40
Unclear payments are never posted automatically	Name or amount alone never posts; conflicts are queued with the top three flats and reasons

Classify complaints by category and urgency	Claude with a fixed category list and JSON schema; refusals, invalid answers or an 8 s timeout fall back to the local model
Help desk changes a category in one tap	A category menu; below 0.6 confidence the complaint is flagged "AI unsure"; the AI's original guess is kept
Fire, gas, lift stuck or shock always escalate	A rule run before the AI, in English, Hindi and Marathi; urgency is set to critical and can't be lowered
Link duplicates, never close them	Reports of the same tower asset are linked to one job; each flat closes and rates its own


Honest confidence. The local model reports the share of matched keywords, discounted by $1 - 0.5^n$, so a single keyword gives about 50%, not 100%. Testing found that "strong smell of gas" had been filed as Housekeeping at 100%. Now the hazard sets the category, and both cases are tests.

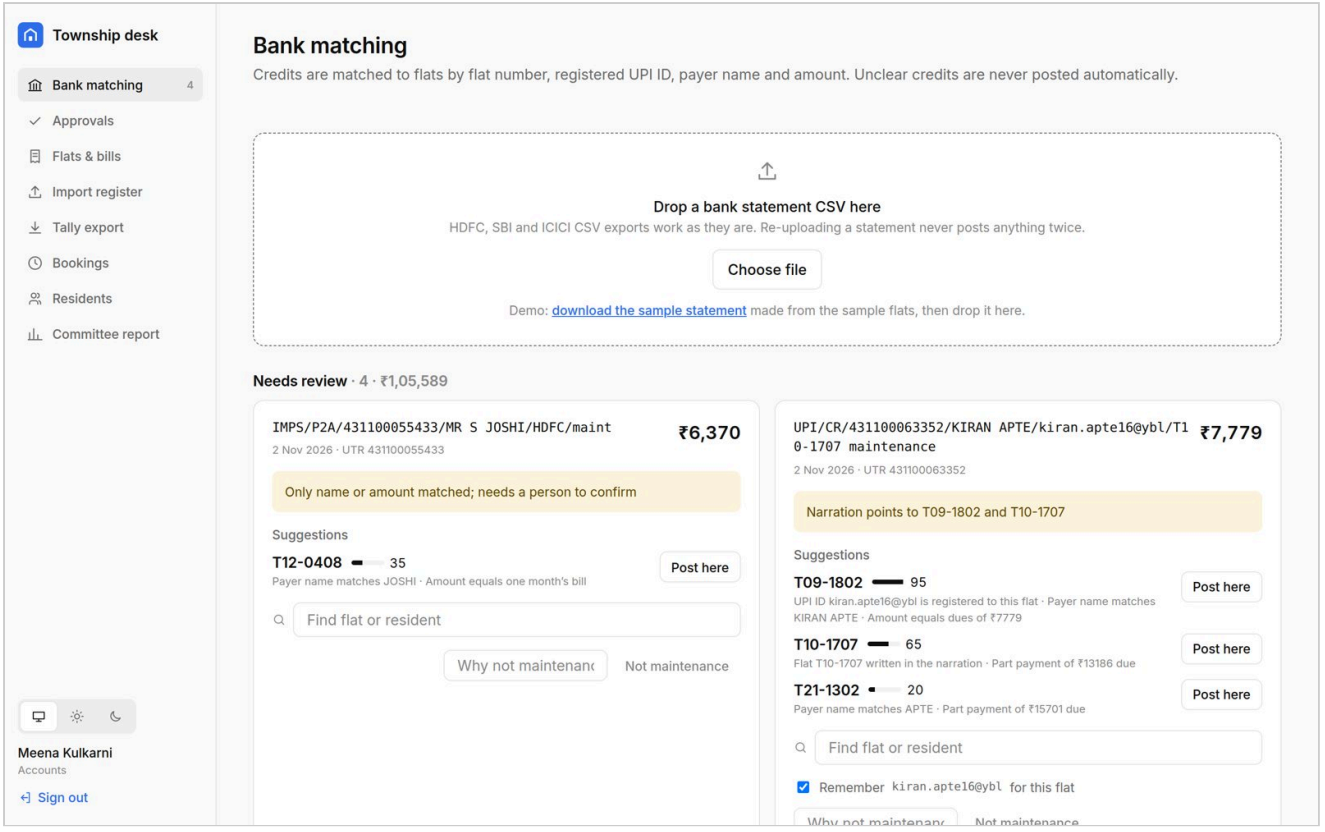


Bank matching on the sample statement. The narration names T10-1707, but the UPI ID is registered to T09-1802. Both are strong evidence, so the credit is queued with both flats and their reasons instead of being posted.

7. UI and design

The brief asks for minimal design: white space, a restrained palette and nothing without a purpose. Each screen has one accent colour for the next action, flat cards, light and dark themes, and loading, empty and error states from shared components. Phone screens use bottom tabs within thumb reach. The desk is denser, for a working day.

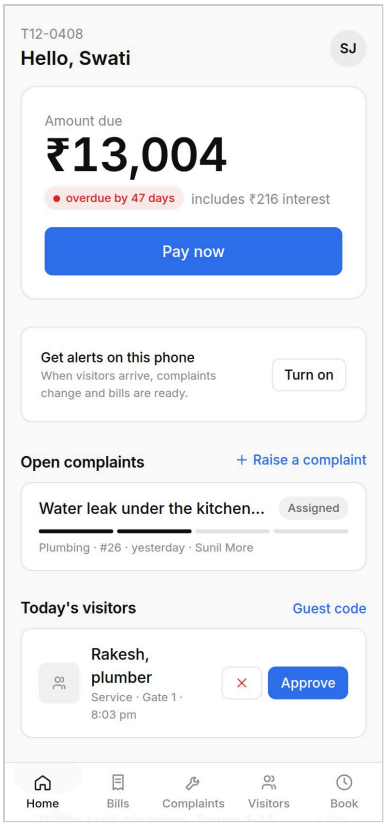

Resident home: dues first, with the overdue days and interest stated; complaints and visitors one tap away.

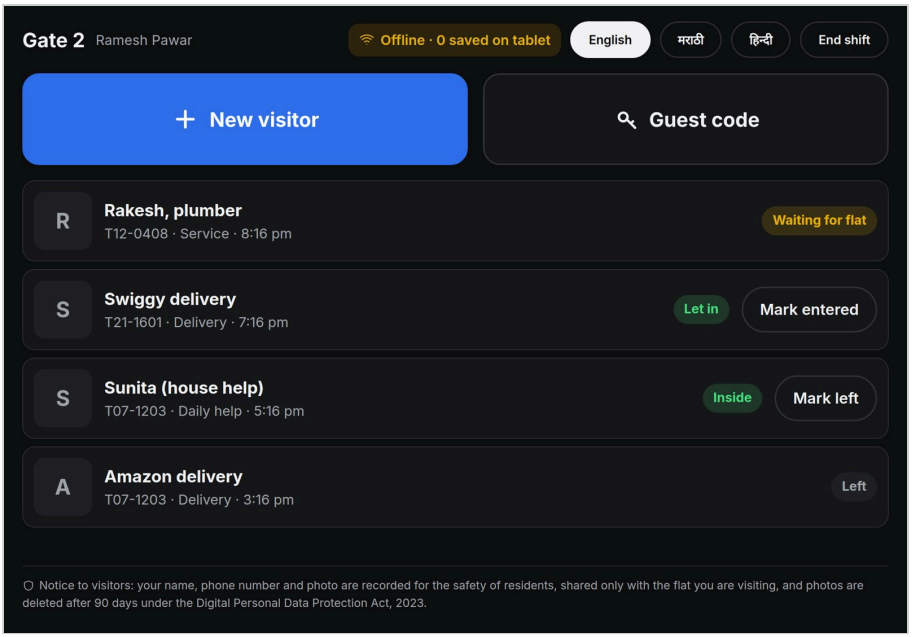

Gate tablet with the network down: very large buttons, a dark screen for night, "Offline · saved on tablet", language switch, and the DPDP notice to visitors.

8. Security and testing

- **Sign-in:** codes stored as hashes, valid for 5 minutes with 5 tries, at most 3 per number an hour. Unknown numbers get the same reply as known ones.
- **Access:** every route declares its roles, and residents only ever reach their own flat. Inputs are validated on every route, and CSV exports can't run spreadsheet formulas.
- **Data:** no secrets in the repository (only `.env.example`), and photos are served through 15-minute signed links. Under the DPDP Act: consent, data download, erasure, and visitor photos deleted after 90 days.
- **Tests:** 51 server and 6 browser tests, all passing. They cover the brief's sample flats, interest, gapless receipts, every matching case, safety words in three languages, role access and two-person approvals.
- **Load test** at full size (2,400 flats, a year of data): 95% of requests under 28 ms at five times peak; a bill run for every flat in 4.1 s; 2,400 bank credits matched in 17.5 s.

9. Cut, next and limits

- **Cut:** WhatsApp (needs Meta business approval), real SMS and payments (mocked, as the brief allows, following the real providers' steps), native apps, and technician sign-in.
- **Next:** measure AI accuracy from the stored guesses and corrections and tune the 0.6 threshold; remember UPI IDs by default to raise automatic matching; WhatsApp alerts through the same outbox; bank feeds instead of CSV uploads.
- **Limits:** not deployed publicly; the local classifier is keyword-based (anything it is unsure of goes to a person); tested on one server process.