


PART VII: SETTINGS

1. General: Personalise the Portal's interface.

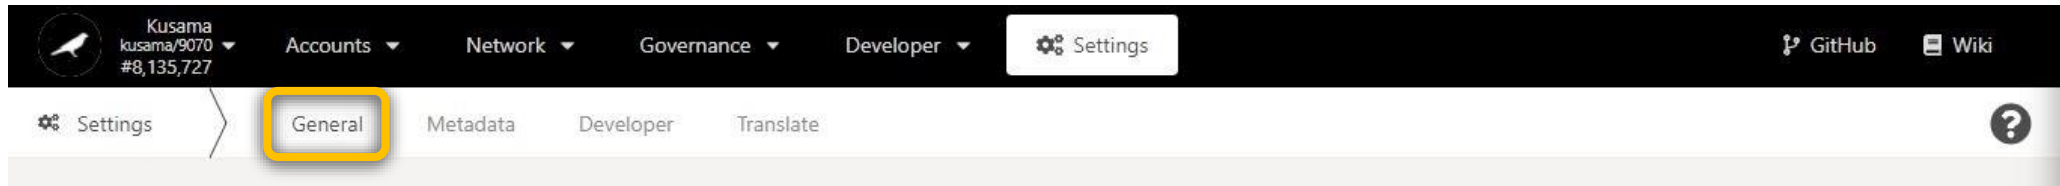

a) Personalise the default address prefix.

Basic information on technical words
used in the SETTINGS section.

The screenshot shows the Polkadot.js Settings interface. At the top, a navigation bar includes 'Kusama', 'Accounts', 'Network', 'Governance', 'Developer', and 'Settings'. The 'Settings' section is active, with sub-tabs for 'General', 'Metadata', 'Developer', and 'Translate'. The 'General' tab is selected, showing various settings. A blue box with the text '1. Click on the address prefix dropdown menu.' has a green arrow pointing to the 'address prefix' dropdown menu. A yellow box on the right contains detailed information about address prefixes. A green arrow points from the 'Basic information on technical words' text to a help icon in the top right corner.

address prefix ?
Default for the connected node (Kusama Relay Chain, 2)

default icon theme ?
Default for the connected node

default interface theme
Light theme (default)

default interface language
Default browser language (auto-detect)

manage hardware connections ?
Do not attach Ledger devices

1. Click on the **address prefix** dropdown menu.

Address prefixes in detail:

Substrate chains' addresses follow a standardised format that allows different representations for the same public key in a private-public key pair.

This format uses an address prefix to ascribe an address to a specific network (i.e *Capital letter* for Kusama, "1" for Polkadot, "5" for the generic Substrate network).

All Substrate chains' addresses are compatible from one Substrate chain to another.

- Switching from one Substrate chain to the other will change the address prefix.
- Allowing your account on any Substrate chain will set the default address prefix as 5.

Save

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

The screenshot shows the Polkadot.js Apps interface with the 'Settings' menu open. The 'General' tab is selected. The 'Default for the connected node' dropdown is open, showing a list of relay chains. A green arrow points to the 'Substrate (42)' option, which is highlighted. A blue callout box contains the text '2. Select one option from the dropdown menu.'

Top navigation bar: Kusama kusama/9070 #8,278,667, Accounts, Network, Governance, Developer, Settings, GitHub, Wiki.

Settings tabs: Settings, General, Metadata, Developer, Translate.

Dropdown menu options:

- Default for the connected node (Kusama Relay Chain, 2)
- Default for the connected node (Kusama Relay Chain, 2)
- Polkadot Relay Chain (0)
- Kusama Relay Chain (2)
- Substrate (42)
- Dock Mainnet (22)
- Edgeware (7)
- Do not attach Ledger devices

Bottom right: Save


GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

The screenshot shows the Polkadot.js Apps interface. At the top, a dark navigation bar contains the Kusama logo, account information (kusama/9070, #8,278,673), and menu items for Accounts, Network, Governance, Developer, and Settings. The Settings menu is active, showing a sub-menu with General, Metadata, Developer, and Translate. The General settings section is visible, containing several dropdown menus: 'address prefix' (set to Substrate (42)), 'default icon theme' (Default for the connected node), 'default interface theme' (Light theme (default)), 'default interface language' (Default browser language (auto-detect)), and 'manage hardware connections' (Do not attach Ledger devices). A green box highlights the 'address prefix' dropdown. At the bottom right, a 'Save & Reload' button is highlighted with a green circle.

3. Click on **Save & Reload** to complete the procedure.

b) Personalise the default identicon.

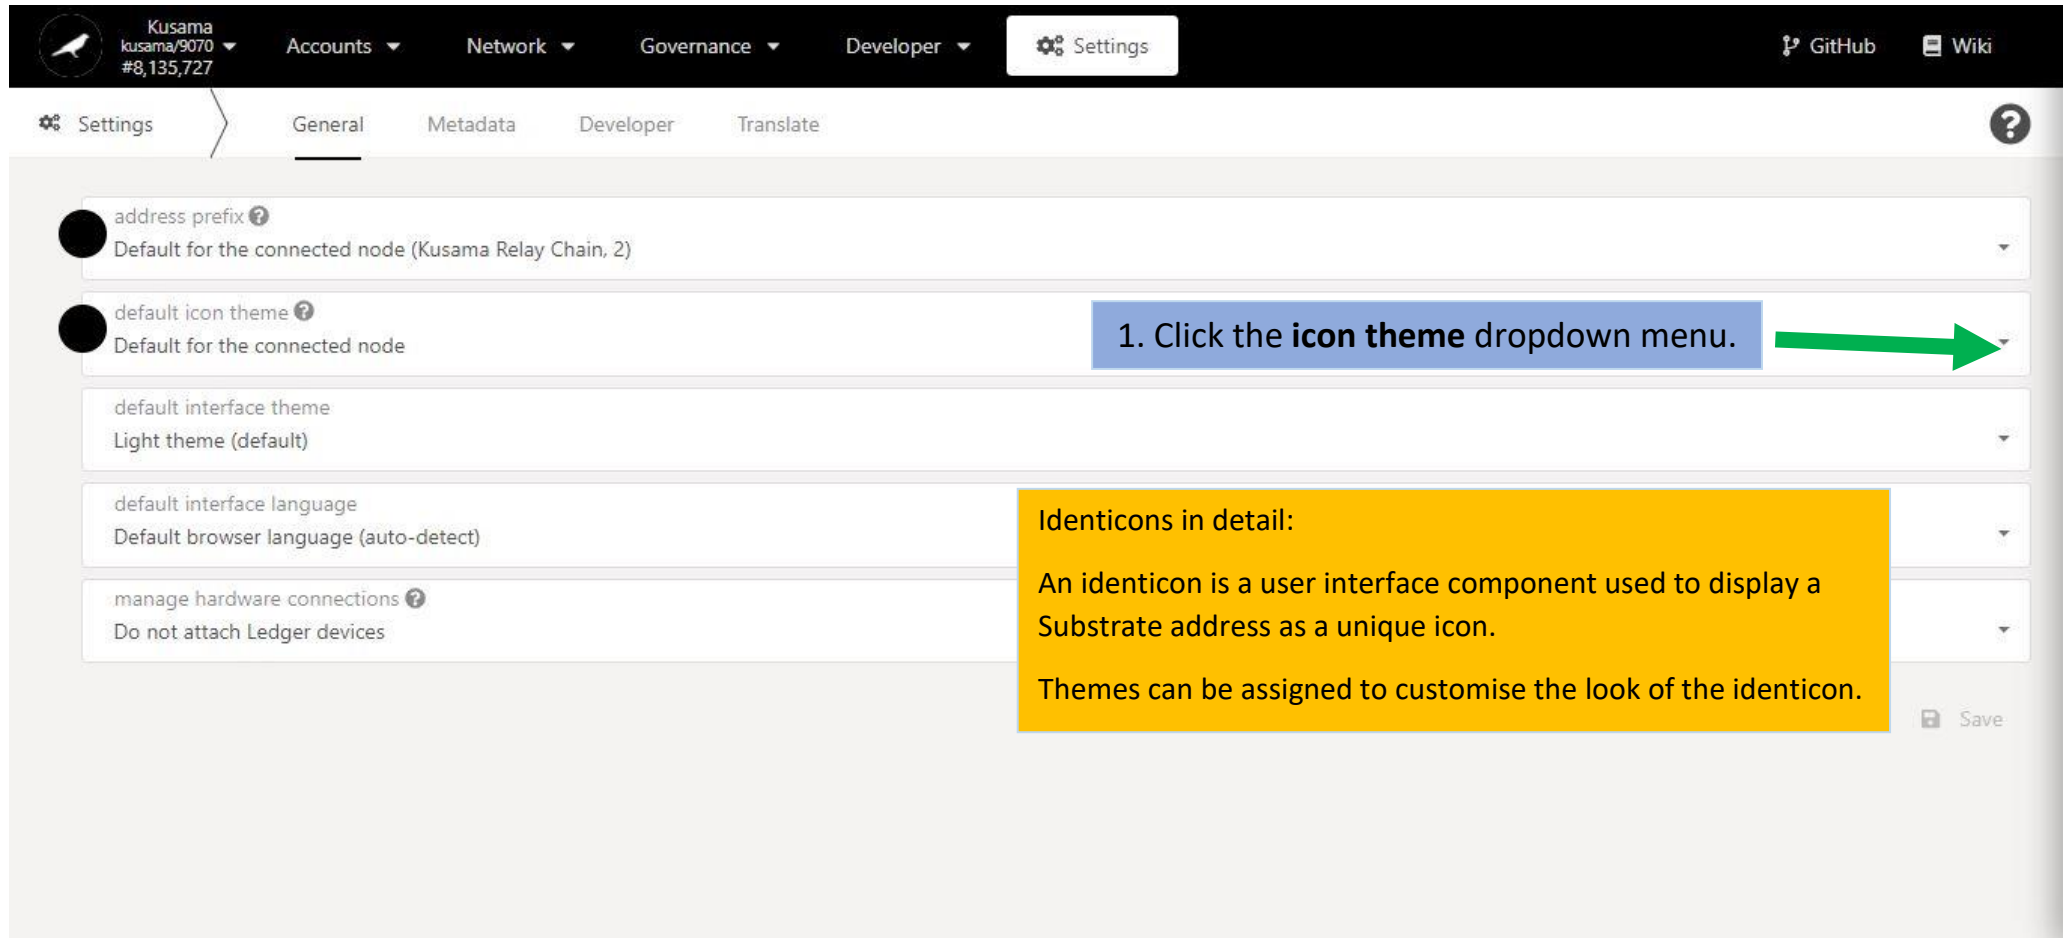

The screenshot shows the 'Settings' page for a Kusama node. The top navigation bar includes 'Accounts', 'Network', 'Governance', 'Developer', and 'Settings'. The 'Settings' page has tabs for 'General', 'Metadata', 'Developer', and 'Translate'. The 'General' tab is active, showing settings for 'address prefix', 'default icon theme', 'default interface theme', 'default interface language', and 'manage hardware connections'. A blue callout box with the text '1. Click the icon theme dropdown menu.' and a green arrow points to the 'default icon theme' dropdown menu. A yellow callout box provides details about identicons.

1. Click the icon theme dropdown menu.

Identicons in detail:

An identicon is a user interface component used to display a Substrate address as a unique icon.

Themes can be assigned to customise the look of the identicon.

Save

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

The screenshot shows the Polkadot.js Apps Settings interface. At the top, there's a navigation bar with links for Accounts, Network, Governance, Developer, and Settings. The Settings page has tabs for General, Metadata, Developer, and Translate. The General tab is active, showing a dropdown menu for 'address prefix' with the value 'Default for the connected node (Kusama Relay Chain, 2)'. Below this is a section for 'Default for the connected node' with a list of node types: Polkadot, Substrate, Beachball, and RoboHash. A green arrow points to the 'Substrate' option. A blue box with the text '2. Select one option from the dropdown menu.' is overlaid on the image. A 'Save' button is visible at the bottom right.

Kusama
kusama/9070
#8,278,680

Accounts Network Governance Developer Settings

Settings General Metadata Developer Translate

address prefix ?
Default for the connected node (Kusama Relay Chain, 2)

Default for the connected node

Default for the connected node

Polkadot

Substrate

Beachball

RoboHash

2. Select one option from the dropdown menu.

Save

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

The screenshot shows the 'Settings' page of the Polkadot.js Apps interface. The top navigation bar includes 'Accounts', 'Network', 'Governance', 'Developer', and 'Settings'. The 'Settings' page has tabs for 'General', 'Metadata', 'Developer', and 'Translate'. The 'General' tab is active, showing several settings:

- address prefix**: Default for the connected node (Kusama Relay Chain, 2)
- default icon theme**: Substrate (highlighted with a green box)
- default interface theme**: Light theme (default)
- default interface language**: Default browser language (auto-detect)
- manage hardware connections**: Do not attach Ledger devices

The **Save** button at the bottom right is highlighted with a green circle.

3. Click on **Save** to complete the procedure.

c) Personalise the default theme.

The screenshot shows the Polkadot.js Apps interface. At the top, there's a navigation bar with the Kusama logo, user info (kusama/9070 #8,135,727), and links to Accounts, Network, Governance, Developer, and Settings. The Settings page is open, showing the General tab. The settings list includes:

- address prefix: Default for the connected node (Kusama Relay Chain, 2)
- default icon theme: Default for the connected node
- default interface theme: Light theme (default)
- default interface language: Default browser language (auto-detect)
- manage hardware connections: Do not attach Ledger devices

A blue callout box with the text "1. Click on the **interface theme** dropdown menu." and a green arrow points to the dropdown arrow of the "default interface theme" setting.

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

The screenshot shows the Polkadot.js Apps interface. At the top, there's a dark header with a user profile (Kusama, kusama/9070, #8,278,692) and navigation links: Accounts, Network, Governance, Developer, and Settings. Below the header, there's a sub-header with tabs: Settings, General, Metadata, Developer, and Translate. The 'General' tab is active. The settings list includes:

- address prefix ⓘ: Default for the connected node (Kusama Relay Chain, 2)
- default icon theme ⓘ: Default for the connected node
- Light theme (default)
- Light theme (default)**
- Dark theme (experimental, work-in-progress)** (highlighted with a green arrow)
- manage hardware connections ⓘ: Do not attach Ledger devices

A blue box with the text "2. Select one option from the dropdown menu." is positioned next to the 'Dark theme' option. A green arrow points from this box to the 'Dark theme' option. At the bottom right, there is a 'Save' button.

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0


The screenshot shows the 'Settings' page of the Polkadot.js Apps interface. The top navigation bar includes the Kusama logo, account information (kusama/9070, #8,278,699), and tabs for Accounts, Network, Governance, Developer, and Settings. The 'Settings' tab is selected, and the 'General' sub-tab is active. The settings list includes:

- address prefix: Default for the connected node (Kusama Relay Chain, 2)
- default icon theme: Default for the connected node
- default interface theme: Dark theme (experimental, work-in-progress) (highlighted with a green box)
- default interface language: Default browser language (auto-detect)
- manage hardware connections: Do not attach Ledger devices

A 'Save' button is located at the bottom right, highlighted with a green circle.

3. Click on **Save** to complete the procedure.

4. Your default theme has been changed!

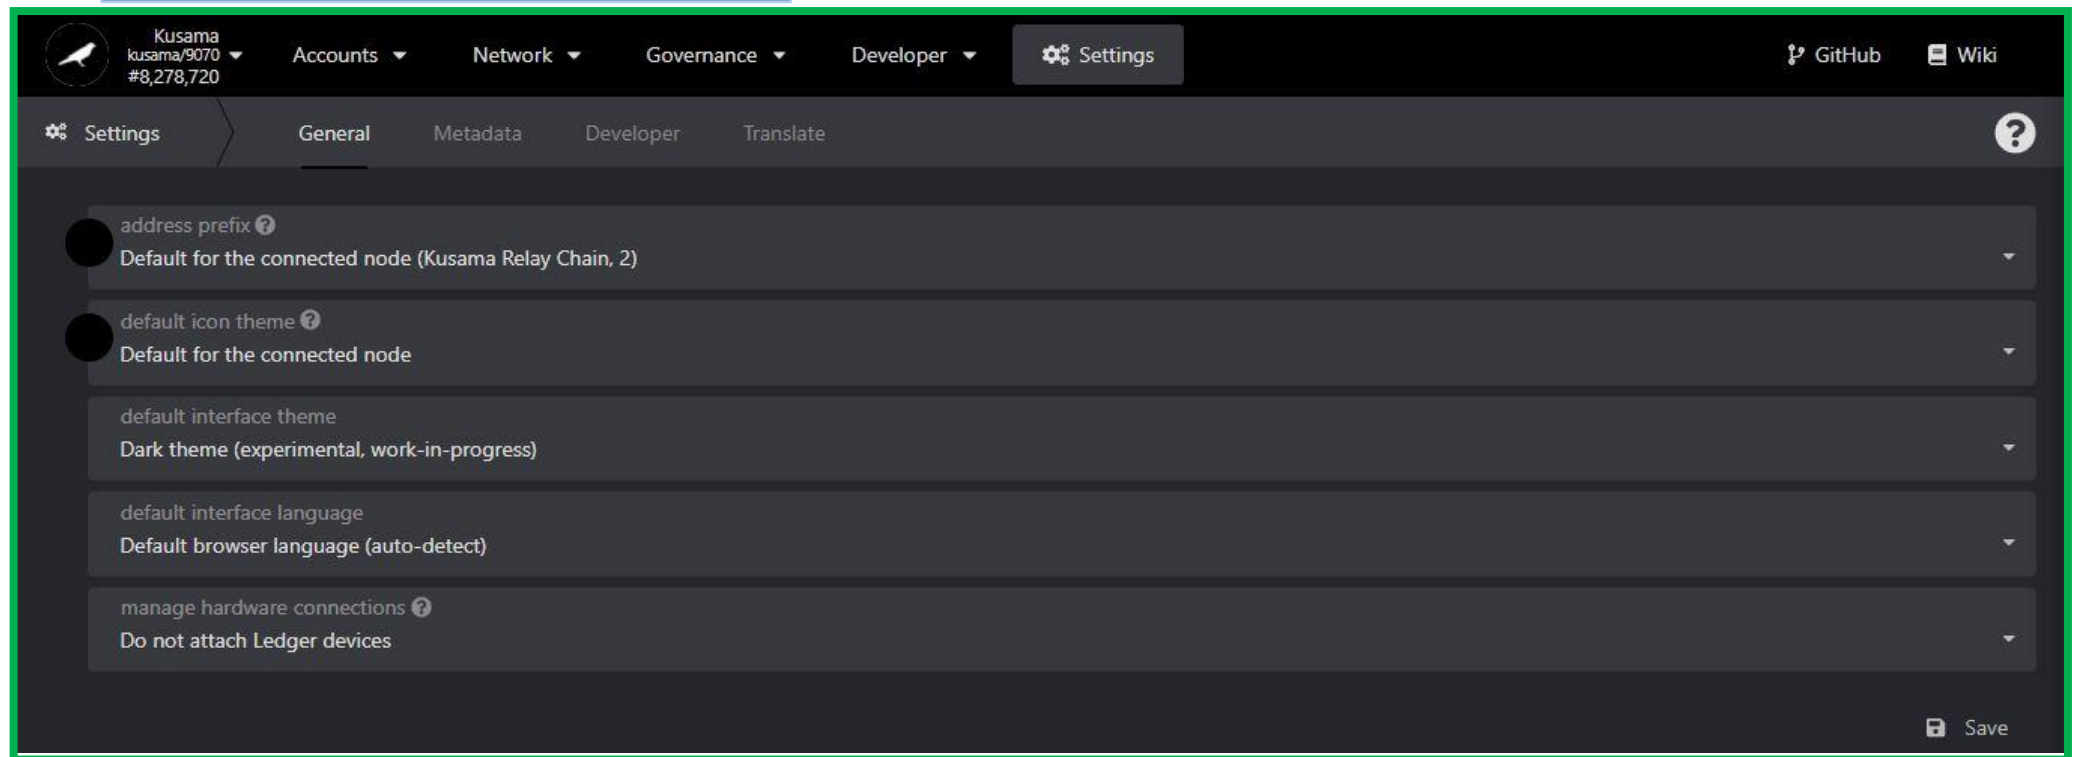

The screenshot shows the Polkadot.js Apps interface with the Settings menu open. The user is logged in as 'Kusama kusama/9070 #8,278,720'. The top navigation bar includes links for Accounts, Network, Governance, Developer, and Settings. The Settings page has tabs for General, Metadata, Developer, and Translate. The General tab is active, showing five settings: address prefix (set to 'Default for the connected node (Kusama Relay Chain, 2)'), default icon theme (set to 'Default for the connected node'), default interface theme (set to 'Dark theme (experimental, work-in-progress)'), default interface language (set to 'Default browser language (auto-detect)'), and manage hardware connections (set to 'Do not attach Ledger devices'). A 'Save' button is located at the bottom right of the settings list.

Kusama
kusama/9070
#8,278,720

Accounts Network Governance Developer Settings

Settings General Metadata Developer Translate ?

address prefix ?
Default for the connected node (Kusama Relay Chain, 2)

default icon theme ?
Default for the connected node

default interface theme
Dark theme (experimental, work-in-progress)

default interface language
Default browser language (auto-detect)

manage hardware connections ?
Do not attach Ledger devices

Save

d) Personalise the default language.

The screenshot shows the Kusama settings interface. At the top, there's a navigation bar with 'Kusama' (kusama/9070 #8,135,727), 'Accounts', 'Network', 'Governance', 'Developer', and 'Settings'. Below this is a sub-navigation bar with 'Settings', 'General', 'Metadata', 'Developer', and 'Translate'. The 'General' tab is active. It contains several settings:

- address prefix** ⓘ: Default for the connected node (Kusama Relay Chain, 2)
- default icon theme** ⓘ: Default for the connected node
- default interface theme**: Light theme (default)
- default interface language**: Default browser language (auto-detect). A blue callout box with the text "1. Click on the **interface language** dropdown menu." and a green arrow points to the dropdown arrow on the right.
- manage hardware connections** ⓘ: Do not attach Ledger devices

At the bottom right, there is a 'Save' button.

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

The screenshot shows the Polkadot.js Apps interface. At the top, a dark navigation bar contains the Kusama logo, account information (kusama/9070, #8,278,706), and menu items: Accounts, Network, Governance, Developer, and Settings. On the right of the navigation bar are links to GitHub and Wiki. Below the navigation bar, a sub-header shows 'Settings' as the active tab, followed by 'General', 'Metadata', 'Developer', and 'Translate'. The main content area is titled 'General' and contains several settings:

- address prefix**: Default for the connected node (Kusama Relay Chain, 2)
- default icon theme**: Default for the connected node
- default interface theme**: Light theme (default)
- Default browser language (auto-detect)**: A dropdown menu with the following options: Français, Bahasa Indonesia, Italiano, 日本語, 한국어, and Português. The 'Italiano' option is highlighted with a green arrow.

A blue callout box with the text '2. Select one option from the dropdown menu.' points to the 'Italiano' option in the language dropdown menu.

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Kusama
kusama/9070
#8,278,713

Accounts Network Governance Developer Settings

Settings General Metadata Developer Translate ?

address prefix ?
Default for the connected node (Kusama Relay Chain, 2)

default icon theme ?
Default for the connected node

default interface theme
Light theme (default)

default interface language
Italiano

manage hardware connections ?
Do not attach Ledger devices

Save

3. Click on **Save** to complete the procedure.


4. Your default language has been changed!

The screenshot shows the Polkadot.js Apps interface. At the top, a dark navigation bar contains the Kusama logo, account information (kusama/9070, #8,278,726), and menu items: Accounts, Network, Governance, Developer, and Settings. On the right of the navigation bar are links to GitHub and Wiki. Below the navigation bar, a sub-header shows 'Impostazioni' (Settings) as the active tab, followed by 'Generale' (General), 'Metadata', 'Sviluppatore' (Developer), and 'Traduci' (Translate). A green border highlights the 'Generale' section. This section contains five settings, each with a question mark icon for help:

- prefisso dell'indirizzo** (Address prefix): Predefinito per il nodo collegato (Kusama Relay Chain, 2)
- tema icone di default** (Default icon theme): Default for the connected node
- Tema di default** (Default theme): Tema chiaro
- lingua dell'interfaccia di default** (Default interface language): Italiano
- gestisci connessioni hardware** (Manage hardware connections): Do not attach Ledger devices

At the bottom right of the settings area is a 'Salva' (Save) button with a floppy disk icon.

e) Personalise hardware wallet connections and create a Polkadot-JS account from Ledger hardware.

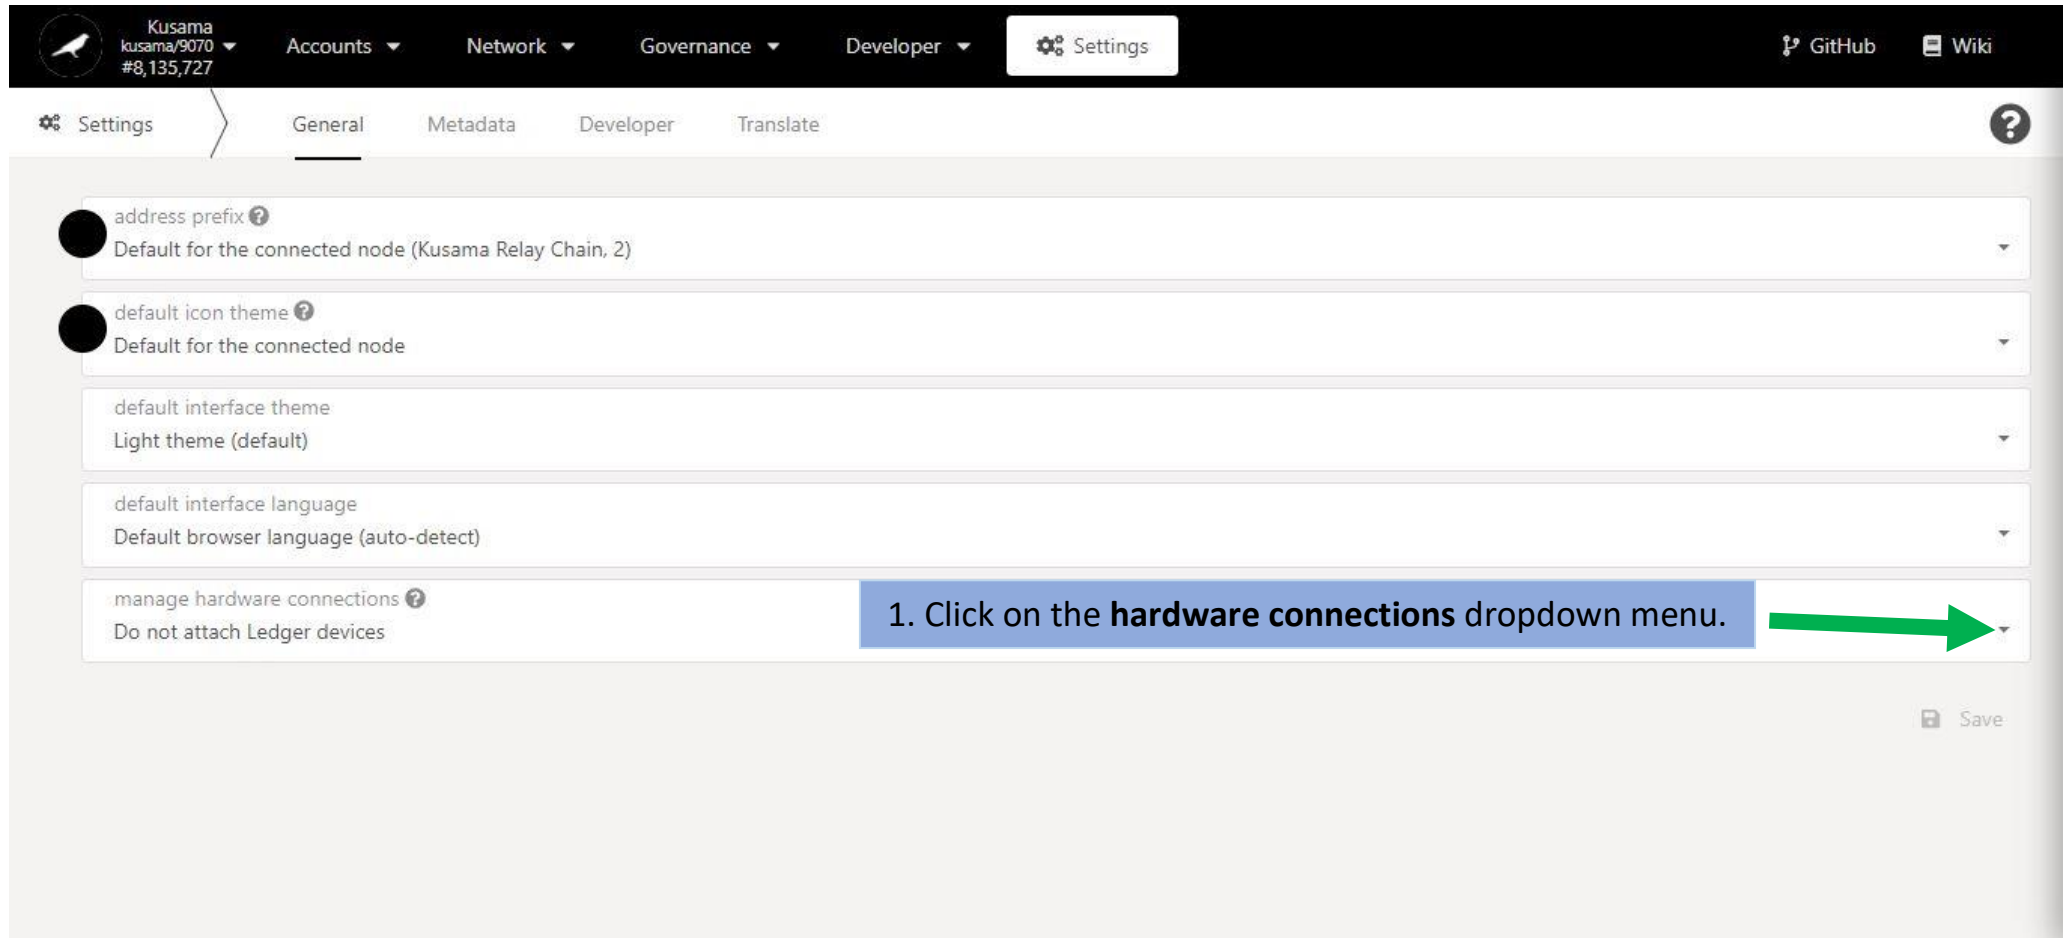

The screenshot shows the Polkadot-JS Settings interface. At the top, there is a navigation bar with a profile icon, the name 'Kusama', the address 'kusama/9070 #8,135,727', and tabs for 'Accounts', 'Network', 'Governance', 'Developer', and 'Settings'. The 'Settings' tab is active. Below the navigation bar, there are sub-tabs: 'General', 'Metadata', 'Developer', and 'Translate'. The 'General' sub-tab is selected. The main content area contains several settings: 'address prefix' (set to 'Default for the connected node (Kusama Relay Chain, 2)'), 'default icon theme' (set to 'Default for the connected node'), 'default interface theme' (set to 'Light theme (default)'), and 'default interface language' (set to 'Default browser language (auto-detect)'). The 'manage hardware connections' setting is currently set to 'Do not attach Ledger devices'. A blue callout box with the text '1. Click on the hardware connections dropdown menu.' and a green arrow points to the dropdown arrow of the 'manage hardware connections' setting. A 'Save' button is located at the bottom right of the settings area.

Kusama
kusama/9070
#8,135,727

Accounts Network Governance Developer Settings

Settings General Metadata Developer Translate

address prefix ?
Default for the connected node (Kusama Relay Chain, 2)

default icon theme ?
Default for the connected node

default interface theme
Light theme (default)

default interface language
Default browser language (auto-detect)


manage hardware connections ?
Do not attach Ledger devices

1. Click on the **hardware connections** dropdown menu.

Save

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

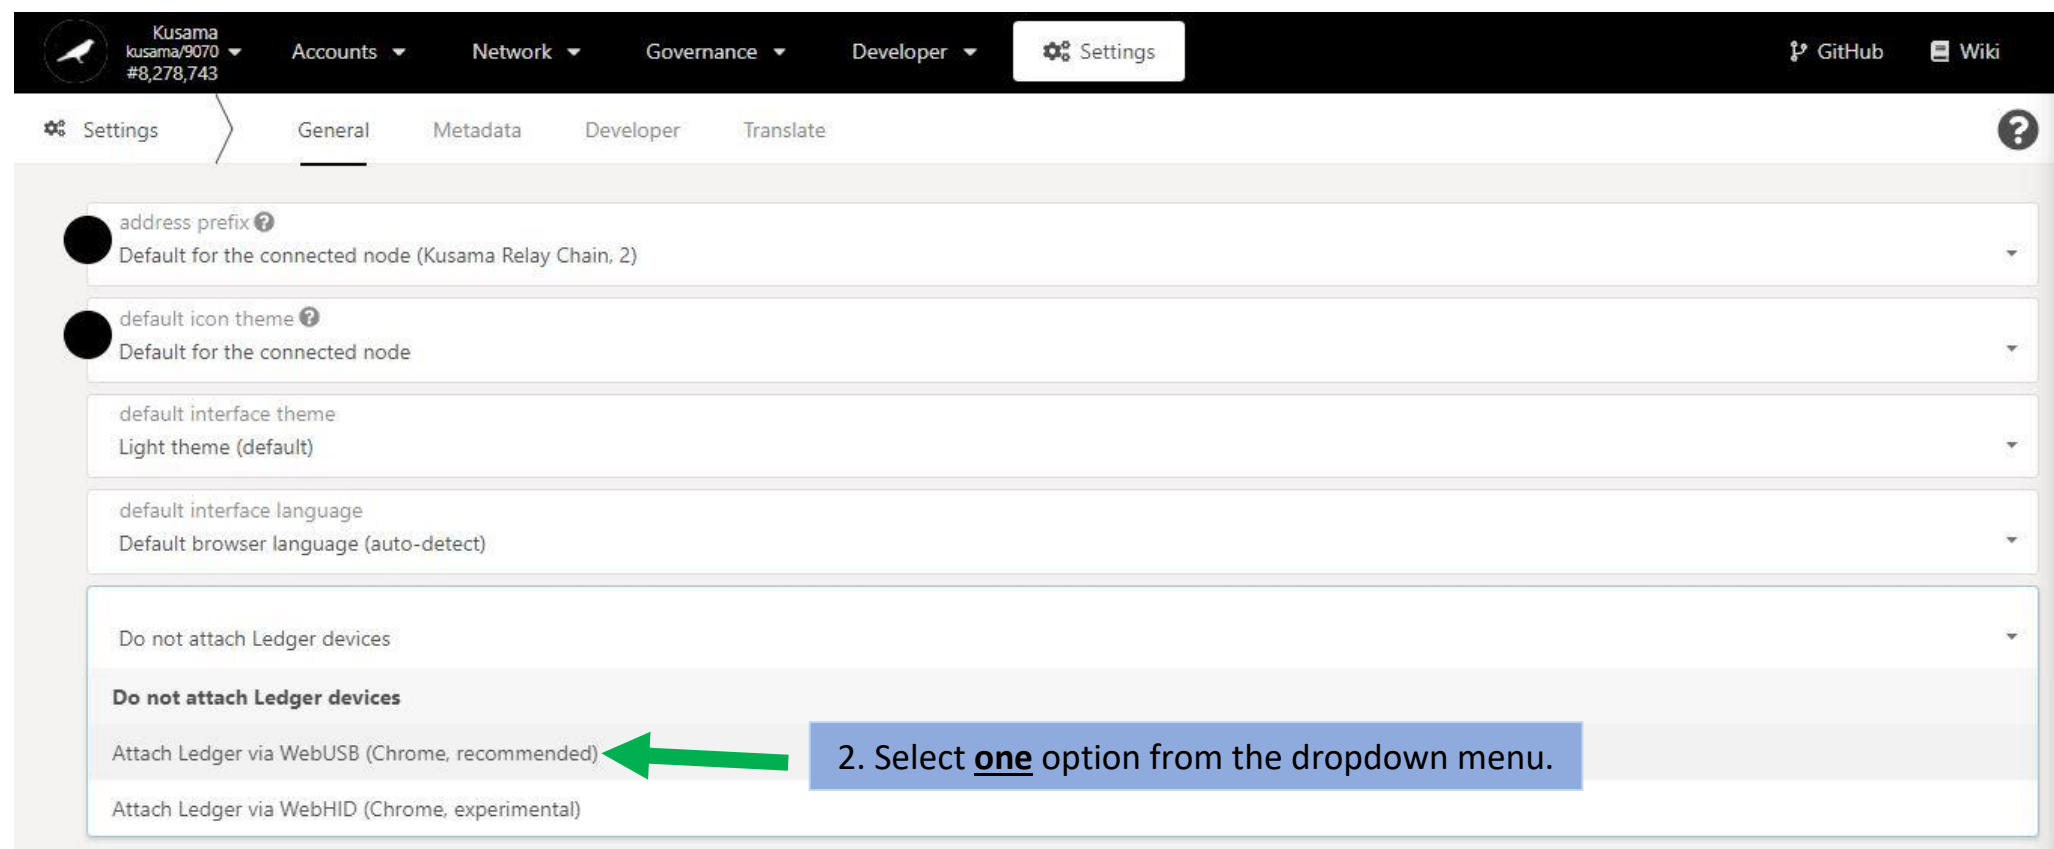

The screenshot shows the 'Settings' page of the Polkadot.js Apps interface. The top navigation bar includes a user profile for 'Kusama' (kusama/9070, #8,278,743) and links to 'Accounts', 'Network', 'Governance', 'Developer', and 'Settings'. The 'Settings' page has a sub-navigation bar with 'General', 'Metadata', 'Developer', and 'Translate'. The 'General' tab is active, showing several settings: 'address prefix' (set to 'Default for the connected node (Kusama Relay Chain, 2)'), 'default icon theme' (set to 'Default for the connected node'), 'default interface theme' (set to 'Light theme (default)'), and 'default interface language' (set to 'Default browser language (auto-detect)'). A section titled 'Do not attach Ledger devices' is expanded, showing three options: 'Do not attach Ledger devices' (selected), 'Attach Ledger via WebUSB (Chrome, recommended)', and 'Attach Ledger via WebHID (Chrome, experimental)'. A green arrow points to the 'Attach Ledger via WebUSB' option, and a blue box contains the instruction '2. Select one option from the dropdown menu.'

Kusama
kusama/9070
#8,278,743

Accounts Network Governance Developer Settings

Settings General Metadata Developer Translate

address prefix ?
Default for the connected node (Kusama Relay Chain, 2)

default icon theme ?
Default for the connected node

default interface theme
Light theme (default)

default interface language
Default browser language (auto-detect)

Do not attach Ledger devices

Do not attach Ledger devices

Attach Ledger via WebUSB (Chrome, recommended)

Attach Ledger via WebHID (Chrome, experimental)

2. Select one option from the dropdown menu.

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

The screenshot shows the settings interface of the Polkadot.js Apps. At the top, there is a navigation bar with the Kusama logo, account information (kusama/9070, #8,278,751), and tabs for Accounts, Network, Governance, Developer, and Settings. Below the navigation bar, there are sub-tabs for Settings, General, Metadata, Developer, and Translate. The main content area lists several settings: address prefix (Default for the connected node (Kusama Relay Chain, 2)), default icon theme (Default for the connected node), default interface theme (Light theme (default)), and default interface language (Default browser language (auto-detect)). The 'manage hardware connections' setting is highlighted with a green box; it is currently set to 'Attach Ledger via WebUSB (Chrome, recommended)'. Below this setting, a yellow warning box states: 'Ledger support is still experimental and some issues may remain. Trust, but verify the addresses on your devices before transferring large amounts. There are some features that will not work, including batch calls (used extensively in staking and democracy) as well as any identity operations.' At the bottom right, a 'Save' button is circled in green.

Kusama
kusama/9070
#8,278,751

Accounts Network Governance Developer Settings

Settings General Metadata Developer Translate

address prefix ?
Default for the connected node (Kusama Relay Chain, 2)

default icon theme ?
Default for the connected node

default interface theme
Light theme (default)

default interface language
Default browser language (auto-detect)

manage hardware connections ?
Attach Ledger via WebUSB (Chrome, recommended)

⚠ Ledger support is still experimental and some issues may remain. Trust, but verify the addresses on your devices before transferring large amounts. There are some features that will not work, including batch calls (used extensively in staking and democracy) as well as any identity operations.

Save

3. Click on **Save** to complete the procedure.

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

4. Click **Accounts**.

The screenshot shows the 'Accounts' page in the Polkadot.js Apps interface. A green arrow points to the 'Accounts' dropdown menu in the top navigation bar. Another green arrow points to the 'Add via Ledger' button in the account management section. The page displays a list of accounts under the 'My accounts' tab.

Navigation Bar:

- Kusama kusama/9070 #8,199,633
- Accounts (selected)
- Network
- Governance
- Developer
- Settings
- GitHub
- Wiki

Account Management Section:

- filter by name or tags
- accounts
- type
- tags
- balances

Account List:

star	icon	name	type	tags	balance	actions
★		ALTD@KSM (EXTENSION)	injected	no tags	10.3703 KSM	send ⋮
★		ANAELLE LTD@KSM	injected	no tags	1.0376 KSM	send ⋮
					11.4079 KSM	

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

add account via ledger

name ?
Ledger KSM

account type ?
Account type 0

address index ?
Address index 0

The name for this account as it will appear under your accounts.

The account type that you wish to create. This is the top-level derivation.

The address index on the account that you wish to add. This is the second-level derivation.

Cancel Save

6. Follow on-screen instructions carefully.

7. Click on **Save** to continue the procedure.

polkadot.js.org wants to connect


No compatible devices found.

8. Click **Cancel** to pause the Polkadot-JS Apps procedure.

Connect Cancel

Status of your Polkadot-JS Apps connection to your Ledger hardware.

9. Connect your Ledger hardware to your computer and **open Ledger Live app.**

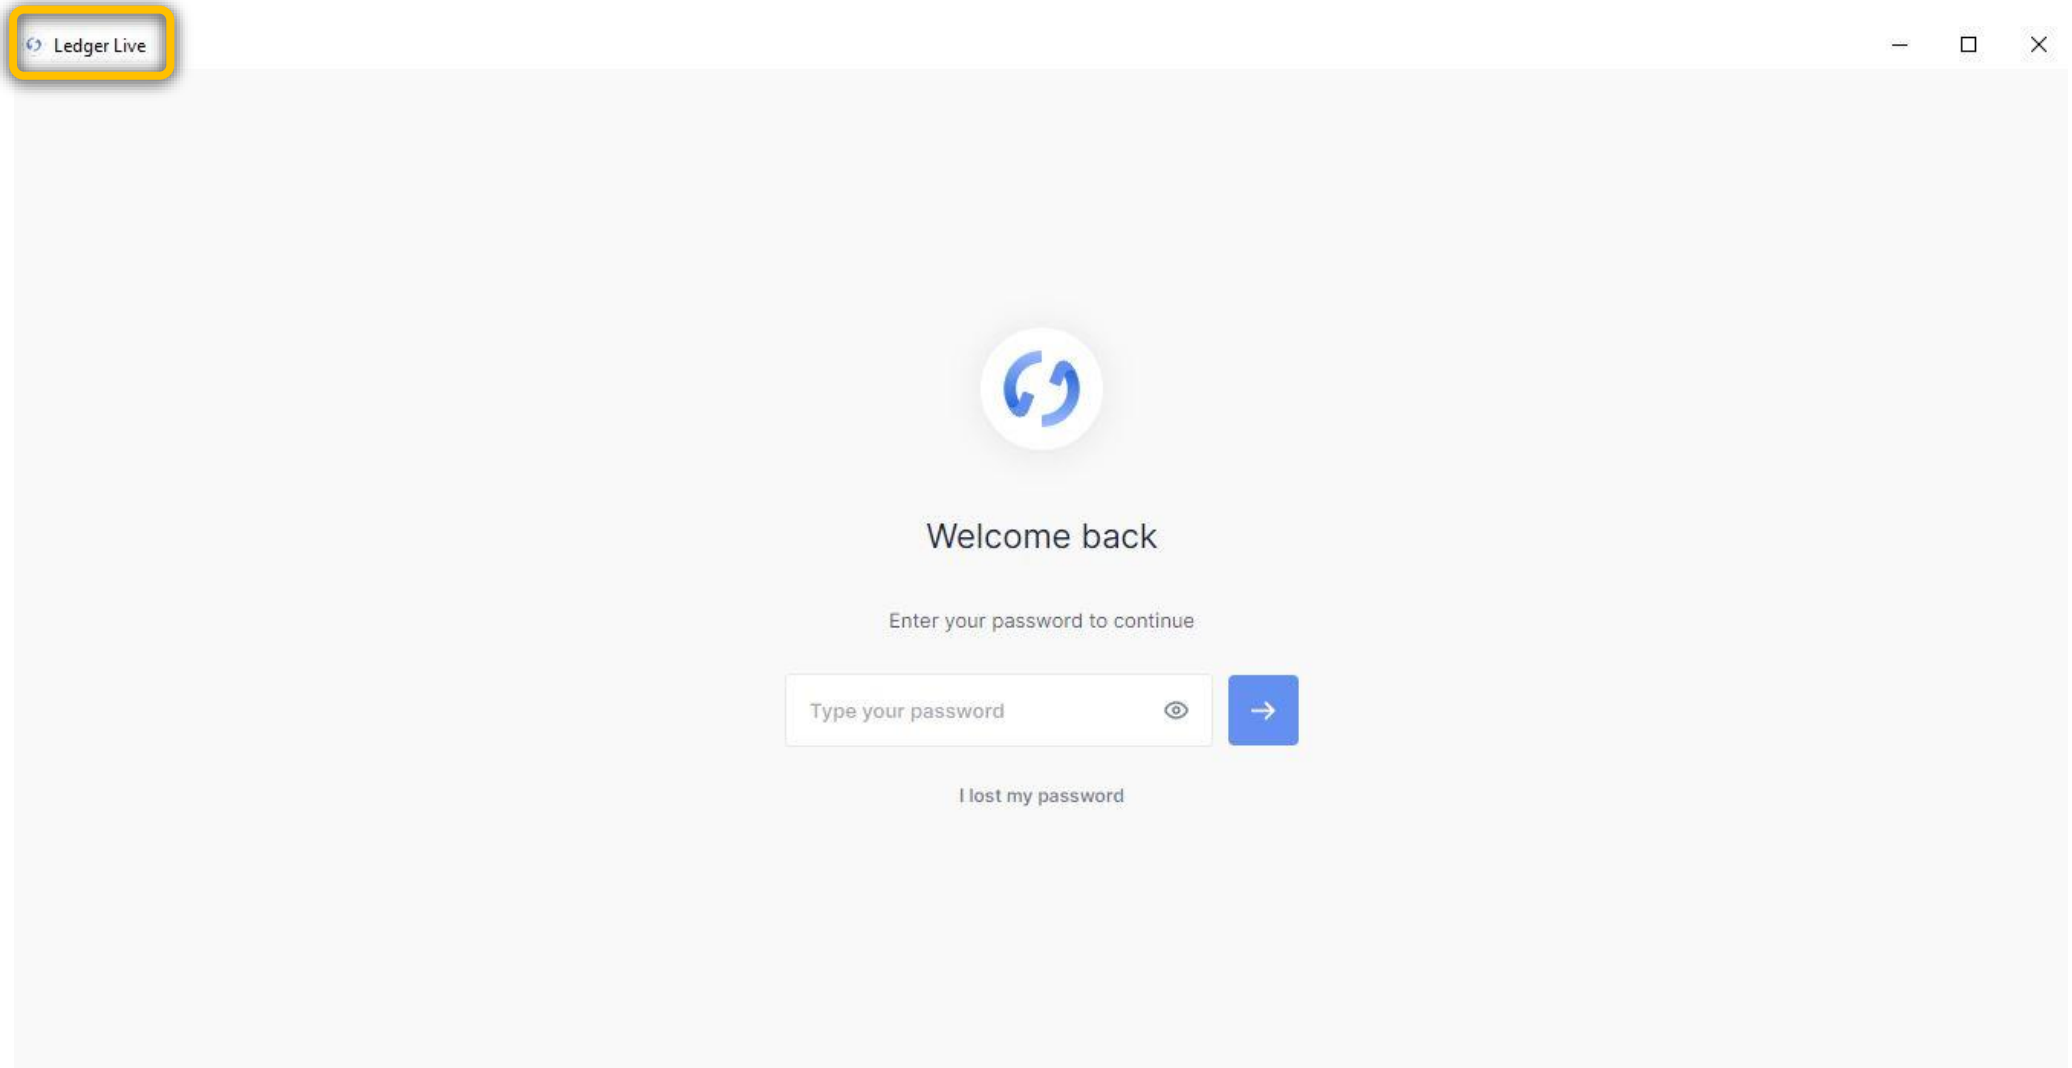

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Ledger Live



Welcome back

Enter your password to continue




[I lost my password](#)

10. Enter your password and click on the arrow to continue the procedure on **Ledger Live app**.

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

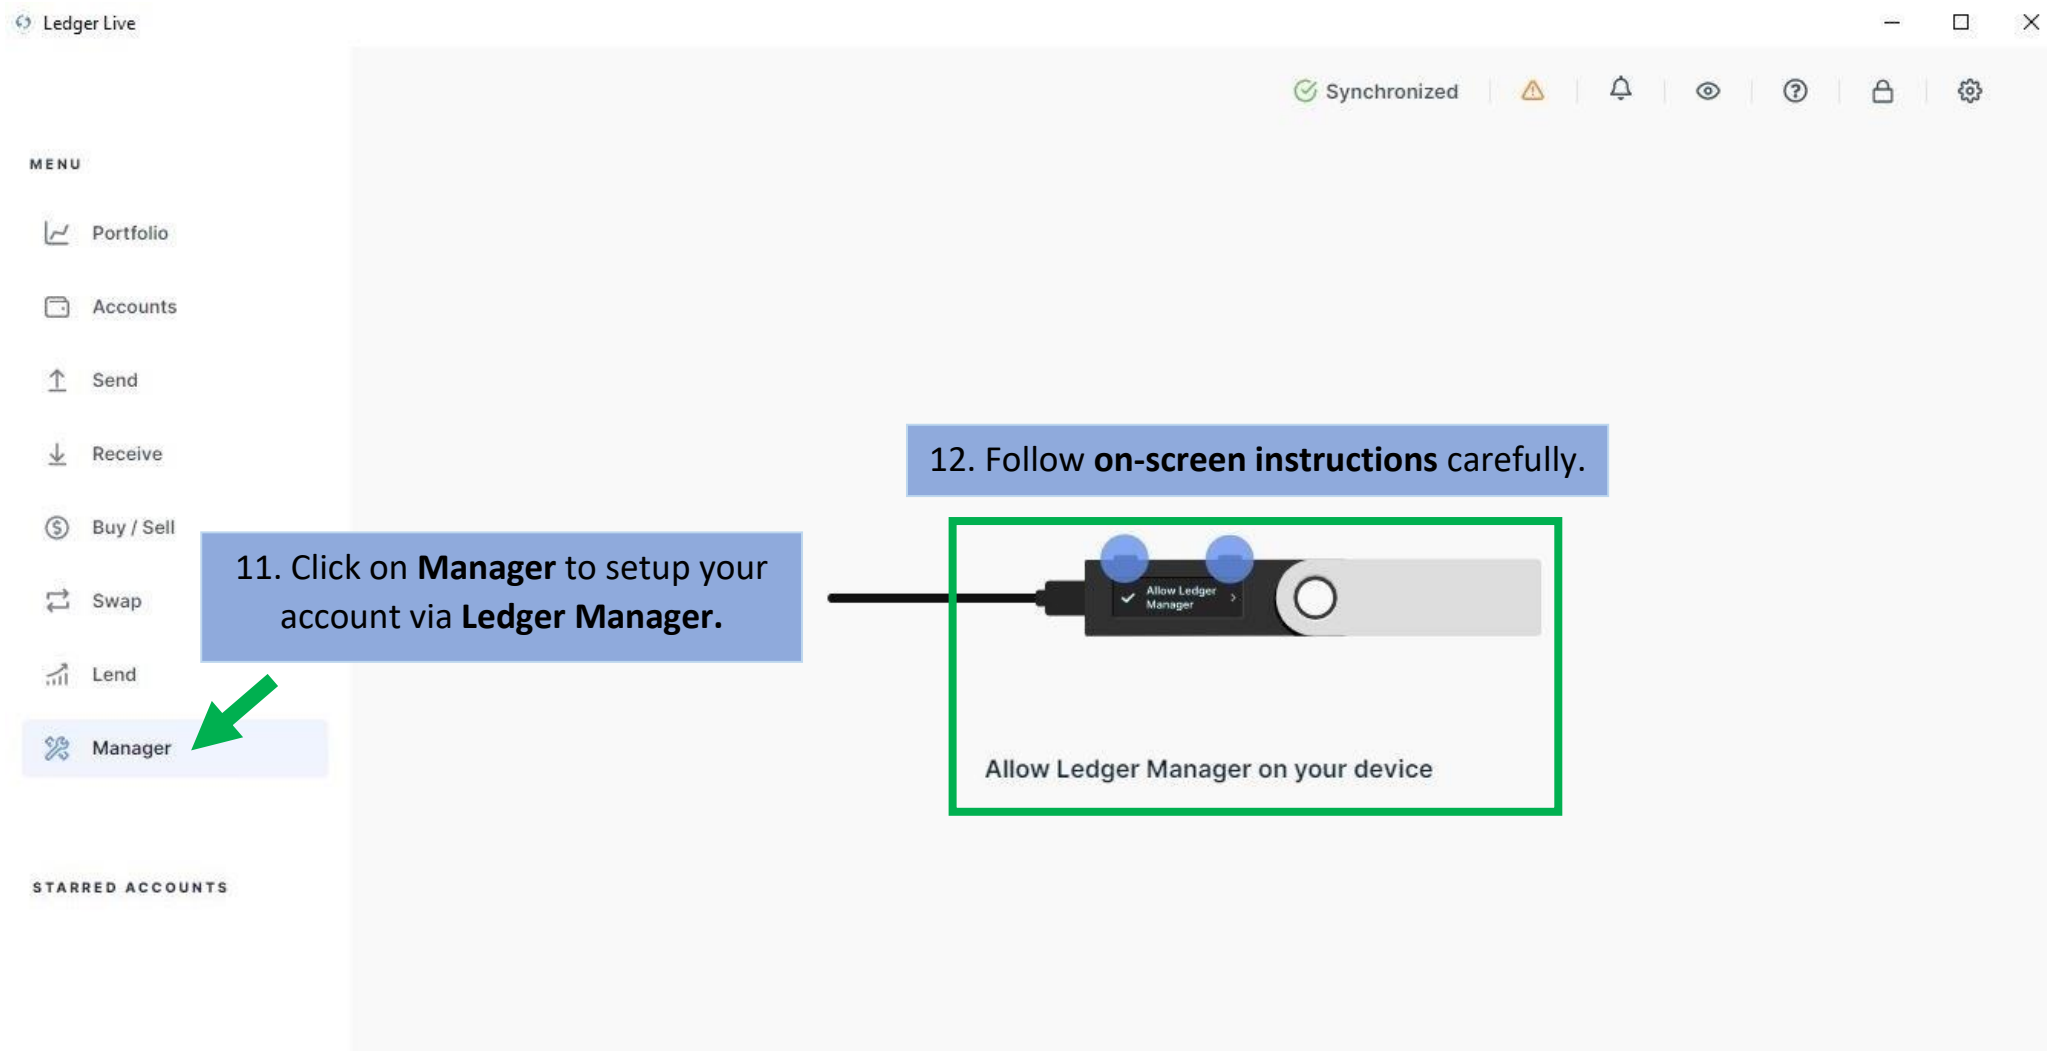

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Ledger Live

MENU

Portfolio

Accounts

Send

Receive

Buy / Sell

Swap

Lend

Manager

STARRED ACCOUNTS

Synchronized



13. Click on the icon to access **Ledger Manager's settings**.



Ledger Nano S

Firmware is up to date: 2.0.0

Used - Capacity 144 Kb Apps 0

144 Kb free

App catalog

Apps installed

Search app in catalog...

Show All Sort Market cap



Bitcoin (BTC)

Version 1.6.2

42 Kb



Ledger Live supported

Install



Ethereum (ETH)

Version 1.8.5

50 Kb



Ledger Live supported

Install



Binance Chain (BNB)

Version 1.1.7

42 Kb

Install

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Ledger Live

MENU

Portfolio

Accounts

Send

Receive

Buy / Sell

Swap

Lend

Manager

STARRED ACCOUNTS

Settings

14. Click on **Experimental features** to access Developer's setups in Ledger Manager.

General Accounts About Help Experimental features

Countervalue

Choose the currency shown next to your balance and operations.

US Dollar - USD

Display language

Set the language displayed in Ledger Live.

Use system language

Theme

Select the theme.

Select the system theme

Password lock

Set a password to secure the Ledger Live data on your computer, including account names, balances, transactions and public addresses.

Change password



Auto-lock

Automatically lock Ledger Live when inactive.

10 Minutes

Bug reports

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Ledger Live

MENU

Portfolio

Accounts

Send

Receive

Buy / Sell

Swap

Lend

Manager

STARRED ACCOUNTS

Settings

General Accounts About Help **Experimental features**



These are experimental features we provide on an "as is" basis for our tech savvy community to test. They may change, break or be removed at any time. By enabling them, you agree to use them at your own risk.

use TronGrid.io

Use trongrid directly without ledger proxy



Translation testing

Adds unreleased languages to the language list in the general settings tab.



Developer mode

Show developer and testnet apps in the Manager.



15. Switch **Developer mode** ON to enable experimental apps in Ledger Manager.



Extended account search

Scan for accounts with erroneous derivation paths. Please send potentially found assets to a regular account.



GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Ledger Live

MENU

Portfolio

Accounts

Send

Receive

Buy / Sell

Swap

Lend

Manager

STARRED ACCOUNTS

Experimental

Settings

General Accounts About Help Experimental features



These are experimental features we provide on an "as is" basis for our tech savvy community to test. They may change, break or be removed at any time. By enabling them, you agree to use them at your own risk.

use TronGrid.io

Use trongrid directly without ledger proxy



Developer mode

Show developer and testnet apps in the Manager.



Developer mode

Show developer and testnet apps in the Manager.



Scan for accounts with erroneous derivation paths. Please send potentially found assets to a regular account.



17. Click on **Manager** to return to the Ledger Manager App catalog.

16. **Experimental apps** are now enabled in Ledger Manager.

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Ledger Live

MENU

Portfolio

Accounts

Send

Receive

Buy / Sell

Swap

Lend

Manager

STARRED ACCOUNTS

Experimental

Synchronized



Ledger Nano S

Firmware is up to date: 2.0.0

Used Capacity 144 Kb Apps 0

144 Kb free

App catalog

Apps installed

Q Kusama

18. Search for all available Kusama apps in Ledger Manager.

Show All Sort Market cap



Kusama (KSM)
Version 5.30.1

42 Kb

↓ Install



Kusama_sec
Version 5.30.1

92 Kb

↓ Install



Kusama XL
Version 5.30.1

82 Kb

↓ Install

19. Click install to set up the Kusama XL app in Ledger Manager.

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Ledger Live

MENU

Portfolio

Accounts

Send

Receive

Buy / Sell

Swap

Lend

Manager

STARRED ACCOUNTS

Experimental

Synchronized



Ledger Nano S

Firmware is up to date: 2.0.0

Used 82 Kb Capacity 144 Kb Apps 1

62 Kb free

App catalog

Apps installed

Kusama

Show All Sort Market cap



Kusama (KSM)
Version 5.30.1

42 Kb

Install



Kusama_sec
Version 5.30.1

92 Kb



Kusama XL
Version 5.30.1

82 Kb

Installing...

20. The installation of **Kusama XL app** takes about a minute.

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Ledger Live

MENU

Portfolio

Accounts

Send

Receive

Buy / Sell

Swap

Lend

Manager

STARRED ACCOUNTS

Experimental

Synchronized



Ledger Nano S

Firmware is up to date: 2.0.0

Used 82 Kb Capacity 144 Kb Apps 1



62 Kb free

App catalog

Apps installed

Kusama

Show All Sort Market cap



Kusama (KSM)
Version 5.30.1

42 Kb

Install



Kusama_sec
Version 5.30.1

92 Kb



Kusama XL
Version 5.30.1


82 Kb

Learn more

Installed

21. The **Kusama XL app** has been installed on Ledger Manager.
You can now **close Ledger Live**.

22. Open the **Kusama XL app** in your Ledger hardware to resume the Polkadot-JS Apps procedure.

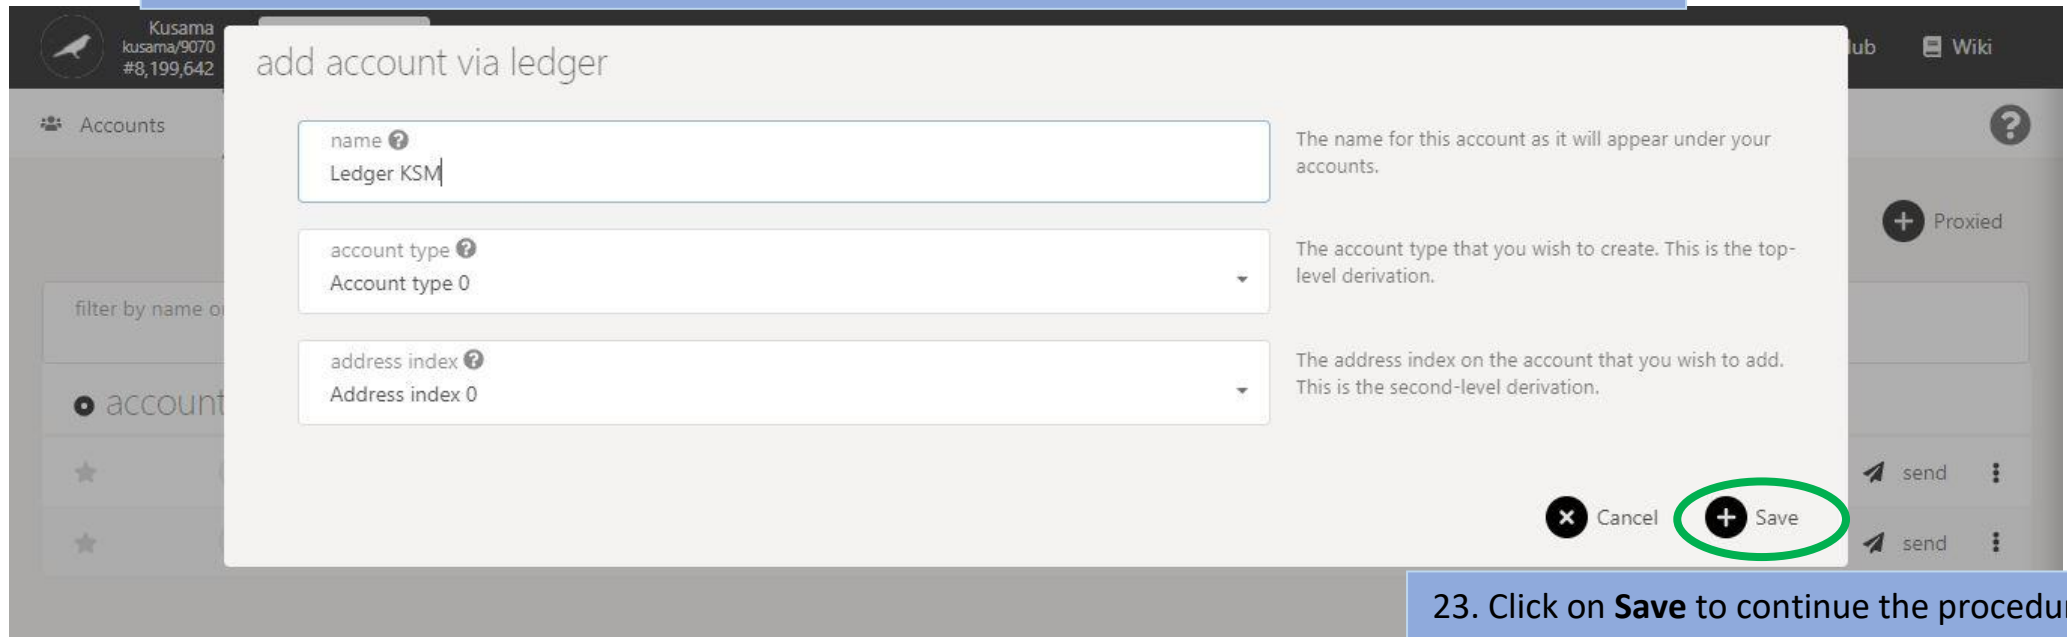

23. Click on **Save** to continue the procedure.

24. Follow the final instructions on the Ledger hardware to complete the procedure.



GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0


The screenshot shows the 'My accounts' page in the Polkadot.js Apps interface. The top navigation bar includes 'Accounts', 'Network', 'Governance', 'Developer', and 'Settings'. The 'Accounts' section is active, showing a list of accounts under the 'My accounts' tab. The list includes three accounts: 'ALTD@KSM (EXTENSION)', 'ANAELLE LTD@KSM', and 'LEDGER KSM'. The 'LEDGER KSM' account is highlighted with a green box. The table columns are 'accounts', 'type', 'tags', and 'balances'.

accounts	type	tags	balances
★ ALTD@KSM (EXTENSION)	injected	no tags	10.3703 KSM ▼ send ⋮
★ ANAELLE LTD@KSM	injected	no tags	1.0376 KSM ▼ send ⋮
★ LEDGER KSM	ledger	no tags	0.0000 KSM ▼ send ⋮

11.4079 KSM

25. Your Ledger account has been added to the *My accounts* list!

2. Metadata: Explore the Portal's network settings.

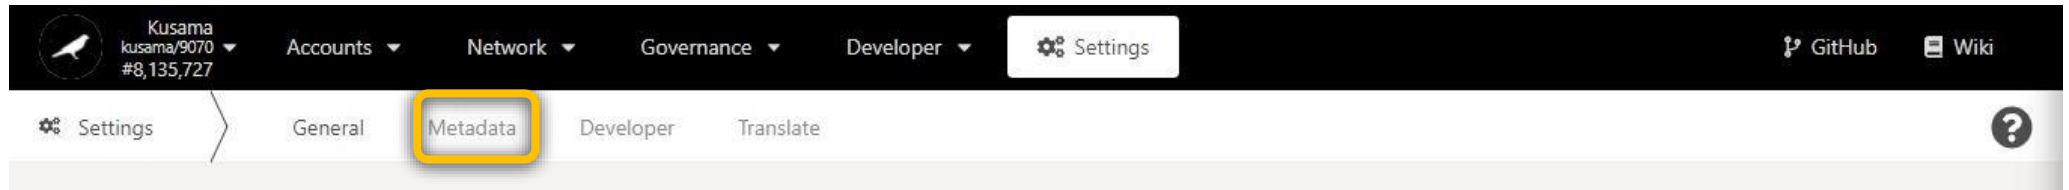

a) Upgrade extensions.


Extension upgrades notifications will appear on *My accounts* and next to *Settings*.

The screenshot shows the Polkadot-JS Apps interface. At the top, a navigation bar includes a profile icon, the text 'Kusama kusama/9070 #8,149,318', a dropdown menu with 'Accounts' selected, and other tabs: 'Network', 'Governance', 'Developer', 'Settings' (with a notification badge '1'), 'GitHub', and 'Wiki'. Below the navigation bar, a sub-header shows 'Accounts' with a dropdown arrow, 'My accounts' (underlined), and 'Vanity generator'. A row of buttons includes '+ Add account', 'Restore JSON', 'Add via Qr', '+ Multisig', and '+ Proxied'. A yellow notification box states: 'You have 1 extensions that need to be updated with the latest chain properties in order to display the correct information for the chain you are connected to. This update includes chain metadata and chain properties. Visit your [settings page](#) to apply the updates to the injected extensions.' Below this is a search bar 'filter by name or tags'. A blue callout box says '1. Click on the link to Settings.' Below the search bar is a table of accounts.

	accounts	type	tags	balances
★	ALTD@KSM (EXTENSION)	injected	no tags	10.3579 KSM ▼ send ⋮
★	✓ ANAELLE LTD@KSM	injected	no tags	1.0376 KSM ▼ send ⋮
				11.3955 KSM

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

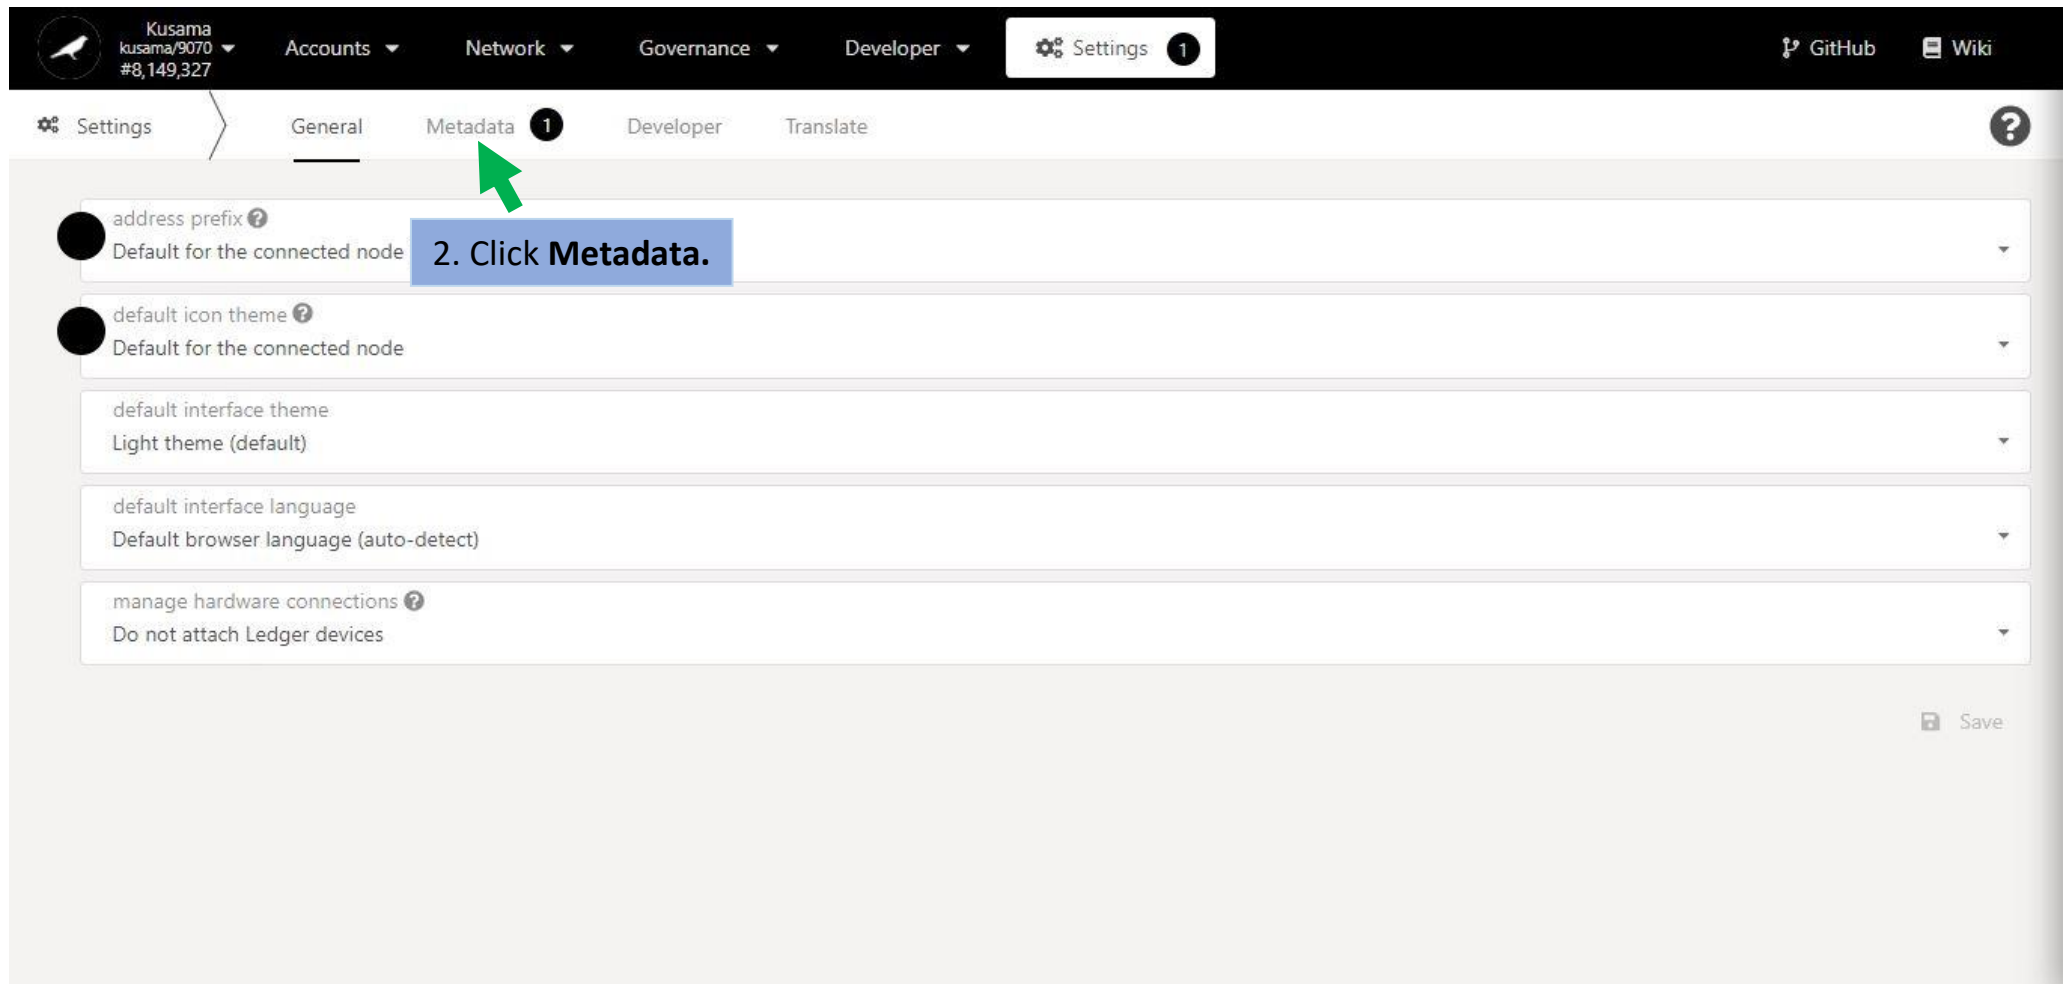

The screenshot shows the Polkadot.js Apps interface. At the top, a dark navigation bar contains the Kusama logo, account information (kusama/9070, #8,149,327), and several menu items: Accounts, Network, Governance, Developer, and Settings (with a notification badge '1'). On the right of the navigation bar are links to GitHub and Wiki. Below the navigation bar, a sub-navigation bar shows 'Settings' (with a gear icon) and tabs for 'General', 'Metadata' (with a notification badge '1'), 'Developer', and 'Translate'. A green arrow points to the 'Metadata' tab, which is highlighted with a blue box containing the text '2. Click Metadata.'.

The main content area displays a list of settings for the 'Metadata' tab:

- address prefix [?]
Default for the connected node
- default icon theme [?]
Default for the connected node
- default interface theme
Light theme (default)
- default interface language
Default browser language (auto-detect)
- manage hardware connections [?]
Do not attach Ledger devices

A 'Save' button is located at the bottom right of the settings list.

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Kusama
kusama/9070
#8,149,331

Accounts ▾

Network ▾

Governance ▾

Developer ▾

Settings 1

GitHub

Wiki

Settings

General

Metadata 1

Developer

Translate

?

extensions

upgradable extensions
polkadot-js 0.38.3

3. Click **Update Metadata.** → Update metadata


chain specifications

Network Name ?
Kusama

Color ?
#000000 generate random color

Genesis Hash ?
0xb0a8d493285c2df73290dfb7e61f870f17b41801197a149ca93654499ea3dafa

Unit ?
KSM



GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Summary of the metadata upgrade made on Polkadot-JS extension.

polkadot[.js]

Metadata

from <https://polkadot.js.org/apps/#/accounts>

chain Kusama

icon polkadot

decimals 12

symbol KSM

upgrade <unknown> -> 9070

⚠ This approval will add the metadata to your extension instance, allowing future requests to be decoded using this metadata.

Yes, do this metadata update


4. Click on **Yes [...]** to complete the procedure.

Kusama kusama/9070 #8,149,348


Accounts Network Governance Developer Settings 1

GitHub Wiki

Update metadata



b) View chain specifications.



Kusama
kusama/9070
#8,149,355

Accounts ▾

Network ▾

Governance ▾

Developer ▾

Settings

GitHub

Wiki

Settings

General

Metadata

Developer


Translate

?


extensions

No Upgradable extensions

chain specifications



Network Name ?
Kusama



Color ?
#000000

generate random color


Genesis Hash ?
0xb0a8d493285c2df73290dfb7e61f870f17b41801197a149ca93654499ea3dafa

Unit ?
KSM


Address Prefix ?
2

Key information on the chain: **name, genesis hash, currency, and address prefix.**

Note: These parameters are immutable.




3. Developer: Define custom types for the Portal's API.

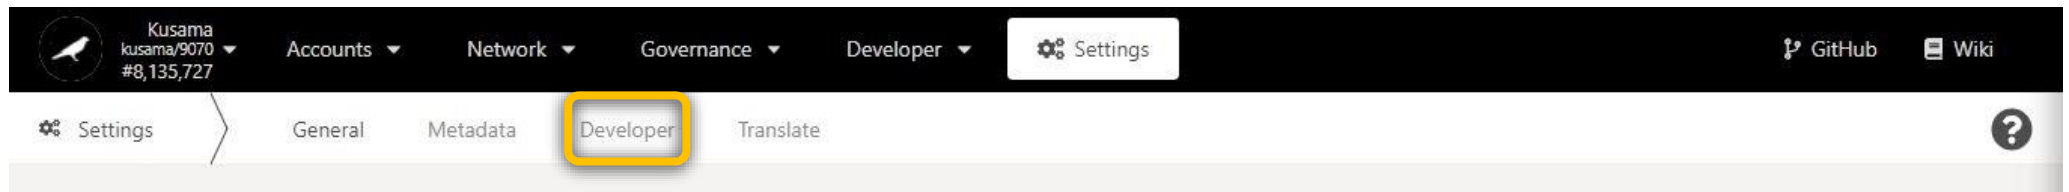

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

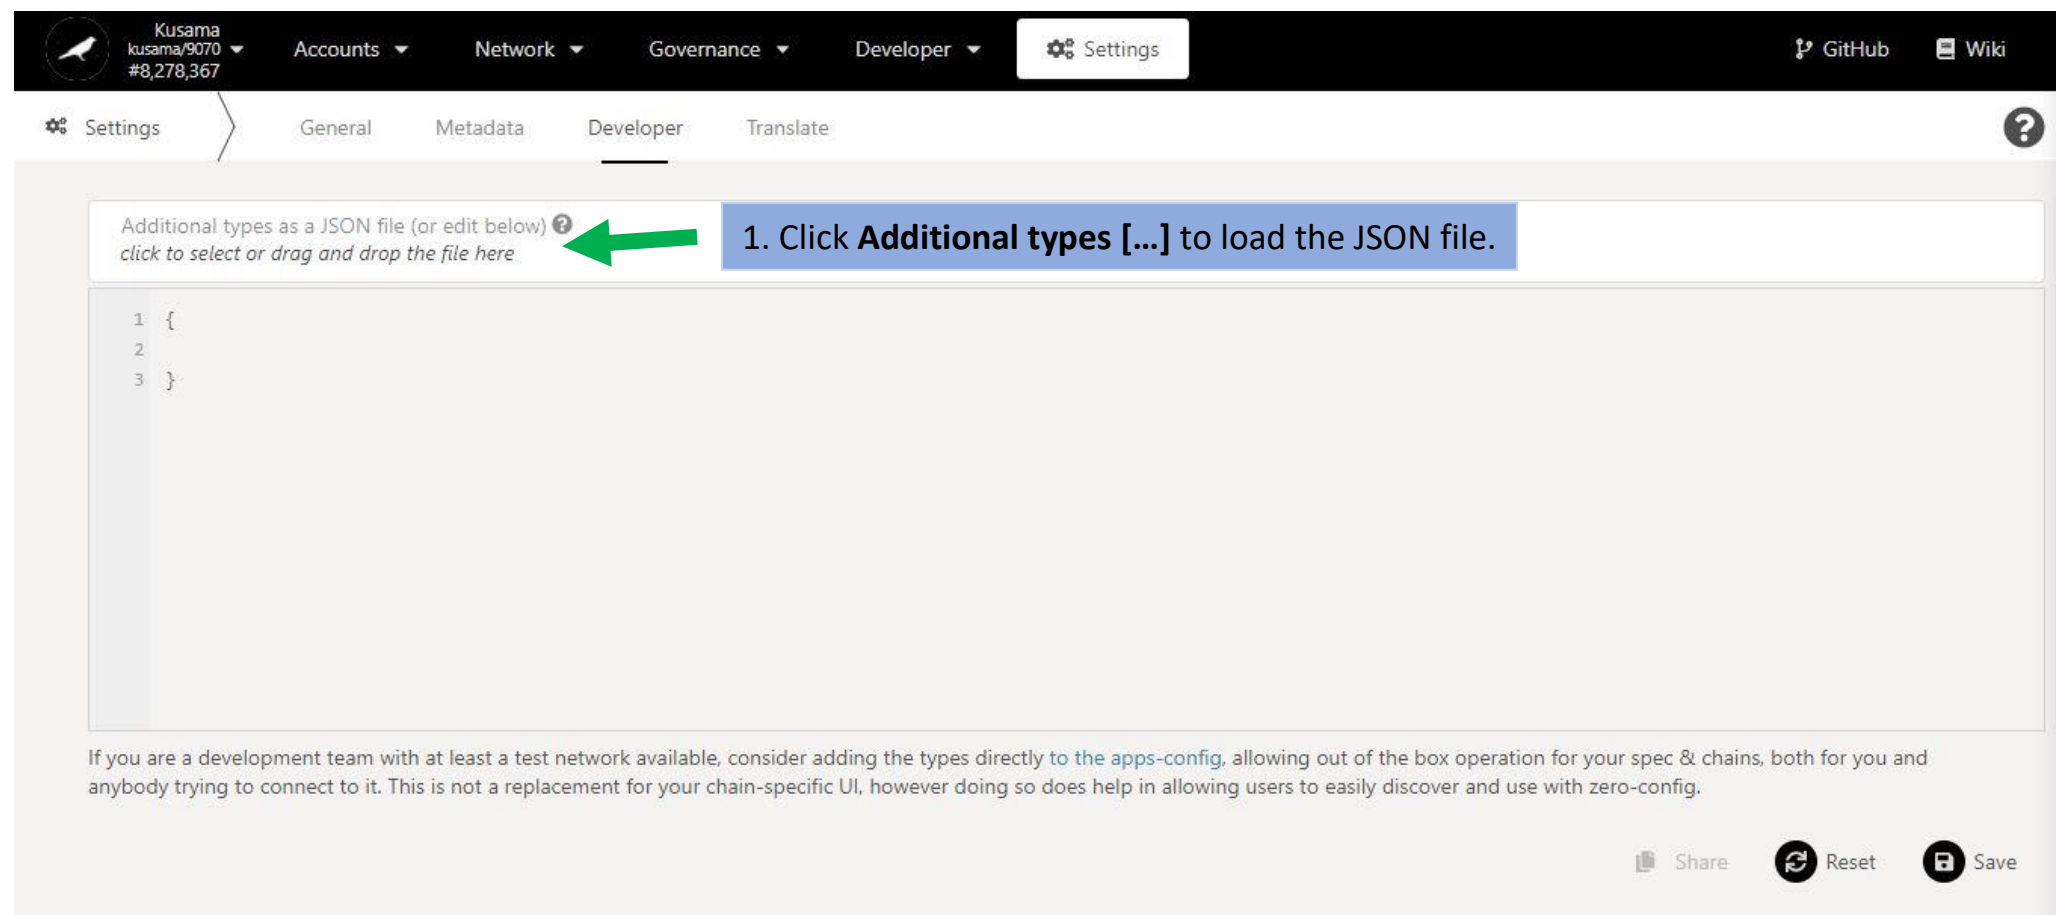

The screenshot shows the Polkadot.js Apps interface. At the top, a dark navigation bar contains the Kusama logo, account information (kusama/9070, #8,278,367), and menu items: Accounts, Network, Governance, Developer, and Settings. The Settings menu is highlighted. Below this, a sub-navigation bar shows Settings, General, Metadata, Developer (selected), and Translate. A help icon is on the right. The main content area has a header with the text 'Additional types as a JSON file (or edit below) ?' and a green arrow pointing to it. A blue callout box contains the instruction '1. Click Additional types [...] to load the JSON file.' Below the header is a large text area for editing JSON, with line numbers 1, 2, and 3 visible on the left. At the bottom, a paragraph explains that adding types directly to the apps-config is recommended for development teams. On the right side of the bottom, there are buttons for Share, Reset, and Save.

Kusama
kusama/9070
#8,278,367

Accounts Network Governance Developer Settings

Settings General Metadata Developer Translate

Additional types as a JSON file (or edit below) ?
click to select or drag and drop the file here

1. Click **Additional types [...]** to load the JSON file.

```
1 {  
2  
3 }
```

If you are a development team with at least a test network available, consider adding the types directly to the [apps-config](#), allowing out of the box operation for your spec & chains, both for you and anybody trying to connect to it. This is not a replacement for your chain-specific UI, however doing so does help in allowing users to easily discover and use with zero-config.

Share Reset Save

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Kusama
kusama/9070
#8,278,378

Accounts Network Governance Developer Settings

Settings General Metadata Developer Translate

Additional types as a JSON file (or edit below) ?
TransactionInput, TransactionOutput, Transaction


```
1 {  
2   "TransactionInput": {  
3     "parent_output": "Hash",  
4     "signature": "Signature"  
5   },  
6   "TransactionOutput": {  
7     "value": "u128",  
8     "pubkey": "Hash",  
9     "sale": "u32"  
10  },  
11  "Transaction": {  
12    "inputs": "Vec<TransactionInput>",  
13    "outputs": "Vec<TransactionOutput>"  
14  }  
15 }
```

If you are a development team with at least a test network available, consider adding the types directly to the [apps-config](#), allowing out of the box operation for your spec & chains, both for you and anybody trying to connect to it. This is not a replacement for your chain-specific UI, however doing so does help in allowing users to easily discover and use with zero-config.

Share Reset Save

3. Click on **Save** to complete the procedure.

4. Translate: Define custom translations for the Portal's UI.

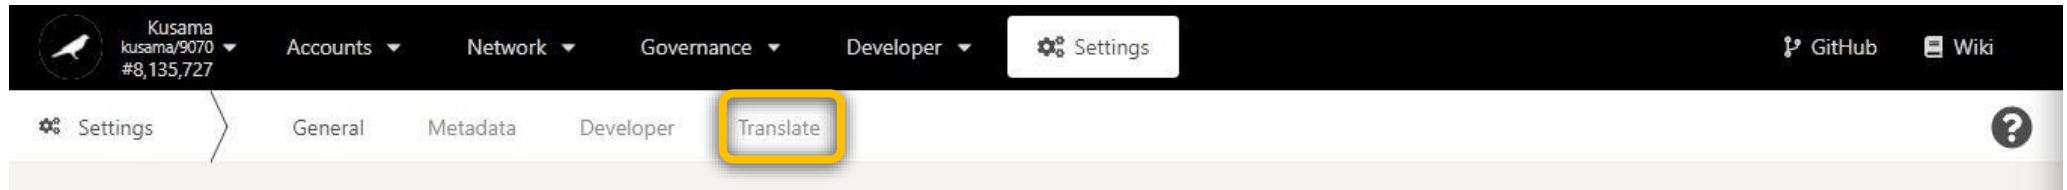

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Kusama
kusama/9070
#8,278,411

Accounts Network Governance Developer Settings

Settings General Metadata Developer Translate

Key information on translations: available languages, modules, completion status.

the language to display translations for
zh 64% 1321/2050, 64.44% done

the module to display strings for
page-accounts 82% 288/347, 83.00% done

do not include empty strings in the generated file

Apply to UI Generate zh/translation.json

//hard
硬

//hard///password
//硬///密码

//hard/soft
//硬/软

//hard/soft///password
//硬/软///密码

Word-for-word translations.

1. Click on the languages to display dropdown menu.

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Kusama
kusama/9070
#8,278,418

Accounts Network Governance Developer Settings

Settings General Metadata Developer Translate

zh
ar
es
fr
id
it
ja

64%

the module to display strings for
page-accounts

82%

288/347, 83.00% done

do not include empty strings in the generated file

Apply to UI Generate zh/translation.json

2. Select one option from the dropdown menu.

//硬///密码

//hard/soft

//硬/软

//hard/soft///password

//硬/软///密码

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Kusama
kusama/9070
#8,278,424

Accounts Network Governance Developer Settings

Settings General Metadata Developer Translate

the language to display translations for it

the module to display strings for page-accounts

69% 90%

1424/2050, 69.46% done 313/347, 90.20% done

do not include empty strings in the generated file


Apply to UI Generate it/translation.json

Word-for-word translations currently active for your selected language and for the selected module.

//hard
//hard
//hard///password
//hard///password
//hard/soft
//hard/soft
//hard/soft///password
//hard/soft///password

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

 Kusama
kusama/9070
#8,278,474

Accounts ▾

Network ▾

Governance ▾

Developer ▾

Settings

GitHub

Wiki

Settings

General

Metadata

Developer

Translate

the language to display translations for it

69%

1424/2050, 69.46% done

the module to display strings for page-accounts

90%

313/347, 90.20% done

do not include empty strings in the generated file ☐ Apply to UI Generate it/translation.json

//hard

//forte

//hard///password

//forte///password

//hard/soft

//forte/debole

//hard/soft///password

//forte/debole///password

3. Replace the word-for-word translation(s).

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Kusama
kusama/9070
#8,278,474

Accounts Network Governance Developer Settings

Settings General Metadata Developer Translate

the language to display translations for it 69% 1424/2050, 69.46% done

the module to display strings for page-accounts 90% 313/347, 90.20% done

4. Click on the **modules to display** dropdown menu.

Apply to UI Generate it/translation.json

//hard
//forte

//hard///password
//forte///password

//hard/soft
//forte/debole

//hard/soft///password
//forte/debole//password

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Kusama
kusama/9070
#8,278,484

Accounts Network Governance Developer Settings

Settings General Metadata Developer Translate

the language to display translations for it

1424/2050, 69.46% done


5. Select one option from the dropdown menu.

page-accounts
page-council
page-democracy
page-explorer
page-extrinsics
page-gilt
page-js

//hard
//forte
//hard///password
//forte///password
//hard/soft
//forte/debole
//hard/soft///password
//forte/debole///password

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

 Kusama
kusama/9070
#8,278,494

Accounts ▾

Network ▾

Governance ▾

Developer ▾

Settings

GitHub

Wiki

Settings

General

Metadata

Developer

Translate

?

the language to display translations for it

69%

1424/2050, 69.46% done

the module to display strings for page-democracy

97%

87/89, 97.75% done

do not include empty strings in the generated file ☐

Apply to UI

Generate it/translation.json

Aye {{count}}

Sì {{count}}

6. Replace the word-for-word translation(s).

Conviction locks do overlap and is additive, meaning that funds locked during a previous vote can be locked again.

I fondi bloccati per un voto con moltiplicatore si sovrappongono e si aggiungono, ciò significa che i fondi bloccati durante il voto precedente possono essere ri-bloccati di nuovo.

Dispatch


Promulgazione

Fast track

Tracciamento veloce

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

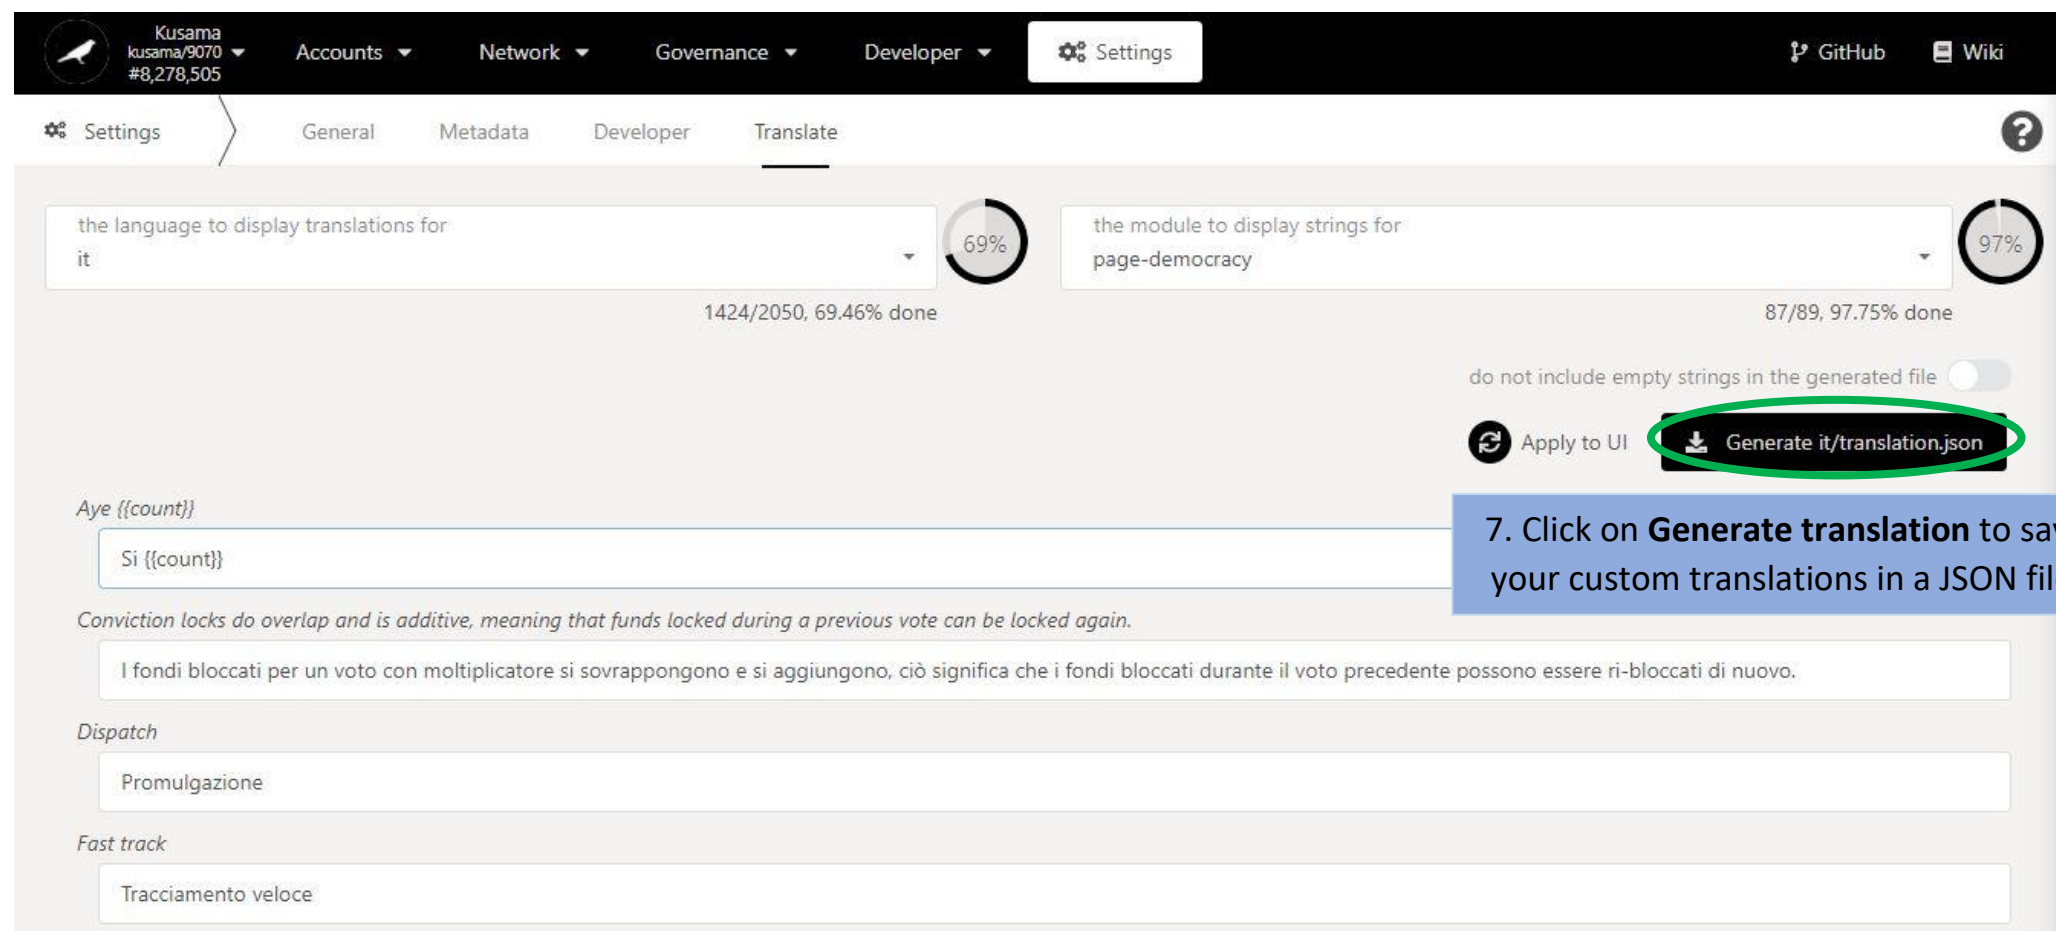

Kusama
kusama/9070
#8,278,505



Accounts ▾ Network ▾ Governance ▾ Developer ▾ Settings

Settings General Metadata Developer **Translate** ?

the language to display translations for it 69% 1424/2050, 69.46% done

the module to display strings for page-democracy 97% 87/89, 97.75% done

do not include empty strings in the generated file ☐

 Apply to UI  **Generate it/translation.json**

Aye {{count}}
Si {{count}}

Conviction locks do overlap and is additive, meaning that funds locked during a previous vote can be locked again.
I fondi bloccati per un voto con moltiplicatore si sovrappongono e si aggiungono, ciò significa che i fondi bloccati durante il voto precedente possono essere ri-bloccati di nuovo.

Dispatch
Promulgazione

Fast track
Tracciamento veloce

7. Click on **Generate translation** to save your custom translations in a JSON file.

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Kusama
kusama/9070
#8,278,511

Accounts ▾

Network ▾

Governance ▾

Developer ▾

Settings

GitHub

Wiki

Settings

General

Metadata

Developer

Translate

the language to display translations for
it

69%

1424/2050, 69.46% done

the module to display strings for
page-democracy

97%

87/89, 97.75% done

do not include empty strings in the generated file ☐

Apply to UI

Generate it/translation.json

Aye {{count}}

Si {{count}}

Conviction locks do overlap and is additive, meaning that funds locked during a previous vote can be locked again.

I fondi bloccati per un voto con moltiplicatore si sovrappongono e si aggiungono, ciò significa che i fondi bloccati durante il voto precedente possono essere ri-bloccati di nuovo.

Dispatch

Promulgazione

8. A JSON file has been created and saved for your custom translations!

translation.json

Show all

GUIDE TO POLKADOT-JS APPS – PART VII: Settings

Version 1.0

Kusama
kusama/9070
#8,278,517

Accounts Network Governance Developer Settings

Settings General Metadata Developer Translate

the language to display translations for it 69% 1424/2050, 69.46% done

the module to display strings for page-democracy 97% 87/89, 97.75% done

do not include empty strings in the generated file

Apply to UI Generate it/translation.json

Aye {{count}}
Si {{count}}

Conviction locks do overlap and is additive, meaning that funds locked during a previous vote can be locked again.
I fondi bloccati per un voto con moltiplicatore si sovrappongono e si aggiungono, ciò significa che i fondi bloccati durante il voto precedente possono essere ri-bloccati di nuovo.

Dispatch
Promulgazione

Fast track
Tracciamento veloce

9. Click on **Apply to UI** to set the custom translations for your Polkadot-JS Apps interface.