



ONTAP 9.7 and earlier-Configure broadcast domains (cluster administrators only)

ONTAP 9

NetApp
May 13, 2021

This PDF was generated from https://docs.netapp.com/us-en/ontap/networking/configure_broadcast_domains_97_overview.html on May 13, 2021. Always check docs.netapp.com for the latest.

Table of Contents

- ONTAP 9.7 and earlier-Configure broadcast domains (cluster administrators only) 1
 - Overview for ONTAP 9.7 and earlier 1
 - Example of using broadcast domains 1
 - Create a broadcast domain 2
 - Add or remove ports from a broadcast domain 3
 - Split broadcast domains 5
 - Merge broadcast domains 5
 - Change the MTU value for ports in a broadcast domain 6
 - Display broadcast domains 6
 - Delete a broadcast domain 8

ONTAP 9.7 and earlier-Configure broadcast domains (cluster administrators only)

Overview for ONTAP 9.7 and earlier

Broadcast domains are intended to group network ports that belong to the same layer 2 network. The ports in the group can then be used by a storage virtual machine (SVM) for data or management traffic.

A broadcast domain resides in an IPspace. During cluster initialization, the system creates two default broadcast domains:

- The Default broadcast domain contains ports that are in the Default IPspace. These ports are used primarily to serve data. Cluster management and node management ports are also in this broadcast domain.
- The Cluster broadcast domain contains ports that are in the Cluster IPspace. These ports are used for cluster communication and include all cluster ports from all nodes in the cluster.

If you have created unique IPspaces to separate client traffic, then you need to create a broadcast domain in each of those IPspaces.




Create a broadcast domain to group network ports in the cluster that belong to the same layer 2 network. The ports can then be used by SVMs.

Example of using broadcast domains

A broadcast domain is a set of network ports in the same IPspace that also has layer 2 reachability to one another, typically including ports from many nodes in the cluster.

The illustration shows the ports assigned to three broadcast domains in a four-node cluster:

- The Cluster broadcast domain is created automatically during cluster initialization, and it contains ports a and b from each node in the cluster.
- The Default broadcast domain is also created automatically during cluster initialization, and it contains ports c and d from each node in the cluster.
- The bcast1 broadcast domain has been created manually, and it contains ports e, f, and g from each node in the cluster.
This broadcast domain was created by the system administrator specifically for a new client to access data through a new SVM.

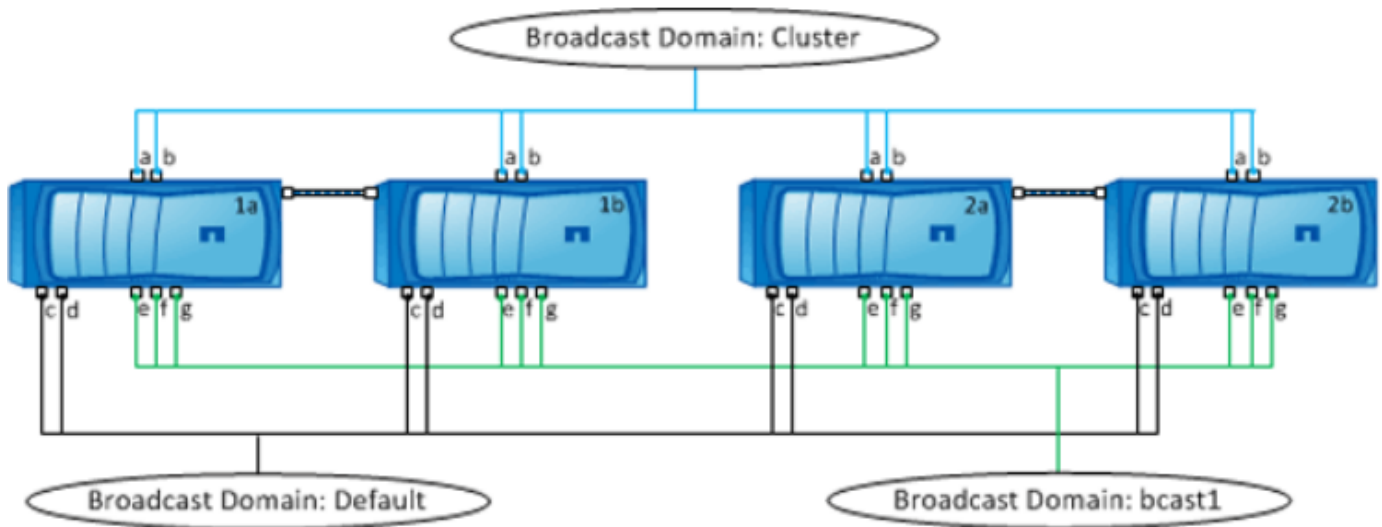

A failover group of the same name and with the same network ports as each of the broadcast domains is created automatically. This failover group is automatically managed by the system, meaning that as ports are added or removed from the broadcast domain, they are automatically added or removed from this failover group.

Create a broadcast domain

In ONTAP 9.7 and earlier, you create a broadcast domain to group network ports in the cluster that belong to the same layer 2 network. The ports can then be used by SVMs.

Before you begin

Starting with ONTAP 9.8, broadcast domains are automatically created during the cluster create or join operation. If you are running ONTAP 9.8 or later, these steps are not needed.

In ONTAP 9.7 and earlier, the ports you plan to add to the broadcast domain must not belong to another broadcast domain.

About this task

- All broadcast domain names must be unique within an IPspace.
- The ports added to a broadcast domain can be physical network ports, VLANs, or interface groups (ifgrps).
- If the ports you want to use belong to another broadcast domain, but are unused, you use the `network port broadcast-domain remove-ports` command to remove the ports from the existing broadcast domain.
- The MTU of the ports added to a broadcast domain are updated to the MTU value set in the broadcast domain.
- The MTU value must match all of the devices connected to that layer 2 network except for the e0M port handling management traffic.
- If you do not specify an IPspace name, the broadcast domain is created in the "Default" IPspace.

To make system configuration easier, a failover group of the same name is created automatically that contains the same ports.

Steps

1. View the ports that are not currently assigned to a broadcast domain:

```
network port show
```

If the display is large, use the `network port show -broadcast-domain` command to view only unassigned ports.

2. Create a broadcast domain:

```
network port broadcast-domain create -broadcast-domain broadcast_domain_name  
-mtu mtu_value [-ipspace ipspace_name] [-ports ports_list]
```

- `broadcast_domain_name` is the name of the broadcast domain you want to create.
- `mtu_value` is the MTU size for IP packets; 1500 and 9000 are typical values.

This value is applied to all ports that are added to this broadcast domain.

- `ipspace_name` is the name of the IPspace to which this broadcast domain will be added.

The "Default" IPspace is used unless you specify a value for this parameter.

- `ports_list` is the list of ports that will be added to the broadcast domain.

The ports are added in the format `node_name:port_number`, for example, `node1:e0c`.

3. Verify that the broadcast domain was created as desired:

```
network port show -instance -broadcast-domain new_domain
```

Example

The following command creates broadcast domain `bcast1` in the Default IPspace, sets the MTU to 1500, and adds four ports:

```
network port broadcast-domain create -broadcast-domain bcast1 -mtu 1500 -ports  
cluster1-01:e0e,cluster1-01:e0f,cluster1-02:e0e,cluster1-02:e0f
```

After you finish

You can define the pool of IP addresses that will be available in the broadcast domain by creating a subnet, or you can assign SVMs and interfaces to the IPspace at this time. For more information, see the [Cluster and SVM Peering Express Guide](#).

If you need to change the name of an existing broadcast domain, you use the `network port broadcast-domain rename` command.

Add or remove ports from a broadcast domain

You can add network ports when initially creating a broadcast domain, or you can add ports to, or remove ports from, a broadcast domain that already exists. This allows you to efficiently use all the ports in the cluster.

Before you begin

- Ports you plan to add to a broadcast domain must not belong to another broadcast domain.
- Ports that already belong to an interface group cannot be added individually to a broadcast domain.

About this task

The following rules apply when adding and removing network ports:

When adding ports...	When removing ports...
The ports can be network ports, VLANs, or interface groups (ifgrps).	N/A
The ports are added to the system-defined failover group of the broadcast domain.	The ports are removed from all failover groups in the broadcast domain.
The MTU of the ports is updated to the MTU value set in the broadcast domain.	The MTU of the ports is unchanged.
The IPspace of the ports is updated to the IPspace value of the broadcast domain.	The ports are moved to the 'Default' IPspace with no broadcast domain attribute.



If you remove the last member port of an interface group using the `network port ifgrp remove-port` command, it causes the interface group port to be removed from the broadcast domain because an empty interface group port is not allowed in a broadcast domain.

Steps

1. Display the ports that are currently assigned or unassigned to a broadcast domain by using the `network port show` command.
2. Add or remove network ports from the broadcast domain:

If you want to...	Use...
Add ports to a broadcast domain	<code>network port broadcast-domain add-ports</code>
Remove ports from a broadcast domain	<code>network port broadcast-domain remove-ports</code>

For more information about these commands, see [ONTAP 9 commands](#).

Examples of adding and removing ports

The following command adds port e0g on node cluster-1-01 and port e0g on node cluster-1-02 to broadcast domain bcast1 in the Default IPspace:

```
cluster-1::> network port broadcast-domain add-ports -broadcast-domain bcast1  
-ports cluster-1-01:e0g,cluster1-02:e0g
```

The following command adds two cluster ports to broadcast domain Cluster in the Cluster IPspace:

```
cluster-1::> network port broadcast-domain add-ports -broadcast-domain Cluster  
-ports cluster-2-03:e0f,cluster2-04:e0f -ipspace Cluster
```

The following command removes port e0e on node cluster1-01 from broadcast domain bcast1 in the Default

IPspace:

```
cluster-1::> network port broadcast-domain remove-ports -broadcast-domain bcast1  
-ports cluster-1-01:e0e
```

Split broadcast domains

You can modify an existing broadcast domain by splitting it into two different broadcast domains, with each broadcast domain containing some of the original ports assigned to the original broadcast domain.

About this task

- If the ports are in a failover group, all of the ports in a failover group must be split.
- If the ports have LIFs associated with them, the LIFs cannot be part of a subnet's ranges.

Step

Split a broadcast domain into two broadcast domains:

```
network port broadcast-domain split -ipSPACE <ipSPACE_name> -broadcast  
-domain <broadcast_domain_name> -new-broadcast-domain  
<broadcast_domain_name> -ports <node:port,node:port>
```

- `ipSPACE_name` is the name of the IPspace where the broadcast domain resides.
- `-broadcast-domain` is the name of the broadcast domain that will be split.
- `-new-broadcast-domain` is the name of the new broadcast domain that will be created.
- `-ports` is the node name and port to be added to the new broadcast domain.

Merge broadcast domains

You can move all of the ports from one broadcast domain into an existing broadcast domain using the merge command.

This operation reduces the steps required if you were to remove all ports from a broadcast domain and then add the ports to an existing broadcast domain.

Step

Merge the ports from one broadcast domain into an existing broadcast domain:

```
network port broadcast-domain merge -ipSPACE <ipSPACE_name> -broadcast  
-domain <broadcast_domain_name> -into-broadcast-domain  
<broadcast_domain_name>
```

- `ipSPACE_name` is the name of the IPspace where the broadcast domains reside.
- `-broadcast-domain` is the name of the broadcast domain that will be merged.

- `-into-broadcast-domain` is the name of the broadcast domain that will receive additional ports.

Example

The following example merges broadcast domain `bd-data1` into broadcast domain `bd-data2`:

```
network port -ipspace Default broadcast-domain bd-data1 into-broadcast-domain bd-data2
```

Change the MTU value for ports in a broadcast domain

You can modify the MTU value for a broadcast domain to change the MTU value for all ports in that broadcast domain. This can be done to support topology changes that have been made in the network.

Before you begin

The MTU value must match all the devices connected to that layer 2 network except for the e0M port handling management traffic.

About this task

Changing the MTU value causes a brief interruption in traffic over the affected ports. The system displays a prompt that you must answer with `y` to make the MTU change.

Step

Change the MTU value for all ports in a broadcast domain:

```
network port broadcast-domain modify -broadcast-domain  
<broadcast_domain_name> -mtu <mtu_valu> [-ipspace <ipspace_name>]
```

- `broadcast_domain` is the name of the broadcast domain.
- `mtu` is the MTU size for IP packets; 1500 and 9000 are typical values.
- `ipspace` is the name of the IPspace in which this broadcast domain resides. The "Default" IPspace is used unless you specify a value for this option. The following command changes the MTU to 9000 for all ports in the broadcast domain `bcast1`:

```
network port broadcast-domain modify -broadcast-domain <Default-1> -mtu <  
9000 >
```

```
Warning: Changing broadcast domain settings will cause a momentary data-  
serving interruption.
```

```
Do you want to continue? {y|n}: <y>
```

Display broadcast domains

You can display the list of broadcast domains within each IPspace in a cluster. The output also shows the list of ports and the MTU value for each broadcast domain.

Step

Display the broadcast domains and associated ports in the cluster:

```
network port broadcast-domain show
```

The following command displays all the broadcast domains and associated ports in the cluster:

```
network port broadcast-domain show
IPspace Broadcast
Name      Domain Name  MTU   Port List
-----
Cluster Cluster      9000
          cluster-1-01:e0a    complete
          cluster-1-01:e0b    complete
          cluster-1-02:e0a    complete
          cluster-1-02:e0b    complete
Default Default      1500
          cluster-1-01:e0c    complete
          cluster-1-01:e0d    complete
          cluster-1-02:e0c    complete
          cluster-1-02:e0d    complete
          bcast1      1500
          cluster-1-01:e0e    complete
          cluster-1-01:e0f    complete
          cluster-1-01:e0g    complete
          cluster-1-02:e0e    complete
          cluster-1-02:e0f    complete
          cluster-1-02:e0g    complete
```

The following command displays the ports in the bcast1 broadcast domain that have an update status of error, which indicate that the port could not be updated properly:

```
network port broadcast-domain show -broadcast-domain bcast1 -port-update
-status error

IPspace Broadcast
Name      Domain Name  MTU   Port List
-----
Default bcast1      1500
          cluster-1-02:e0g    error
```

For more information, see [ONTAP 9 commands](#).

Delete a broadcast domain

If you no longer need a broadcast domain, you can delete it. This moves the ports associated with that broadcast domain to the "Default" IPspace.

Before you begin

There must be no subnets, network interfaces, or SVMs associated with the broadcast domain you want to delete.

About this task

- The system-created "Cluster" broadcast domain cannot be deleted.
- All failover groups related to the broadcast domain are removed when you delete the broadcast domain.

Step

Delete a broadcast domain:

```
network port broadcast-domain delete -broadcast-domain  
<broadcast_domain_name> [-ipspace <ipspace_name>]
```

The following command deletes broadcast domain bcast1 in IPspace ipspace1:

```
network port broadcast-domain delete -broadcast-domain <bcast1> -ipspace  
<ipspace1>
```

Copyright Information

Copyright © 2021 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system-without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

Trademark Information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.