Static-K GSM8K: complete figure collection

16 source figure PDFs: 15 saved-data research plots and the pre-existing comparison montage.

This document preserves the source vector plots. Each plot appears once; its PNG/SVG alternatives are embedded as source attachments. No figure or experimental result was regenerated.


Source folder: results/gsm8k/static_k_comparison

Repository checkpoint: experiment/static-k, commit 54948cf, pushed before packaging.


Figure index

Order	Source PDF	Scope
1	01_best_validation_accuracy.pdf	Saved-data analysis figure
2	02_held_out_test_accuracy.pdf	Saved-data analysis figure
3	03_training_pipeline_evaluations.pdf	Saved-data analysis figure
4	04_training_time.pdf	Saved-data analysis figure
5	05_mean_training_reward.pdf	Saved-data analysis figure
6	06_zero_advantage_rate.pdf	Saved-data analysis figure
7	07_nonzero_gradient_rate.pdf	Saved-data analysis figure
8	08_unique_pipeline_count.pdf	Saved-data analysis figure
9	09_normalized_diversity.pdf	Saved-data analysis figure
10	10b_empirical_selection_entropy.pdf	Saved-data analysis figure
11	11_gradient_norms.pdf	Saved-data analysis figure
12	12_validation_vs_evaluations.pdf	Saved-data analysis figure
13	13_unique_pipelines_over_training.pdf	Saved-data analysis figure
14	14_pipeline_selection_distribution.pdf	Saved-data analysis figure
15	15_observed_candidate_prefixes.pdf	Saved-data analysis figure
16	static_k_comparison.pdf	Pre-existing montage


True policy entropy was not saved. The empirical selection-entropy figure is explicitly labeled as an empirical statistic. The separate analysis bundle contains source tables, audits, definitions and the research report.

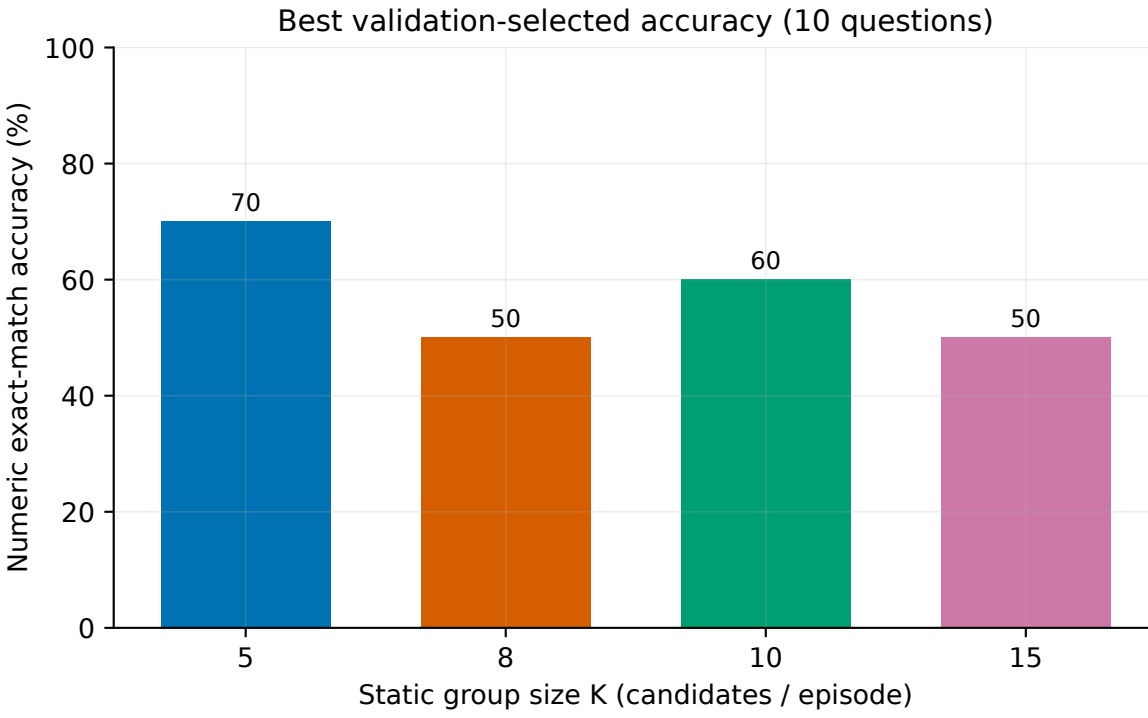


Saved GSM8K runs; seed 42; 30 episodes

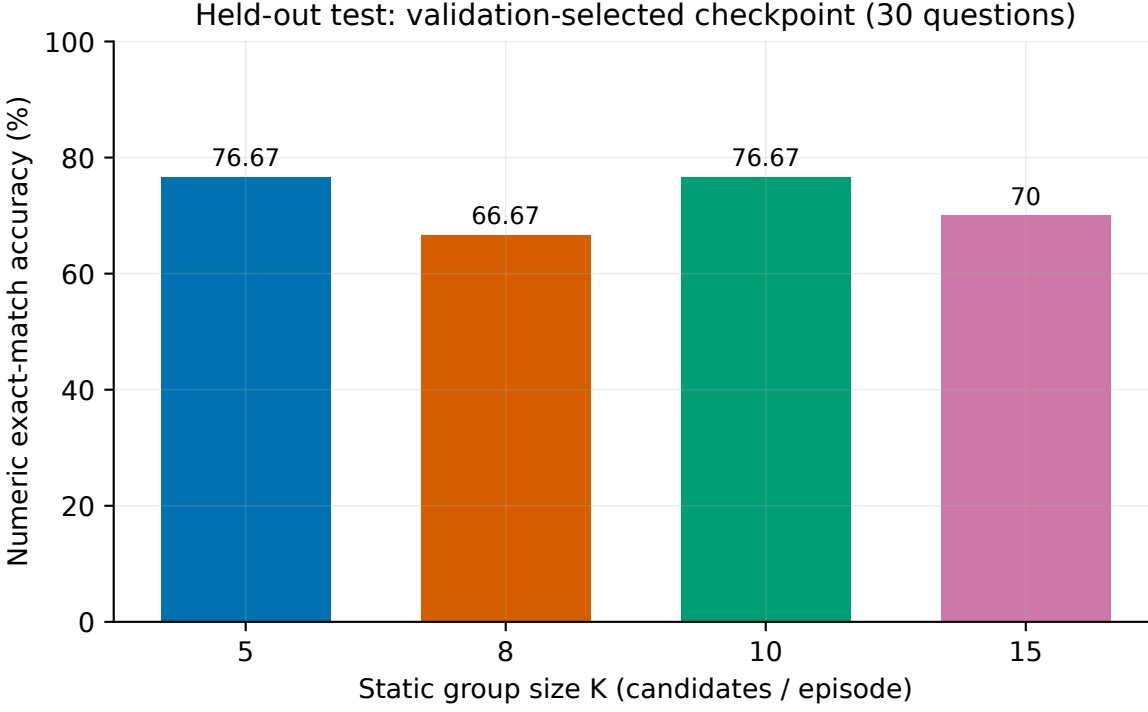


Saved GSM8K runs; seed 42; 30 episodes

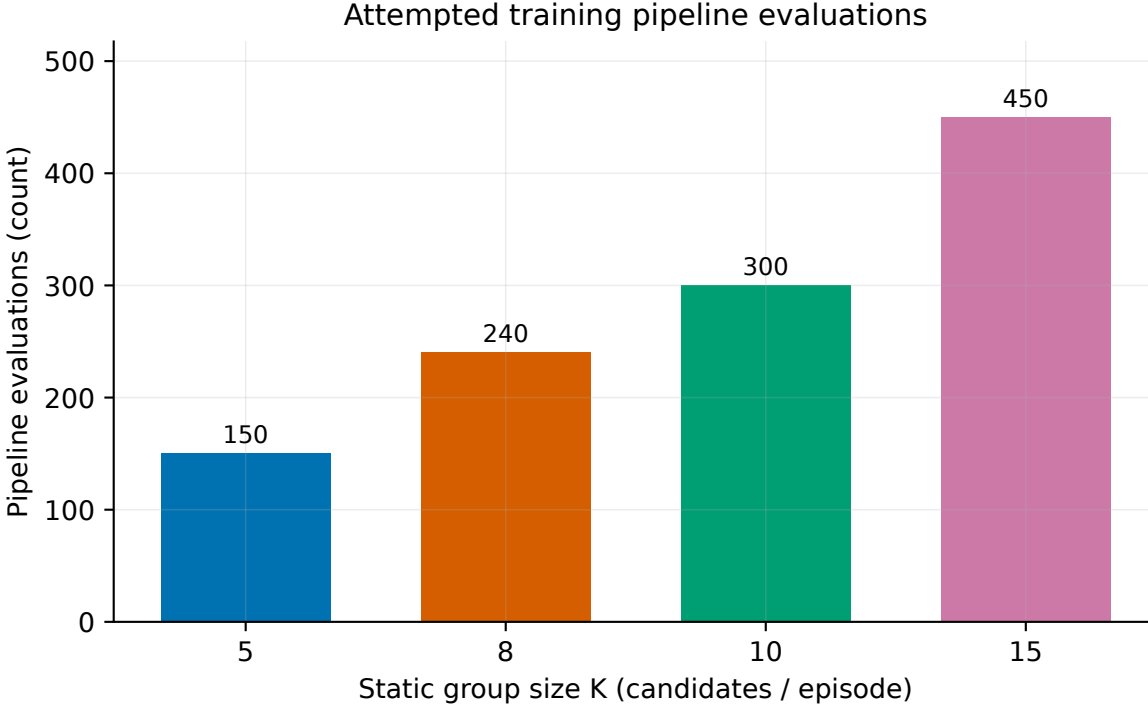


Saved GSM8K runs; seed 42; 30 episodes

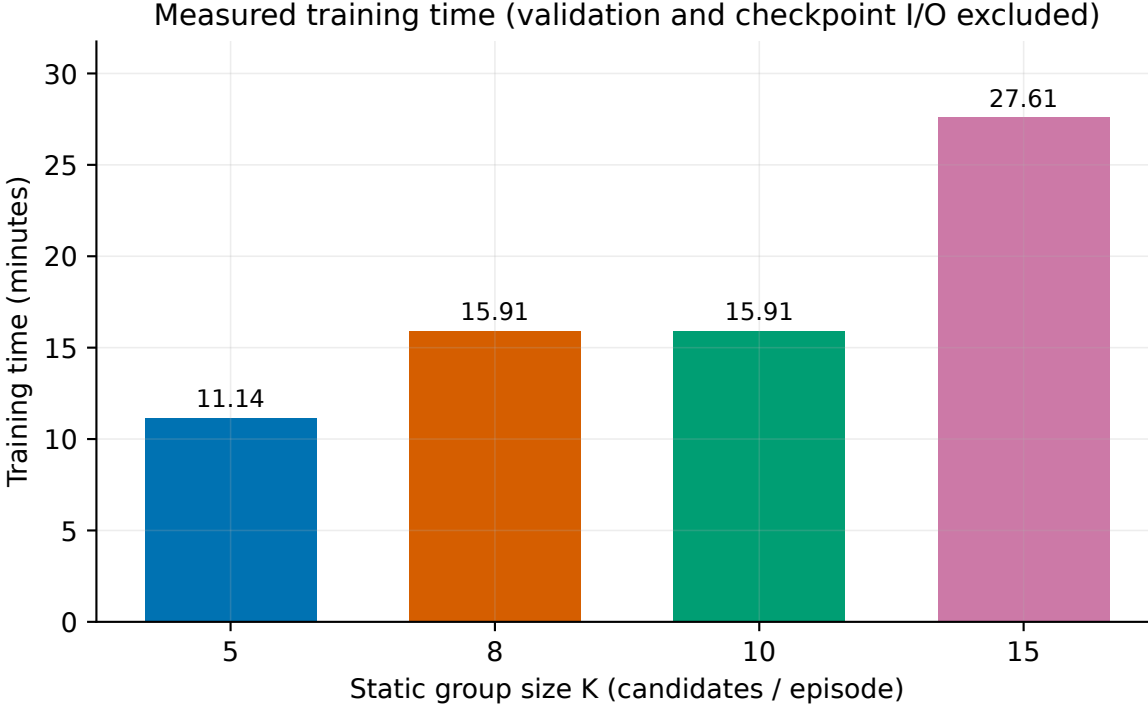


Saved GSM8K runs; seed 42; 30 episodes

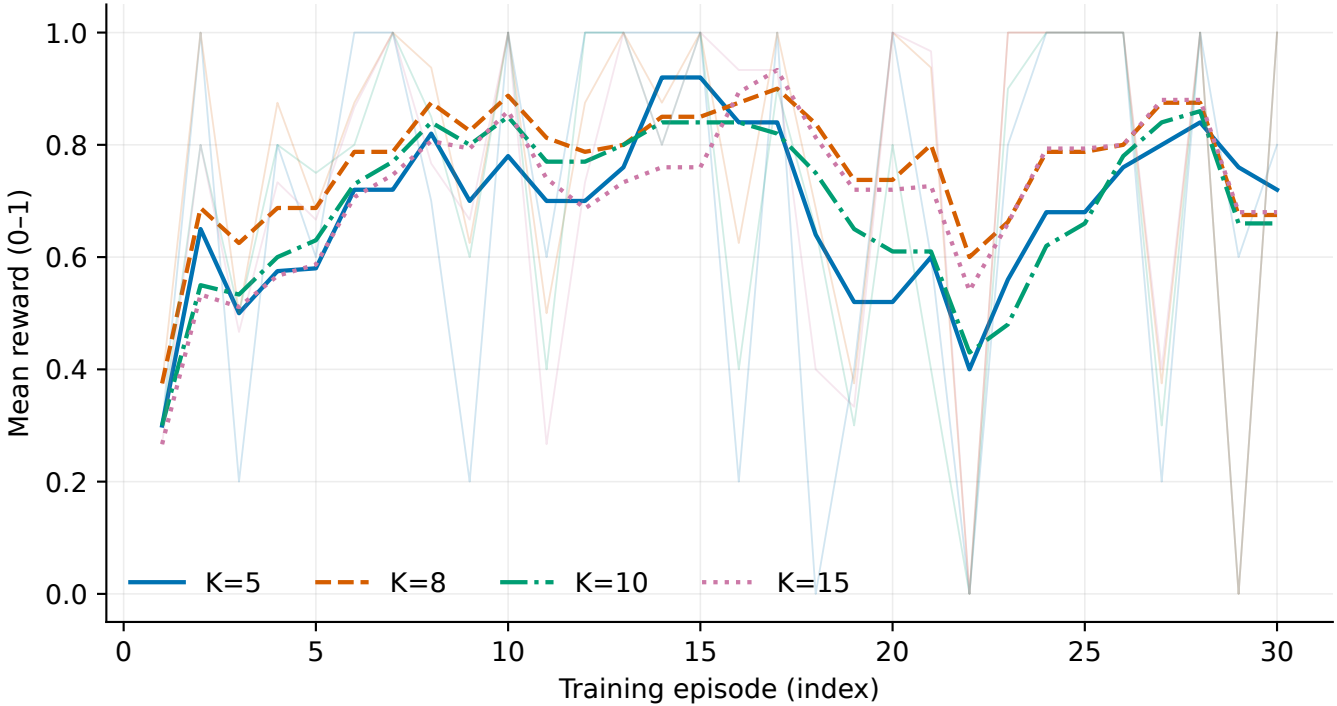


Saved GSM8K runs; seed 42; 30 episodes

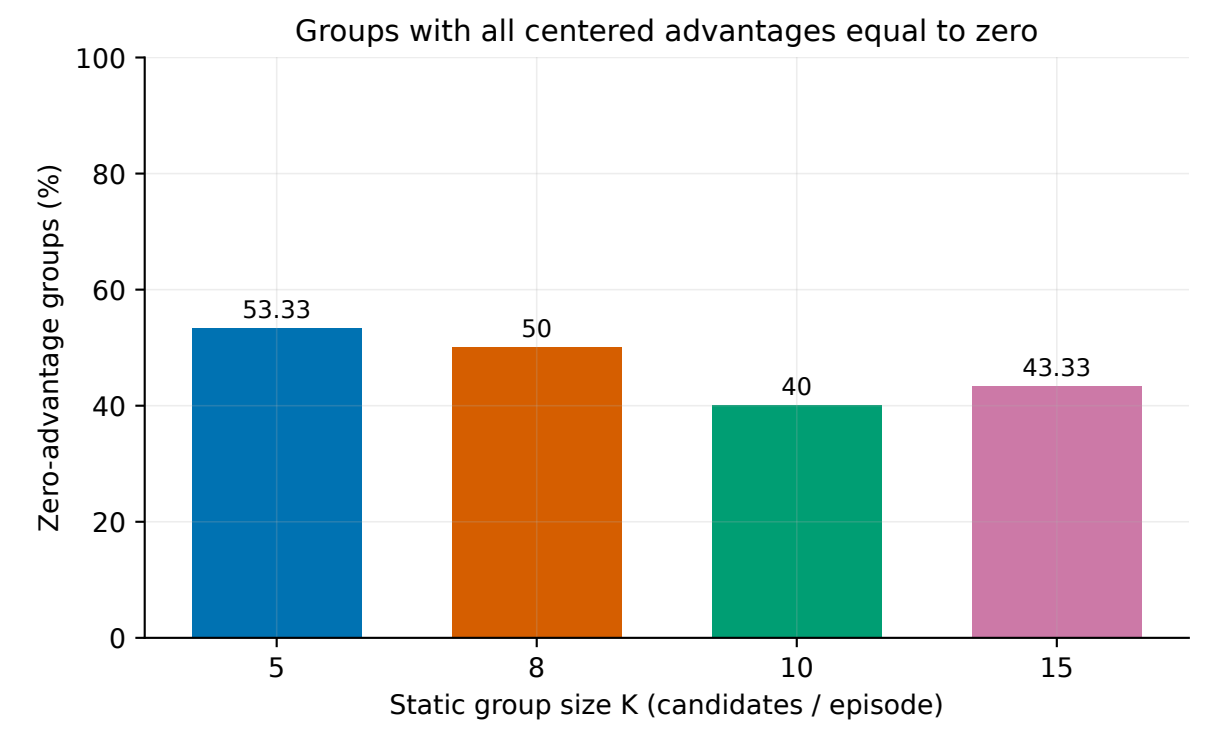


Saved GSM8K runs; seed 42; 30 episodes

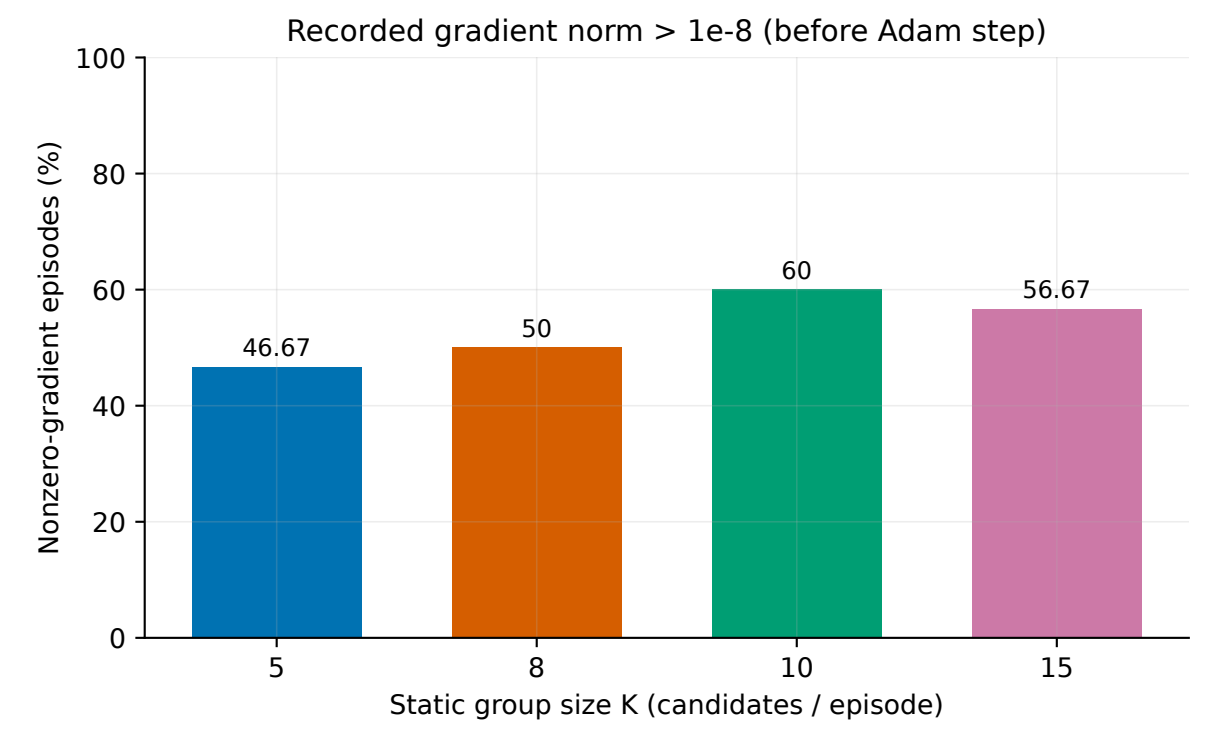


Saved GSM8K runs; seed 42; 30 episodes

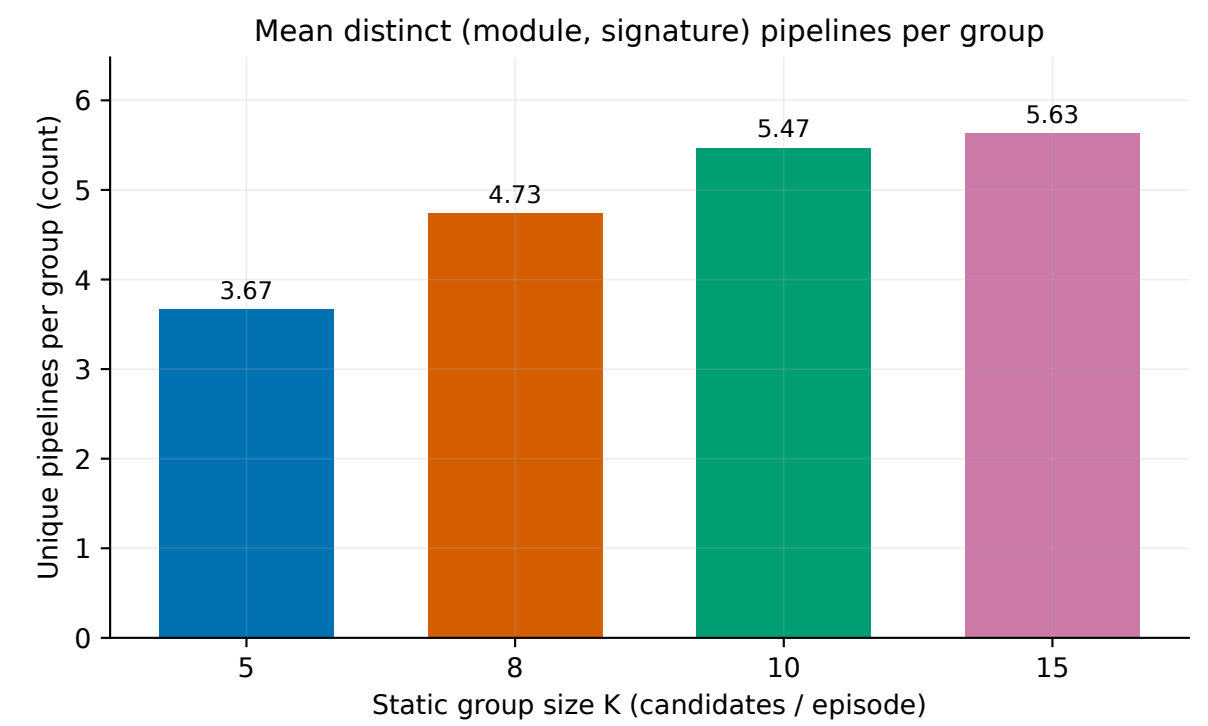


Saved GSM8K runs; seed 42; 30 episodes

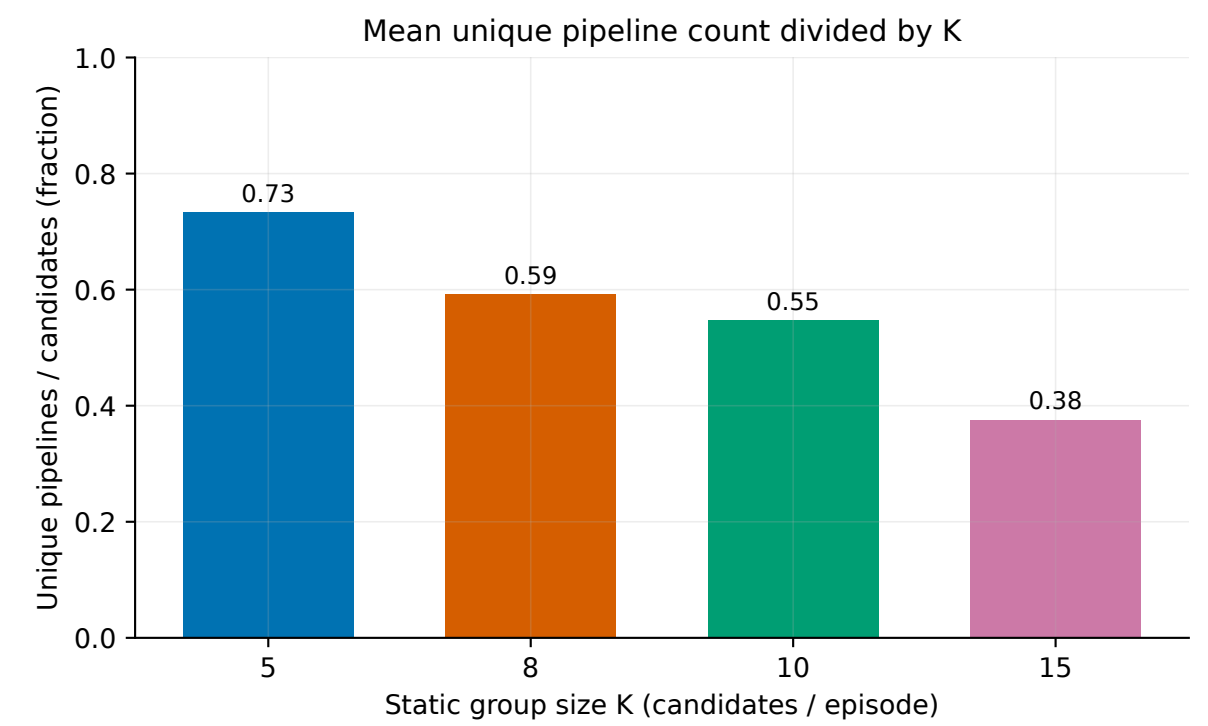


Saved GSM8K runs; seed 42; 30 episodes

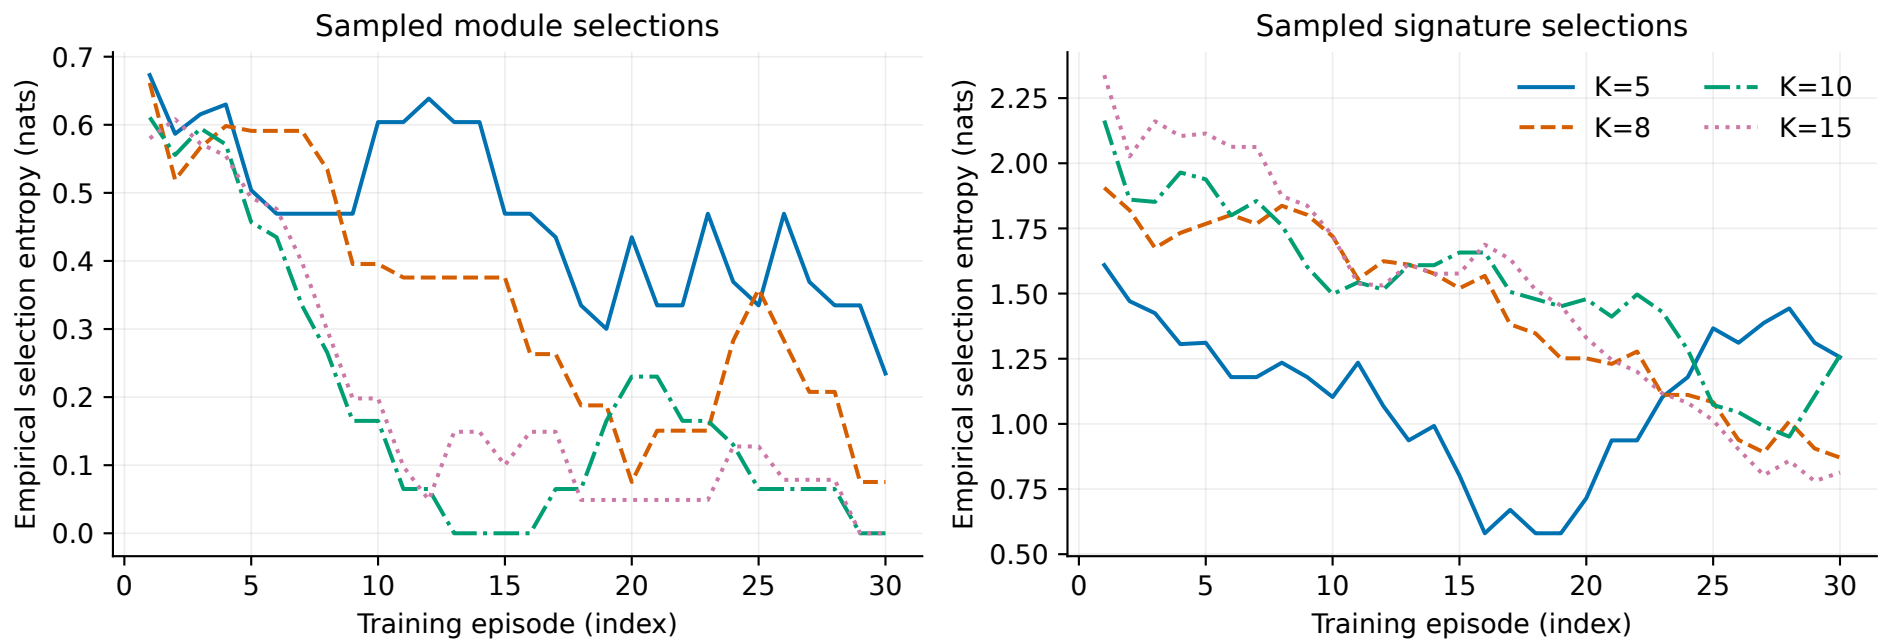

Empirical selection entropy: trailing 5-episode mean (policy entropy unavailable)
Sampled module selections
Empirical selection entropy (nats)
Training episode (index)
Sampled signature selections
Empirical selection entropy (nats)
Training episode (index)
K=5
K=8
K=10
K=15
Saved GSM8K runs; seed 42; 30 episodes

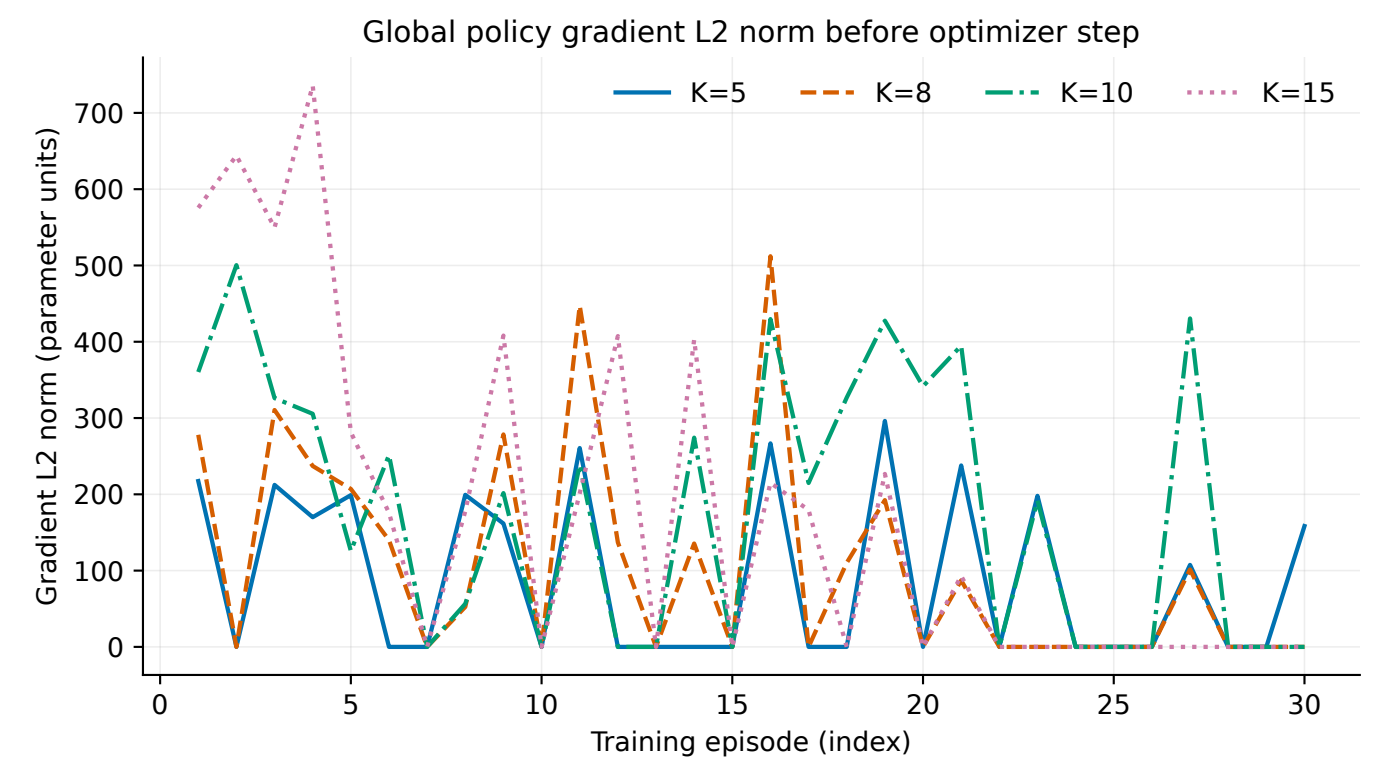


Saved GSM8K runs; seed 42; 30 episodes

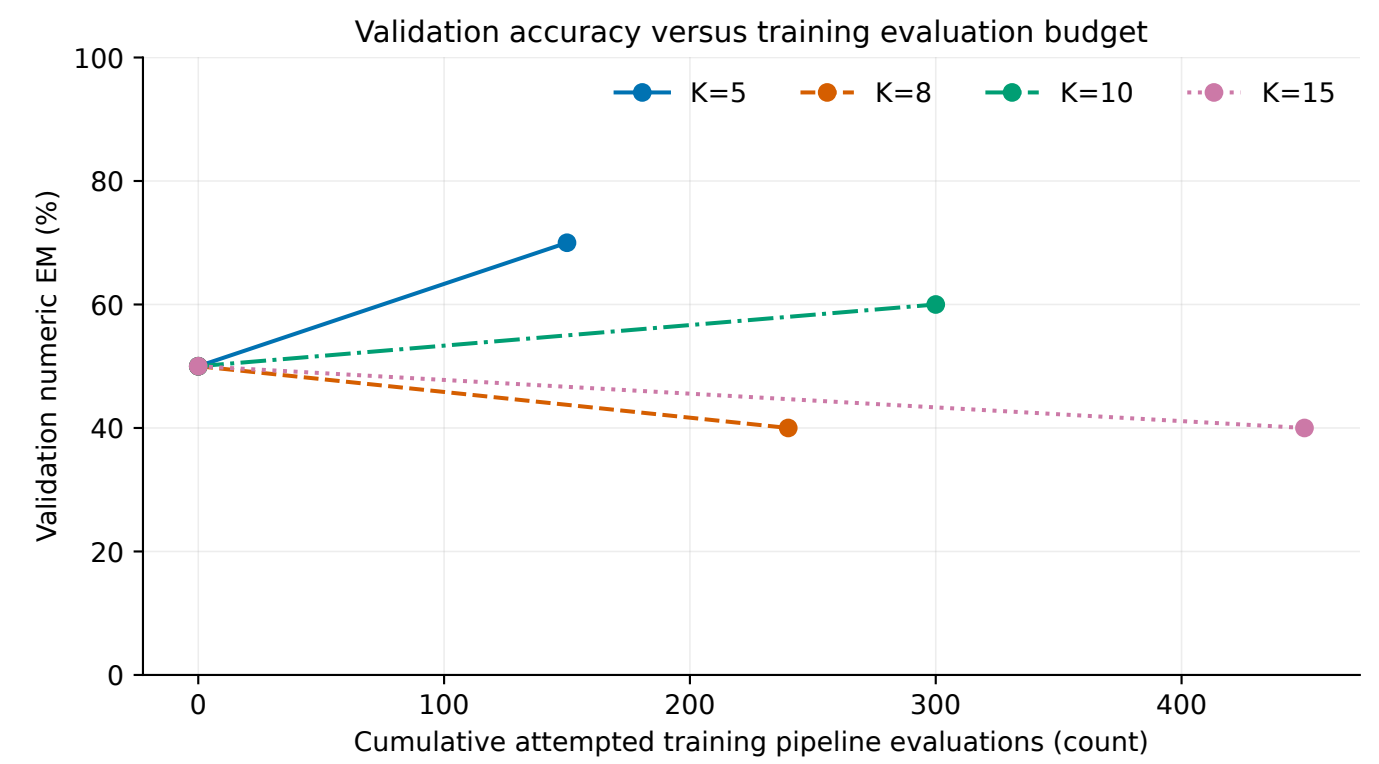


Saved validation at episodes 0 and 30 only; lines join observations

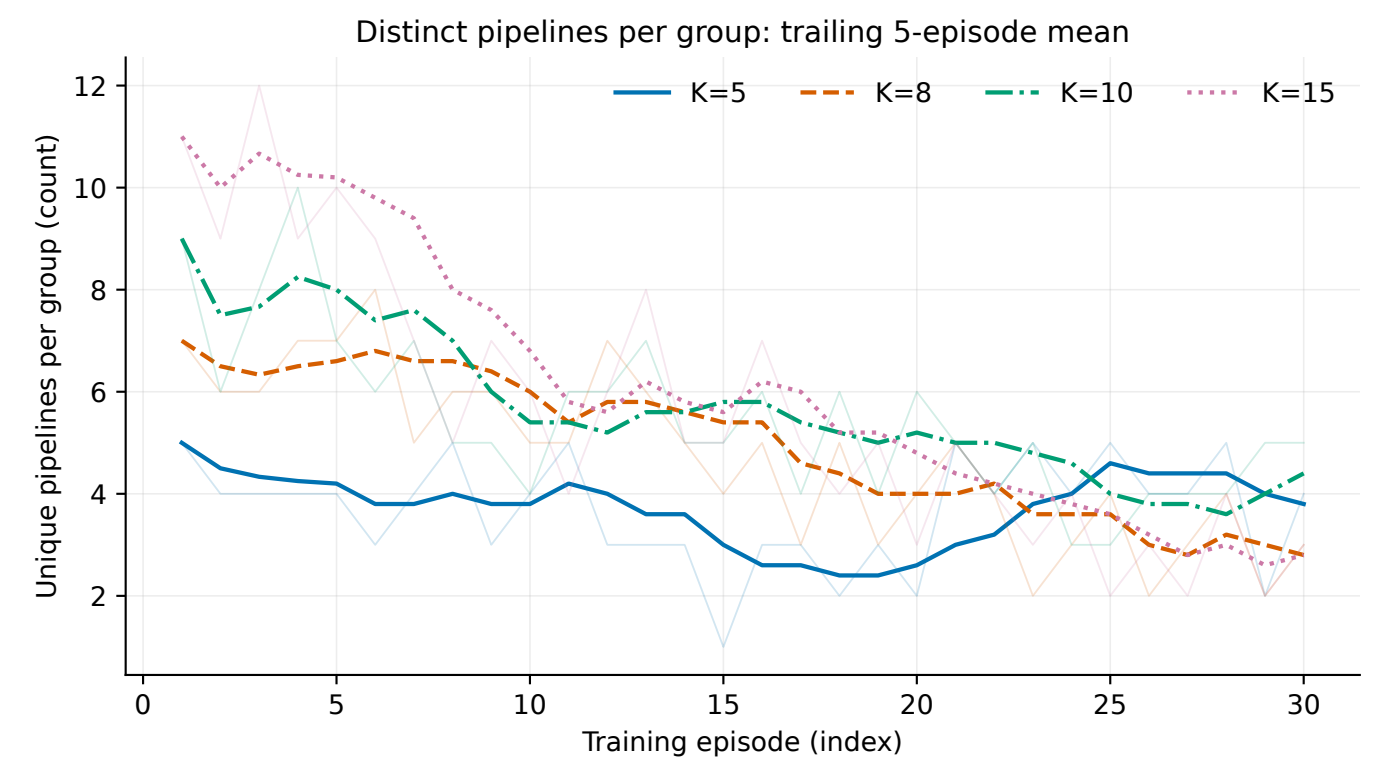

Saved GSM8K runs; seed 42; 30 episodes

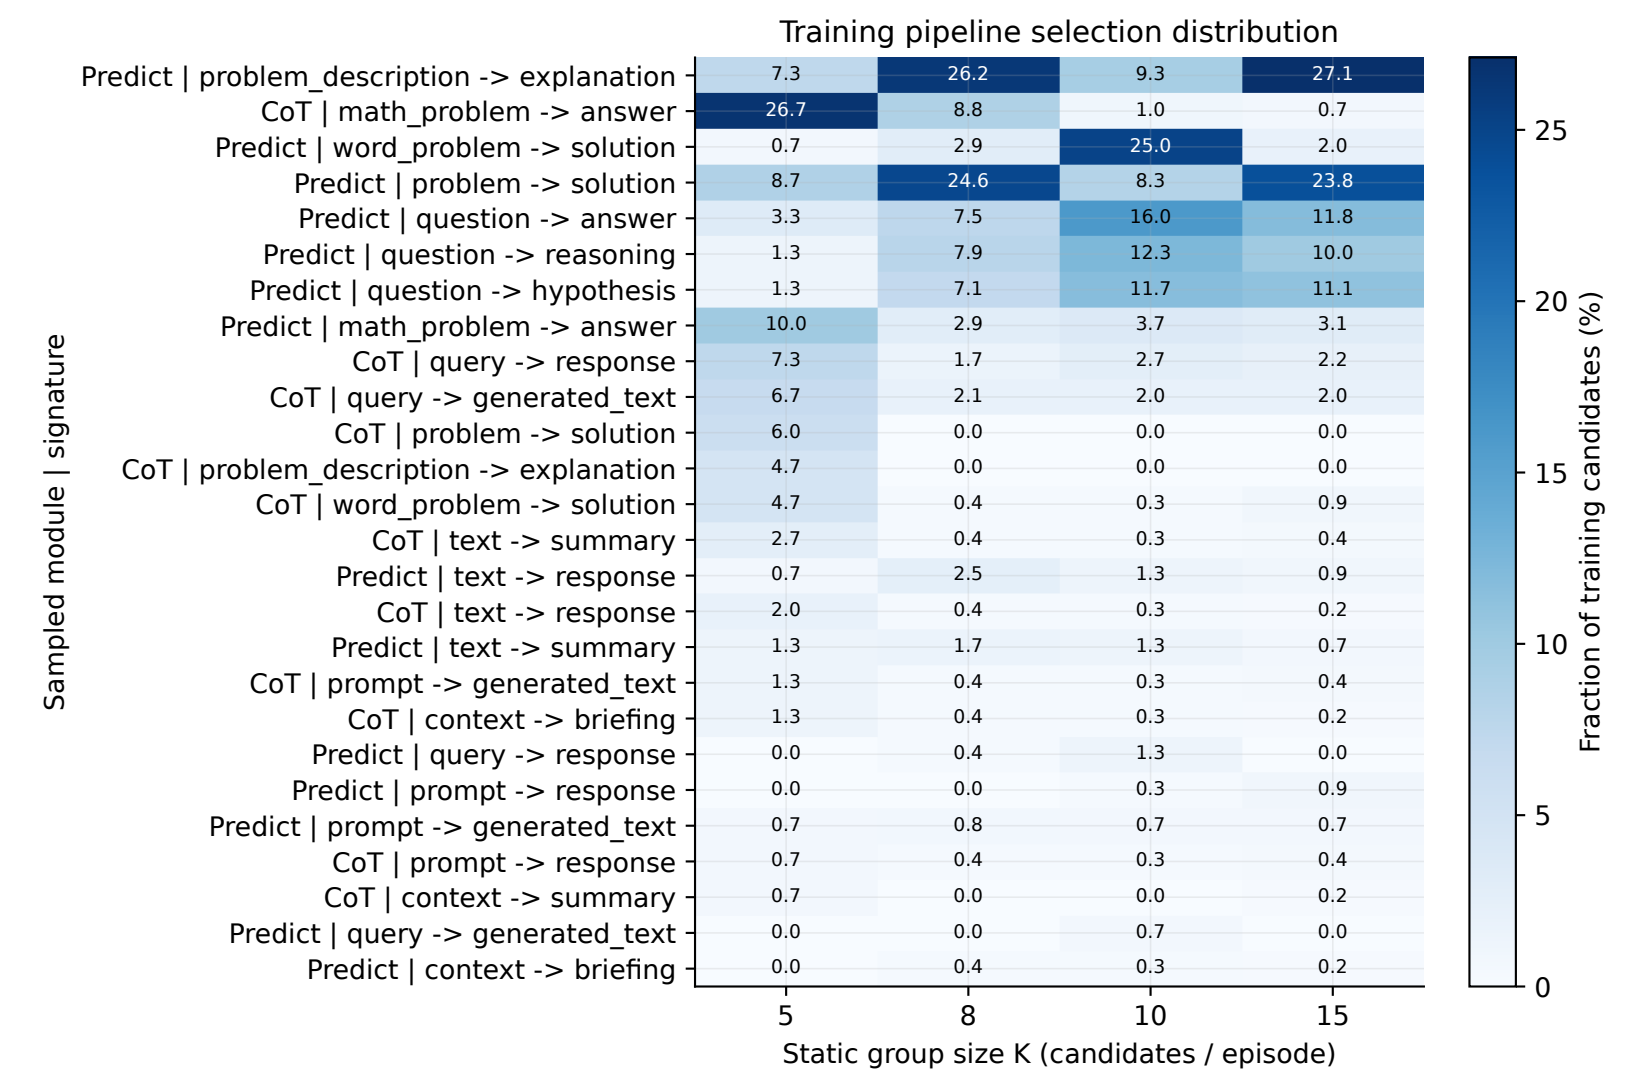


Saved GSM8K runs; seed 42; 30 episodes

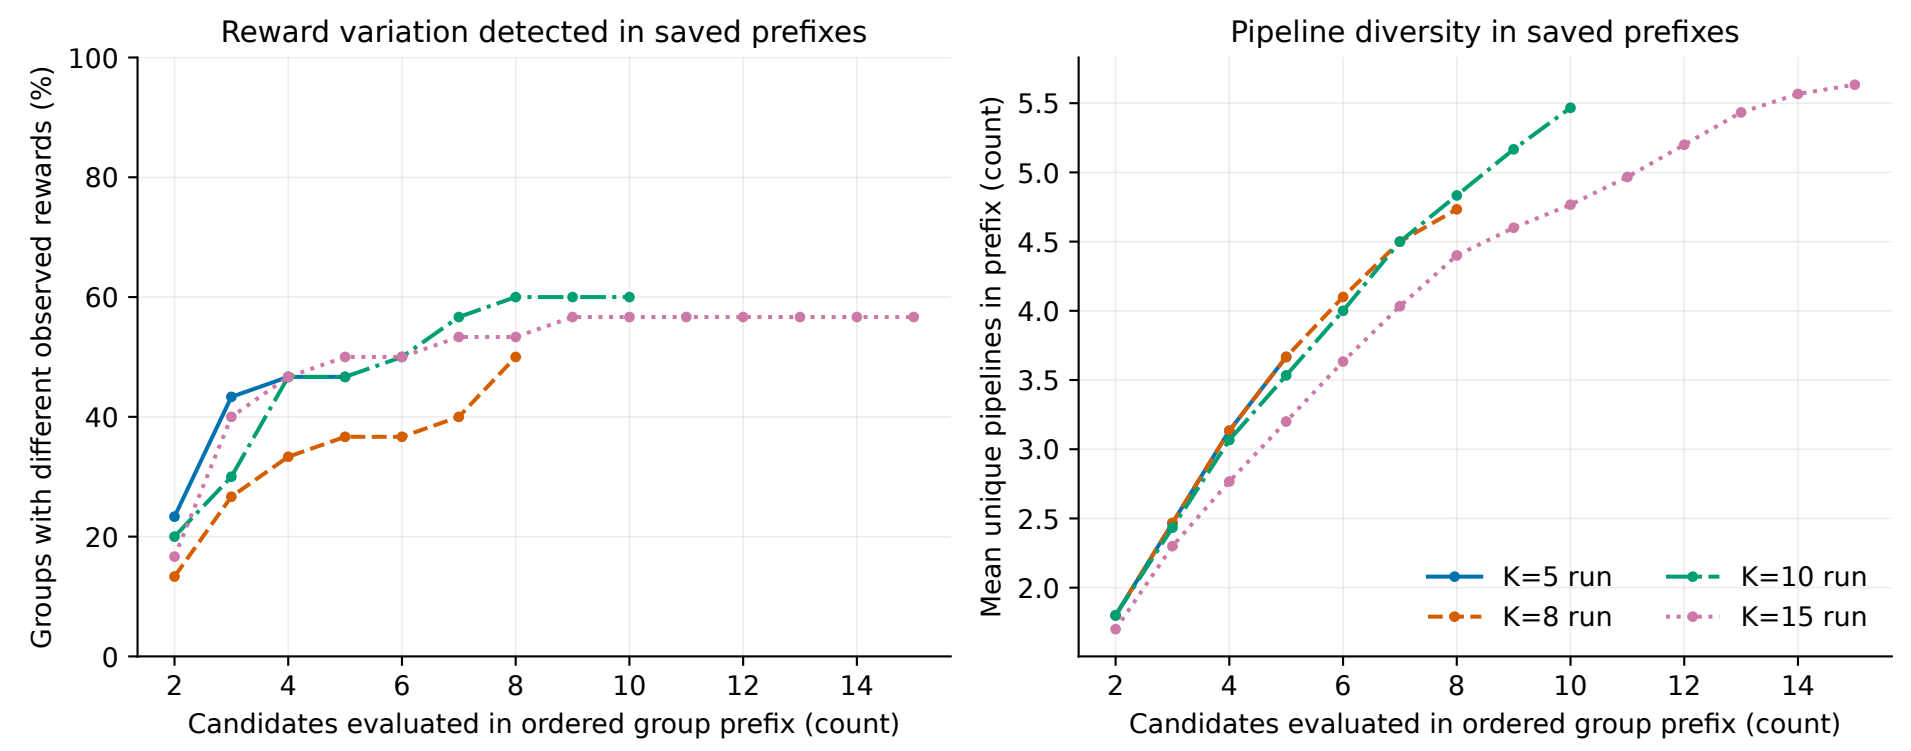


Recorded candidates in saved order; policies differ across K; no counterfactual training or stopping rule

GSM8K Static-K comparison | seed 42 | 30 episodes | learning rate 1e-5

Best-checkpoint held-out numeric EM (95% interval)

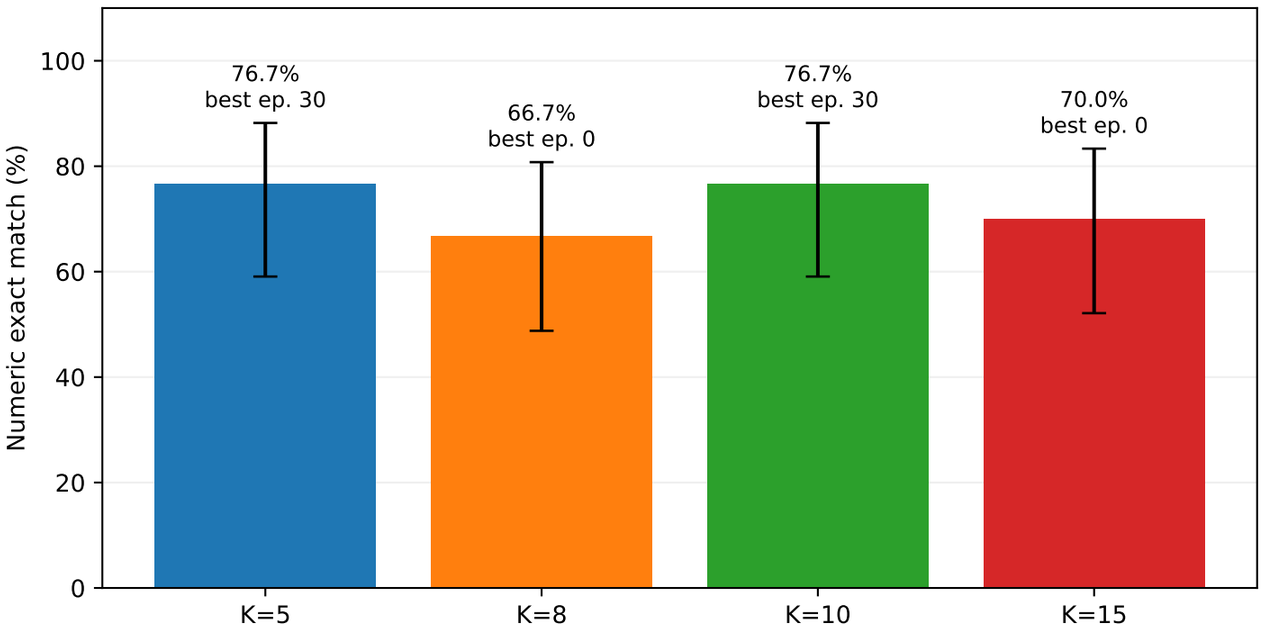


Validation EM at measured checkpoints

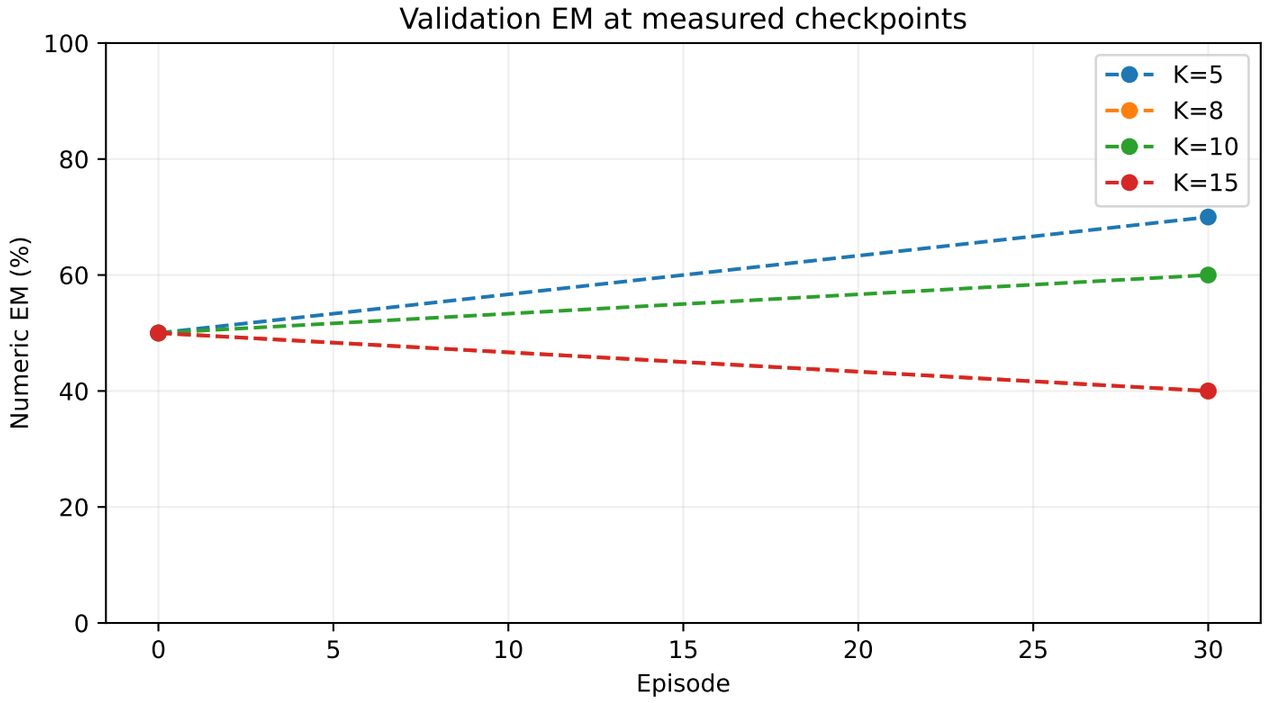


Training reward: trailing 5-episode mean




Distinct pipelines generated per episode

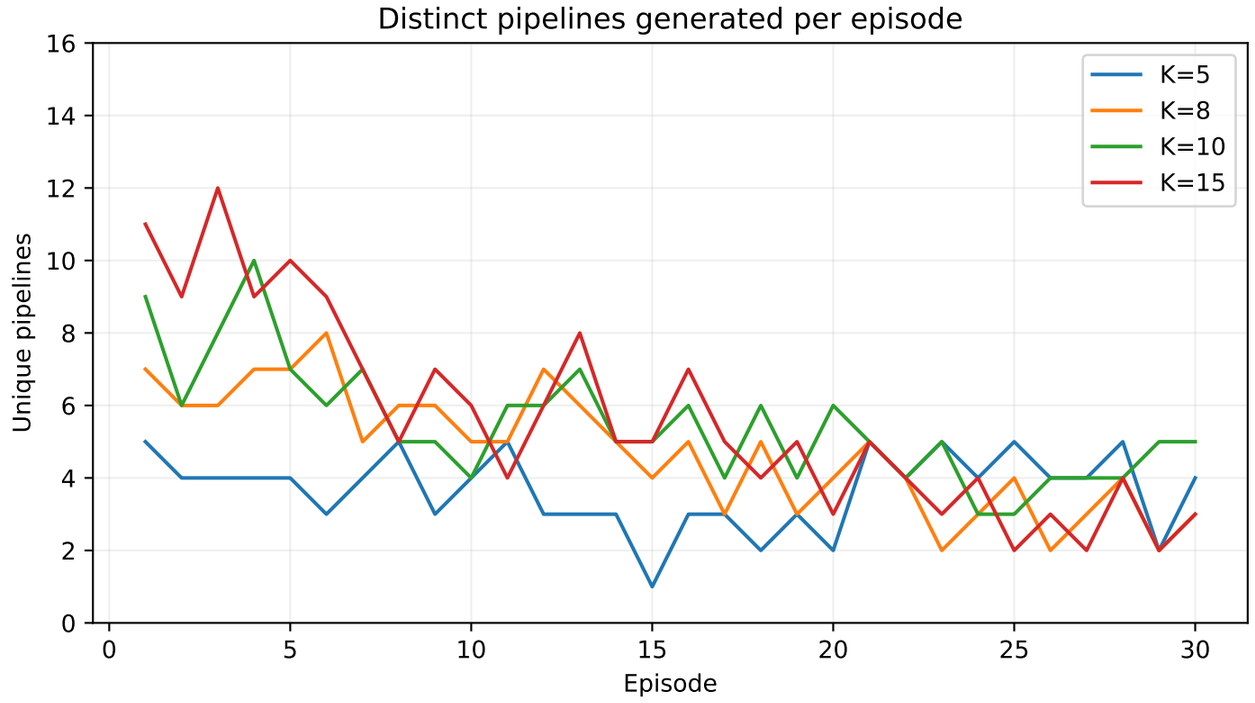


Gradient norm: original Figure 2 summed loss

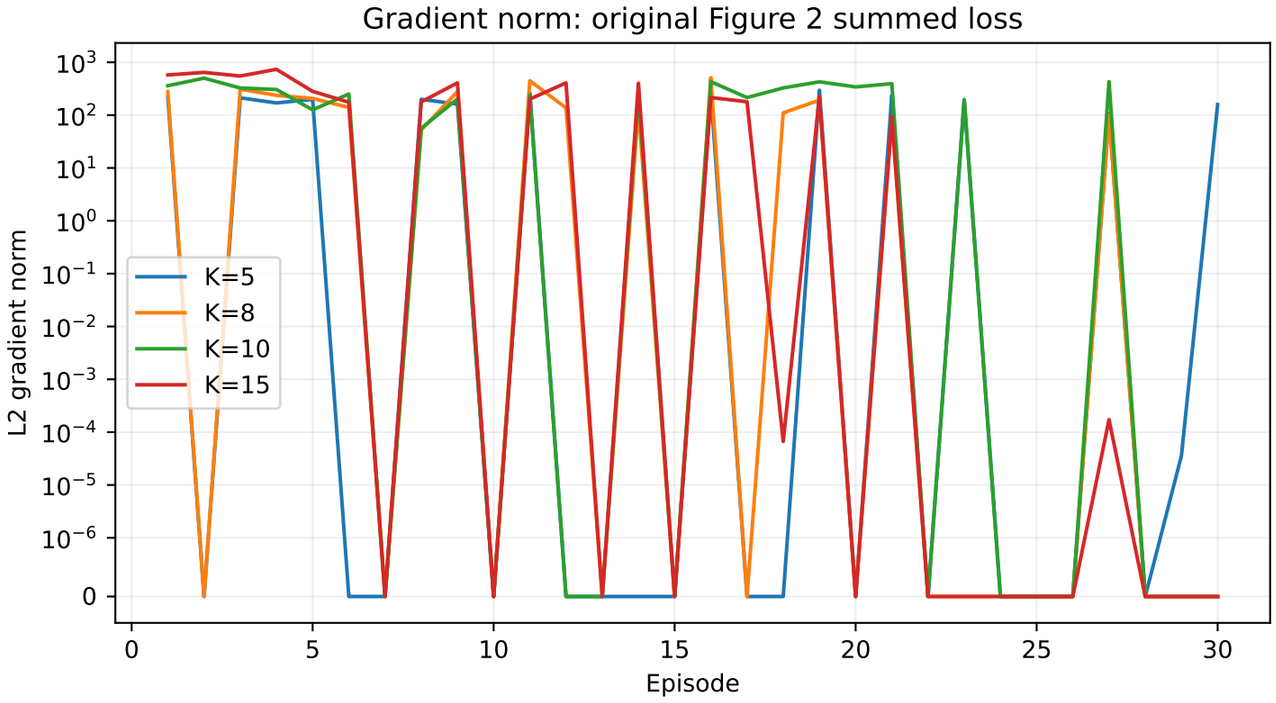

Equal-reward groups: all advantages are zero

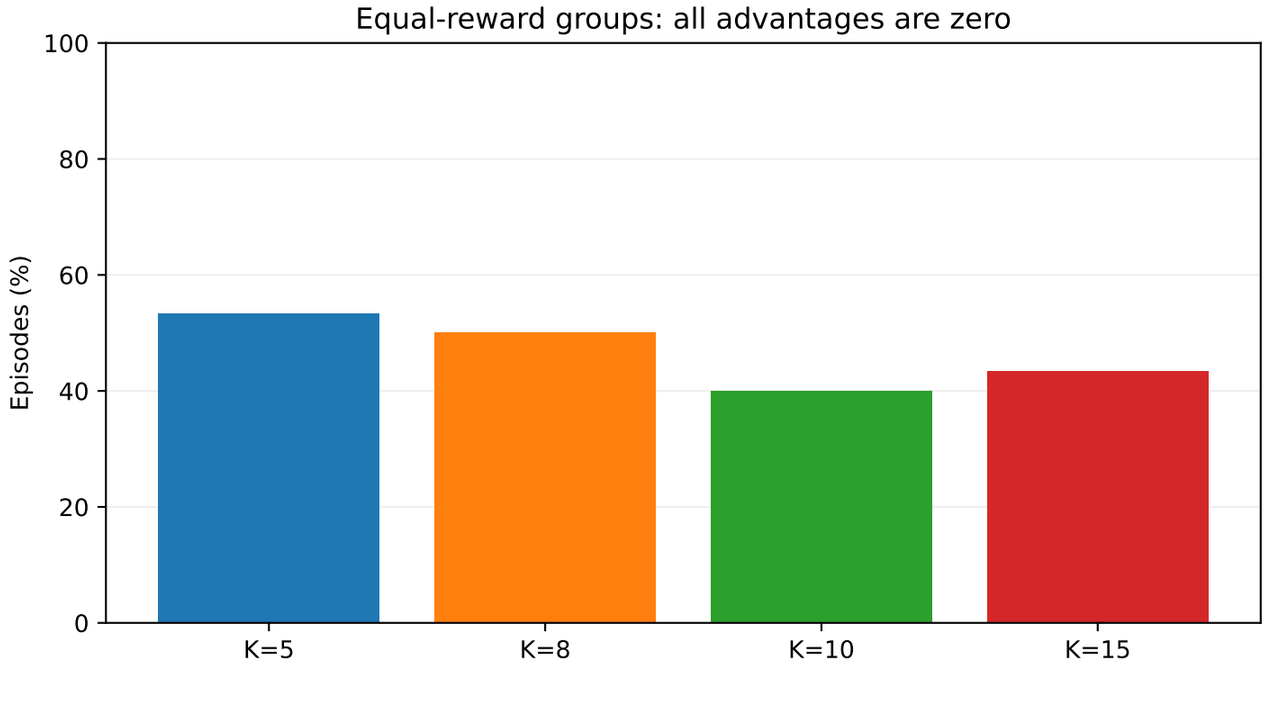

Training time, excluding validation and checkpoint I/O

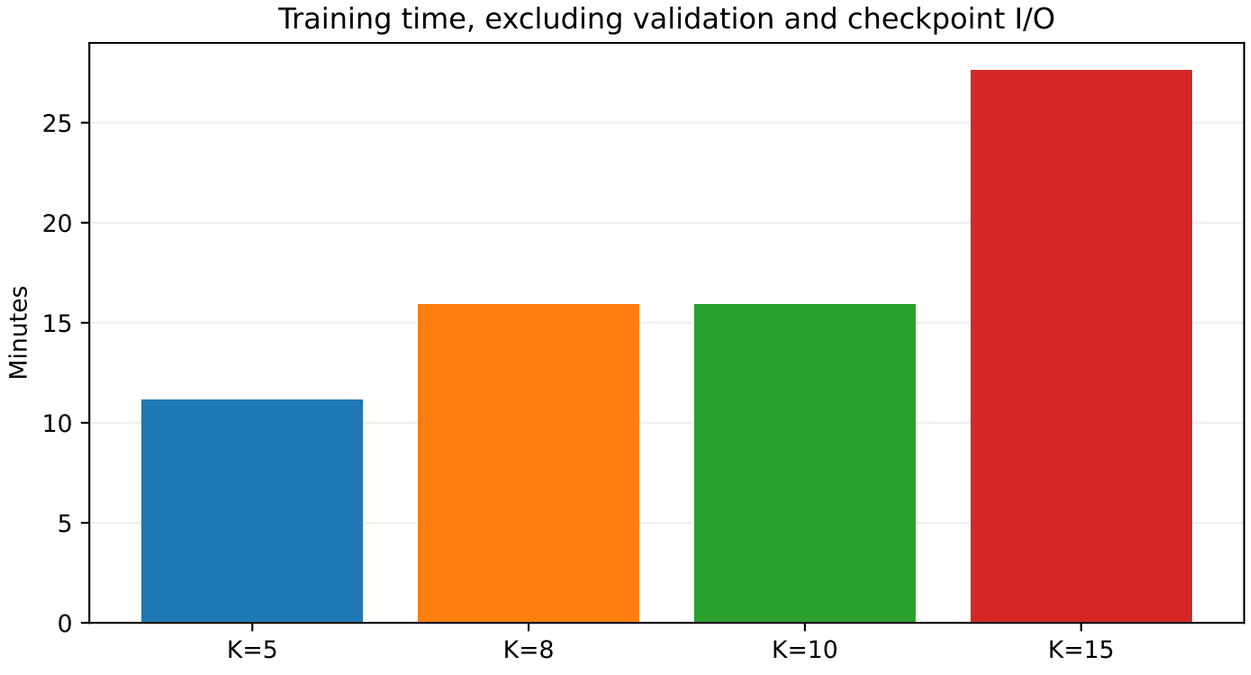

Training execution and judge cost



Source: saved run artifacts. One training seed; 30 held-out questions. Accuracy intervals describe test-set uncertainty, not variability across seeds.