


# Antmicro

## Protoplaster - docs example

2026-10-28

# CONTENTS


**1 Introduction** **1**

**2 Protoplaster** **2**
- 2.1 Installation . . . 2
- 2.2 Usage . . . 2
- 2.3 Writing additional modules . . . 5
- 2.4 Plugins . . . 6
- 2.5 Protoplaster test report . . . 7
- 2.6 System report . . . 8
- 2.7 Protoplaster manager . . . 9

**3 Protoplaster Server API Reference** **11**
- 3.1 Error Handling . . . 11
- 3.2 Configs API . . . 11
- 3.3 Test Runs API . . . 14

**4 Web UI** **22**
- 4.1 Accessing Web UI . . . 22
- 4.2 Devices . . . 22
- 4.3 Configs . . . 23
- 4.4 Test runs . . . 23

**5 Tests reference** **25**
- 5.1 ADC12DJ3200 SPI test . . . 25
- 5.2 LTC2493 device test . . . 25
- 5.3 LTC2499 device test . . . 25
- 5.4 ADC device test . . . 26
- 5.5 Eye Scan tests . . . 27
- 5.6 Camera sensor tests . . . 27
- 5.7 LMK04828 SPI test . . . 27
- 5.8 LTC2655 device test . . . 28
- 5.9 LTC2657 device test . . . 28
- 5.10 DAC device test . . . 28
- 5.11 Eye Scan tests . . . 28
- 5.12 DAC38J8x SPI test . . . 28
- 5.13 Extended simple tests . . . 29
- 5.14 Flash chip test . . . 29
- 5.15 Flashing FPGA test . . . 30
- 5.16 PI4IO tests . . . 30

5.17 GPIOs tests . . . 30
5.18 HTTP echo tests . . . 31
5.19 I2C device tests . . . 32
5.20 TCA9548A test . . . 32
5.21 I2C multiplexer test . . . 33
5.22 DMA test . . . 34
5.23 Network interface tests . . . 34
5.24 DA9062 device test . . . 34
5.25 UCD90320U device test . . . 35
5.26 Simple tests . . . 35
5.27 SPI device tests . . . 35
5.28 TMP431 device test . . . 36
5.29 USB tests . . . 36

**6 Tests description** **37**
6.1 I2C device tests . . . 37
6.2 Camera sensor tests . . . 38
6.3 Camera sensor tests . . . 38

**7 Protoplaster system report** **40**

**HTTP Routing Table** **41**

CHAPTER

ONE

# INTRODUCTION

This documentation serves as an example of what an individual project's documentation can look like.

The second chapter contains reference of remote API when running Protoplaster in server mode.

The third chapter contains information from the README file.

The fourth chapter describes in detail all test modules included with Protoplaster.

The fifth chapter is generated from the sample YAML file which can be found in the README. Its purpose is to demonstrate the documentation generated to describe test procedures used in a project.

The last chapter shows an example of a system report configuration.

CHAPTER

TWO

# PROTOPLASTER

Copyright (c) 2022-2026 Antmicro

An automated framework for platform testing (Hardware and BSPs).

Currently includes tests for:

- I2C
- GPIO
- Camera
- FPGA

## 2.1 Installation

```
pip install git+https://github.com/antmicro/protoplaster.git
```

## 2.2 Usage

```
usage: protoplaster [-h] [-d TEST_DIR] [-r REPORTS_DIR] [-a ARTIFACTS_DIR]
                    [-m] [-t TEST_FILE] [-g GROUP] [-s TEST_SUITE]
                    [--list-groups] [--list-test-suites] [--list-tests]
                    [-o OUTPUT] [--csv CSV] [--csv-columns CSV_COLUMNS]
                    [--generate-docs] [-c CUSTOM_TESTS] [-l]
                    [--report-output REPORT_OUTPUT]
                    [--system-report-config SYSTEM_REPORT_CONFIG] [--sudo]
                    [--server | --dut] [--port PORT]
                    [--external-devices EXTERNAL_DEVICES]
                    [--override OVERRIDES]

options:
  -h, --help            show this help message and exit
  -d, --test-dir TEST_DIR
                        Path to the test directory
  -r, --reports-dir REPORTS_DIR
                        Path to the reports directory
  -a, --artifacts-dir ARTIFACTS_DIR
                        Path to the test artifacts directory
  -m, --mkdir           Try to create test/reports/artifacts directories if
```

(continues on next page)

(continued from previous page)

```
                        missing
  -t, --test-file TEST_FILE
                        Path to the yaml test description in the test
                        directory
  -g, --group GROUP     Group to execute [deprecated]
  -s, --test-suite TEST_SUITE
                        Test suite to execute
  --list-groups         List possible groups to execute [deprecated]
  --list-test-suites    List possible test suites to execute
  --list-tests          List all defined tests
  -o, --output OUTPUT   A junit-xml style report of the tests results
  --csv CSV             Generate a CSV report of the tests results
  --csv-columns CSV_COLUMNS
                        Comma-separated list of columns to be included in
                        generated CSV
  --generate-docs       Generate documentation
  -c, --custom-tests CUSTOM_TESTS
                        Path to the custom tests sources
  -l, --log             Append test results to a log file
  --report-output REPORT_OUTPUT
                        Proplaster report archive
  --system-report-config SYSTEM_REPORT_CONFIG
                        Path to the system report yaml config file
  --sudo                Run as sudo
  --server              Run in server mode
  --dut                 Run in DUT mode
  --port PORT           Port to use when running in server mode
  --external-devices EXTERNAL_DEVICES
                        Path to yaml config file with additional external
                        devices
  --override OVERRIDES  Config property override
```

Protoplaster expects a yaml file describing tests as an input. The yaml file should have a structure specified as follows:

```
includes:
  - addition.yml        # Import additional definitions from external file

tests:
  base:                 # Test name
  - i2c:                # A module specifier
      dev:              # An interface specifier
        name: "I2C 0"
        driver: "I2C_SMBus"
        bus: 0
      devices:          # Multiple instances of devices can be defined in one␣
↪module
      - name: "Sensor name"
        address: 0x3c   # The given device parameters determine which tests will␣
```

(continues on next page)

(continued from previous page)

```
↪be run for the module
      - name: "I2C-bus multiplexer"
        address: 0x70
  - camera:
      device: "/dev/video0"
      camera_name: "vivid"
      driver_name: "vivid"
  - camera:
      device: "/dev/video2"
      camera_name: "vivid"
      driver_name: "vivid"
      save_file: "frame.raw"
  additional:
  - gpio:
      dev:
        name: "GPIO 0"
        driver: "GPIO_sysfs"
      pins:
        - pin: 20
          direction: out
          state: on

metadata:               # Additional metadata to be generated on tested device
  uname:                # Metadata name
    run: uname -r       # Command to run

test-suites:
  basic:                # Test suite name
    tests:              # Tests to include
      - base
  full:
    tests:
      - basic           # Test suites can include other test suites
      - additional
    metadata:           # Metadata to generate for this test
      - uname
```

### 2.2.1 Test suites

In the YAML file, you can define different groups of tests in the `test-suites` section to run them for different use cases. In the YAML file example, there are two suites defined: `basic` and `full`. Protoplaster, when run without a defined test suite, will execute all tests defined in given file. When the test suite is specified with the parameter `-s` or `--test-suite`, only the tests in the specified suite are going to be run. You can also list existing groups in the YAML file, simply run `protoplaster --list-test-suites test.yaml`.

### 2.2.2 Config overrides

It is possible to apply provisional changes to configuration without modifying the YAML file. Assume that in the example above, the path to the second video device has changed from `/dev/video2` to `/dev/video1`, and we would like to save the received frame to a file named `image.raw` instead of `frame.raw`. To account for this, you may run Protoplaster with the options: `--override "tests.base.2.camera.device: /dev/video1" --override "tests.base.2.camera.save_file: image.raw"`.

Overrides may also be used directly in the config file – for example, in the `i2c` test, to rename the first device from `Sensor name` to `Some other name`, you might add an override:

- at the beginning or end of the file: `tests.base.0.i2c.devices.0.name: Some other name`
- within the `i2c` test definition, before or after `devices`: `devices.0.name: Some other name`.

### 2.2.3 External Devices

When running in server mode, you can provide a YAML configuration file to automatically register external devices using the `--external-devices` argument.

The configuration file should be a YAML dictionary mapping device names to their IP addresses or URLs:

```
node1: 10.0.1.2
node2: 10.0.1.3:2100
lab_device: http://192.168.1.50:8037
```

## 2.3 Writing additional modules

Apart from the base modules available in Protoplaster, you can provide your own additional modules.

Each custom module should follow this structure:

```
{module_name}/
|- __init__.py
|- test.py
|- <optional helper files>
```

Here, `module_name` must match the name of the test module. For example, in the sample below, it would be `additional_camera`.

By default, external modules are expected in the `--TEST_DIR` directory. If you want to store them elsewhere, you can use the `--custom-tests` argument to specify a custom path.

The `test.py` file must define a test class decorated with `ModuleName(test_module)` from the `protoplaster.conf.module` package. This decorator specifies the name of the module, allowing Protoplaster to correctly initialize the test parameters.

The test class must also implement a `name()` method, whose return value is used for the `device_name` field in the CSV output.

All individual tests should be implemented within the main class in `test.py`. The class name must start with `Test`, and every test method within it must start with `test`.

An example of an extended module test:

```python
from protoplaster.conf.module import ModuleName


@ModuleName("additional_camera")
class TestAdditionalCamera:
    """
    {% macro TestAdditionalCamera(prefix) -%}
    Additional camera tests
    -----------------------
    {% do prefix.append('') %}
    This module provides tests dedicated to camera sensors on specific video node:
    {%- endmacro %}
    """

    def test_exists(self):
        """
        {% macro test_exists(device) -%}
          check if the path exists
        {%- endmacro %}
        """
        assert self.path == "/dev/video0"
```

And a YAML definition:

```yaml
---
base:
  additional_camera:
    - path: "/dev/video0"
    - path: "/dev/video1"
```

## 2.4 Plugins

Protoplaster supports extending its functionality via **plugins**. Each plugin is a Python module that can be placed in a directory specified when running Protoplaster using:

```
--plugins <dir>
```

### 2.4.1 Directory structure

- Each plugin is a single module at the top level of that directory.
- Each module must define a class `ProtoplasterPlugin`.

Example structure of a `plugins` directory:

```
plugins/
├─ __init__.py
├─ plugin1.py
├─ plugin2.py
└─ plugin3.py
```

### 2.4.2 Required plugin class

Each plugin must implement the `ProtoplasterPlugin` class and can optionally implement the hooks `before_test_function` and `after_test_function`.

Both of them have to be decorated with `hookimpl` from `protoplaster.conf.plugin_manager` module.

Example minimal plugin:

```
from typing import Callable
from protoplaster.conf.plugin_manager import hookimpl

class ProtoplasterPlugin:
    @hookimpl
    def before_test_setup(self, test_class):
        print(f"setting up test class: {test_class.__name__}")

    @hookimpl
    def before_test_function(self, test_instance, test_function: Callable):
        print(f"hello from {test_instance.name()}", test_instance, test_function._
↪_name__)

    @hookimpl
    def after_test_function(self, test_instance, test_function: Callable):
        print(f"goodbye from {test_instance.name()}", test_instance, test_
↪function.__name__)
```

- `before_test_setup` — called **before** the test class's `configure()` method.
- `before_test_function` — called **before** each test function is executed.
- `after_test_function` — called **after** each test function has finished.
- `test_instance` — the test class instance running the test.
- `test_function` — the test function itself (of type `Callable`).

## 2.5 Protoplaster test report

Protoplaster provides `protoplaster-test-report`, a tool to convert test CSV output into a HTML or Markdown table.

```
usage: protoplaster-test-report [-h] [-i INPUT_FILE] -t {md,html} [-o OUTPUT_FILE]

options:
  -h, --help            show this help message and exit
  -i INPUT_FILE, --input-file INPUT_FILE
                        Path to the csv file
  -t {md,html}, --type {md,html}
                        Output type
  -o OUTPUT_FILE, --output-file OUTPUT_FILE
                        Path to the output file
```

## 2.6 System report

Protoplaster provides `protoplaster-system-report`, a tool for obtaining information about system state and configuration. It executes a list of commands and saves their outputs. The outputs are stored in a single zip archive along with an HTML summary.

### 2.6.1 Usage

```
usage: protoplaster-system-report [-h] [-o OUTPUT_FILE] [-c CONFIG] [--sudo]

options:
  -h, --help            show this help message and exit
  -o OUTPUT_FILE, --output-file OUTPUT_FILE
                        Path to the output file
  -c CONFIG, --config CONFIG
                        Path to the YAML config file
  --sudo                Run as sudo
```

The YAML config contains a list of actions to perform. A single action is described as follows:

```yaml
report_item_name:
  run: script
  summary:
    - title: summary_title
      run: summary_script
  output: script_output_file
  superuser: required | preferred
  on-fail: ...
```

- `run` - command to be run
- `summary` – a list of summary generators, each one with fields:
  - `title` – summary title
  - `run` – command that generates the summary. This command gets the output of the original command as stdin. This field is optional; if not specified, the output is placed in the report as-is.
- `output` - output file for the output of `run`.
- `superuser` – optional, should be specified if the command requires elevated privileges to run. Possible values:
  - `required` – `protoplaster-system-report` will terminate if the privilege requirement is not met
  - `preferred` – if the privilege requirement is not met, a warning will be issued and this particular item won't be included in the report
- `on-fail` – optional description of an item to run in case of failure. It can be used to run an alternative command when the original one fails or is not available.

Example config file:

```
uname:
  run: uname -a
  summary:
    - title: os info
      run: cat
  output: uname.out
dmesg:
  run: dmesg
  summary:
    - title: usb
      run: grep usb
    - title: v4l
      run: grep v4l
  output: dmesg.out
  superuser: required
ip:
  run: ip a
  summary:
    - title: Network interfaces state
      run: python3 $PROTOPLASTER_SCRIPTS/generate_ip_table.py "$(cat)"
  output: ip.out
  on-fail:
    run: ifconfig -a
    summary:
      - title: Network interfaces state
        run: python3 $PROTOPLASTER_SCRIPTS/generate_ifconfig_table.py "$(cat)"
    output: ifconfig.out
```

### 2.6.2 Running as root

By default, sudo doesn't preserve `PATH`. To run `protoplaster-system-report` installed by a non-root user as root, invoke `protoplaster-system-report --sudo`

## 2.7 Protoplaster manager

Protoplaster provides `protoplaster-mgmt`, a tool to remotely control Protoplaster via the API. For more detailed information, see the help messages associated with each subcommand.

```
usage: protoplaster-mgmt [-h] [--url URL] [--config CONFIG] [--config-dir CONFIG_
↪DIR] [--report-dir REPORT_DIR] [--artifact-dir ARTIFACT_DIR] {configs,runs} ...

Tool for managing Protoplaster via remote API

options:
  -h, --help            show this help message and exit
  --url URL             URL to a device running Protoplaster server (default:␣
↪http://127.0.0.1:5000/)
  --config CONFIG       Config file with values for url, config-dir, report-dir,␣
↪artifact-dir
  --config-dir CONFIG_DIR
```

(continues on next page)

(continued from previous page)

```
                        Directory to save fetched config (default: ./)
  --report-dir REPORT_DIR
                        Directory to save a test report (default: ./)
  --artifact-dir ARTIFACT_DIR
                        Directory to save a test artifact (default: ./)

available commands:
  {configs,runs}
    configs             Configs management
    runs                Test runs management
```

CHAPTER

THREE

# PROTOPLASTER SERVER API REFERENCE

## 3.1 Error Handling

Should an error occur during the handling of an API request, either because of incorrect request data or other endpoint-specific scenarios, the server will return an error structure containing a user-friendly description of the error. An example error response is shown below:

```
{
   "error": "test start failed"
}
```

## 3.2 Configs API

**GET /api/v1/configs**

Fetch a list of configs

**Status Codes**

- 200 OK – no error

**Request JSON Array of Objects**

- **created** (string) – UTC datetime of config upload (RFC822)
- **name** (string) – config name

**Example Request**

```
GET /api/v1/configs HTTP/1.1
Accept: application/json, text/javascript
```

**Example Response**

```
HTTP/1.1 200 OK
Content-Type: application/json

[
  {
    "name": "sample_config.yaml",
    "created": "Mon, 25 Aug 2025 16:58:35 +0200",
  }
]
```

**POST /api/v1/configs**

Upload a test config

**Form Parameters**

- **file** – yaml file with the test config

**Status Codes**

- 200 OK – no error, config was uploaded
- 400 Bad Request – file was not provided

**Example Request**

```
POST /api/v1/configs HTTP/1.1
Accept: */*
Content-Length: 4194738
Content-Type: multipart/form-data; boundary=------------------------
↪0f8f9642db3a513e

--------------------------0f8f9642db3a513e
Content-Disposition: form-data; name="file"; filename="config.yaml"
Content-Type: application/octet-stream

<file contents>
--------------------------0f8f9642db3a513e--
```

**Example Response**

```
HTTP/1.1 200 OK
```

**DELETE /api/v1/configs/(string:** *config_name*)

Remove a test config

**Parameters**

- **name** – filename of the test config

**Status Codes**

- 200 OK – no error, config was removed
- 404 Not Found – file was not found

**Example Request**

```
DELETE /api/v1/configs/sample_config.yaml HTTP/1.1
```

**Example Response**

```
HTTP/1.1 200 OK
```

**GET /api/v1/configs/(string:** *config_name*)

Fetch information about a config

**Status Codes**

- 200 OK – no error

- 404 Not Found – config does not exist

**Request JSON Object**

- **created** (string) – UTC datetime of config upload (RFC822)
- **config_name** (string) – config name

**Example Request**

```
GET /api/v1/configs/sample_config.yaml HTTP/1.1
Accept: application/json, text/javascript
```

**Example Response**

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "name": "sample_config.yaml",
  "created": "Mon, 25 Aug 2025 16:58:35 +0200",
}
```

**GET /api/v1/configs/(string:** *config_name*)**/file**

Fetch a config file

**Status Codes**

- 200 OK – no error
- 404 Not Found – config does not exist

**>file text/yaml**

YAML config file

**Example Request**

```
GET /api/v1/configs/sample_config.yaml/file HTTP/1.1
```

**Example Response**

```
HTTP/1.1 200 OK
Content-Type: text/yaml
Content-Disposition: attachment; filename="sample_config.yaml"

base:
  network:
    - interface: enp14s0
```

**GET /api/v1/configs/(string:** *config_name*)**/override-hints**

Fetch list of suggested overrides in config file

**Status Codes**

- 200 OK – no error
- 500 Internal Server Error – error while parsing file

**Request JSON Object**

- **array** – list of override hints

**Example Request**

```
GET /api/v1/configs/some_example.yml/override-hints HTTP/1.1
```

**Example Response**

```
HTTP/1.1 200 OK
Content-Type: application/json

["tests.check.0.simple.device","tests.simple_test.0.simple.device"]
```

**GET /api/v1/configs/(string:** *config_name*)**/test-suites**

Fetch list of test suites in config file

**Status Codes**

- 200 OK – no error
- 500 Internal Server Error – error while parsing file

**Request JSON Object**

- **array** – list of test suites

**Example Request**

```
GET /api/v1/configs/complex.yml/test-suites HTTP/1.1
```

**Example Response**

```
HTTP/1.1 200 OK
Content-Type: application/json

["local","full"]
```

## 3.3 Test Runs API

**GET /api/v1/test-runs**

Fetch a list of test runs

**Status Codes**

- 200 OK – no error

**Request JSON Array of Objects**

- **id** (string) – run id
- **config_name** (string) – name of config for this test run
- **test_suite_name** (string) – name of the test suite for this test run
- **created_at** (string) – UTC datetime of test run creation (RFC822)
- **started_at** (string) – UTC datetime of test run start (RFC822)

- **finished_at** (string) – UTC completion time (RFC822)
- **status** (string) – test run status, one of: * pending - accepted but not started * running - currently executing * finished - completed successfully * failed - error during execution * aborted - stopped by user or system
- **metadata** (dict[str, str]) – optional test run metadata (key/value pairs)

**Example Request**

```
GET /api/v1/test-runs HTTP/1.1
Accept: application/json, text/javascript
```

**Example Response**

```
HTTP/1.1 200 OK
Content-Type: application/json

[
  {
    "id": "25d9f4a2-2556-4647-b3cc-762348dc51ce",
    "config_name": "config1.yaml"
    "test_suite_name": "simple-test"
    "status": "finished",
    "created_at": "Mon, 25 Aug 2025 15:56:35 +0200",
    "started_at": "Mon, 25 Aug 2025 15:56:36 +0200",
    "finished_at": "Mon, 25 Aug 2025 15:56:44 +0200",
    "metadata": {
      "bsp-sha256":
↪"a5603553e0eaad133719dc19b57c96e811a72af5329e120310f96b4fdc891732"
    }
  },
  {
    "run_id": "976c3d37-0b9a-4c81-ad0d-ebb96c9eee94",
    "config_name": "config2.yaml"
    "test_suite_name": "complex-test"
    "status": "running",
    "created_at": "Mon, 25 Aug 2025 16:58:35 +0200",
    "started_at": "Mon, 25 Aug 2025 16:58:36 +0200",
    "finished_at": "",
    "metadata": {}
  }
]
```

**POST /api/v1/test-runs**

Trigger a test run

**Status Codes**

- 200 OK – test run was triggered successfully (returns run object for local/tracked runs, or empty object for remote dispatch)
- 404 Not Found – config file was not found

- 500 Internal Server Error – failed to dispatch remote run

**Response JSON Object**

- **config_name** (string) – name of config for this test run
- **test_suite_name** (string) – (optional) name of the test suite for this test run
- **machine_target** (string) – (optional) name of the node this test is meant to be run on
- **overrides** (string) – (optional) newline-delimited list of YAML config overrides

**Example Request**

```
POST /api/v1/test-runs/ HTTP/1.1
Content-Type: application/json
Accept: application/json, text/javascript

{
  "config_name": "config1.yaml",
  "test_suite_name": "simple-test"
}
```

**Example Response (Tracked (local) Run)**

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "id": "25d9f4a2-2556-4647-b3cc-762348dc51ce",
  "config_name": "config1.yaml"
  "test_suite_name": "simple-test"
  "status": "pending",
  "created_at": "Mon, 25 Aug 2025 15:56:35 +0200",
  "started_at": "",
  "finished_at": "",
  "metadata": {}
}
```

**Example Response (Remote Dispatch Success)**

```
HTTP/1.1 200 OK
Content-Type: application/json

{}
```

**Example Response (Remote Dispatch Failure)**

```
HTTP/1.1 500 Internal Server Error
Content-Type: application/json
```

(continues on next page)

(continued from previous page)

```
{
    "error": "Machine 'node1' not defined in devices list"
}
```

**DELETE /api/v1/test-runs/(string:** *identifier*)

Cancel a pending test run

**Parameters**

- **identifier** – test run identifier

**Status Codes**

- 200 OK – no error
- 400 Bad Request – test run not pending
- 404 Not Found – test run does not exist

**Example Request**

```
DELETE /api/v1/test-runs/25d9f4a2-2556-4647-b3cc-762348dc51ce HTTP/1.1
```

**Example Response**

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "run_id": "25d9f4a2-2556-4647-b3cc-762348dc51ce",
  "config_name": "config1.yaml"
  "test_suite_name": "simple-test"
  "status": "aborted",
  "created_at": "Mon, 25 Aug 2025 15:56:35 +0200",
  "finished_at": "Mon, 25 Aug 2025 15:56:44 +0200",
  "metadata": {
    "bsp-sha256":
↪"a5603553e0eaad133719dc19b57c96e811a72af5329e120310f96b4fdc891732"
  }
}
```

**GET /api/v1/test-runs/(string:** *identifier*)

Fetch information about a test run

**Parameters**

- **identifier** – test run identifier

**Status Codes**

- 200 OK – no error
- 404 Not Found – test run does not exist

**Request JSON Object**

- **id** (string) – test run identifier

- **config_name** (string) – name of config for this test run
- **test_suite_name** (string) – name of the test suite for this test run
- **created_at** (string) – UTC creation time (RFC822)
- **started_at** (string) – UTC creation time (RFC822)
- **finished_at** (string) – UTC completion time (RFC822)
- **status** (string) – test run status, one of: * pending - accepted but not started * running - currently executing * finished - completed successfully * failed - error during execution * aborted - stopped by user or system
- **metadata** (dict[str, str]) – optional test run metadata (key/value pairs)

**Example Request**

```
GET /api/v1/test-runs/25d9f4a2-2556-4647-b3cc-762348dc51ce HTTP/1.1
```

**Example Response**

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "run_id": "25d9f4a2-2556-4647-b3cc-762348dc51ce",
  "config_name": "config1.yaml"
  "test_suite_name": "simple-test"
  "status": "finished",
  "created_at": "Mon, 25 Aug 2025 15:56:35 +0200",
  "started_at": "Mon, 25 Aug 2025 15:56:36 +0200",
  "finished_at": "Mon, 25 Aug 2025 15:56:44 +0200",
  "metadata": {
    "bsp-sha256":
↪"a5603553e0eaad133719dc19b57c96e811a72af5329e120310f96b4fdc891732"
  }
}
```

**GET /api/v1/test-runs/(string:** *identifier*)**/artifacts**

Fetch a list of test run artifacts.

**Parameters**

- **identifier** – test run identifier

**Status Codes**

- 200 OK – no error, file returned
- 404 Not Found – test run not completed or does not exist

**>file**
artifact file with content type inferred automatically

**Example request**

```
GET /api/v1/runs/25d9f4a2-2556-4647-b3cc-762348dc51ce/artifacts HTTP/1.1
```

**Example response**

```
HTTP/1.1 200 OK
Content-Type: application/json

[
  {
    "name": "frame.raw",
    "created": "Mon, 25 Aug 2025 16:58:35 +0200",
  }
]
```

**GET /api/v1/test-runs/(string: *identifier*)/artifacts/**

**path:** *artifact_name*

Fetch test run artifact.

**Parameters**

- **identifier** – test run identifier
- **artifact_name** – artifact filename

**Status Codes**

- 200 OK – no error, file returned
- 404 Not Found – test run not completed or does not exist, or artifact does not exist

**>file**

artifact file with content type inferred automatically

**Example request**

```
GET /api/v1/runs/25d9f4a2-2556-4647-b3cc-762348dc51ce/artifacts/frame.raw␣
↪HTTP/1.1
```

**Example response**

```
HTTP/1.1 200 OK
Content-Type: <depends on artifact>
Content-Disposition: attachment; filename="frame.raw"
```

**POST /api/v1/test-runs/(string: *identifier*)/repeat**

Repeat a test run

**Parameters**

- **identifier** – test run identifier

**Status Codes**

- 200 OK – no error
- 404 Not Found – test run does not exist

- 500 Internal Server Error – failed to dispatch

**Response JSON Object**

- **string** – test name pattern (repeat whole run if empty)

**>json**
test run description object

**Example Request**

```
POST /api/v1/test-runs/25d9f4a2-2556-4647-b3cc-762348dc51ce/repeat HTTP/1.1
Content-Type: application/json
Accept: application/json, text/javascript

"exist[test_config0] or speed"
```

**Example Response**

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "id": "bff55077-77c8-4035-a2a9-9273f57a09de",
  "config_name": "config1.yaml"
  "test_suite_name": "simple-test"
  "status": "pending",
  "created_at": "Wed, 25 Mar 2026 18:56:11 +0000",
  "started_at": "",
  "finished_at": "",
  "metadata": {}
}
```

**GET /api/v1/test-runs/(string:** *identifier*)**/report**

Fetch test run report

**Parameters**

- **identifier** – test run identifier

**Query Parameters**

- **format** – (optional) “json” to return parsed JSON data instead of CSV

**Status Codes**

- 200 OK – no error
- 404 Not Found – test run not completed or does not exist, or report file does not exist

**>file text/csv**
(default) CSV file containing the full test report

**Request JSON Array of Objects**

- **dict** – (if format=json) List of test result objects

**Example request (CSV)**

```
GET /api/v1/test-runs/25d9f4a2-2556-4647-b3cc-762348dc51ce/report HTTP/1.1
```

**Example response (CSV)**

```
HTTP/1.1 200 OK
Content-Type: text/csv
Content-Disposition: attachment; filename="25d9f4a2-2556-4647-b3cc-
↪762348dc51ce.csv"

device name,test name,module,duration,message,status
enp14s0,exist,test.py::TestNetwork::test_exist,0.0007359918672591448,,passed
```

**Example request (JSON)**

```
GET /api/v1/test-runs/25d9f4a2-2556-4647-b3cc-762348dc51ce/report?
↪format=json HTTP/1.1
```

**Example response (JSON)**

```
HTTP/1.1 200 OK
Content-Type: application/json

[
    {
        "device name": "enp14s0",
        "test name": "exist",
        "module": "test.py::TestNetwork::test_exist",
        "duration": "0.0007359918672591448",
        "message": "",
        "status": "passed"
    }
]
```

CHAPTER

FOUR

# WEB UI

When Protoplaster is running in server mode, it serves a Web UI which can be used for remote configuration and tests triggering. It also supports controlling other devices running Protoplaster in server mode from a single Web UI.

## 4.1 Accessing Web UI

Run Protoplaster in server mode, optionally specifying a port:

```
protoplaster -d tests/ -r reports/ -a artifacts/ --server --port 5000
```

Access the Web UI from a web browser using the device's IP and the specified port:

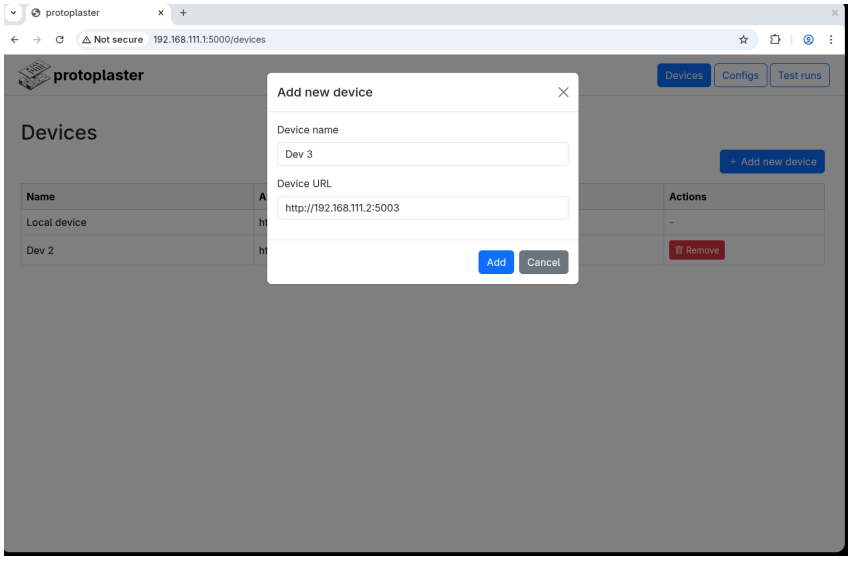



Figure 4.1: Protoplaster Web UI.

## 4.2 Devices

In the Devices tab, external devices can be added and removed. The local device (the one serving the Web UI) is always present and cannot be removed. To add an external device, first start Protoplaster on it in server mode, then add it using the "Add new device" button, specifying its IP and port on which Protoplaster is running:

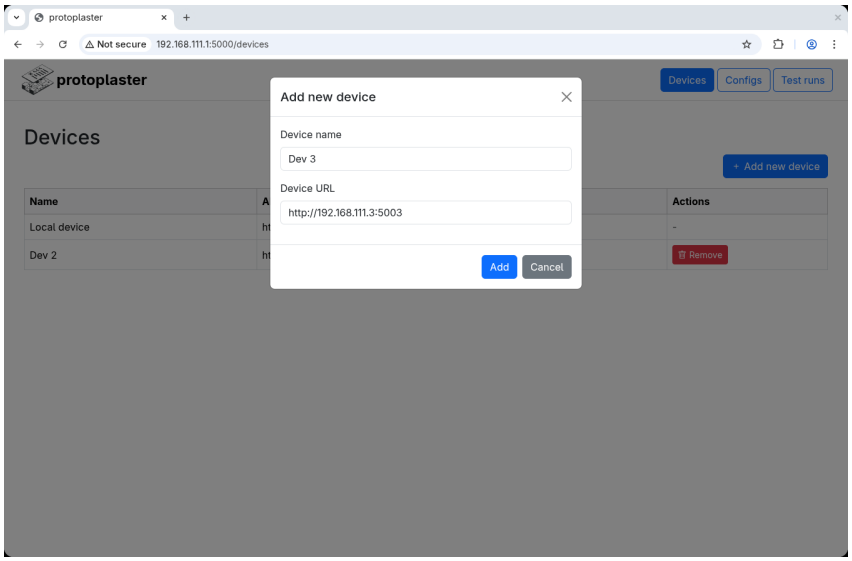



Figure 4.2: Web UI - adding new device.

## 4.3 Configs

In the Configs tab, all the available configs can be listed for all connected devices. Select the device for which configs are listed using the drop-down on the left. To add a new config, use the "Add new config" button. Configs can be uploaded to multiple devices by selecting more than one in the Devices box:

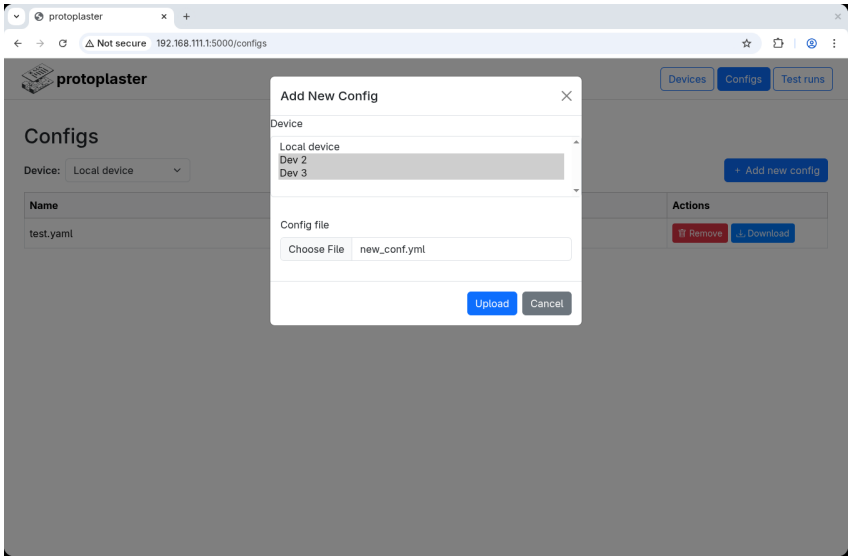



Figure 4.3: Web UI - adding new config.

## 4.4 Test runs

In the Test runs tab, running and finished test runs can be listed for available devices. Like in the Configs tab, the desired device for which test runs are listed can be selected using the drop-down menu. To trigger a test run, use the "Trigger test run" button. Tests can be triggered on multiple devices, by selecting multiple devices in the Devices box. When multiple devices are selected, the config field will only show configs which are present on all selected devices.

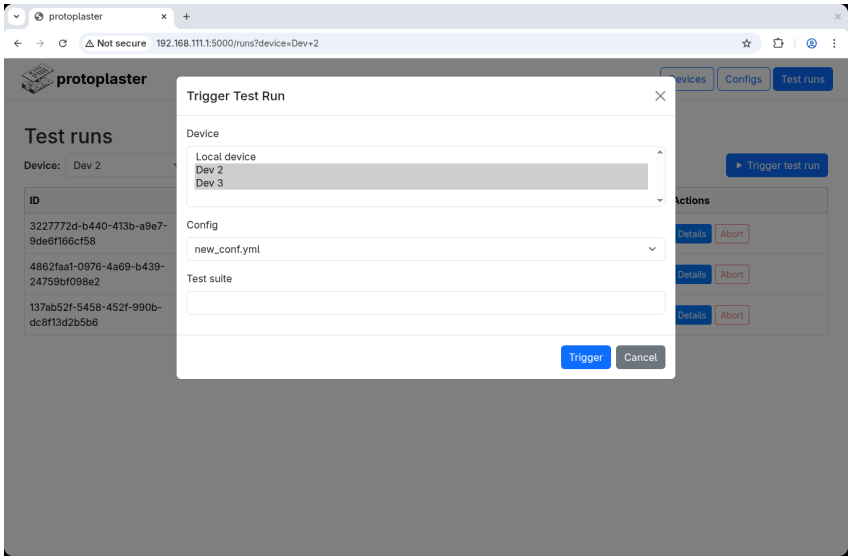



Figure 4.4: Web UI - adding new config.

CHAPTER

FIVE

# TESTS REFERENCE

Protoplaster contains tests described in the following sections:

## 5.1 ADC12DJ3200 SPI test

This module provides tests for the ADC12DJ3200:

### 5.1.1 Tests

**test_default_values**
: check if some ADC12DJ3200 registers have default reset values

## 5.2 LTC2493 device test

This module provides tests for LTC2493:

### 5.2.1 Parameters

**address: int**
: I2C address of device

**bus: int | str**
: I2C bus

**vref: float**
: Voltage reference

### 5.2.2 Tests

**test_is_alive**
: check if responds correctly to simple requests

## 5.3 LTC2499 device test

This module provides tests for LTC2499:

### 5.3.1 Parameters

**address: int**
: I2C address of device

**bus: int | str**
I2C bus

**vref: float**
Voltage reference

### 5.3.2 Tests

**test_is_alive**
check if responds correctly to simple requests

## 5.4 ADC device test

This module provides tests for ADC devices: `dev.name`

### 5.4.1 Parameters

**channels: list[adc.__Channel]**
Device-dependent channel configuration

**__Channel**
*(type with attributes defined below)*

**channel: int**
Channel number

**v_expected: float**
Expected voltage for channel

**dev: __ADC**
ADC device config

**name: str**
Name of ADC

**driver: str**
Name of an ADC driver class defined in `protoplaster/tests/adc` (further parameters required)

**device_name: str**
Expected name for drivers that can return a name

**tolerance: float**
Absolute tolerance for results measured vs expected [V]

### 5.4.2 Tests

**test_device_name**
(if applicable) check if the device name is `device_name`

**test_is_alive**
check if `dev.name` exists and responds

**test_read_adc**
verify that voltages measure within `self.tolerance`: *0.5 V* of their expected values

## 5.5 Eye Scan tests

This module provides tests for Eye Scan using IBERT:

### 5.5.1 Tests

**`test_create_diagram`**
parse `` and create diagram

**`test_eye_size`**
parse `` and assert eye size

**`test_transceiver_status`**
check if the transceiver link is correctly established via verifying STATUS property

## 5.6 Camera sensor tests

This module provides tests dedicated to V4L devices on specific video node: `device`

### 5.6.1 Parameters

**`camera_name`: `str`, *required***
Camera sensor name

**`device`: `str`, *required***
Video device

**`driver_name`: `str`, *required***
Video driver name

**`save_file`: `str`**
Output file for frame test

### 5.6.2 Tests

**`test_device_name`**
check if the camera sensor name is `camera_name`

**`test_driver_name`**
check if the camera sensor driver name is `driver_name`

**`test_frame`**
try to capture frame

## 5.7 LMK04828 SPI test

This module provides tests for the LMK04828:

### 5.7.1 Tests

**`test_default_values`**
check if read-only LMK04828 registers have their default reset value

## 5.8 LTC2655 device test

This module provides tests for LTC2655:

### 5.8.1 Tests

**test_is_alive**
: check if LTC2655 responds correctly to simple requests

## 5.9 LTC2657 device test

This module provides tests for LTC2657:

### 5.9.1 Tests

**test_is_alive**
: check if LTC2657 responds correctly to simple requests

## 5.10 DAC device test

This module provides tests for DAC devices:

### 5.10.1 Tests

**test_sysfs_interface**
: check if the sysfs interface exists: ``

## 5.11 Eye Scan tests

This module provides tests for Eye Scan:

### 5.11.1 Tests

**test_create_diagram**
: parse `` and create diagram

**test_eye_size**
: parse `` and assert eye size

## 5.12 DAC38J8x SPI test

This module provides tests for the DAC38J8x:

### 5.12.1 Tests

**test_config127_value**
: verify the default value of the read-only CONFIG127 register

## 5.13 Extended simple tests

This module extends TestSimple:

### 5.13.1 Parameters

**`device`: `str`, *required***
Name to use in dummy tests

**`skipped_devices`: `list[str]`**
List of devices to skip

### 5.13.2 Tests

**`test_conditional_skip`**
This test is skipped if the device name is “skip” or its contained in skipped_devices list

**`test_configure_runs_once`**
This test asserts `configure` has been executed and the class state is correctly initialized for the current test run.

**`test_failure`**
This test always fails.

**`test_record_artifact`**
This test always succeeds, and records an artifact.

**`test_success`**
This test always succeeds.

## 5.14 Flash chip test

This module provides tests dedicated to flash chips: `dev.name`

### 5.14.1 Parameters

**`binary`: `str`, *required***
Path to file to be flashed

**`dev`: `__Flash`, *required***
Device config

**`name`: `str`**
Storage device name

**`driver`: `str`**
Name of a device driver class defined in `protoplaster/tests/flash` (further parameters required)

### 5.14.2 Tests

**`test_flashing`**
try flashing file `binary` onto device

**`test_presence`**
check if device `dev.name` is present

**test_validate_flashing**
check if file was flashed correctly (if possible)

## 5.15 Flashing FPGA test

This module provides tests for flashing the fpga:

### 5.15.1 Tests

## 5.16 PI4IO tests

This module provides tests dedicated to the PI4IOE5V96224

### 5.16.1 Parameters

**address: int**
I2C address of device

**bus: int**
I2C bus

### 5.16.2 Tests

**test_is_alive**
check if PI4IOE5V96224 responds correctly to simple requests

## 5.17 GPIOs tests

This module provides tests dedicated to GPIO on specified bus: `dev.name`

### 5.17.1 Parameters

**dev: _GPIO**
GPIO device

**name: str**
GPIO device name

**driver: str**
Name of a GPIO driver class defined in `protoplaster/tests/gpio` (further parameters required)

**pins: list[gpio.__GPIO_Pin]**
List of pins to test

**__GPIO_Pin**
*(type with attributes defined below)*

**pin: int**
Pin number

**direction: str**
Direction ('in' or 'out')

**state: bool**
Expected pin state

**test_name: str**
Custom name for the test

### 5.17.2 Tests

**test_is_alive**
(if applicable) check if device `dev.name` responds

## 5.18 HTTP echo tests

This module tests HTTP responses between nodes: `dev1`, `dev2`

### 5.18.1 Parameters

**dev1: str, *required***
Device 1 to be used in tests

**dev2: str, *required***
Device 2 to be used in tests

**port: int**
Port for this machine to run server on

**test_string: str**
String to send in tests (default: “Hello World!”)

### 5.18.2 Tests

**test_echo_async**
Async Orchestration test:

1. Main PC starts HTTP server.
2. dev2 starts polling for the message (non-blocking).
3. Main PC thread sleeps for 5 seconds.
4. dev1 connects to Main PC and POSTs “Hello world”.
5. dev2 receives the message and returns it.

**test_echo_fully_async**
Fully Async test:

1. Main PC starts HTTP server.
2. Triggers dev2 (read) AND dev1 (write) asynchronously.
3. Waits for both to complete.

**test_echo_multinode**
Orchestration test:

1. Main PC starts HTTP server.
2. dev1 connects to Main PC and POSTs “Hello world”.
3. dev2 connects to Main PC and GETs the message.
4. Main PC verifies the message matches.

## 5.19 I2C device tests

This module provides tests dedicated to i2c devices on a specific bus: `dev.name`

### 5.19.1 Parameters

**dev: _I2C**
I2C controller

**name: str**
Name of I2C controller

**driver: str**
Name of an I2C driver class defined in `protoplaster/tests/i2c` (further parameters required)

**devices: list[i2c.__I2C_Device], *required***
List of I2C devices

**__I2C_Device**
*(type with attributes defined below)*

**name: str**
Name of I2C device

**address: int**
Address of I2C device

### 5.19.2 Tests

**test_addresses**
detection test:

- check for device `name` on address `address`

## 5.20 TCA9548A test

This module provides tests for the TCA9548A:

### 5.20.1 Parameters

**i2c_address: int, *required***
I2C device address

**i2c_bus: int | str, *required***
I2C bus address

**reset_gpio: int | str**
GPIO number for resetting device

**reset_state: bool**
GPIO reset pin logic level – active-low (False) or active-high (True)

**smbus_force: bool**
Use address even if already in use by another kernel driver

### 5.20.2 Tests

**test_is_alive**
check if TCA9548A responds correctly to simple requests

**test_reset**
Check whether the TCA9548A responds correctly to a reset triggered by pulling low

## 5.21 I2C multiplexer test

This module provides generic tests for I2C multiplexers: `dev.name`

### 5.21.1 Parameters

**dev: __Mux**
I2C multiplexer

**name: str**
Device name

**model: str**
Name of a mux driver class defined in `protoplaster/tests/i2c/i2c_mux` (further parameters may be required)

**parent: _I2C**
Parent I2C bus (attribute `dev` of I2C test)

**name: str**
Name of I2C controller

**driver: str**
Name of an I2C driver class defined in `protoplaster/tests/i2c` (further parameters required)

**i2c_address: int**
I2C address of multiplexer

**gpio_dev: protoplaster.tests.gpio.gpio.test._GPIO | None**
GPIO device for reset functionality

**_GPIO, NoneType**
*(type with attributes defined below)*

**name: str**
GPIO device name

**driver: str**
Name of a GPIO driver class defined in `protoplaster/tests/gpio` (further parameters required)

**reset_gpio: int | None**
GPIO reset pin

**reset_state: bool**
GPIO reset pin logic level – active-low (False) or active-high (True)

### 5.21.2 Tests

**test_is_alive**
check if muxer responds correctly to simple requests

**test_reset**
(skipped) check whether the multiplexer responds correctly to a reset triggered by pulling the reset pin low

## 5.22 DMA test

This module provides tests for DMA:

### 5.22.1 Tests

**test_memory**
verify the integrity of memory of size with iterations.

## 5.23 Network interface tests

This module provides tests dedicated to network interfaces: `interface`

### 5.23.1 Parameters

**interface: str, *required***
Network device to perform tests on

**speed: str**
Speed of network device [Mbit/s]

### 5.23.2 Tests

**test_exist**
check if the interface exists

**test_speed**
check if the interface speed is speed Mbit/s

## 5.24 DA9062 device test

This module provides tests for DA9062:

### 5.24.1 Tests

**test_config_id**
verify that the DA9062 PMIC returns the expected config ID: ``

**test_current_ldos**
verify voltage of:

**test_current_selections**
verify selection of:

**test_customer_id**
verify that the DA9062 PMIC returns the expected customer ID: ``

**test_is_alive**
check if DA9062 responds correctly to simple requests

**test_variant_id**
verify that the DA9062 PMIC returns the expected variant ID: ``

## 5.25 UCD90320U device test

This module provides tests for UCD90320U:

### 5.25.1 Tests

**test_clear_faults**
clear the faults latched by the UCD90320U in preparation for a new test run

**test_is_alive**
check if UCD90320U responds correctly to simple requests

**test_read_faults**
read the faults latched by the UCD90320U after the test run

## 5.26 Simple tests

This module provides simple dummy tests: `device`

### 5.26.1 Parameters

**device: str**, ***required***
Name to use in dummy tests

### 5.26.2 Tests

**test_conditional_skip**
This test is skipped if the device name is “skip”

**test_configure_runs_once**
This test asserts `configure` has been executed and the class state is correctly initialized for the current test run.

**test_failure**
This test always fails.

**test_record_artifact**
This test always succeeds, and records an artifact.

**test_success**
This test always succeeds.

## 5.27 SPI device tests

This module provides tests dedicated to SPI devices: `dev.name`

### 5.27.1 Parameters

**command: list[int]**
Command to send

**dev: __SPI**
Device config

**name: str**
SPI device name

**driver: str**
Name of an SPI driver class defined in `protoplaster/tests/spi` (further parameters required)

**response_expected: list[int]**
Expected response to command

### 5.27.2 Tests

**test_spi_response**
check if device responds to command `command` with `response_expected`

## 5.28 TMP431 device test

This module provides tests for TMP431:

### 5.28.1 Tests

**test_is_alive**
check if TMP431 responds correctly to simple requests

## 5.29 USB tests

This module provides tests for USB devices: `device`

### 5.29.1 Parameters

**device: str, *required***
Name of device as seen by kernel

**speed: int**
Expected speed [Mbps]

### 5.29.2 Tests

**test_negotiated_speed**
check if the negotiated USB speed is Mbps

**test_sysfs_interface**
check if the sysfs interface exists: ``

CHAPTER

SIX

# TESTS DESCRIPTION

> **Note**
>
> This page has been autogenerated from a Protoplaster tests definition file.

To perform hardware/BSP tests the open-source Protoplaster framework has been used.

Running Protoplaster runs the tests described in the following sections:

## 6.1 I2C device tests

This module provides tests dedicated to i2c devices on a specific bus: `dev.name`: *I2C 0*

### 6.1.1 Parameters

**dev: _I2C**
: I2C controller

  **name: str**
  : Name of I2C controller

  **driver: str**
  : Name of an I2C driver class defined in `protoplaster/tests/i2c` (further parameters required)

**devices: list[i2c.__I2C_Device], *required***
: List of I2C devices

  **__I2C_Device**
  : *(type with attributes defined below)*

    **name: str**
    : Name of I2C device

    **address: int**
    : Address of I2C device

### 6.1.2 Tests

**test_addresses**
: detection test:

- check for device `name`: *Sensor name* on address `address`: *0x3c*

- check for device `name`: *I2C-bus multiplexer* on address `address`: *0x70*

## 6.2 Camera sensor tests

This module provides tests dedicated to V4L devices on specific video node: `device`: */dev/video0*

### 6.2.1 Parameters

**`camera_name`: `str`, *required***
Camera sensor name

**`device`: `str`, *required***
Video device

**`driver_name`: `str`, *required***
Video driver name

**`save_file`: `str`**
Output file for frame test

### 6.2.2 Tests

**`test_device_name`**
check if the camera sensor name is `camera_name`: *vivid*

**`test_driver_name`**
check if the camera sensor driver name is `driver_name`: *vivid*

**`test_frame`**
try to capture frame

## 6.3 Camera sensor tests

This module provides tests dedicated to V4L devices on specific video node: `device`: */dev/video2*

### 6.3.1 Parameters

**`camera_name`: `str`, *required***
Camera sensor name

**`device`: `str`, *required***
Video device

**`driver_name`: `str`, *required***
Video driver name

**`save_file`: `str`**
Output file for frame test

### 6.3.2 Tests

**`test_device_name`**
check if the camera sensor name is `camera_name`: *vivid*

**`test_driver_name`**
check if the camera sensor driver name is `driver_name`: *vivid*

**`test_frame`**
: try to capture frame and store it to file `save_file`: *frame.raw*

CHAPTER

SEVEN

# PROTOPLASTER SYSTEM REPORT

Protoplaster provides `protoplaster-system-report`, a tool to obtain information about system state and configuration. It executes a list of commands and saves their outputs. The outputs are stored in a single zip archive together with an HTML summary. An example summary can be found here.

The following config was used to generate the example:

```
uname:
  run: uname -a
  summary:
    - title: os info
      run: cat
  output: uname.out
dmesg:
  run: dmesg
  summary:
    - title: usb
      run: grep usb
    - title: v4l
      run: grep v4l
  output: dmesg.out
  superuser: required
ip:
  run: ip a
  summary:
    - title: Network interfaces state
      run: python3 $PROTOPLASTER_SCRIPTS/generate_ip_table.py "$(cat)"
  output: ip.out
  on-fail:
    run: ifconfig -a
    summary:
      - title: Network interfaces state
        run: python3 $PROTOPLASTER_SCRIPTS/generate_ifconfig_table.py "$(cat)"
    output: ifconfig.out
```

## /api

GET /api/v1/configs, 11
GET /api/v1/configs/(string:config_name),
12
GET /api/v1/configs/(string:config_name)/file,
13
GET /api/v1/configs/(string:config_name)/override-hints,
13
GET /api/v1/configs/(string:config_name)/test-suites,
14
GET /api/v1/test-runs, 14
GET /api/v1/test-runs/(string:identifier),
17
GET /api/v1/test-runs/(string:identifier)/artifacts,
18
GET /api/v1/test-runs/(string:identifier)/artifacts/(path:artifact_name),
19
GET /api/v1/test-runs/(string:identifier)/report,
20
POST /api/v1/configs, 11
POST /api/v1/test-runs, 15
POST /api/v1/test-runs/(string:identifier)/repeat,
19
DELETE /api/v1/configs/(string:config_name),
12
DELETE /api/v1/test-runs/(string:identifier),
17