



Antmicro

Protoplaster - docs example

2026-09-09

CONTENTS

1	Introduction	1
2	Protoplaster	2
2.1	Installation	2
2.2	Usage	2
2.3	Writing additional modules	5
2.4	Plugins	6
2.5	Protoplaster test report	7
2.6	System report	8
2.7	Protoplaster manager	9
3	Protoplaster Server API Reference	11
3.1	Error Handling	11
3.2	Configs API	11
3.3	Test Runs API	14
4	Web UI	22
4.1	Accessing Web UI	22
4.2	Devices	22
4.3	Configs	23
4.4	Test runs	23
5	Tests reference	25
5.1	ADC12DJ3200 SPI test	25
5.2	LTC2493 device test	25
5.3	LTC2499 device test	25
5.4	ADC device test	26
5.5	Eye Scan tests	27
5.6	Camera sensor tests	27
5.7	LMK04828 SPI test	27
5.8	LTC2655 device test	28
5.9	LTC2657 device test	28
5.10	DAC device test	28
5.11	Eye Scan tests	28
5.12	DAC38J8x SPI test	28
5.13	Extended simple tests	29
5.14	Flash chip test	29
5.15	Flashing FPGA test	30
5.16	PI4IO tests	30

5.17	GPIOs tests	30
5.18	HTTP echo tests	31
5.19	I2C device tests	32
5.20	TCA9548A test	32
5.21	I2C multiplexer test	33
5.22	DMA test	34
5.23	Network interface tests	34
5.24	DA9062 device test	34
5.25	UCD90320U device test	35
5.26	Simple tests	35
5.27	SPI device tests	35
5.28	TMP431 device test	36
5.29	USB tests	36
6	Tests description	37
6.1	I2C device tests	37
6.2	Camera sensor tests	38
6.3	Camera sensor tests	38
7	Protoplaster system report	40
	HTTP Routing Table	41

INTRODUCTION

This documentation serves as an example of what an individual project's documentation can look like.

The second chapter contains reference of remote API when running Protoplaster in server mode.

The third chapter contains information from the README file.

The fourth chapter describes in detail all test modules included with Protoplaster.

The fifth chapter is generated from the sample YAML file which can be found in the README. Its purpose is to demonstrate the documentation generated to describe test procedures used in a project.

The last chapter shows an example of a system report configuration.

PROTOPLASTER

Copyright (c) 2022-2025 [Antmicro](#)

An automated framework for platform testing (Hardware and BSPs).

Currently includes tests for:

- I2C
- GPIO
- Camera
- FPGA

2.1 Installation

```
pip install git+https://github.com/antmicro/protoplaster.git
```

2.2 Usage

```
usage: protoplaster [-h] [-d TEST_DIR] [-r REPORTS_DIR] [-a ARTIFACTS_DIR]
                  [-m] [-t TEST_FILE] [-g GROUP] [-s TEST_SUITE]
                  [--list-groups] [--list-test-suites] [--list-tests]
                  [-o OUTPUT] [--csv CSV] [--csv-columns CSV_COLUMNS]
                  [--generate-docs] [-c CUSTOM_TESTS] [-l]
                  [--report-output REPORT_OUTPUT]
                  [--system-report-config SYSTEM_REPORT_CONFIG] [--sudo]
                  [--server | --dut] [--port PORT]
                  [--external-devices EXTERNAL_DEVICES]
                  [--override OVERRIDES]
```

options:

```
-h, --help                show this help message and exit
-d, --test-dir TEST_DIR   Path to the test directory
-r, --reports-dir REPORTS_DIR Path to the reports directory
-a, --artifacts-dir ARTIFACTS_DIR Path to the test artifacts directory
-m, --mkdir                Try to create test/reports/artifacts directories if
```

(continues on next page)

(continued from previous page)

```

missing
-t, --test-file TEST_FILE
    Path to the yaml test description in the test
    directory
-g, --group GROUP
    Group to execute [deprecated]
-s, --test-suite TEST_SUITE
    Test suite to execute
--list-groups
    List possible groups to execute [deprecated]
--list-test-suites
    List possible test suites to execute
--list-tests
    List all defined tests
-o, --output OUTPUT
    A junit-xml style report of the tests results
--csv CSV
    Generate a CSV report of the tests results
--csv-columns CSV_COLUMNS
    Comma-separated list of columns to be included in
    generated CSV
--generate-docs
    Generate documentation
-c, --custom-tests CUSTOM_TESTS
    Path to the custom tests sources
-l, --log
    Append test results to a log file
--report-output REPORT_OUTPUT
    Proplaster report archive
--system-report-config SYSTEM_REPORT_CONFIG
    Path to the system report yaml config file
--sudo
    Run as sudo
--server
    Run in server mode
--dut
    Run in DUT mode
--port PORT
    Port to use when running in server mode
--external-devices EXTERNAL_DEVICES
    Path to yaml config file with additional external
    devices
--override OVERRIDES
    Config property override

```

Protoplaster expects a yaml file describing tests as an input. The yaml file should have a structure specified as follows:

```

includes:
- addition.yaml          # Import additional definitions from external file

tests:
  base:                # Test name
  - i2c:                # A module specifier
    dev:                # An interface specifier
      name: "I2C 0"
      driver: "I2C_SMBus"
      bus: 0
    devices:           # Multiple instances of devices can be defined in one_
↪module
      - name: "Sensor name"
        address: 0x3c  # The given device parameters determine which tests will_

```

(continues on next page)

(continued from previous page)

```
→ be run for the module
  - name: "I2C-bus multiplexer"
    address: 0x70
  - camera:
    device: "/dev/video0"
    camera_name: "vivid"
    driver_name: "vivid"
  - camera:
    device: "/dev/video2"
    camera_name: "vivid"
    driver_name: "vivid"
    save_file: "frame.raw"
additional:
  - gpio:
    dev:
      name: "GPIO 0"
      driver: "GPIO_sysfs"
    pins:
      - pin: 20
        direction: out
        state: on

metadata:           # Additional metadata to be generated on tested device
  uname:            # Metadata name
  run: uname -r      # Command to run

test-suites:
  basic:             # Test suite name
    tests:           # Tests to include
      - base
  full:
    tests:
      - basic         # Test suites can include other test suites
      - additional
  metadata:          # Metadata to generate for this test
    - uname
```

2.2.1 Test suites

In the YAML file, you can define different groups of tests in the test-suites section to run them for different use cases. In the YAML file example, there are two suites defined: basic and full. Protoplaster, when run without a defined test suite, will execute all tests defined in given file. When the test suite is specified with the parameter `-s` or `--test-suite`, only the tests in the specified suite are going to be run. You can also list existing groups in the YAML file, simply run `protoplaster --list-test-suites test.yaml`.

2.2.2 Config overrides

It is possible to apply provisional changes to configuration without modifying the YAML file. Assume that in the example above, the path to the second video device has changed from `/dev/video2` to `/dev/video1`, and we would like to save the received frame to a file named `image.raw` instead of `frame.raw`. To account for this, you may run Protoplaster with the options: `--override "tests.base.2.camera.device: /dev/video1" --override "tests.base.2.camera.save_file: image.raw"`.

Overrides may also be used directly in the config file – for example, in the `i2c` test, to rename the first device from `Sensor` name to `Some other name`, you might add an override:

- at the beginning or end of the file: `tests.base.0.i2c.devices.0.name: Some other name`
- within the `i2c` test definition, before or after `devices`: `devices.0.name: Some other name`.

2.2.3 External Devices

When running in server mode, you can provide a YAML configuration file to automatically register external devices using the `--external-devices` argument.

The configuration file should be a YAML dictionary mapping device names to their IP addresses or URLs:

```
node1: 10.0.1.2
node2: 10.0.1.3:2100
lab_device: http://192.168.1.50:8037
```

2.3 Writing additional modules

Apart from the base modules available in Protoplaster, you can provide your own additional modules.

Each custom module should follow this structure:

```
{module_name}/
|- __init__.py
|- test.py
|- <optional helper files>
```

Here, `module_name` must match the name of the test module. For example, in the sample below, it would be `additional_camera`.

By default, external modules are expected in the `--TEST_DIR` directory. If you want to store them elsewhere, you can use the `--custom-tests` argument to specify a custom path.

The `test.py` file must define a test class decorated with `ModuleName(test_module)` from the `protoplaster.conf.module` package. This decorator specifies the name of the module, allowing Protoplaster to correctly initialize the test parameters.

The test class must also implement a `name()` method, whose return value is used for the `device_name` field in the CSV output.

All individual tests should be implemented within the main class in `test.py`. The class name must start with `Test`, and every test method within it must start with `test`.

An example of an extended module test:

```
from protoplaster.conf.module import ModuleName

@ModuleName("additional_camera")
class TestAdditionalCamera:
    """
    {% macro TestAdditionalCamera(prefix) -%}
    Additional camera tests
    -----
    {% do prefix.append('') %}
    This module provides tests dedicated to camera sensors on specific video node:
    {%- endmacro %}
    """

    def test_exists(self):
        """
        {% macro test_exists(device) -%}
        check if the path exists
        {%- endmacro %}
        """

        assert self.path == "/dev/video0"
```

And a YAML definition:

```
---
base:
  additional_camera:
    - path: "/dev/video0"
    - path: "/dev/video1"
```

2.4 Plugins

Protoplaster supports extending its functionality via **plugins**. Each plugin is a Python module that can be placed in a directory specified when running Protoplaster using:

```
--plugins <dir>
```

2.4.1 Directory structure

- Each plugin is a single module at the top level of that directory.
- Each module must define a class `ProtoplasterPlugin`.

Example structure of a plugins directory:

```
plugins/
├── __init__.py
├── plugin1.py
├── plugin2.py
└── plugin3.py
```

2.4.2 Required plugin class

Each plugin must implement the `ProtoplasterPlugin` class and can optionally implement the hooks `before_test_function` and `after_test_function`.

Both of them have to be decorated with `hookimpl` from `protoplaster.conf.plugin_manager` module.

Example minimal plugin:

```
from typing import Callable
from protoplaster.conf.plugin_manager import hookimpl

class ProtoplasterPlugin:
    @hookimpl
    def before_test_setup(self, test_class):
        print(f"setting up test class: {test_class.__name__}")

    @hookimpl
    def before_test_function(self, test_instance, test_function: Callable):
        print(f"hello from {test_instance.name()}", test_instance, test_function.
        ↪__name__)

    @hookimpl
    def after_test_function(self, test_instance, test_function: Callable):
        print(f"goodbye from {test_instance.name()}", test_instance, test_
        ↪function.__name__)
```

- `before_test_setup` — called **before** the test class's `configure()` method.
- `before_test_function` — called **before** each test function is executed.
- `after_test_function` — called **after** each test function has finished.
- `test_instance` — the test class instance running the test.
- `test_function` — the test function itself (of type `Callable`).

2.5 Protoplaster test report

Protoplaster provides `protoplaster-test-report`, a tool to convert test CSV output into a HTML or Markdown table.

```
usage: protoplaster-test-report [-h] [-i INPUT_FILE] -t {md,html} [-o OUTPUT_FILE]

options:
  -h, --help            show this help message and exit
  -i INPUT_FILE, --input-file INPUT_FILE
                        Path to the csv file
  -t {md,html}, --type {md,html}
                        Output type
  -o OUTPUT_FILE, --output-file OUTPUT_FILE
                        Path to the output file
```

2.6 System report

Protoplaster provides `protoplaster-system-report`, a tool for obtaining information about system state and configuration. It executes a list of commands and saves their outputs. The outputs are stored in a single zip archive along with an HTML summary.

2.6.1 Usage

```
usage: protoplaster-system-report [-h] [-o OUTPUT_FILE] [-c CONFIG] [--sudo]
```

options:

```
-h, --help            show this help message and exit
-o OUTPUT_FILE, --output-file OUTPUT_FILE
                        Path to the output file
-c CONFIG, --config CONFIG
                        Path to the YAML config file
--sudo                Run as sudo
```

The YAML config contains a list of actions to perform. A single action is described as follows:

```
report_item_name:
  run: script
  summary:
    - title: summary_title
      run: summary_script
  output: script_output_file
  superuser: required | preferred
  on-fail: ...
```

- `run` - command to be run
- `summary` – a list of summary generators, each one with fields:
 - `title` – summary title
 - `run` – command that generates the summary. This command gets the output of the original command as stdin. This field is optional; if not specified, the output is placed in the report as-is.
- `output` - output file for the output of `run`.
- `superuser` – optional, should be specified if the command requires elevated privileges to run. Possible values:
 - `required` – `protoplaster-system-report` will terminate if the privilege requirement is not met
 - `preferred` – if the privilege requirement is not met, a warning will be issued and this particular item won't be included in the report
- `on-fail` – optional description of an item to run in case of failure. It can be used to run an alternative command when the original one fails or is not available.

Example config file:

```
uname:
  run: uname -a
  summary:
    - title: os info
      run: cat
  output: uname.out
dmesg:
  run: dmesg
  summary:
    - title: usb
      run: grep usb
    - title: v4l
      run: grep v4l
  output: dmesg.out
  superuser: required
ip:
  run: ip a
  summary:
    - title: Network interfaces state
      run: python3 $PROTOPLASTER_SCRIPTS/generate_ip_table.py "$(cat)"
  output: ip.out
  on-fail:
    run: ifconfig -a
    summary:
      - title: Network interfaces state
        run: python3 $PROTOPLASTER_SCRIPTS/generate_ifconfig_table.py "$(cat)"
    output: ifconfig.out
```

2.6.2 Running as root

By default, sudo doesn't preserve PATH. To run protoplaster-system-report installed by a non-root user as root, invoke protoplaster-system-report --sudo

2.7 Protoplaster manager

Protoplaster provides protoplaster-mgmt, a tool to remotely control Protoplaster via the API. For more detailed information, see the help messages associated with each subcommand.

```
usage: protoplaster-mgmt [-h] [--url URL] [--config CONFIG] [--config-dir CONFIG_
↪DIR] [--report-dir REPORT_DIR] [--artifact-dir ARTIFACT_DIR] {configs,runs} ...
```

Tool **for** managing Protoplaster via remote API

options:

```
-h, --help          show this help message and exit
--url URL           URL to a device running Protoplaster server (default:↪
↪http://127.0.0.1:5000/)
--config CONFIG     Config file with values for url, config-dir, report-dir,↪
↪artifact-dir
--config-dir CONFIG_DIR
```

(continues on next page)

(continued from previous page)

```
        Directory to save fetched config (default: ./)
--report-dir REPORT_DIR
        Directory to save a test report (default: ./)
--artifact-dir ARTIFACT_DIR
        Directory to save a test artifact (default: ./)

available commands:
{configs,runs}
  configs      Configs management
  runs         Test runs management
```

PROTOPLASTER SERVER API REFERENCE

3.1 Error Handling

Should an error occur during the handling of an API request, either because of incorrect request data or other endpoint-specific scenarios, the server will return an error structure containing a user-friendly description of the error. An example error response is shown below:

```
{  
  "error": "test start failed"  
}
```

3.2 Configs API

GET /api/v1/configs

Fetch a list of configs

Status Codes

- **200 OK** – no error

Response JSON Array of Objects

- **created** (string) – UTC datetime of config upload (RFC822)
- **name** (string) – config name

Example Request

```
GET /api/v1/configs HTTP/1.1  
Accept: application/json, text/javascript
```

Example Response

```
HTTP/1.1 200 OK  
Content-Type: application/json  
  
[  
  {  
    "name": "sample_config.yaml",  
    "created": "Mon, 25 Aug 2025 16:58:35 +0200",  
  }  
]
```

POST /api/v1/configs

Upload a test config

Form Parameters

- **file** – yaml file with the test config

Status Codes

- **200 OK** – no error, config was uploaded
- **400 Bad Request** – file was not provided

Example Request

```
POST /api/v1/configs HTTP/1.1
Accept: */*
Content-Length: 4194738
Content-Type: multipart/form-data; boundary=-----
0f8f9642db3a513e

-----0f8f9642db3a513e
Content-Disposition: form-data; name="file"; filename="config.yaml"
Content-Type: application/octet-stream

<file contents>
-----0f8f9642db3a513e--
```

Example Response

```
HTTP/1.1 200 OK
```

DELETE /api/v1/configs/(string: config_name)

Remove a test config

Parameters

- **name** – filename of the test config

Status Codes

- **200 OK** – no error, config was removed
- **404 Not Found** – file was not found

Example Request

```
DELETE /api/v1/configs/sample_config.yaml HTTP/1.1
```

Example Response

```
HTTP/1.1 200 OK
```

GET /api/v1/configs/(string: config_name)

Fetch information about a config

Status Codes

- **200 OK** – no error

- **404 Not Found** – config does not exist

Response JSON Object

- **created** (string) – UTC datetime of config upload (RFC822)
- **config_name** (string) – config name

Example Request

```
GET /api/v1/configs/sample_config.yaml HTTP/1.1
Accept: application/json, text/javascript
```

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "name": "sample_config.yaml",
  "created": "Mon, 25 Aug 2025 16:58:35 +0200",
}
```

GET /api/v1/configs/(string: config_name)/file

Fetch a config file

Status Codes

- **200 OK** – no error
- **404 Not Found** – config does not exist

>file text/yaml
YAML config file

Example Request

```
GET /api/v1/configs/sample_config.yaml/file HTTP/1.1
```

Example Response

```
HTTP/1.1 200 OK
Content-Type: text/yaml
Content-Disposition: attachment; filename="sample_config.yaml"

base:
  network:
    - interface: enp14s0
```

GET /api/v1/configs/(string: config_name)/override-hints

Fetch list of suggested overrides in config file

Status Codes

- **200 OK** – no error
- **500 Internal Server Error** – error while parsing file

Response JSON Object

- **array** – list of override hints

Example Request

```
GET /api/v1/configs/some_example.yml/override-hints HTTP/1.1
```

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json

["tests.check.0.simple.device","tests.simple_test.0.simple.device"]
```

GET /api/v1/configs/(string: config_name)/test-suites

Fetch list of test suites in config file

Status Codes

- **200 OK** – no error
- **500 Internal Server Error** – error while parsing file

Response JSON Object

- **array** – list of test suites

Example Request

```
GET /api/v1/configs/complex.yml/test-suites HTTP/1.1
```

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json

["local","full"]
```

3.3 Test Runs API

GET /api/v1/test-runs

Fetch a list of test runs

Status Codes

- **200 OK** – no error

Response JSON Array of Objects

- **id** (string) – run id
- **config_name** (string) – name of config for this test run
- **test_suite_name** (string) – name of the test suite for this test run
- **created_at** (string) – UTC datetime of test run creation (RFC822)
- **started_at** (string) – UTC datetime of test run start (RFC822)

- **finished_at** (string) – UTC completion time (RFC822)
- **status** (string) – test run status, one of: * pending - accepted but not started * running - currently executing * finished - completed successfully * failed - error during execution * aborted - stopped by user or system
- **metadata** (dict[str, str]) – optional test run metadata (key/value pairs)

Example Request

```
GET /api/v1/test-runs HTTP/1.1
Accept: application/json, text/javascript
```

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json

[
  {
    "id": "25d9f4a2-2556-4647-b3cc-762348dc51ce",
    "config_name": "config1.yaml"
    "test_suite_name": "simple-test"
    "status": "finished",
    "created_at": "Mon, 25 Aug 2025 15:56:35 +0200",
    "started_at": "Mon, 25 Aug 2025 15:56:36 +0200",
    "finished_at": "Mon, 25 Aug 2025 15:56:44 +0200",
    "metadata": {
      "bsp-sha256":
↪ "a5603553e0eaad133719dc19b57c96e811a72af5329e120310f96b4fdc891732"
    }
  },
  {
    "run_id": "976c3d37-0b9a-4c81-ad0d-ebb96c9eee94",
    "config_name": "config2.yaml"
    "test_suite_name": "complex-test"
    "status": "running",
    "created_at": "Mon, 25 Aug 2025 16:58:35 +0200",
    "started_at": "Mon, 25 Aug 2025 16:58:36 +0200",
    "finished_at": "",
    "metadata": {}
  }
]
```

POST /api/v1/test-runs

Trigger a test run

Status Codes

- **200 OK** – test run was triggered successfully (returns run object for local/tracked runs, or empty object for remote dispatch)
- **404 Not Found** – config file was not found

- **500 Internal Server Error** – failed to dispatch remote run

Request JSON Object

- **config_name** (string) – name of config for this test run
- **test_suite_name** (string) – (optional) name of the test suite for this test run
- **machine_target** (string) – (optional) name of the node this test is meant to be run on
- **overrides** (string) – (optional) newline-delimited list of YAML config overrides

Example Request

```
POST /api/v1/test-runs/ HTTP/1.1
Content-Type: application/json
Accept: application/json, text/javascript

{
  "config_name": "config1.yaml",
  "test_suite_name": "simple-test"
}
```

Example Response (Tracked (local) Run)

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "id": "25d9f4a2-2556-4647-b3cc-762348dc51ce",
  "config_name": "config1.yaml"
  "test_suite_name": "simple-test"
  "status": "pending",
  "created_at": "Mon, 25 Aug 2025 15:56:35 +0200",
  "started_at": "",
  "finished_at": "",
  "metadata": {}
}
```

Example Response (Remote Dispatch Success)

```
HTTP/1.1 200 OK
Content-Type: application/json

{}
```

Example Response (Remote Dispatch Failure)

```
HTTP/1.1 500 Internal Server Error
Content-Type: application/json
```

(continues on next page)

(continued from previous page)

```
{
  "error": "Machine 'node1' not defined in devices list"
}
```

DELETE /api/v1/test-runs/(string: *identifier*)

Cancel a pending test run

Parameters

- **identifier** – test run identifier

Status Codes

- **200 OK** – no error
- **400 Bad Request** – test run not pending
- **404 Not Found** – test run does not exist

Example Request

```
DELETE /api/v1/test-runs/25d9f4a2-2556-4647-b3cc-762348dc51ce HTTP/1.1
```

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "run_id": "25d9f4a2-2556-4647-b3cc-762348dc51ce",
  "config_name": "config1.yaml",
  "test_suite_name": "simple-test",
  "status": "aborted",
  "created_at": "Mon, 25 Aug 2025 15:56:35 +0200",
  "finished_at": "Mon, 25 Aug 2025 15:56:44 +0200",
  "metadata": {
    "bsp-sha256":
      ↪ "a5603553e0eaad133719dc19b57c96e811a72af5329e120310f96b4fdc891732"
  }
}
```

GET /api/v1/test-runs/(string: *identifier*)

Fetch information about a test run

Parameters

- **identifier** – test run identifier

Status Codes

- **200 OK** – no error
- **404 Not Found** – test run does not exist

Response JSON Object

- **id** (string) – test run identifier

- **config_name** (string) – name of config for this test run
- **test_suite_name** (string) – name of the test suite for this test run
- **created_at** (string) – UTC creation time (RFC822)
- **started_at** (string) – UTC creation time (RFC822)
- **finished_at** (string) – UTC completion time (RFC822)
- **status** (string) – test run status, one of: * pending - accepted but not started * running - currently executing * finished - completed successfully * failed - error during execution * aborted - stopped by user or system
- **metadata** (dict[str, str]) – optional test run metadata (key/value pairs)

Example Request

```
GET /api/v1/test-runs/25d9f4a2-2556-4647-b3cc-762348dc51ce HTTP/1.1
```

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "run_id": "25d9f4a2-2556-4647-b3cc-762348dc51ce",
  "config_name": "config1.yaml",
  "test_suite_name": "simple-test",
  "status": "finished",
  "created_at": "Mon, 25 Aug 2025 15:56:35 +0200",
  "started_at": "Mon, 25 Aug 2025 15:56:36 +0200",
  "finished_at": "Mon, 25 Aug 2025 15:56:44 +0200",
  "metadata": {
    "bsp-sha256":
    ↪ "a5603553e0eaad133719dc19b57c96e811a72af5329e120310f96b4fdc891732"
  }
}
```

GET /api/v1/test-runs/(string: identifier)/artifacts

Fetch a list of test run artifacts.

Parameters

- **identifier** – test run identifier

Status Codes

- **200 OK** – no error, file returned
- **404 Not Found** – test run not completed or does not exist

>file

artifact file with content type inferred automatically

Example request

```
GET /api/v1/runs/25d9f4a2-2556-4647-b3cc-762348dc51ce/artifacts HTTP/1.1
```

Example response

```
HTTP/1.1 200 OK
Content-Type: application/json

[
  {
    "name": "frame.raw",
    "created": "Mon, 25 Aug 2025 16:58:35 +0200",
  }
]
```

**GET /api/v1/test-runs/(string: *identifier*)/artifacts/
path: *artifact_name***
Fetch test run artifact.

Parameters

- **identifier** – test run identifier
- **artifact_name** – artifact filename

Status Codes

- **200 OK** – no error, file returned
- **404 Not Found** – test run not completed or does not exist, or artifact does not exist

>file

artifact file with content type inferred automatically

Example request

```
GET /api/v1/runs/25d9f4a2-2556-4647-b3cc-762348dc51ce/artifacts/frame.raw_
↪HTTP/1.1
```

Example response

```
HTTP/1.1 200 OK
Content-Type: <depends on artifact>
Content-Disposition: attachment; filename="frame.raw"
```

POST /api/v1/test-runs/(string: *identifier*)/repeat
Repeat a test run

Parameters

- **identifier** – test run identifier

Status Codes

- **200 OK** – no error
- **404 Not Found** – test run does not exist

- **500 Internal Server Error** – failed to dispatch

Request JSON Object

- **string** – test name pattern (repeat whole run if empty)

>json

test run description object

Example Request

```
POST /api/v1/test-runs/25d9f4a2-2556-4647-b3cc-762348dc51ce/repeat HTTP/1.1
Content-Type: application/json
Accept: application/json, text/javascript

"exist[test_config0] or speed"
```

Example Response

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "id": "bff55077-77c8-4035-a2a9-9273f57a09de",
  "config_name": "config1.yaml",
  "test_suite_name": "simple-test",
  "status": "pending",
  "created_at": "Wed, 25 Mar 2026 18:56:11 +0000",
  "started_at": "",
  "finished_at": "",
  "metadata": {}
}
```

GET /api/v1/test-runs/(string: identifier)/report

Fetch test run report

Parameters

- **identifier** – test run identifier

Query Parameters

- **format** – (optional) “json” to return parsed JSON data instead of CSV

Status Codes

- **200 OK** – no error
- **404 Not Found** – test run not completed or does not exist, or report file does not exist

>file text/csv

(default) CSV file containing the full test report

Response JSON Array of Objects

- **dict** – (if format=json) List of test result objects

Example request (CSV)

```
GET /api/v1/test-runs/25d9f4a2-2556-4647-b3cc-762348dc51ce/report HTTP/1.1
```

Example response (CSV)

```
HTTP/1.1 200 OK
Content-Type: text/csv
Content-Disposition: attachment; filename="25d9f4a2-2556-4647-b3cc-
↪762348dc51ce.csv"

device name,test name,module,duration,message,status
enp14s0,exist,test.py::TestNetwork::test_exist,0.0007359918672591448,,passed
```

Example request (JSON)

```
GET /api/v1/test-runs/25d9f4a2-2556-4647-b3cc-762348dc51ce/report?
↪format=json HTTP/1.1
```

Example response (JSON)

```
HTTP/1.1 200 OK
Content-Type: application/json

[
  {
    "device name": "enp14s0",
    "test name": "exist",
    "module": "test.py::TestNetwork::test_exist",
    "duration": "0.0007359918672591448",
    "message": "",
    "status": "passed"
  }
]
```

When Protoplaster is running in server mode, it serves a Web UI which can be used for remote configuration and tests triggering. It also supports controlling other devices running Protoplaster in server mode from a single Web UI.

4.1 Accessing Web UI

Run Protoplaster in server mode, optionally specifying a port:

```
protoplaster -d tests/ -r reports/ -a artifacts/ --server --port 5000
```

Access the Web UI from a web browser using the device's IP and the specified port:

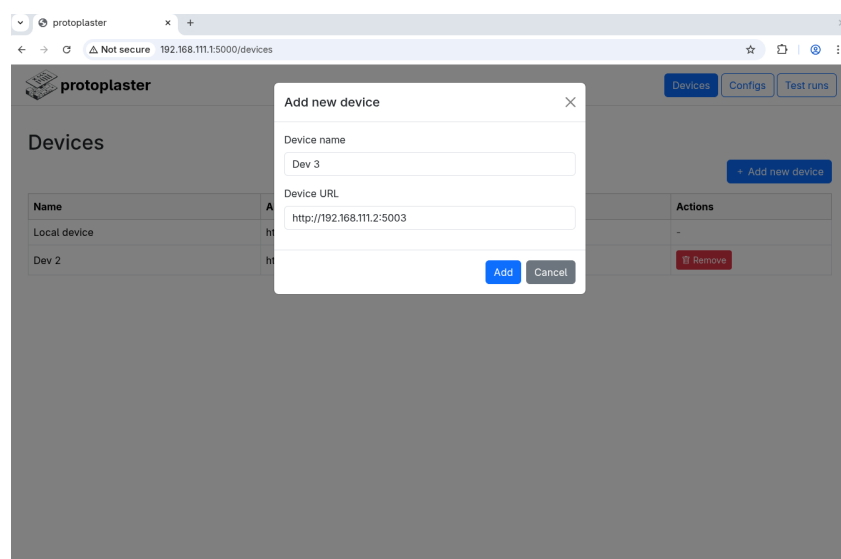


Figure 4.1: Protoplaster Web UI.

4.2 Devices

In the Devices tab, external devices can be added and removed. The local device (the one serving the Web UI) is always present and cannot be removed. To add an external device, first start Protoplaster on it in server mode, then add it using the “Add new device” button, specifying its IP and port on which Protoplaster is running:

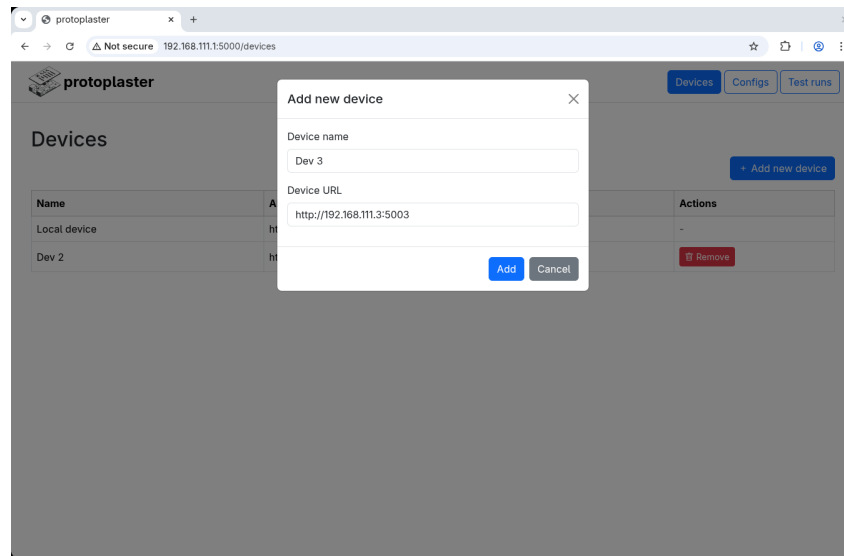


Figure 4.2: Web UI - adding new device.

4.3 Configs

In the Configs tab, all the available configs can be listed for all connected devices. Select the device for which configs are listed using the drop-down on the left. To add a new config, use the “Add new config” button. Configs can be uploaded to multiple devices by selecting more than one in the Devices box:

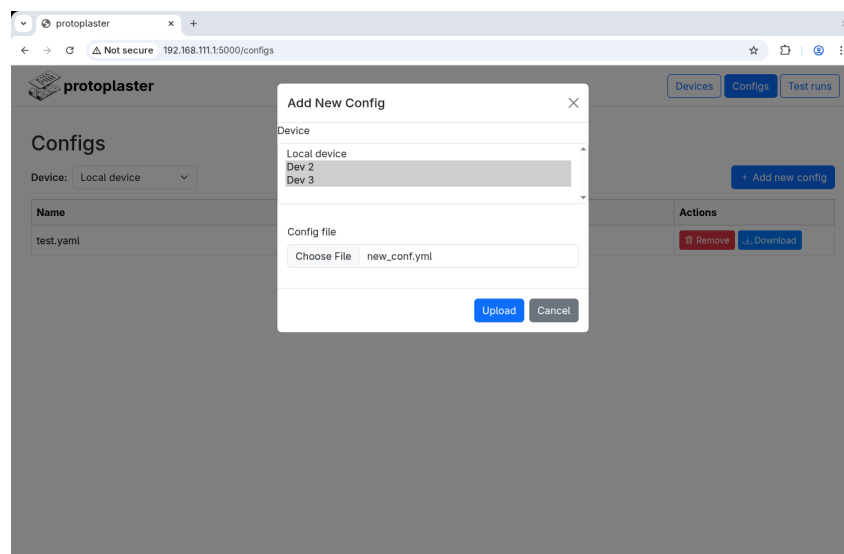


Figure 4.3: Web UI - adding new config.

4.4 Test runs

In the Test runs tab, running and finished test runs can be listed for available devices. Like in the Configs tab, the desired device for which test runs are listed can be selected using the drop-down menu. To trigger a test run, use the “Trigger test run” button. Tests can be triggered on multiple devices, by selecting multiple devices in the Devices box. When multiple devices are selected, the config field will only show configs which are present on all selected devices.

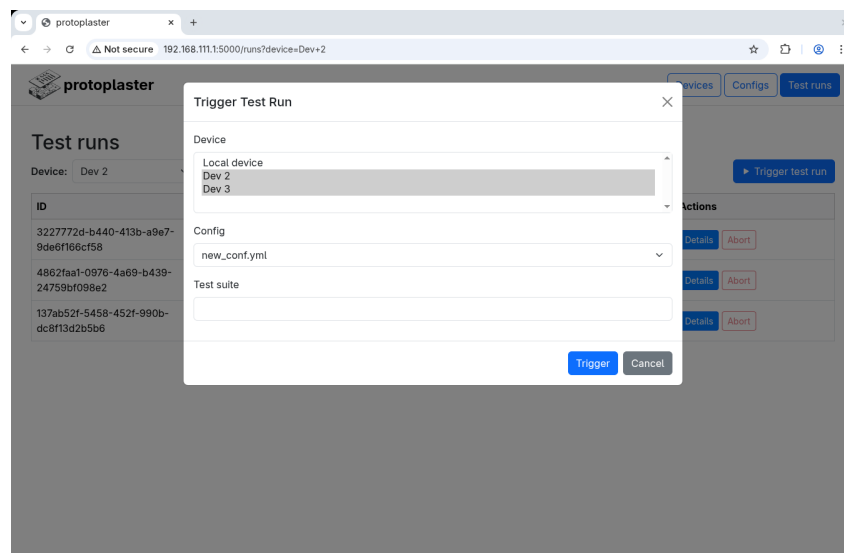


Figure 4.4: Web UI - adding new config.

TESTS REFERENCE

Protoplaster contains tests described in the following sections:

5.1 ADC12DJ3200 SPI test

This module provides tests for the ADC12DJ3200:

5.1.1 Tests

test_default_values

check if some ADC12DJ3200 registers have default reset values

5.2 LTC2493 device test

This module provides tests for LTC2493:

5.2.1 Parameters

address: int

I2C address of device

bus: int | str

I2C bus

vref: float

Voltage reference

5.2.2 Tests

test_is_alive

check if responds correctly to simple requests

5.3 LTC2499 device test

This module provides tests for LTC2499:

5.3.1 Parameters

address: int

I2C address of device

bus: int | str
I2C bus

vref: float
Voltage reference

5.3.2 Tests

test_is_alive
check if responds correctly to simple requests

5.4 ADC device test

This module provides tests for ADC devices: `dev.name`

5.4.1 Parameters

channels: list[adc.__Channel]
Device-dependent channel configuration

__Channel
(type with attributes defined below)

channel: int
Channel number

v_expected: float
Expected voltage for channel

dev: __ADC
ADC device config

name: str
Name of ADC

driver: str
Name of an ADC driver class defined in `protoplaster/tests/adc` (further parameters required)

device_name: str
Expected name for drivers that can return a name

tolerance: float
Absolute tolerance for results measured vs expected [V]

5.4.2 Tests

test_device_name
(if applicable) check if the device name is `device_name`

test_is_alive
check if `dev.name` exists and responds

test_read_adc
verify that voltages measure within `self.tolerance: 0.5 V` of their expected values

5.5 Eye Scan tests

This module provides tests for Eye Scan using IBERT:

5.5.1 Tests

test_create_diagram
parse `` and create diagram

test_eye_size
parse `` and assert eye size

test_transceiver_status
check if the transceiver link is correctly established via verifying STATUS property

5.6 Camera sensor tests

This module provides tests dedicated to V4L devices on specific video node: device

5.6.1 Parameters

camera_name: str, required
Camera sensor name

device: str, required
Video device

driver_name: str, required
Video driver name

save_file: str
Output file for frame test

5.6.2 Tests

test_device_name
check if the camera sensor name is camera_name

test_driver_name
check if the camera sensor driver name is driver_name

test_frame
try to capture frame

5.7 LMK04828 SPI test

This module provides tests for the LMK04828:

5.7.1 Tests

test_default_values
check if read-only LMK04828 registers have their default reset value

5.8 LTC2655 device test

This module provides tests for LTC2655:

5.8.1 Tests

test_is_alive

check if LTC2655 responds correctly to simple requests

5.9 LTC2657 device test

This module provides tests for LTC2657:

5.9.1 Tests

test_is_alive

check if LTC2657 responds correctly to simple requests

5.10 DAC device test

This module provides tests for DAC devices:

5.10.1 Tests

test_sysfs_interface

check if the sysfs interface exists: ``

5.11 Eye Scan tests

This module provides tests for Eye Scan:

5.11.1 Tests

test_create_diagram

parse `` and create diagram

test_eye_size

parse `` and assert eye size

5.12 DAC38J8x SPI test

This module provides tests for the DAC38J8x:

5.12.1 Tests

test_config127_value

verify the default value of the read-only CONFIG127 register

5.13 Extended simple tests

This module extends TestSimple:

5.13.1 Parameters

device: str, *required*
Name to use in dummy tests

skipped_devices: list[str]
List of devices to skip

5.13.2 Tests

test_conditional_skip
This test is skipped if the device name is “skip” or its contained in skipped_devices list

test_configure_runs_once
This test asserts configure has been executed and the class state is correctly initialized for the current test run.

test_failure
This test always fails.

test_record_artifact
This test always succeeds, and records an artifact.

test_success
This test always succeeds.

5.14 Flash chip test

This module provides tests dedicated to flash chips: `dev.name`

5.14.1 Parameters

binary: str, *required*
Path to file to be flashed

dev: __Flash, *required*
Device config

name: str
 Storage device name

driver: str
 Name of a device driver class defined in `protoplaster/tests/flash` (further parameters required)

5.14.2 Tests

test_flashing
try flashing file binary onto device

test_presence
check if device `dev.name` is present

test_validate_flashing

check if file was flashed correctly (if possible)

5.15 Flashing FPGA test

This module provides tests for flashing the fpga:

5.15.1 Tests

5.16 PI4IO tests

This module provides tests dedicated to the PI4IOE5V96224

5.16.1 Parameters

address: int

I2C address of device

bus: int

I2C bus

5.16.2 Tests

test_is_alive

check if PI4IOE5V96224 responds correctly to simple requests

5.17 GPIOs tests

This module provides tests dedicated to GPIO on specified bus: `dev.name`

5.17.1 Parameters

dev: _GPIO

GPIO device

name: str

GPIO device name

driver: str

Name of a GPIO driver class defined in `protoplaster/tests/gpio` (further parameters required)

pins: list[`gpio._GPIO_Pin`]

List of pins to test

`_GPIO_Pin`

(type with attributes defined below)

pin: int

Pin number

direction: str

Direction ('in' or 'out')

state: bool

Expected pin state

test_name: str

Custom name for the test

5.17.2 Tests

test_is_alive

(if applicable) check if device `dev.name` responds

5.18 HTTP echo tests

This module tests HTTP responses between nodes: `dev1`, `dev2`

5.18.1 Parameters

dev1: str, *required*

Device 1 to be used in tests

dev2: str, *required*

Device 2 to be used in tests

port: int

Port for this machine to run server on

test_string: str

String to send in tests (default: "Hello World!")

5.18.2 Tests

test_echo_async

Async Orchestration test:

1. Main PC starts HTTP server.
2. `dev2` starts polling for the message (non-blocking).
3. Main PC thread sleeps for 5 seconds.
4. `dev1` connects to Main PC and POSTs "Hello world".
5. `dev2` receives the message and returns it.

test_echo_fully_async

Fully Async test:

1. Main PC starts HTTP server.
2. Triggers `dev2` (read) AND `dev1` (write) asynchronously.
3. Waits for both to complete.

test_echo_multinode

Orchestration test:

1. Main PC starts HTTP server.
2. `dev1` connects to Main PC and POSTs "Hello world".
3. `dev2` connects to Main PC and GETs the message.
4. Main PC verifies the message matches.

5.19 I2C device tests

This module provides tests dedicated to i2c devices on a specific bus: `dev.name`

5.19.1 Parameters

dev: `_I2C`
I2C controller

name: `str`
Name of I2C controller

driver: `str`
Name of an I2C driver class defined in `protoplaster/tests/i2c` (further parameters required)

devices: `list[i2c.__I2C_Device]`, *required*
List of I2C devices

`__I2C_Device`
(type with attributes defined below)

name: `str`
Name of I2C device

address: `int`
Address of I2C device

5.19.2 Tests

test_addresses
detection test:

- check for device name on address `address`

5.20 TCA9548A test

This module provides tests for the TCA9548A:

5.20.1 Parameters

i2c_address: `int`, *required*
I2C device address

i2c_bus: `int` | `str`, *required*
I2C bus address

reset_gpio: `int` | `str`
GPIO number for resetting device

reset_state: `bool`
GPIO reset pin logic level – active-low (False) or active-high (True)

smbus_force: `bool`
Use address even if already in use by another kernel driver

5.20.2 Tests

test_is_alive

check if TCA9548A responds correctly to simple requests

test_reset

Check whether the TCA9548A responds correctly to a reset triggered by pulling low

5.21 I2C multiplexer test

This module provides generic tests for I2C multiplexers: `dev.name`

5.21.1 Parameters

dev: __Mux

I2C multiplexer

name: str

Device name

model: str

Name of a mux driver class defined in `protoplaster/tests/i2c/i2c_mux` (further parameters may be required)

parent: _I2C

Parent I2C bus (attribute `dev` of I2C test)

name: str

Name of I2C controller

driver: str

Name of an I2C driver class defined in `protoplaster/tests/i2c` (further parameters required)

i2c_address: int

I2C address of multiplexer

gpio_dev: protoplaster.tests.gpio.gpio.test._GPIO | None

GPIO device for reset functionality

_GPIO, NoneType

(type with attributes defined below)

name: str

GPIO device name

driver: str

Name of a GPIO driver class defined in `protoplaster/tests/gpio` (further parameters required)

reset_gpio: int | None

GPIO reset pin

reset_state: bool

GPIO reset pin logic level – active-low (False) or active-high (True)

5.21.2 Tests

test_is_alive

check if muxer responds correctly to simple requests

test_reset

(skipped) check whether the multiplexer responds correctly to a reset triggered by pulling the reset pin low

5.22 DMA test

This module provides tests for DMA:

5.22.1 Tests

test_memory

verify the integrity of memory of size with iterations.

5.23 Network interface tests

This module provides tests dedicated to network interfaces: interface

5.23.1 Parameters

interface: str, *required*

Network device to perform tests on

speed: str

Speed of network device [Mbit/s]

5.23.2 Tests

test_exist

check if the interface exists

test_speed

check if the interface speed is speed Mbit/s

5.24 DA9062 device test

This module provides tests for DA9062:

5.24.1 Tests

test_config_id

verify that the DA9062 PMIC returns the expected config ID: ``

test_current_ldos

verify voltage of:

test_current_selections

verify selection of:

test_customer_id

verify that the DA9062 PMIC returns the expected customer ID: ``

test_is_alive

check if DA9062 responds correctly to simple requests

test_variant_id

verify that the DA9062 PMIC returns the expected variant ID: ``

5.25 UCD90320U device test

This module provides tests for UCD90320U:

5.25.1 Tests

test_clear_faults

clear the faults latched by the UCD90320U in preparation for a new test run

test_is_alive

check if UCD90320U responds correctly to simple requests

test_read_faults

read the faults latched by the UCD90320U after the test run

5.26 Simple tests

This module provides simple dummy tests: device

5.26.1 Parameters

device: str, *required*

Name to use in dummy tests

5.26.2 Tests

test_conditional_skip

This test is skipped if the device name is “skip”

test_configure_runs_once

This test asserts configure has been executed and the class state is correctly initialized for the current test run.

test_failure

This test always fails.

test_record_artifact

This test always succeeds, and records an artifact.

test_success

This test always succeeds.

5.27 SPI device tests

This module provides tests dedicated to SPI devices: `dev.name`

5.27.1 Parameters

command: list[int]
Command to send

dev: __SPI
Device config

name: str
SPI device name

driver: str
Name of an SPI driver class defined in `protoplaster/tests/spi` (further parameters required)

response_expected: list[int]
Expected response to command

5.27.2 Tests

test_spi_response
check if device responds to command `command` with `response_expected`

5.28 TMP431 device test

This module provides tests for TMP431:

5.28.1 Tests

test_is_alive
check if TMP431 responds correctly to simple requests

5.29 USB tests

This module provides tests for USB devices: `device`

5.29.1 Parameters

device: str, *required*
Name of device as seen by kernel

speed: int
Expected speed [Mbps]

5.29.2 Tests

test_negotiated_speed
check if the negotiated USB speed is Mbps

test_sysfs_interface
check if the sysfs interface exists: ``

TESTS DESCRIPTION

Note

This page has been autogenerated from a Protoplaster tests definition file.

To perform hardware/BSP tests the open-source **Protoplaster** framework has been used.
Running Protoplaster runs the tests described in the following sections:

6.1 I2C device tests

This module provides tests dedicated to i2c devices on a specific bus: `dev.name: I2C 0`

6.1.1 Parameters

dev: `_I2C`
I2C controller

name: `str`
 Name of I2C controller

driver: `str`
 Name of an I2C driver class defined in `protoplaster/tests/i2c` (further parameters required)

devices: `list[i2c.__I2C_Device]`, *required*
List of I2C devices

`__I2C_Device`
 (type with attributes defined below)

name: `str`
 Name of I2C device

address: `int`
 Address of I2C device

6.1.2 Tests

test_addresses

detection test:

- check for device name: *Sensor name* on address `address: 0x3c`

- check for device name: *I2C-bus multiplexer* on address address: *0x70*

6.2 Camera sensor tests

This module provides tests dedicated to V4L devices on specific video node: device: */dev/video0*

6.2.1 Parameters

camera_name: str, required
Camera sensor name

device: str, required
Video device

driver_name: str, required
Video driver name

save_file: str
Output file for frame test

6.2.2 Tests

test_device_name
check if the camera sensor name is camera_name: *vivid*

test_driver_name
check if the camera sensor driver name is driver_name: *vivid*

test_frame
try to capture frame

6.3 Camera sensor tests

This module provides tests dedicated to V4L devices on specific video node: device: */dev/video2*

6.3.1 Parameters

camera_name: str, required
Camera sensor name

device: str, required
Video device

driver_name: str, required
Video driver name

save_file: str
Output file for frame test

6.3.2 Tests

test_device_name
check if the camera sensor name is camera_name: *vivid*

test_driver_name
check if the camera sensor driver name is driver_name: *vivid*

test_frame

try to capture frame and store it to file save_file: *frame.raw*

PROTOPLASTER SYSTEM REPORT

Protoplaster provides `protoplaster-system-report`, a tool to obtain information about system state and configuration. It executes a list of commands and saves their outputs. The outputs are stored in a single zip archive together with an HTML summary. An example summary can be found [here](#).

The following config was used to generate the example:

```
uname:
  run: uname -a
  summary:
    - title: os info
      run: cat
  output: uname.out
dmesg:
  run: dmesg
  summary:
    - title: usb
      run: grep usb
    - title: v4l
      run: grep v4l
  output: dmesg.out
  superuser: required
ip:
  run: ip a
  summary:
    - title: Network interfaces state
      run: python3 $PROTOPLASTER_SCRIPTS/generate_ip_table.py "$(cat)"
  output: ip.out
  on-fail:
    run: ifconfig -a
    summary:
      - title: Network interfaces state
        run: python3 $PROTOPLASTER_SCRIPTS/generate_ifconfig_table.py "$(cat)"
  output: ifconfig.out
```

HTTP ROUTING TABLE

/api

GET /api/v1/configs, 11
GET /api/v1/configs/(string:config_name),
12
GET /api/v1/configs/(string:config_name)/file,
13
GET /api/v1/configs/(string:config_name)/override-hints,
13
GET /api/v1/configs/(string:config_name)/test-suites,
14
GET /api/v1/test-runs, 14
GET /api/v1/test-runs/(string:identifier),
17
GET /api/v1/test-runs/(string:identifier)/artifacts,
18
GET /api/v1/test-runs/(string:identifier)/artifacts/(path:artifact_name),
19
GET /api/v1/test-runs/(string:identifier)/report,
20
POST /api/v1/configs, 11
POST /api/v1/test-runs, 15
POST /api/v1/test-runs/(string:identifier)/repeat,
19
DELETE /api/v1/configs/(string:config_name),
12
DELETE /api/v1/test-runs/(string:identifier),
17