

FACULTY OF ENGINEERING AND TECHNOLOGY
BACHELOR OF TECHNOLOGY

Operating System
(303105251)

SEMESTER IV
Computer Science & Engineering Department



Laboratory Manual



OPERATING SYSTEM PRACTICAL BOOK
COMPUTER SCIENCE & ENGINEERING DEPARTMENT
PREFACE

It gives us immense pleasure to present the first edition of the **OPERATING SYSTEM** Practical Book for the B.Tech . **4th semester** students for **PARUL UNIVERSITY**.

The **OS** theory and laboratory courses at **PARUL UNIVERSITY, WAGHODIA, VADODARA** are designed in such a way that students develop the basic understanding of the subject in the theory classes and then try their hands on the experiments to realize the various implementations of problems learnt during the theoretical sessions. The main objective of the **OS** laboratory course is: Learning **OS** through Experimentations. All the experiments are designed to illustrate various problems in different areas of **OS** and also to expose the students to various uses.

The objective of this **OS** Practical Book is to provide a comprehensive source for all the experiments included in the **OS** laboratory course. It explains all the aspects related to every experiment such as: basic underlying concept and how to analyze a problem. It also gives sufficient information on how to interpret and discuss the obtained results.

We acknowledge the authors and publishers of all the books which we have consulted while developing this Practical book. Hopefully this **OS** Practical Book will serve the purpose for which it has been developed.



INSTRUCTIONS TO STUDENTS

1. The main objective of the **OS** laboratory is: Learning through the Experimentation. All the experiments are designed to illustrate various problems in different areas of **OS** and also to expose the students to various problems and their uses.
2. Be prompt in arriving at the laboratory and always come well prepared for the practical.
3. Every student should have his/her individual copy of the **OS** Practical Book.
4. Every student have to prepare the notebooks specifically reserved for the **OS** practical work: "**OS** Practical Book"
5. Every student has to necessarily bring his/her **OS** Practical Book, **OS** Practical Class Notebook and **OS** Practical Final Notebook.
6. Finally find the output of the experiments along with the problem and note results in the **OS** Practical Notebook.
7. The grades for the **OS** practical coursework will be awarded based on our performance in the laboratory, regularity, recording of experiments in the **OS** Practical Final Notebook, lab quiz, regular viva-voce and end-term examination



CERTIFICATE

This is to certify that

Mr./Ms **MEEN BAHADUR BUDHA**, Enrolment No

2303051050439, has successfully Completed his/her

laboratory experiments in the **OPERATING SYSTEM**

(303105251)

from the department of **CSE** during The academic year **2024-25**



Date of Submission:.....

Staff In charge:.....

Head Of Department:.....



TABLE OF CONTENTS

Sr No	Experiment Title	Page No		Date of Performance	Date of Assessment	Sign	Marks (out of 10)
		From	To				
1	Study of Basic commands of Linux.						
2	Study the basics of shell programming.						
3	Write a Shell script to print the given numbers sum of all digits.						
4	Write a shell script to validate the entered date. (eg. Date format is: dd-mm-yyyy).						
5	Write a shell script to check if the entered string is palindrome or not.						
6	Write a Shell script to say Good morning/Afternoon/Evening as you log in to the system.						
7	Write a C program to create a child process.						
8	Finding out biggest number from given three numbers supplied as command line arguments.						
9	Printing the patterns using for loop.						
10	Shell script to determine whether a given file exists or not.						
11	Write a program for process creation using C. (Use of gcc compiler).						
12	Implementation of FCFS & Round Robin Algorithm.						
13	Implementation of Banker's Algorithm.						



PRACTICAL 1

AIM:-Study of Basic commands of Linux.

Command shell: A program that interprets commands is Command shell.

Shell Script: Allows a user to execute commands by typing them manually at a terminal, or automatically in programs called shell scripts. A shell is not an operating system. It is a way to interface with the operating system and run Commands.

BASH (Bourne Again Shell)

- Bash is a shell written as a free replacement to the standard Bourne Shell (/bin/sh) originally written by Steve Bourne for UNIX systems.
- It has all of the features of the original Bourne Shell, plus additions that make it easier to program with and use from the command line.
- Since it is Free Software, it has been adopted as the default shell on most Linux systems.

BASIC LINUX COMMANDS:

1) Pwd : print working

directory DESCRIPTION:

pwd prints the full pathname of the current working directory.

SYNTAX:

Pwd

```
(kali㉿kali)-[~/Desktop/Mayur,210303126039]  
$ pwd  
/home/kali/Desktop/Mayur,210303126039  
  
(kali㉿kali)-[~/Desktop/Mayur,210303126039]  
$ cd ..
```



2) cd: Change

Directory

DESCRIPTION:

It allows you to change your working directory. You use it to move around within the hierarchy of your file system.

SYNTAX:

cd directory_name

```
Mayur,210303126039 pr6
(kali@kali)-[~/Desktop]
$ cd Mayur,210303126039
(kali@kali)-[~/Desktop/Mayur,210303126039]
```

3) cd ..

DESCRIPTION:

Move up one directory.

SYNTAX:

cd ..

```
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ cd ..
(kali@kali)-[~/Desktop]
$ pwd
/home/kali/Desktop
(kali@kali)-[~/Desktop]
```

4) ls : list all the files and

directories DESCRIPTION:

List all files and folders in the current directory in the column format.

SYNTAX:

ls [options]

```
(kali@kali)-[~/Desktop]
$ ls
Mayur,210303126039 pr6
```



5) cat

DESCRIPTION:

cat stands for "catenate". It reads data from files, and outputs their contents. It is the simplest way to display the contents of a file at the command line.

SYNTAX:

cat filename

```
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ cat data.txt
23
45
fgb
45
fr
6
3
g
g
7
34
fr
```

6) head

DESCRIPTION:

head, by default, prints the first 10 lines of each FILE to standard output. With more than one FILE, it precedes each set of output with a header identifying the file name.

If no FILE is specified, or when FILE is specified as a dash ("-"), head reads from standard input.

SYNTAX:

head [option]...[file/directory]

```
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ head data.txt
23
45
fgb
45
fr
6
3
g
g
7
```



7)Tail

DESCRIPTION:

tail is a command which prints the last few number of lines (10 lines by default) of a certain file, then terminates.

SYNTAX:

tail [option]...[file/directory]

```
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ tail data.txt
fgb
45
fr
6
3
g
g
7
34
fr
```

8) mv : Moving (and Renaming) Files

DESCRIPTION:

The mv command lets you move a file from one directory location to another. It also lets you rename a file (there is no separate rename command).

SYNTAX:

mv [option] source directory

```
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ ls
data2.txt  data.txt

(kali@kali)-[~/Desktop/Mayur,210303126039]
$ mv data2.txt data.txt

(kali@kali)-[~/Desktop/Mayur,210303126039]
$ ls
data.txt
```



9) mkdir : Make

Directory

DESCRIPTION:

If the specified directory does not already exist, mkdir creates it. More than one directory may be specified when calling mkdir.

SYNTAX:

mkdir [option] directory

```
(kali@kali)-[~/Desktop]
$ mkdir mayur.txt

(kali@kali)-[~/Desktop]
$ ls
Mayur,210303126039  mayur.txt  pr6
```

10) cp : Copy Files

DESCRIPTION:

The cp command is used to make copy of files and directories.

SYNTAX:

cp [option] source directory

```
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ cp data.txt data2.txt

(kali@kali)-[~/Desktop/Mayur,210303126039]
$ ls
data2.txt  data.txt
```

11) rmdir : Remove

Directory DESCRIPTION:

The rmdir command is used to remove a directory that contains other files or directories.

SYNTAX:

rm directory_name

```
(kali@kali)-[~/Desktop]
$ rmdir mayur.txt

(kali@kali)-[~/Desktop]
$ ls
Mayur,210303126039  pr6
```



12) gedit

DESCRIPTION:

The gedit command is used to create and open a file.

SYNTAX:

```
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ ls
data2.txt  data.txt

(kali@kali)-[~/Desktop/Mayur,210303126039]
$ mv data2.txt data.txt

(kali@kali)-[~/Desktop/Mayur,210303126039]
$ ls
data.txt

(kali@kali)-[~/Desktop/Mayur,210303126039]
$ gedit data.txt
```

data.txt

```
1 3
2 4
3 34
4 6
5 35
6 7
7 2
8 6
```

Plain Text Tab Width: 8 Ln 1, Col 1 INS

13) man

DESCRIPTION:

Displays on an online manual page or manpage.

SYNTAX:

man command

```
File Actions Edit View Help
PRINTF(1)
NAME
printf - format and print data
SYNOPSIS
printf FORMAT [ARGUMENT]...
printf OPTION
DESCRIPTION
Print ARGUMENT(s) according to FORMAT, or execute according to OPTION:
--help display this help and exit
--version output version information and exit
FORMAT controls the output as in C printf. Interpreted sequences are:
\" double quote
\\ backslash
\a alert (BEL)
\b backspace
\c produce no further output
\e escape
\f form feed
\n new line
\r carriage return
\t horizontal tab
\v vertical tab
%% puts with octal value 000 (1 to 3 digits)
```



14) echo

DESCRIPTION:

Display text on the screen.

SYNTAX:

echo yourtext

```
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ echo "Mayu"
Mayu
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ clear
```

15)clear


DESCRIPTION:

Used to clear the screen

SYNTAX:

Clear

```
(kali@kali)-[~]
$ cd Desktop
(kali@kali)-[~/Desktop]
$ ls
Mayur,210303126039  pr6
(kali@kali)-[~/Desktop]
$ cd Mayur,210303126039
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ ls
data.txt
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ gedit data.txt
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ man printf
No manual entry for printf
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ man printf
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ echo "Mayu"
Mayu
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ clear
```

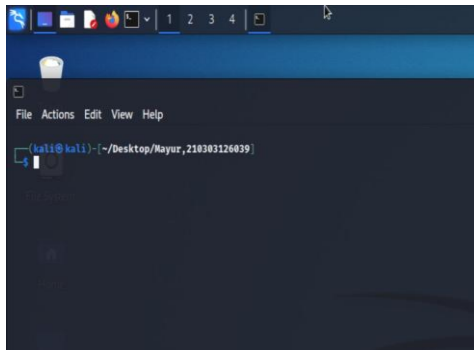



16) whoami

DESCRIPTION:

whoami prints the effective user ID. This command prints the username associated with the current effective user ID.

SYNTAX:

whoami [option]

```
(kali@kali)~[/Desktop/Mayur,210303126039]
$ whoami
kali
```

17) wc

DESCRIPTION:

wc (word count) command, can return the number of lines, words, and characters in a file.

SYNTAX:

wc [option]... [file]...

```
(kali@kali)~[/Desktop/Mayur,210303126039]
$ wc data.txt
12 12 32 data.txt

(kali@kali)~[/Desktop/Mayur,210303126039]
$ grep "2" data.txt
```

18) grep

DESCRIPTION:

grep command uses a search term to look through a file.

SYNTAX:

grep [option]... Pattern [file]...

```
(kali@kali)~[/Desktop/Mayur,210303126039]
$ grep "2" data.txt
23

(kali@kali)~[/Desktop/Mayur,210303126039]
$ free
```



19) free

DESCRIPTION:

Display RAM details in Linux machine.

SYNTAX: Free

```
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ free
              total        used        free      shared  buff/cache   available
Mem:           5653692       633996       3214904        12564       1804792       4743512
Swap:           998396           0         998396
```

20) pipe (|)

DESCRIPTION:

Pipe command is used to send output of one program as a input to another. Pipes “|” help combine 2 or more commands.

SYNTAX:

Command 1 | command 2

```
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ sort data.txt | uniq
23
3
34
45
6
7
fgb
fr
g
```


PRACTICAL 2

AIM:-Study the basics of shell programming.

What is a Shell?

An Operating is made of many components, but its two prime components are -

- Kernel
- Shell

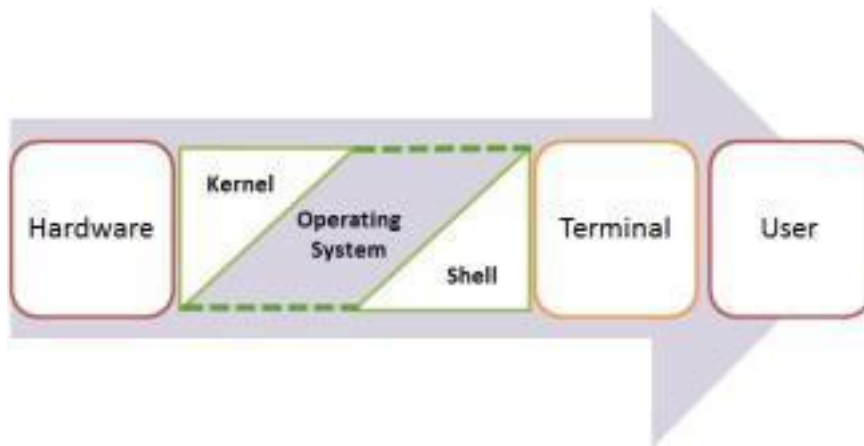

A Kernel is at the nucleus of a computer. It makes the communication between the hardware and software possible. While the Kernel is the innermost part of an operating system, a shell is the outermost one.

A shell in a Linux operating system takes input from you in the form of commands, processes it, and



then gives an output. It is the interface through which a user works on the programs, commands, and

scripts. A shell is accessed by a terminal which runs it.

When you run the terminal, the Shell issues a command prompt (usually \$), where you can type your input, which is then executed when you hit the Enter key. The output or the result is thereafter

displayed on the terminal.

The Shell wraps around the delicate interior of an Operating system protecting it from accidental damage. Hence the name Shell.

Types of Shell

There are two main shells in Linux:

1. The Bourne Shell: The prompt for this shell is \$ and its derivatives are listed below:

- POSIX shell also is known as sh
- Korn Shell also knew as sh
- **Bourne Again SHell** also knew as bash (most popular)

2. The C shell: The prompt for this shell is %, and its subcategories are:

- C shell also is known as csh
- Tops C shell also is known as tcsh

What is Shell Scripting?

Shell scripting is writing a series of command for the shell to execute. It can combine lengthy and repetitive sequences of commands into a single and simple script, which can be stored and executed anytime. This reduces the effort required by the end user.

Let us understand the steps in creating a Shell Script

- 1. Create a file using a vi editor(or any other editor). Name script file with extension .sh**
- 2. Start the script with #! /bin/sh**
- 3. Write some code.**




4. Save the script file as filename.sh
5. For **executing** the script type **bash filename.sh**

"#!" is an operator called shebang which directs the script to the interpreter location. So, if we use "#!/bin/sh" the script gets directed to the bourne-shell.

Let's create a small script -

```
#!/bin/sh  
ls
```

Let's see the steps to create it –

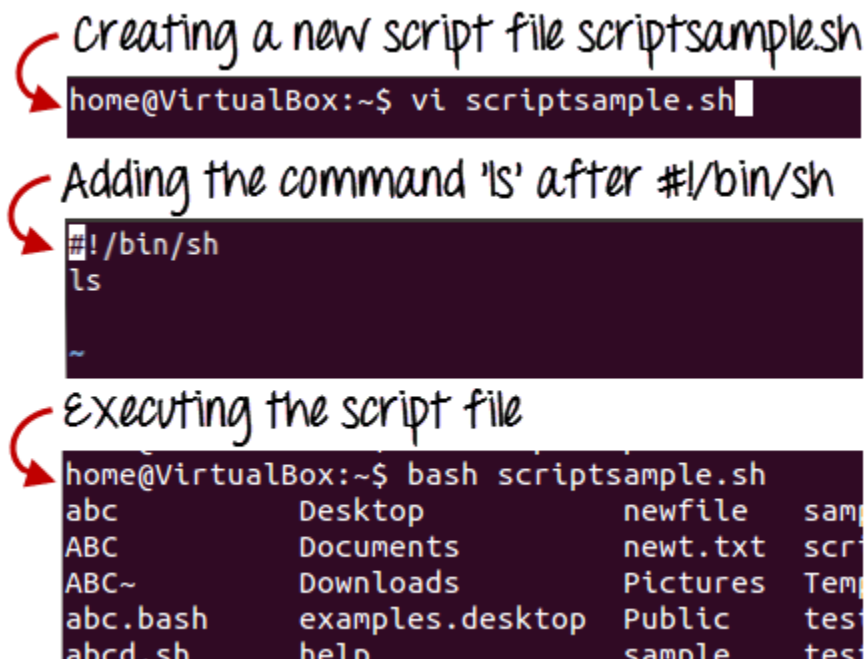

Command 'ls' is executed when we execute the scrip sample.sh file.

Adding shell comments

Commenting is important in any program. In Shell programming, the syntax to add a comment is
#comment

Let understand this with an example.



Adding a comment

```
#!/bin/sh  
# sample scripting  
pwd
```

Shell executes only the command

```
home@VirtualBox:~$ bash scriptsample.sh  
/home/home
```

It ignores the comment **# sample scripting**

What are Shell Variables?

As discussed earlier, Variables store data in the form of characters and numbers. Similarly, Shell variables are used to store information and they can be used by the shell only.

For example, the following creates a shell variable and then prints it:

```
variable="Hello"
```

```
echo $variable
```

Below is a small script which will use a variable.

```
#!/bin/sh
```

```
echo "what is your name?"
```

```
read name
```

```
echo "How do you do, $name?"
```

```
read remark
```

```
echo "I am $remark too!"
```

Let's understand, the steps to create and execute the script



Creating the script

```
#!/bin/sh
echo "what is your name?"
read name
echo "How do you do, $name?"
read remark
echo "I am $remark too!"
```

running the script file

```
home@VirtualBox:~$ bash scriptsample.sh
what is your name?
```

Entering the input

script reads the name

```
home@VirtualBox:~$ bash scriptsample.sh
what is your name?
Joy
How do you do, Joy?
```

Entering the remark

```
home@VirtualBox:~$ bash scriptsample.sh
what is your name?
Joy
How do you do, Joy?
excellent
I am excellent too!
```

script repeats the remark

As you see, the program picked the value of the variable 'name' as Joy and 'remark' as excellent. This is a simple script. You can develop advanced scripts which contain conditional statements, loops, and functions. Shell scripting will make your life easy and Linux administration a breeze.

Summary:

- Kernel is the nucleus of the operating systems, and it communicates between hardware and software
- Shell is a program which interprets user commands through CLI like Terminal
- The Bourne shell and the C shell are the most used shells in Linux
- Shell scripting is writing a series of command for the shell to execute
- Shell variables store the value of a string or a number for the shell to read
- Shell scripting can help you create complex programs containing conditional statements, loops, and functions



Aim: - Write a shell script to make addition of two Numbers

Input: -

```
#!/bin/bash
```

```
echo " Write a Program to Addition Of two Number "
```

```
echo " Enter the First Number"
```

```
read a
```

```
echo " Enter the second Number "
```

```
read b
```

```
c=$((a+b))
```

```
echo $c
```

#Output:-

```
(root@kali)~[/home/kali]
# #!/bin/bash
echo " Write a Program to Addition Of two Number "
echo " Enter the First Number"
read a
echo " Enter the second Number "
read b
c=$((a+b))
echo $c

Write a Program to Addition Of two Number
Enter the First Number
12
Enter the second Number
12
24
```

Aim: - Write a shell script to make subtraction of two Numbers

Input: -

```
#!/bin/bash
```

```
echo " Write a Program to subtraction of two Number "
```

```
echo " Enter the First Number"
```

```
read a
```

```
echo " Enter the second Number "
```

```
read b
```

```
c=$((a-b))
```

```
echo $c
```



#Output:-

```
(root@kali)~/home/kali
# #!/bin/bash
echo " Write a Program to subtraction of two Number "
echo " Enter the First Number"
read a
echo " Enter the second Number "
read b
c=$((a-b))
echo $c
Write a Program to subtraction of two Number
Enter the First Number
12
Enter the second Number
12
0
```

Aim: - Write a shell script to make multiplication of two Numbers

Input: -

```
#!/bin/bash
echo " Write a Program to multiplication of two Number "
echo " Enter the First Number"
read a
echo " Enter the second Number "
read b
c=$((a*b))
echo $c
```

#Output:-

```
(root@kali)~/home/kali
# #!/bin/bash
echo " Write a Program to multiplication of two Number "
echo " Enter the First Number"
read a
echo " Enter the second Number "
read b
c=$((a*b))
echo $c
Write a Program to multiplication of two Number
Enter the First Number
12
Enter the second Number
12
144
```

Aim: - Write a shell script to make division of two Numbers

Input: -

```
#!/bin/bash
echo " Write a Program to do division of two Number "
echo " Enter the First Number"
read a
echo " Enter the second Number "
```



```
read b
c=$((($a/$b))
echo $c
```

#Output:-

```
(root@kali)~/home/kali
# ./bin/bash
echo " Write a Program to do division of two Number "
echo " Enter the First Number"
read a
echo " Enter the second Number "
read b
c=$((($a/$b))
echo $c
Write a Program to do division of two Number
Enter the First Number
12
```

Aim: - Write a shell script to make modulus of two Numbers

Input: -

```
#!/bin/bash
echo " Write a Program to find modulus of two numbers "
echo " Enter the First Number"
read a
echo " Enter the second Number "
read b
c=$((($a%$b))
echo $c
```

#Output:-

```
(root@kali)~/home/kali
# ./bin/bash
echo " Write a Program to find modulus of two numbers "
echo " Enter the First Number"
read a
echo " Enter the second Number "
read b
c=$((($a%$b))
echo $c
Write a Program to find modulus of two numbers
Enter the First Number
12
Enter the second Number
12
0
```

Aim: - Write a shell script to type name

Input: -

```
#!/bin/bash
echo " Enter Your Name
" read name
echo "Your name is "$name
```



#Output:-

```
(root@kali)-[/home/kali]
# #!/bin/bash
echo "Enter Your Name "
read name
echo "Your name is "$name

Enter Your Name
Mayur
Your name is Mayur
```

Aim: - Write a shell script to find swap of 2 numbers

Input: -

```
#!/bin/bash
echo "Enter the First Number"
read first
echo "Enter the Second Number"
read second
temp=$first
first=$second
second=$temp
echo "After swapping, numbers are:"
echo "first = $first, second = $second"
```

#Output:-

```
(root@kali)-[/home/kali]
# #!/bin/bash
echo "Enter the First Number"
read first
echo "Enter the Second Number"
read second
temp=$first
first=$second
second=$temp
echo "After swapping, numbers are:"
echo "first = $first, second = $second"

Enter the First Number
12
Enter the Second Number
21
After swapping, numbers are:
first = 21, second = 12
```

Aim: - Write a shell script to define variable

Input: -

```
#!/bin/bash
```



echo " What is your name?"

read MY_NAME

echo " Hello, I'm "\$MY_NAME". I Hope you are well"

#Output:-

```
(root@kali)~/home/kali
$ #!/bin/bash
echo " What is your name?"
read MY_NAME
echo " Hello, I'm "$MY_NAME". I Hope you are well"

What is your name?
Mayur
Hello, I'm Mayur. I Hope you are well

(root@kali)~/home/kali
$
```



PRACTICAL 3

AIM:-Write a Shell script to print the given numbers sum of all digits.

Input: -

```
#!/bin/bash
echo "Enter a number"
read num
sum=0
while [ $num -gt 0 ]
do
mod=$((num % 10))
sum=$((sum + mod))
num=$((num / 10))
done
echo $sum
```

#Output:-

```
File Actions Edit View Help

(kali@kali)-[~/Desktop/Mayur,210303126039]
$ #!/bin/bash
echo "Enter a number"
read num
sum=0
while [ $num -gt 0 ]
do
mod=$((num % 10))
sum=$((sum + mod))
num=$((num / 10))
done
echo $sum

Enter a number
12
3
```



PRACTICAL 4

AIM:-Write a shell script to validate the entered date. (eg. Date format is: dd-mm-yyyy).

Input: -

```
#!/bin/bash
d=`date +%m-%d-%Y`
echo $d #DD-MM-YYYY
echo " Please Enter Date "
read D
echo " Please Enter Month "
read M
echo " Please Enter Year "
" read Y
if [ `expr $Y % 4` -eq 0 ]
then
Mayur Pandya Division: - 4B18
echo "$Y is a leap year"
else
echo "$Y is not a leap year"
fi
```

#Output:-

```
(kali㉿kali)-[~/Desktop/Mayur,210303126039]
$ #!/bin/bash
d=`date +%m-%d-%Y`
echo $d #DD-MM-YYYY
echo " Please Enter Date "
read D
echo " Please Enter Month "
read M
echo " Please Enter Year "
read Y
if [ `expr $Y % 4` -eq 0 ]
then
Mayur Pandya Division: - 4B18
echo "$Y is a leap year"
else
echo "$Y is not a leap year"
fi

02-08-2023
Please Enter Date
15
Please Enter Month
12
Please Enter Year
2003
2003 is not a leap year
```



PRACTICAL 5

AIM:- Write a shell script to check entered string is palindrome or not

Input: -

```
#!/bin/bash
# Store the string entered by the user
echo -n "Enter a string: "
read str
# Reverse the string
revstr=$(echo $str | rev)
# Check if the string is a palindrome
if [ "$str" == "$revstr" ]
then
echo "The string is a palindrome"
else
echo "The string is not a palindrome"
fi
```

#Output:-

```
(kali㉿kali)-[~/Desktop/Mayur,210303126039]
$ #!/bin/bash
# Store the string entered by the user
echo -n "Enter a string: "
read str
# Reverse the string
revstr=$(echo $str | rev)
# Check if the string is a palindrome
if [ "$str" == "$revstr" ]
then
echo "The string is a palindrome"
else
echo "The string is not a palindrome"
fi

Enter a string: mayur
The string is not a palindrome
```



PRACTICAL 6

AIM:- Write a Shell script to say Good morning/Afternoon/Evening as you log in to the system.

Input: -

```
#!/bin/bash
# Get the current hour
hour=$(date +%H)
name=" Mayur Pandya "
# Set the greeting message
if [ $hour -ge 6 ] && [ $hour -lt 12 ]; then
greeting="Good morning $name"
elif [ $hour -ge 12 ] && [ $hour -lt 16 ]; then
greeting="Good afternoon $name"
elif [ $hour -ge 16 ] && [ $hour -lt 20 ]; then
greeting="Good evening $name"
else
greeting="Good Night $name"
fi
# Print the greeting message
echo $greeting
```

#Output:-

```
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ #!/bin/bash
# Get the current hour
hour=$(date +%H)
name=" Mayur Pandya "
# Set the greeting message
if [ $hour -ge 6 ] && [ $hour -lt 12 ]; then
greeting="Good morning $name"
elif [ $hour -ge 12 ] && [ $hour -lt 16 ]; then
greeting="Good afternoon $name"
elif [ $hour -ge 16 ] && [ $hour -lt 20 ]; then
greeting="Good evening $name"
else
greeting="Good Night $name"
fi
# Print the greeting message
echo $greeting
Good afternoon Mayur Pandya
```



PRACTICAL 7

AIM:- Write a C program to create a child process.

Input: -

```
#include <sys/types.h>
#include <unistd.h>

void forkexample()
{
    // Check if the return value of fork() is 0
    if (fork() == 0)
    {
        printf("Hello from Child!\n");
    }
    // If the return value of fork() is non-zero
    else
    {
        printf("Hello from Parent!\n");
    }
}

int main()
{
    forkexample();
    return 0;
}

#include <stdio.h>
```

#Output:-

```
Hello from Parent!
Hello from Child!
```



PRACTICAL 8

AIM:- Finding out biggest number from given three numbers supplied as command line arguments.

Input: -

```
echo "Enter Num1"
read num1
echo "Enter Num2"
read num2
echo "Enter Num3"
read num3
if [ $num1 -gt $num2 ] && [ $num1 -gt $num3 ]
then
echo $num1
elif [ $num2 -gt $num1 ] && [ $num2 -gt $num3 ]
then
echo $num2
else
echo $num3
fi
```

#Output:-

```
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ echo "Enter Num1"
read num1
echo "Enter Num2"
read num2
echo "Enter Num3"
read num3
if [ $num1 -gt $num2 ] && [ $num1 -gt $num3 ]
then
echo $num1
elif [ $num2 -gt $num1 ] && [ $num2 -gt $num3 ]
then
echo $num2
else
echo $num3
fi
Enter Num1
34
Enter Num2
69
Enter Num3
07
69
```



PRACTICAL 9

AIM:- Printing the patterns using for loop

Input: -

```
# Static input for N N=5
N=5
i=0
while [ $i -lt $N ]
do
    j=0
    while [ $j -lt $N ]
    do
        if [ $((N-1-i)) -le $j ]
        then
            # Print the pattern
            echo -ne "/"
        else
            # Print the spaces required
            echo -ne " "
        fi
        j=$((j + 1))
    done
    echo
    i=$((i + 1))
done
```

#Output:-

```
(kali@kali)-[~/Desktop/Mayur,210303126039]
$ # Static input for N N=5
N=5
i=0
while [ $i -lt $N ]
do
    j=0
    while [ $j -lt $N ]
    do
        if [ $((N-1-i)) -le $j ]
        then
            # Print the pattern
            echo -ne "/"
        else
            # Print the spaces required
            echo -ne " "
        fi
        j=$((j + 1))
    done
    echo
    i=$((i + 1))
done
/
//
///
////
/////
```



PRACTICAL 10

AIM:- Shell script to determine whether a given file exists or not.

Input: -

#!/bin/bash

File=dp.txt

if [-f "\$File"]; then

echo "\$File exists"

else

echo "\$File does not exist"

fi

#Output:-

```
(kali㉿kali)-[~/Desktop/Mayur,210303126039]
$ #!/bin/bash
File=dp.txt
if [ -f "$File" ]; then
    echo "$File exists"
else
    echo "$File does not exist"
fi

dp.txt does not exist

(kali㉿kali)-[~/Desktop/Mayur,210303126039]
$
```



PRACTICAL 11

AIM:- Write a program for process creation using C. (Use of gcc compiler).

Input: -

```
#include <unistd.h>
#include <sys/wait.h>

int main(void) {
int pid = fork();
if (pid == 0) {
    // Child process
    printf("Child process (pid=%d)\n", getpid());
} else if (pid > 0) {
    // Parent
    process int status;
    wait(&status);
    printf("Parent process (pid=%d)\n", getpid());
} else {
    // Error
    perror("fork");
}
return 0;
}
```

```
#include <stdio.h>
```

#Output:-

```
rating System/"processcreation
Child process (pid=2429)
Parent process (pid=2428)
```



PRACTICAL 12

AIM:- Implementation of FCFS & Round Robin Algorithm

#

Input: -

FCFS

```
int main()
{
    int n, count;
    int at[10], bt[10];
    printf("Enter the number of processes:
"); scanf("%d", &n);

    for (count = 0; count < n; count++)
    {
        printf("Enter arrival time and burst time for process %d: ", count + 1);
        scanf("%d%d", &at[count], &bt[count]);
    }

    return 0;
}
```

#include <stdio.h>

#Output:-

```
Enter the number of processes: 4
Enter arrival time and burst time for process 1: 2 02
Enter arrival time and burst time for process 2: 1 05
Enter arrival time and burst time for process 3: 2 04
Enter arrival time and burst time for process 4: 3 20
```

Input: -

RR



```
int main() {  
    int n,count, tq;  
    int at[10],bt[10];  
    printf("Enter Total Process:\t "); scanf("%d",&n); for(count=0;count<n;count++) {  
    #include <stdio.h>
```



```
printf("Enter Arrival Time and Burst Time for Process Number %d :",count+1);
scanf("%d",&at[count]);
scanf("%d",&bt[count]);
}
printf("Enter Time Quantum:\t "); scanf("%d",&tq);
return 0;
}
```

#Output:-

```
Enter Total Process:    3
Enter Arrival Time and Burst Time for Process Number 1 :1
3
Enter Arrival Time and Burst Time for Process Number 2 :2
4
Enter Arrival Time and Burst Time for Process Number 3 :1
2
Enter Time Quantum:    23
```



PRACTICAL 13

AIM:- Implementation of Banker's Algorithm.

Input: - #include

<stdio.h> #include

<stdlib.h>

int main()

{

int Max[10][10], need[10][10], alloc[10][10], avail[10], completed[10];

int p, r, i, j, process, count;

count = 0;

printf("Enter the number of processes: ");

scanf("%d", &p);

for (i = 0; i < p; i++)

{

completed[i] = 0;

}

printf("\nEnter the number of resources: ");

scanf("%d", &r);

printf("\nEnter the Max Matrix for each process:\n");

for (i = 0; i < p; i++)

{

printf("For process %d: ", i + 1);

for (j = 0; j < r; j++)

{

scanf("%d", &Max[i][j]);

}



```
}
```

```
printf("\nEnter the allocation for each process:\n");
```

```
for (i = 0; i < p; i++)
```

```
{
```

```
    printf("For process %d: ", i + 1);
```

```
    for (j = 0; j < r; j++)
```

```
    {
```

```
        scanf("%d", &alloc[i][j]);
```

```
    }
```

```
}
```

```
printf("\nEnter the available resources: ");
```

```
for (i = 0; i < r; i++)
```

```
{
```

```
    scanf("%d", &avail[i]);
```

```
}
```

```
printf("\nMax Matrix\tAllocation Matrix\n");
```

```
for (i = 0; i < p; i++)
```

```
{
```

```
    for (j = 0; j < r; j++)
```

```
    {
```

```
        printf("%d ", Max[i][j]);
```

```
    }
```

```
    printf("\t\t");
```

```
    for (j = 0; j < r; j++)
```

```
    {
```

```
        printf("%d ", alloc[i][j]);
```

```
    }
```

```
    printf("\n");
```

```
}
```

```
return 0;}
```