


Task-4

.html

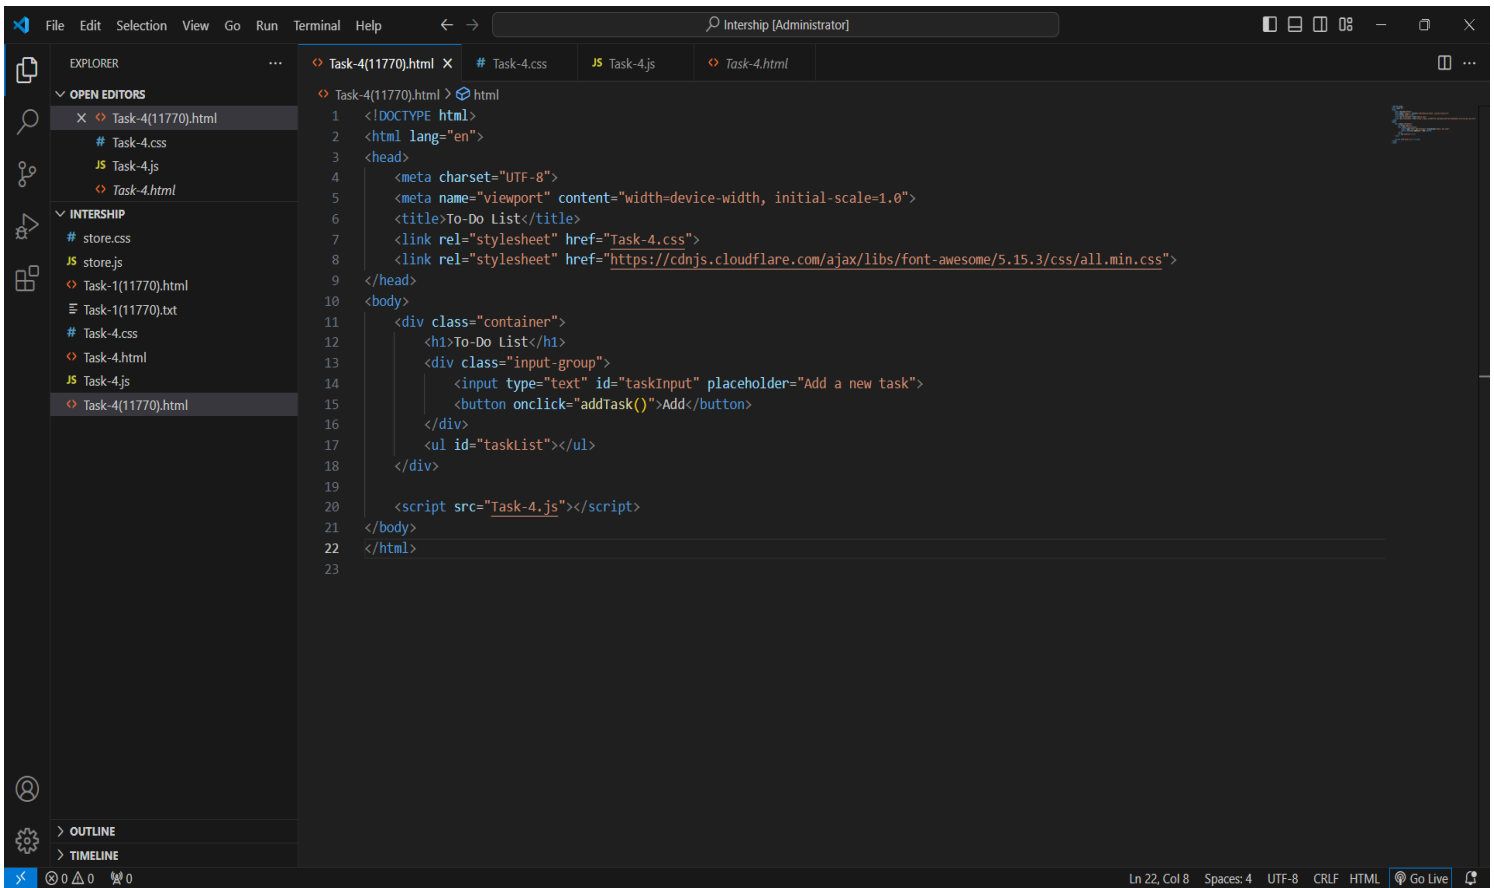


The screenshot shows a VS Code editor window with the following components:

- EXPLORER:** Displays the file structure. The 'Task-4(11770).html' file is selected under the 'Task-4(11770)' folder.
- OPEN EDITORS:** Shows the open files: 'Task-4(11770).html', 'Task-4.css', 'Task-4.js', and 'Task-4.html'.
- EDITOR:** Displays the content of 'Task-4(11770).html'. The code is as follows:


```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6   <title>To-Do List</title>
7   <link rel="stylesheet" href="Task-4.css">
8   <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/5.15.3/css/all.min.css">
9 </head>
10 <body>
11   <div class="container">
12     <h1>To-Do List</h1>
13     <div class="input-group">
14       <input type="text" id="taskInput" placeholder="Add a new task">
15       <button onclick="addTask()">Add</button>
16     </div>
17     <ul id="taskList"></ul>
18   </div>
19
20   <script src="Task-4.js"></script>
21 </body>
22 </html>
23
```
- STATUS BAR:** Shows the current position (Ln 22, Col 8), encoding (UTF-8), line endings (CRLF), and the file type (HTML). It also includes a 'Go Live' button.

.CSS

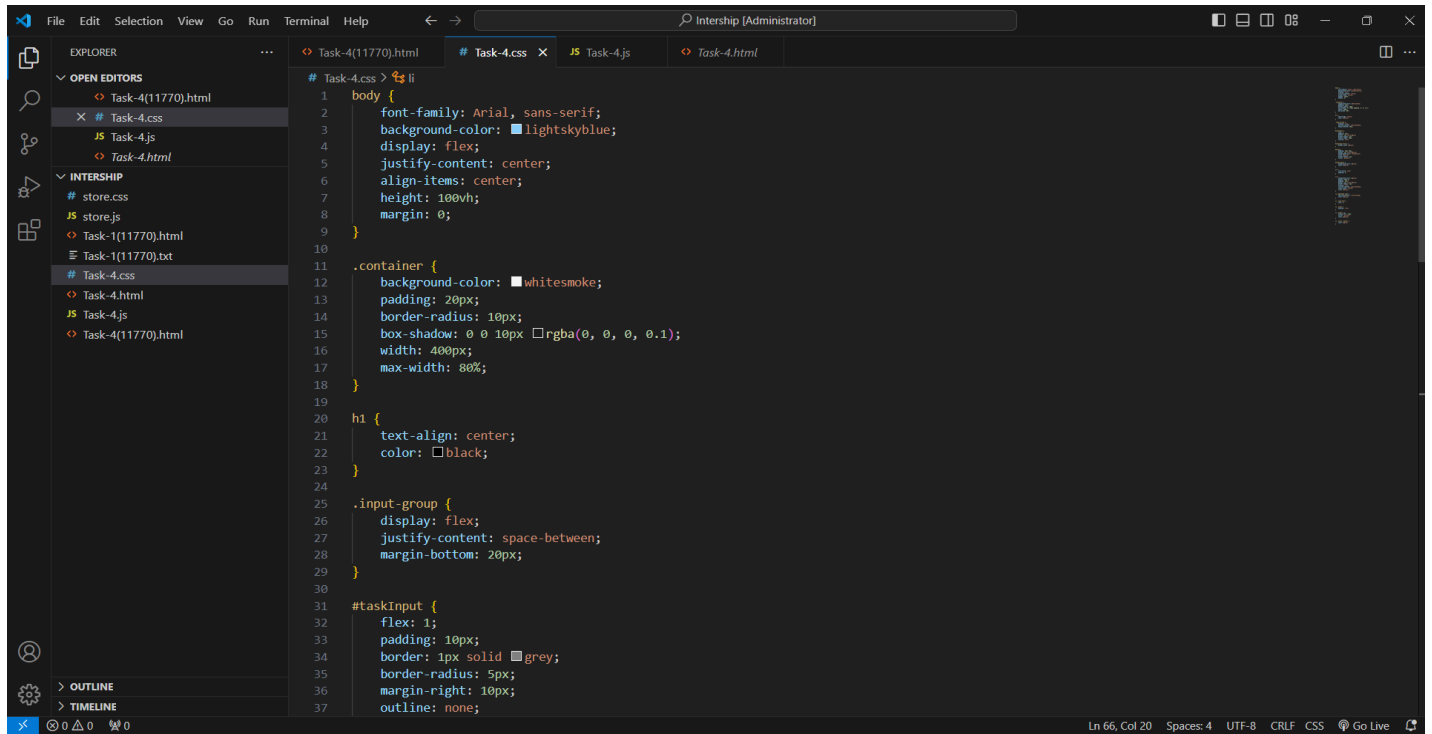


The image shows a VS Code editor window with the file explorer on the left. The 'OPEN EDITORS' list shows 'Task-4(11770).html', 'Task-4.css', 'Task-4.js', and 'Task-4.html'. The 'INTERSHIP' folder contains 'store.css', 'store.js', 'Task-1(11770).html', 'Task-1(11770).txt', 'Task-4.css', 'Task-4.html', 'Task-4.js', and 'Task-4(11770).html'. The main editor area displays the content of 'Task-4.css'.

```
# Task-4.css > li
1 body {
2   font-family: Arial, sans-serif;
3   background-color: lightskyblue;
4   display: flex;
5   justify-content: center;
6   align-items: center;
7   height: 100vh;
8   margin: 0;
9 }
10
11 .container {
12   background-color: whitesmoke;
13   padding: 20px;
14   border-radius: 10px;
15   box-shadow: 0 0 10px rgba(0, 0, 0, 0.1);
16   width: 400px;
17   max-width: 80%;
18 }
19
20 h1 {
21   text-align: center;
22   color: black;
23 }
24
25 .input-group {
26   display: flex;
27   justify-content: space-between;
28   margin-bottom: 20px;
29 }
30
31 #taskInput {
32   flex: 1;
33   padding: 10px;
34   border: 1px solid grey;
35   border-radius: 5px;
36   margin-right: 10px;
37   outline: none;
```

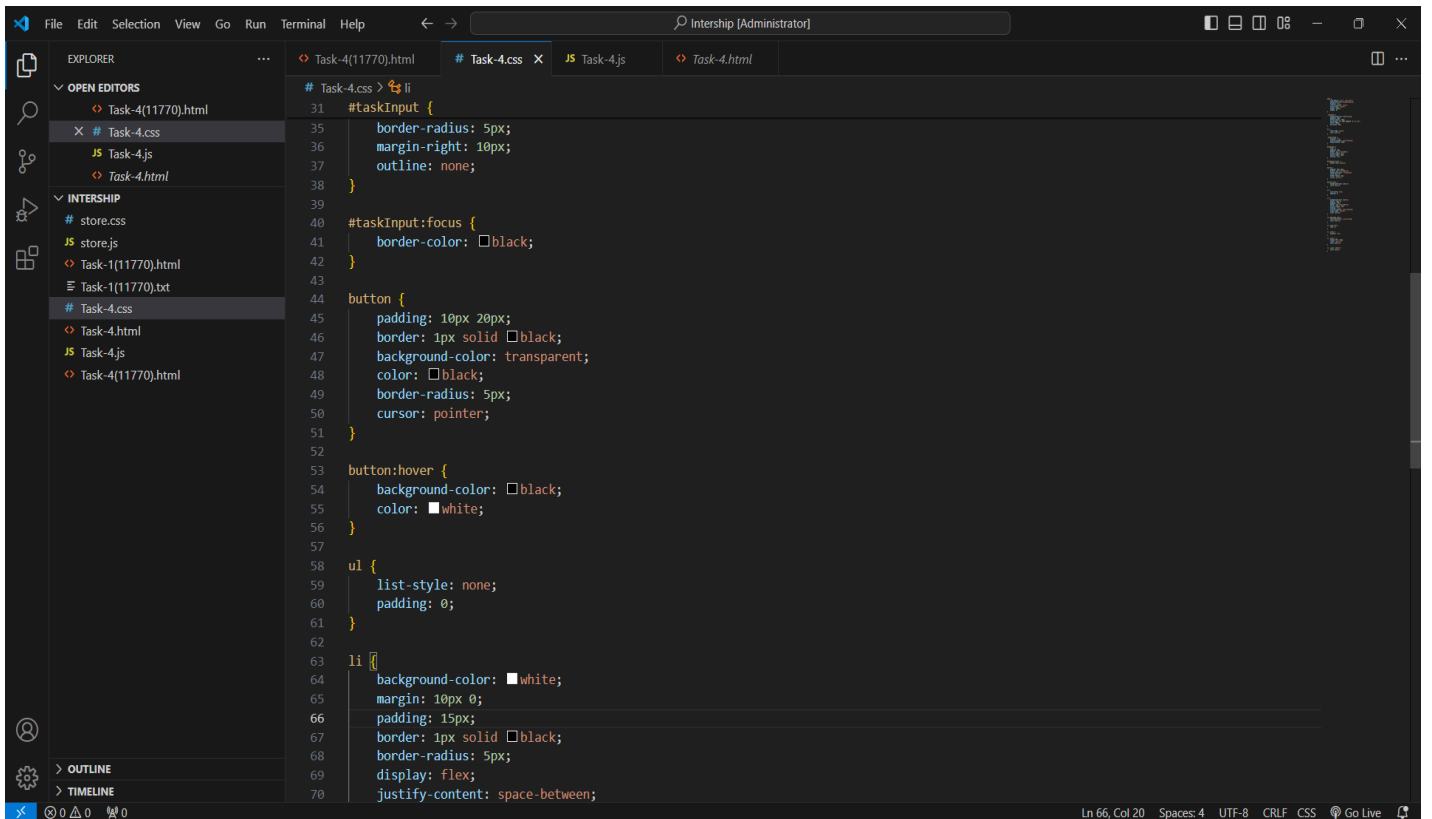


The image shows a VS Code editor window with the file explorer on the left. The 'OPEN EDITORS' list shows 'Task-4(11770).html', 'Task-4.css', 'Task-4.js', and 'Task-4.html'. The 'INTERSHIP' folder contains 'store.css', 'store.js', 'Task-1(11770).html', 'Task-1(11770).txt', 'Task-4.css', 'Task-4.html', 'Task-4.js', and 'Task-4(11770).html'. The main editor area displays the content of 'Task-4.css'.

```
# Task-4.css > li
31 #taskInput {
32   border-radius: 5px;
33   margin-right: 10px;
34   outline: none;
35 }
36
37 #taskInput:focus {
38   border-color: black;
39 }
40
41 button {
42   padding: 10px 20px;
43   border: 1px solid black;
44   background-color: transparent;
45   color: black;
46   border-radius: 5px;
47   cursor: pointer;
48 }
49
50 button:hover {
51   background-color: black;
52   color: white;
53 }
54
55 ul {
56   list-style: none;
57   padding: 0;
58 }
59
60 li {
61   background-color: white;
62   margin: 10px 0;
63   padding: 15px;
64   border: 1px solid black;
65   border-radius: 5px;
66   display: flex;
67   justify-content: space-between;
```

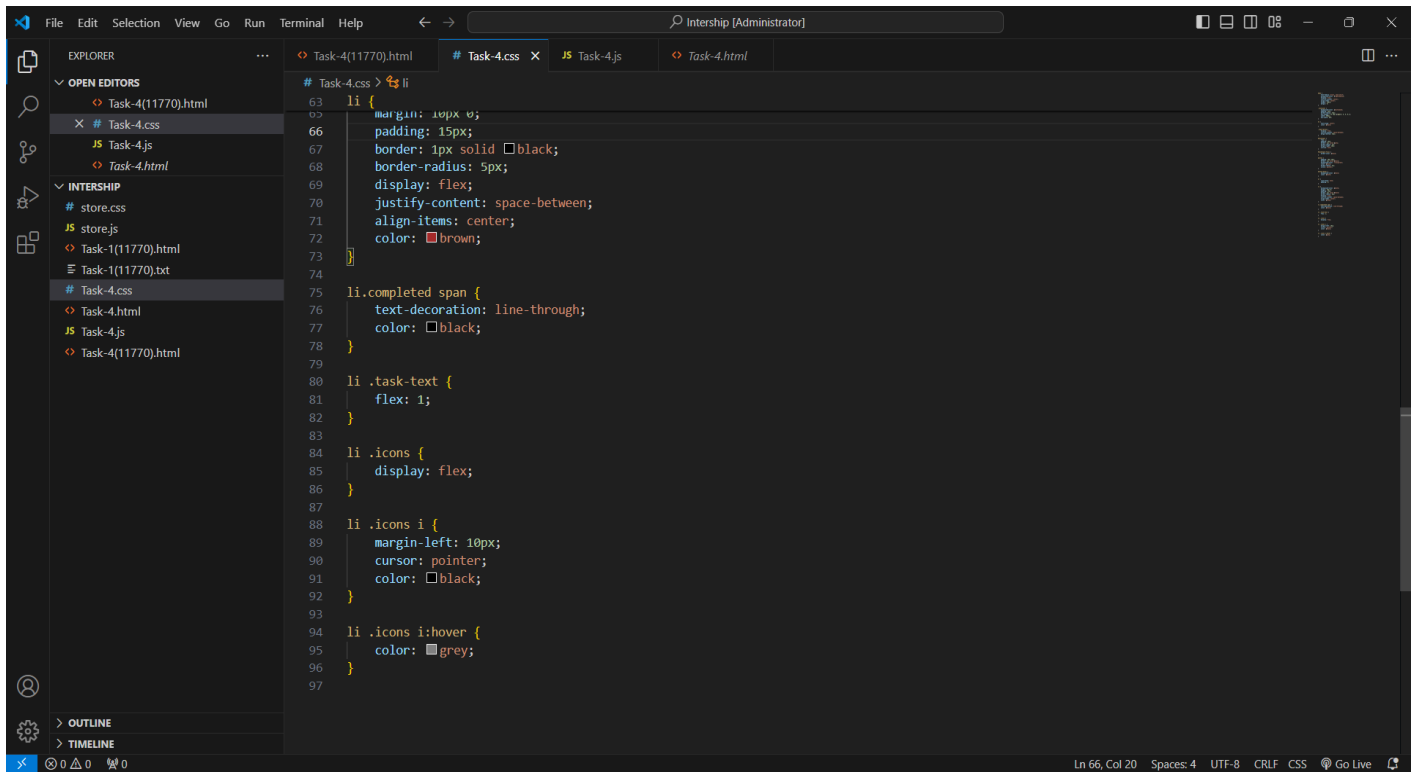

.js

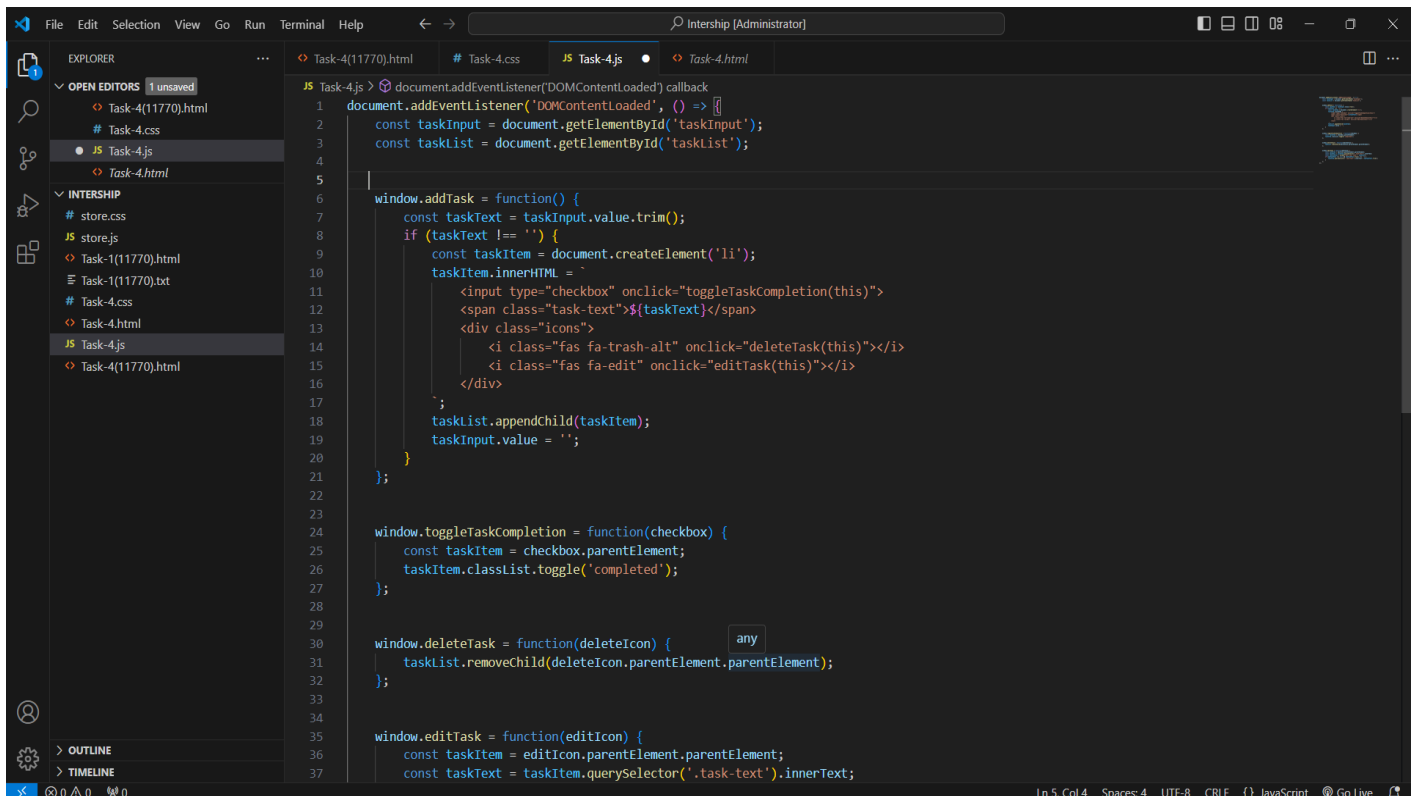

The image shows a Visual Studio Code editor window with the following structure:

- EXPLORER:** Shows a project named "INTERSHIP" with files: `store.css`, `store.js`, `Task-1(11770).html`, `Task-1(11770).txt`, `Task-4.css`, `Task-4.html`, `Task-4.js`, and `Task-4(11770).html`. The `Task-4.js` file is selected.
- EDITOR:** Displays the content of `Task-4.js`. The code is as follows:

```
1 document.addEventListener('DOMContentLoaded', () => {  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25 window.toggleTaskCompletion = function(checkbox) {  
26   const taskItem = checkbox.parentElement;  
27   taskItem.classList.toggle('completed');  
28 };  
29  
30 window.deleteTask = function(deleteIcon) {  
31   taskList.removeChild(deleteIcon.parentElement.parentElement);  
32 };  
33  
34  
35 window.editTask = function(editIcon) {  
36   const taskItem = editIcon.parentElement.parentElement;  
37   const taskText = taskItem.querySelector('.task-text').innerText;  
38   const newTaskText = prompt("Edit your task:", taskText);  
39   if (newTaskText !== null && newTaskText.trim() !== '') {  
40     taskItem.querySelector('.task-text').innerText = newTaskText.trim();  
41   }  
42 };  
43  
44 };
```
- STATUS BAR:** Shows "Ln 5, Col 4", "Spaces: 4", "UTF-8", "CRLF", and "JavaScript".

Output

