



SmartVista Instant Payment System

Specification –Request To Pay

**PRODUCT
DOCUMENTATION**

20 August 2024



bpcbt.com

Confidential © 2024 BPC Banking Technologies

Notice

All information contained in this documentation, as well as the software described in it, is proprietary to BPC Group and its affiliates. BPC Group reserves any and all intellectual property rights in respect of this document.

The Customer is granted the right to use this document in accordance with the relevant agreement entered into with authorized SmartVista distributors within BPC Group. Except as permitted by the relevant license agreement, no part of this documentation may be reproduced, stored in a retrieval system, or transmitted in any form or by electronic, mechanical, recording, or any other means, without the prior written permission of BPC Group.

The limited warranties provided in respect of this document are described in the relevant legal agreement entered into with BPC Group. BPC Group provides no other warranties, explicit or implied.

This document is confidential and proprietary and is not intended for use by any person other than a named Customer.

SmartVista is the registered trademark of BPC Group entities. Other company, product or service names mentioned herein may be trademarks or service marks of their respective owners.

For information regarding permissions, write to:

BPC Group HQ
Neuhofstrasse 5a
6340 Baar
Switzerland

Phone: +41 43 508 4024

Email: info@bpcbt.com

Web: www.bpcbt.com

File: sv_ip__specification_RTP_en_core_20231120

Applicable to: Instant Payment

Permitted distribution: Under NDA only

Contents

Specification Update and Version History	3
1 Scope and functionality.....	4
1.1 Background.....	4
1.2 Scope	4
1.3 Document purpose	4
1.4 Introduction	5
2 RTP Message Flows and Exception.....	5
2.1 A: Regular Request to Pay lifecycle	5
2.1.1 AA: Request to Pay Send and Receive.....	7
2.1.2 AB: Request to Pay Cancelled.....	10
2.1.3 AC: Request to Pay is Expired	11
2.1.4 AD: Request to Pay Declined by Payer	12
2.1.5 AE: Request to Pay is Paid	14
2.1.6 AF: Attempt to Pay RtP after End of Lifecycle	20
3 Business examples	23
3.1 Example of an RTP	23
3.1.1 Description of the main fields	23
3.1.2 RTP request call (pain.013.001.10).....	24
3.1.3 Positive response message from IPS to payer's participant (pain.014.001.10)	27
3.1.4 Negative response message from IPS to payer's participant (pain.014.001.10)	28
3.1.5 Example of an RTP status request (pacs.028.001.05).....	29
3.1.6 Example of payment request (pacs.008.001.10)	29
3.1.7 Example of payment response (pacs.002.001.12)	29
3.1.8 Example of RTP cancel request(camt.055.001.10).....	29
3.1.9 Example of RTP cancel response(camt.029.001.10)	31
4 RTP request (pain.013.001.10).....	33
4.1 Message structure	33
4.2 Message building blocks.....	36
4.2.1 GroupHeader <GrpHdr>	36

4.2.2	Message Body<body>	38
5	RTP Response/RTP Status Update Request (pain.014.001.10).....	59
5.1	Message structure (RTP response pain.014.001.10).....	59
5.2	Message building blocks.....	60
5.2.1	Group Header <GrpHdr>	60
5.2.2	Body <body>	62
6	RTP Cancel Request (camt055.001.10)	67
6.1	Message structure (RTPcancelRequest camt055.001.10).....	67
6.2	Message building blocks.....	69
6.2.1	Assignment <Assgnmt>	69
6.2.2	Underlying <Undrlyg>	72
7	RTP Cancel Response (camt029.001.10)	79
7.1	Message structure (RTPcancelResponse camt029.001.10).....	79
7.2	Message building blocks.....	80
7.2.1	Assignment <Assgnmt>	80
7.2.2	CancellationDetails<CxlDtls>	84

Specification Update and Version History

Version	Release Type	Release Date	Summary Of Changes	Impact Analysis
1.0.0	Initial Release	-	Initial Release	Initial draft
1.0.1	Minor non breaking	18-1-2024	Changes in the definition and update messages with removal of out-of-scope fields.	Message are according to scope defined.
1.0.2	Minor non breaking	13-03-2024	Addition of RTP generation and uniqueness logic.	
1.0.3	Minor non breaking	09-04-2024	identification for institution synched with payment specs. some business example was corrected like: account identification scheme was IBAN which was wrong its corrected to accountID. localinstrumentcode was corrected in business example.	
1.0.4	Minor non breaking	15-07-2024	Added category purpose and some formatting corrections.	
1.0.5	Minor-non-breaking	23-7-2024	Added reason codes	

1 Scope and functionality

1.1 Background

This document covers messages that comply with the ISO 20022 financial messaging standard (Financial services – Universal financial industry message scheme). It specifically describes only those messages that are intended to be implemented for the Instant Payment System.

The terms used in this document are reserved words defined in the ISO 20022 Edition 2021.

The set of specifications includes the following documents:

1. sv_ip__how-to_specification_en_core (general instructions for all IPS specifications).
2. sv_ip__specification_bah_en_core (business header specification).
3. sv_ip__specification_payment_en_core (payment document).
4. sv_ip__specification_RTP_en_core (this document).

1.2 Scope

To facilitate the initiation, execution, and management of Request to pay (RTP), as well as the monitoring of their statuses, this document outlines a set of messages exchanged between a payer and their participant (or a payee and their participant) through the Instant Payment System.

1.3 Document purpose

The main purpose of this document is as follows:

- To describe the message flows related to request to pay (RTP) transaction
- To provide business examples
- To outline the message formats and respective field values

1.4 Introduction


The purpose of a Request to pay transactions is to transfer funds from the initiator participant to the receiving participant via RTP.

Request to Pay is a service allowing counterparty to request funds from another counterparty. In other words, this is a request for funds sent from Payee to Payer, where Payer is person, while payee is either person or merchant. The request to pay is followed by the underlying payment that is matched with the request to pay during its processing in The System. Status of the payment (after posting/rejection/declining) is linked to the status of the underlying request to pay. Status of the request to pay shared with the stakeholders guarantees status of the payment processed in The System and can be used as a confirmation for merchant to process its further activity that is related to the requested payment (i.e., goods/services delivery).

2 RTP Message Flows and Exception


2.1 A: Regular Request to Pay lifecycle

Outlined below are the variations within the regular "Request to Pay " process:

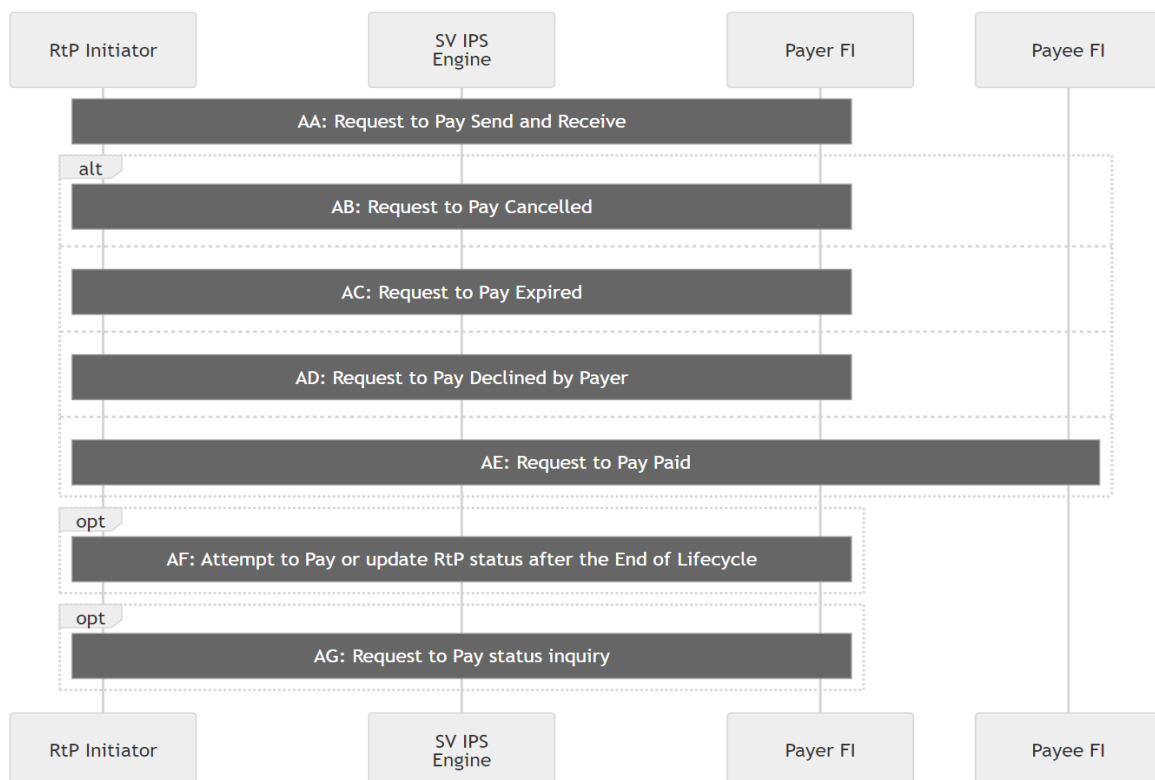

Sub-Process Reference	Description
AA: Request to Pay Send and Receive	This is the foundational step where a request to pay is initiated by the RtP Initiator and processed by the IPS RtP Engine. The request is then received and acknowledged by the desired endpoint.
AB: Request to Pay is Cancelled	This variation accounts for scenarios where, post-initiation, a request is subsequently cancelled. This could be due to various reasons such as user intervention or system constraints.
AC: Request to Pay is Expired	Every "Request to Pay" comes with a stipulated expiration timeframe. This path caters to situations where the request was neither acted upon nor cancelled, leading it to naturally expire.
AD: Request to Pay Declined by Payer	This variation accounts for scenarios where, post-initiation, a request is subsequently declined by the payer. May also be declined by Payer FI by various reasons, e.g. account is closed after the RtP is received, suspected fraud, etc.
AE: Request to Pay is Paid	In this pathway, the request to pay is eventually honoured, leading to the payment being processed and settled.
AF: Attempt to Pay Request to Pay after End of Lifecycle	This represents an exceptional case where there's an attempt to process the request after its defined lifecycle has ended, which typically should not happen in regular circumstances.
AG: Request to Pay Inquiry	An optional step wherein an inquiry regarding the status or details of the "Request to Pay" is made. This is especially useful for reconciliation or for gaining clarity on specific transactions.

2.1.1 AA: Request to Pay Send and Receive

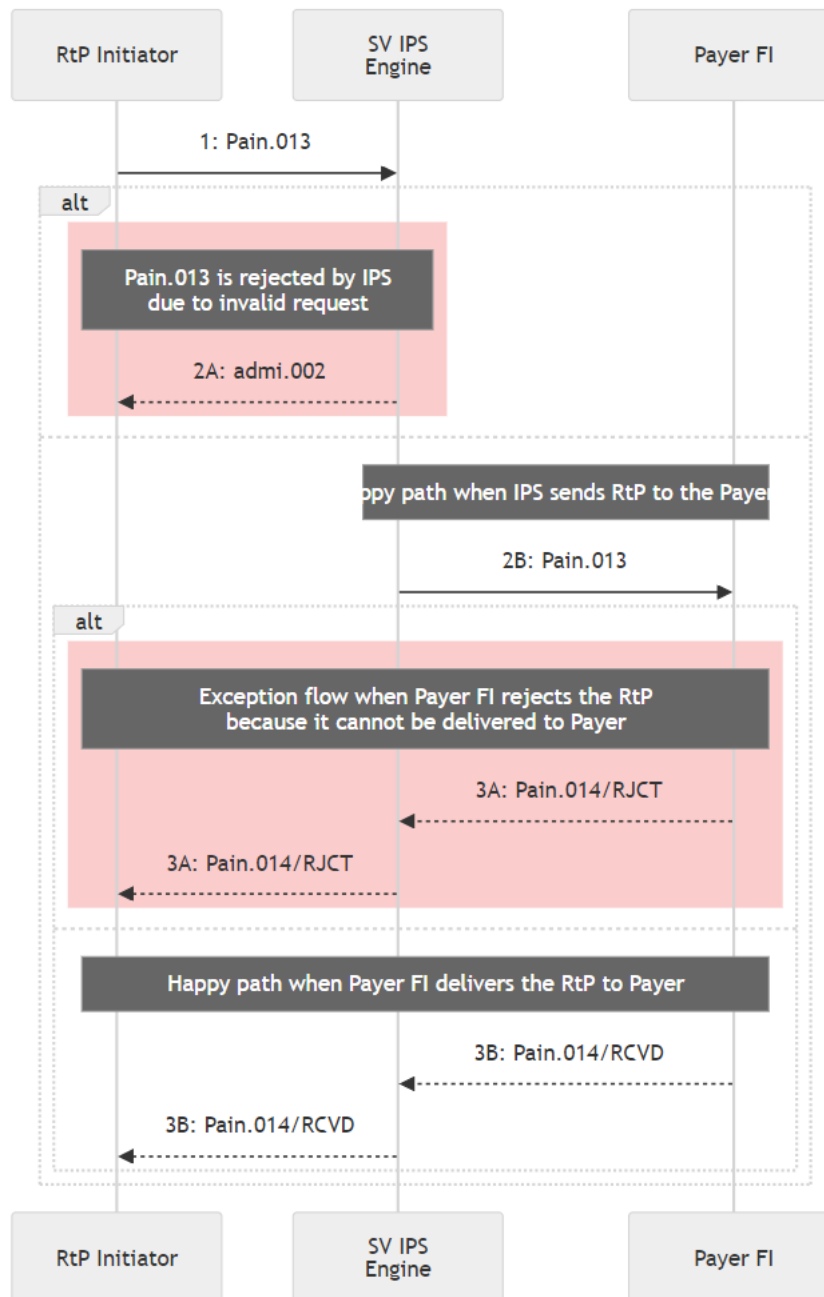

Step	From	To	Message	Description
1	RtP Initiator	SV IPS	Pain.013	Initial request from RtP Initiator to SV IPS.

Step	From	To	Message	Description
				RTP Initiator participant is responsible for unique RTP ID generation using the UUIDv4 format as per ISO 20022 standards, ensuring compliance with the RFC 4122 specification. For details refer below this table.
2A	SV IPS	RtP Initiator	admi.002	Exception case: The Pain.013 message is rejected by SV IPS, and a notification is sent back to the RtP Initiator.
2B	SV IPS	Payer FI	Pain.013	Standard flow: SV IPS forwards the Pain.013 message to Payer FI without any issues.
3A	Payer FI	SV IPS	Pain.014/RJCT	Exception flow: The Payer FI rejects the transaction because it cannot be delivered and notifies SV IPS using the Pain.014/RJCT message.
3A	SV IPS	RtP Initiator	Pain.014/RJCT	Notification from SV IPS to RtP Initiator about the rejection from Payer FI.
3A'	SV IPS	RtP Initiator	Pain.014/RJCT	Exception Flow: (timeout from Payer FI) IPS sends Pain.014/RJCT with corresponding error status code to the RTP Initiator if IPS have not received any response from Payer FI within the defined timeout period.
3B	Payer FI	RtP Initiator	Pain.014/RCVD	Standard flow: The Payer FI acknowledges successful delivery of the RtP and notifies the RtP Initiator.
3B	SV IPS	RtP Initiator	Pain.014/RCVD	Acknowledgment from SV IPS to RtP Initiator regarding the successful delivery notification from Payer FI.

UUIDv4Identifier

Definition: Universally Unique Identifier (UUID) version 4, as described in IETC RFC 4122 "Universally Unique Identifier (UUID) URN Namespace".

Type: IdentifierSet

Identification scheme: RFC4122;

UUIDv4 Format pattern [a-f0-9]{8}-[a-f0-9]{4}-4[a-f0-9]{3}-[89ab][a-f0-9]{3}-[a-f0-9]{12}

Further clarification on the pattern is as follows:

The pattern **[a-f0-9]{8}-[a-f0-9]{4}-4[a-f0-9]{3}-[89ab][a-f0-9]{3}-[a-f0-9]{12}** is a regular expression that outlines the structure of a UUIDv4:

[a-f0-9]{8}-: The first 8 characters are hexadecimal digits (0-9 and a-f), followed by a hyphen (-) to enhance readability.

[a-f0-9]{4}-: This is followed by 4 more hexadecimal digits and another hyphen.

4[a-f0-9]{3}-: Here, the **'4'** denotes a UUID version 4, followed by 3 random hexadecimal digits.


[89ab][a-f0-9]{3}-: This section specifies the UUID's variant, where the first character is one of 8, 9, a, or b, followed by three hexadecimal digits. For UUIDv4, this is typically 8 or 9, as outlined in RFC 4122.

[a-f0-9]{12}: This concludes the UUID with the last 12 hexadecimal digits, making up the 36-character string.

Example

A UUIDv4 like f47ac10b-58cc-4372-a567-0e02b2c3d479 demonstrates this pattern. The **'4'** in the third block indicates its version, while the **'a'** in the fourth block specifies the variant.

2.1.2 AB: Request to Pay Cancelled

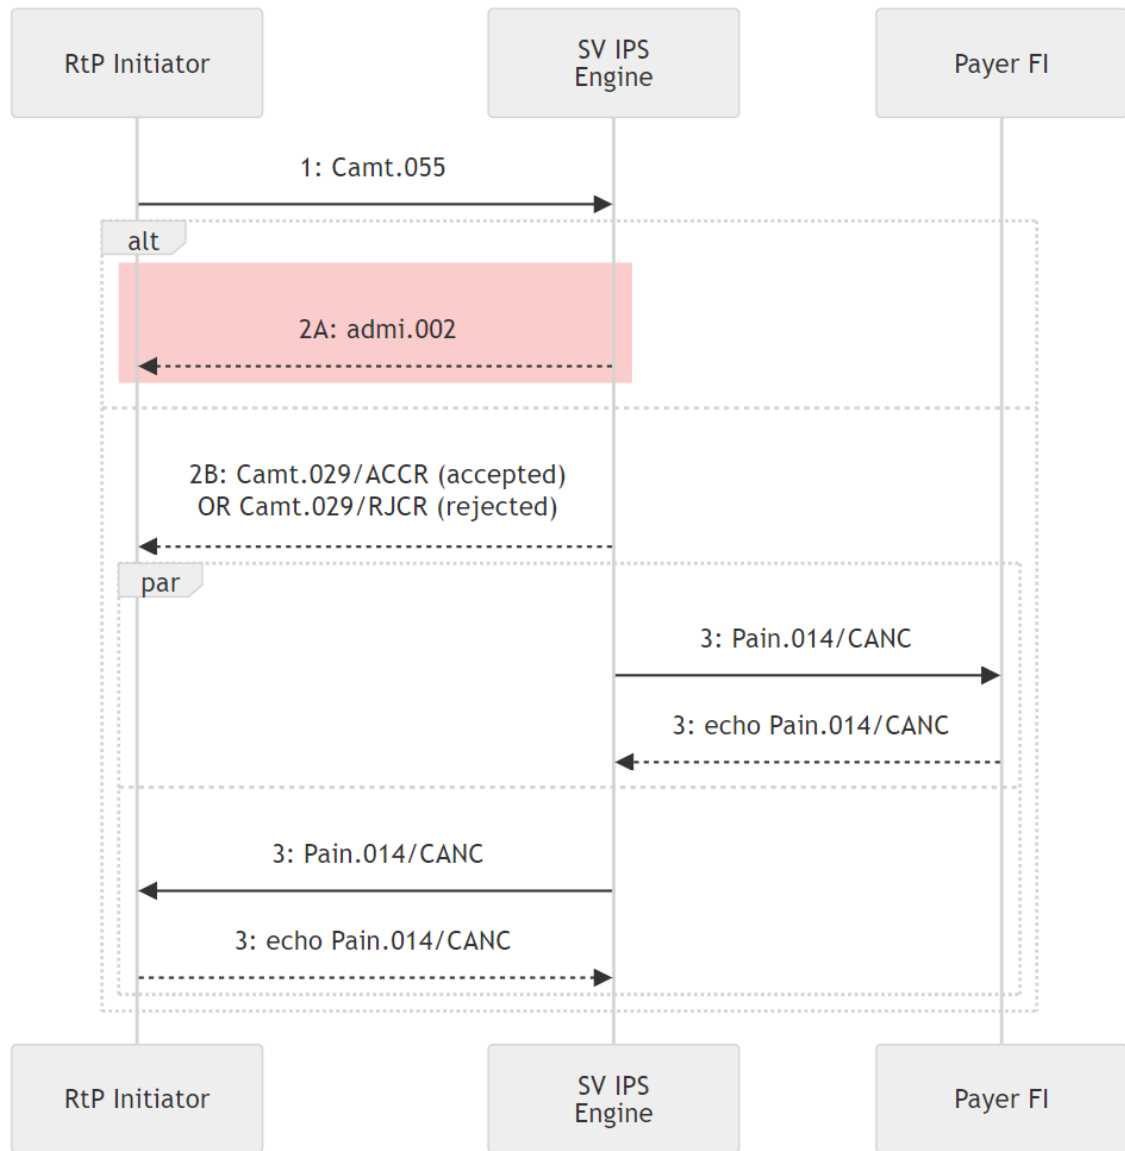


Step	From	To	Message	Description
1	RtP Initiator	SV IPS	Camt.055	The process begins with the RtP Initiator sending a cancellation message, denoted as Camt.055, to the IPS RtP Engine. This signifies the intention to cancel a prior request or transaction.
2A	SV IPS	RtP Initiator	Admi.002	In some cases, immediately upon receiving the cancellation request, the IPS RtP Engine may send an administrative message admi.002 back to the RtP Initiator. This message typically signals an

Step	From	To	Message	Description
				error or issue that prevents the cancellation request from proceeding.
2B	SV IPS	RtP Initiator	Camt.029/ACCR Camt.029/RJCR	If there are no issues, the IPS RtP Engine will forward a cancellation acknowledgment, represented by Camt.029, to the RtP Initiator. If the request is honored and the respective RtP is cancelled then the Camt.029/ACCR is used. For rejected cancellations Camt.029/RJCR is to be used.
3	SV IPS	RtP Initiator & Payer FI	Pain.014/CANC	Concurrently, the IPS RtP Engine sends cancellation notifications, denoted as Pain.014/CANC, to both the RtP Initiator and the Payer FI.
3	RtP Initiator & Payer FI	SV IPS	echo Pain.014/CANC	Echo the request to confirm notification is received and processed.

2.1.3 AC: Request to Pay is Expired

When an RtP record reaches its expiration, the Settlement and Validation Instant Payment Service (SV IPS) labels it as expired. Each participant stores the RtP expiration datetime in their record extension, using the expiry date tag as outlined below. Upon receiving a response for the Real-time Payment (RtP) in the form of pain.014, the system carefully checks the expiry date tag. If it finds that the payment has expired, the system rejects it, citing the reason as expiration.


2.1.4 AD: Request to Pay Declined by Payer

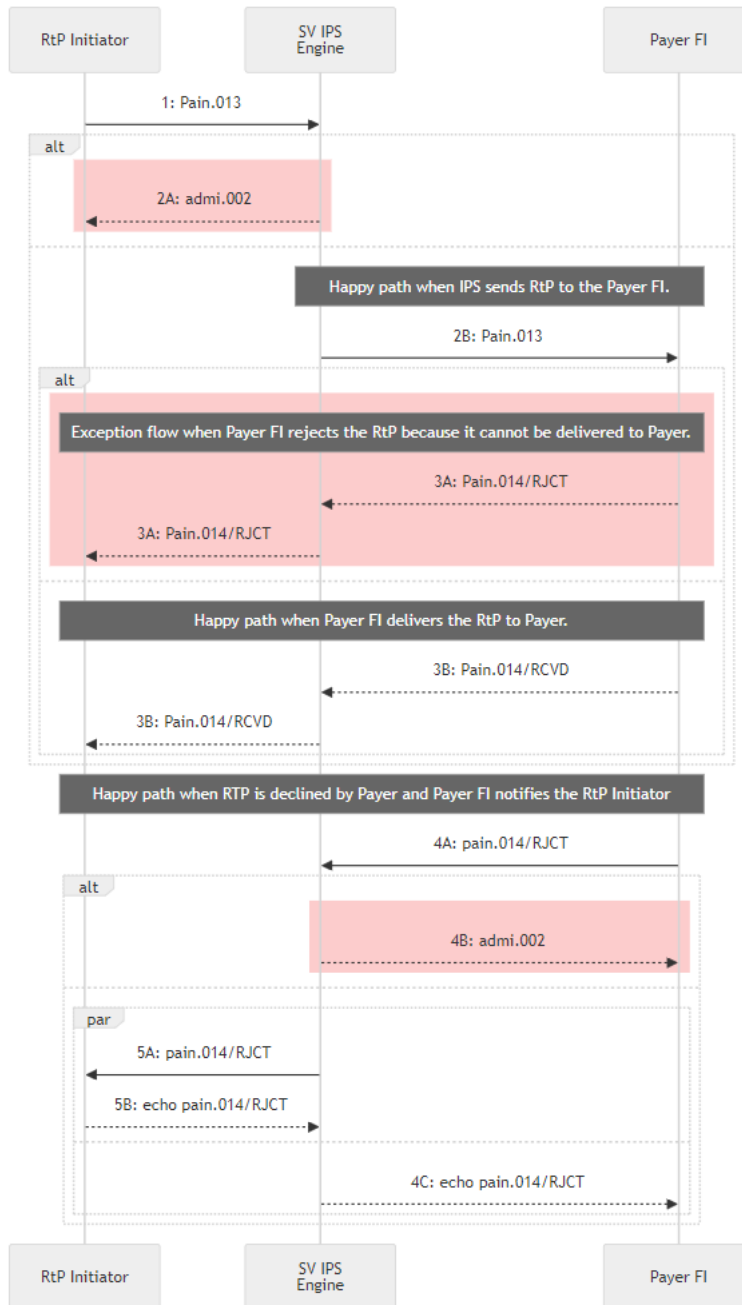

Step	From	To	Message	Description
1-3B	-	-	-	Regular RtP flow. RtP is in Acknowledged state at this point.

Step	From	To	Message	Description
4A	Payer FI	SV IPS	Pain.014/RJCT	The Payer is presented with RtP and chooses to Decline it. The Payer FI notifies SV IPS using the Pain.014/RJCT message.
4B	SV IPS	Payer FI	Admi.002	Technical Rejection by IPS: If there are any technical discrepancies or errors detected by the IPS, it responds with an administrative message, admi.002, indicating that the initial request (Pain.014) has been technically rejected.
5A	SV IPS	RtP Initiator	Pain.014/RJCT	Pain.014/RJCT with appropriate status reason notification on Payer Decline is proxied to the RtP Initiator.
5B	RtP Initiator	SV IPS	echo Pain.014/RJCT	Echo the request to confirm notification is received and processed.
4C	SV IPS	Payer FI	echo Pain.014/RJCT	Echo the request to confirm notification is received and processed.

2.1.5 AE: Request to Pay is Paid

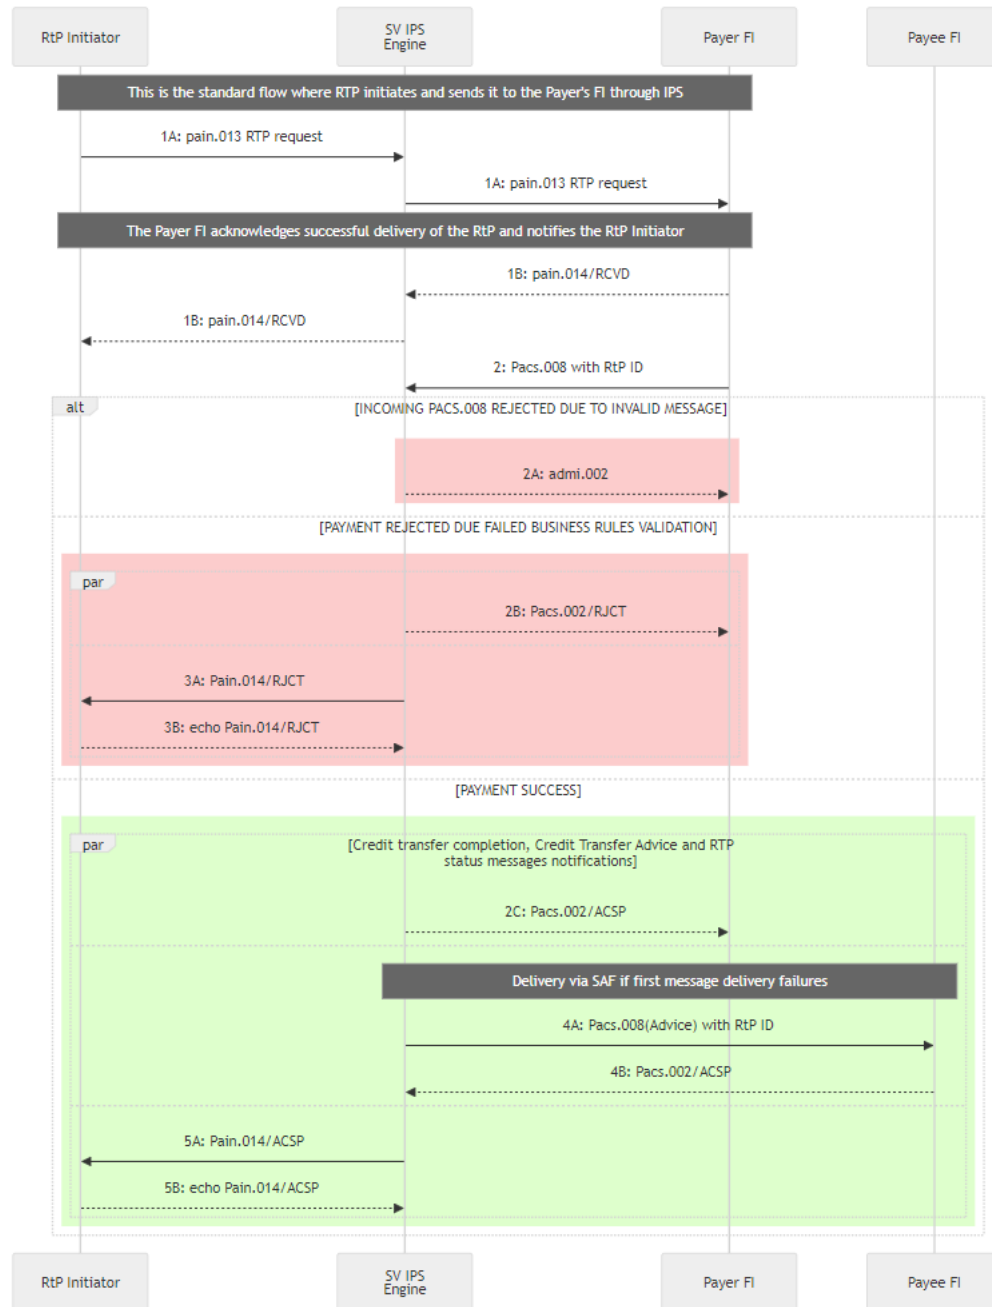

Step	From	To	Message	Description
1A-1B	-	-	-	Regular RtP flow. RtP is in Acknowledged state at this point.

Step	From	To	Message	Description
2	Payer FI	SV IPS	Pacs.008	When RtP is accepted by the Payer and the payment is initiated by the Payer FI within the expiration period of RtP, the credit transfer is sent to SV IPS as a pacs.008 containing the RTP ID.
2A	SV IPS	Payer FI	Admi.002	Technical Rejection by IPS: If there are any technical discrepancies or errors detected by the IPS, it responds with an administrative message, admi.002, indicating that the initial request (Pacs.008 with RTP ID) has been technically rejected.
2B	SV IPS	Payer FI	Pacs.002/RJCT	If the payment cannot be processed due to participant insufficient funds, detected fraud, expired RtP, etc. the SV IPS rejects the payment.
3A	SV IPS	RtP Initiator	Pain.014/RJCT	Pain.014/RJCT with appropriate status reason notification on Payment Failed is sent to the RtP Initiator.
3B	RtP Initiator	SV IPS	echo Pain.014/RJCT	Echo the request to confirm notification is received and processed.
2C	SV IPS	Payer FI	Pacs.002/ACSP	The Pacs.002/ACSP message response is sent to the Payer FI, indicating that the payment process is completed successfully.
4A	SV IPS	Payee FI	Pacs.008 (Advice)	It is assumed that, in the RtP payment scenario, the Payee's account has been validated and thoroughly checked prior to the RtP initiator sending the RtP request. To streamline the credit transfer process within the RtP scenario, a Credit Transfer Advice is employed in place of the payee account authorization procedure. SAF mechanism is to be used to guarantee advice message delivery.
4B	Payee FI	SV IPS	Pacs.002/ACSP	Credit transfer advice message is received and processed.
5A	SV IPS	RtP Initiator	Pain.014/ACSP	Following the processing in step 2C, an acknowledgment message, Pain.014/ACSP is also sent to the RtP Initiator This confirms that the RtP request has been processed and paid.
5B	RtP Initiator	SV IPS	echo Pain.014/ACSP	Echo the request to confirm notification is received and processed.

Validation rules:


- Original RTP must be present in the system with Valid Status.
- Currency/Amount of RTP operation equal to payment transfer.
- Original payment operation has to be done within due date of RTP.
- Limit of "original creditor" participant enough for perform payment Transfer.
- Payment Transfer must be validated successfully against Fraud detection System.
- For credit transfer initiated via RTP we only accept credit advice mode. If the payment type info is incorrect message will be declined.
- For regular RTP flow the credit transfer debtor and creditor must also be validated against RTP request.

Document reference:

For SAF mechanism and payment advice details kindly follow below mentioned specification.


sv_ip__specification_payment_en_core (section "SAF Mechanism")

2.1.5.1 Exception Flow: failed business validation

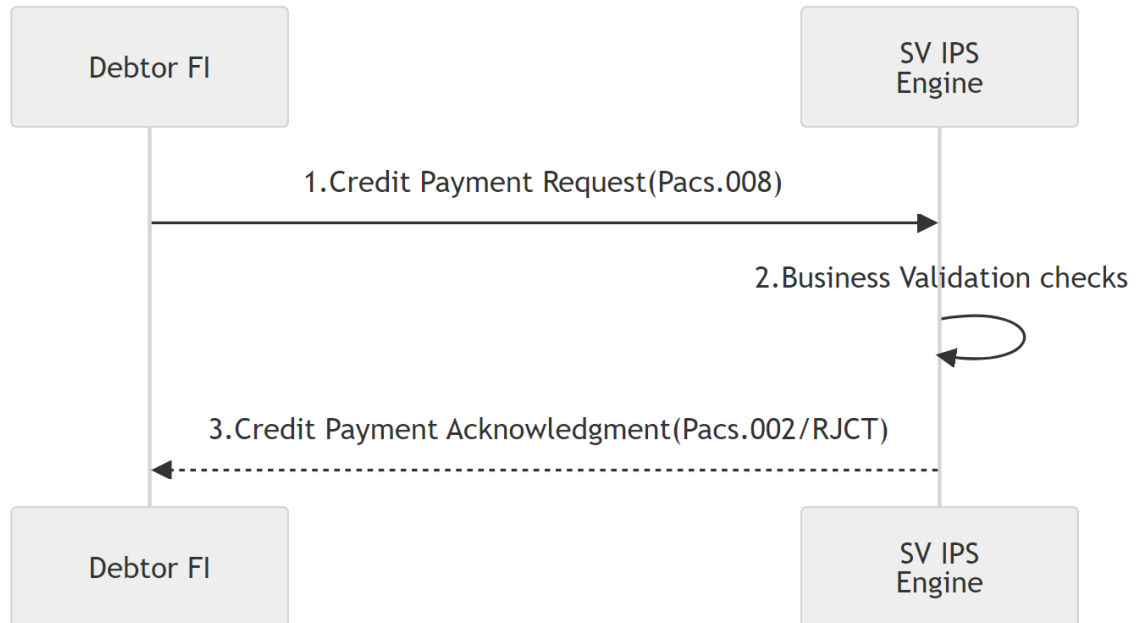


Step	From	To	Message	Description
1	Debtor FI	SV IPS Engine	Credit Payment Request (Pacs.008)	The financial institution (Debtor FI) initiates a credit payment by sending a Pacs.008 message to the SV IPS Engine.
2	SV IPS Engine		Business validations check	The SV IPS Engine validates the <u>business rules</u> involved in the credit payment request to ensure that the transfer does not encounter any business validation failures
3	SV IPS Engine	Debtor FI	Payment Rejection (Pacs.002/RJCT)	The SV IPS Engine sends a rejection message (Pacs.002/RJCT) back to Debtor FI, indicating that the credit payment request could not be processed successfully.

2.1.5.2 Exception Flow: Detected fraud

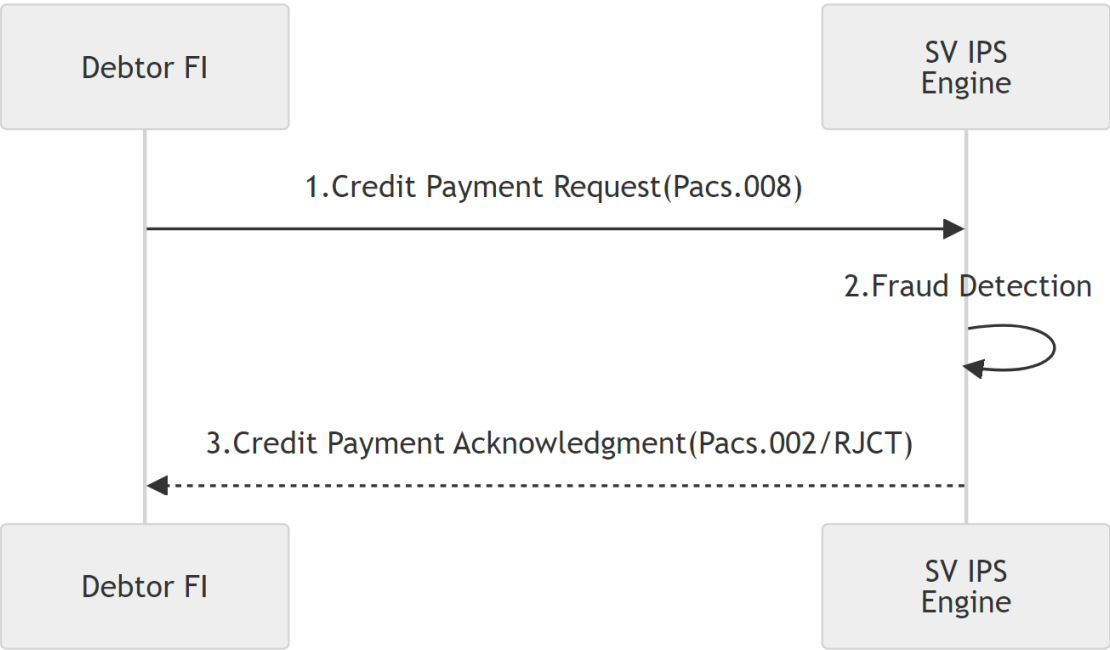


Step	From	To	Message	Description
1	Debtor FI	SV IPS Engine	Credit Payment Request (Pacs.008)	The financial institution (Debtor FI) initiates a credit payment by sending a Pacs.008 message to the SV IPS Engine.
2	SV IPS Engine		Fraud Detection	The SV IPS Engine verifies the Payments and checks if it is involved in Fraud.
3	SV IPS Engine	Debtor FI	Payment Rejection (Pacs.002/RJCT)	The SV IPS Engine sends a rejection message (Pacs.002/RJCT) back to Debtor FI, indicating that the credit payment request could not be processed successfully.

2.1.5.3 Exception Flow: Expired RTP

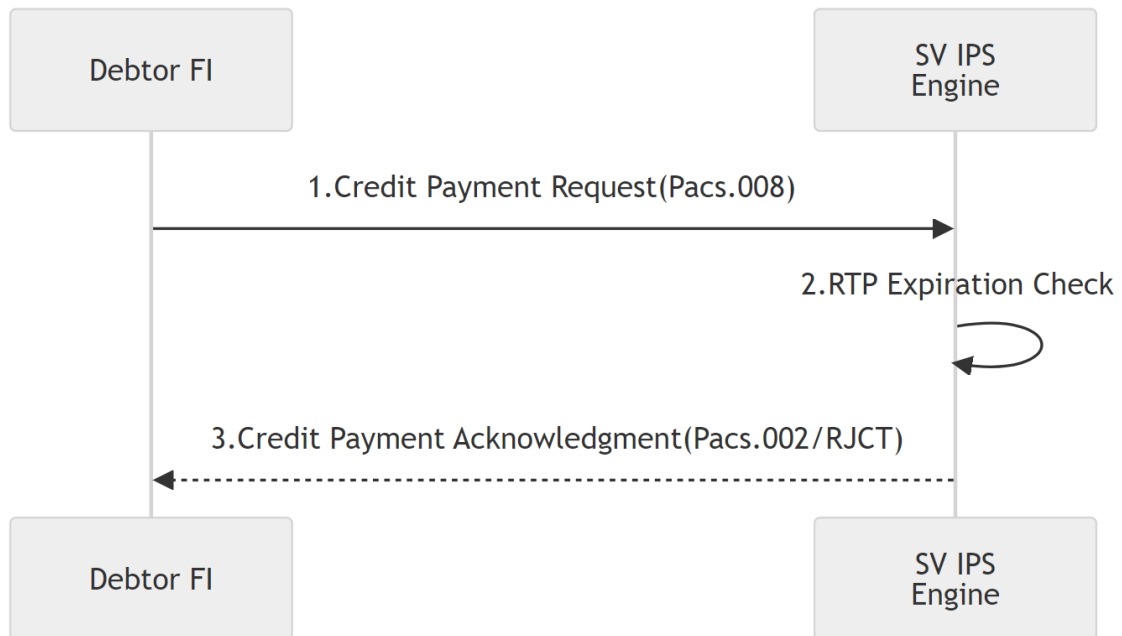

Step	From	To	Message	Description
1	Debtor FI	SV IPS Engine	Credit Payment Request (Pacs.008)	The financial institution (Debtor FI) initiates a credit payment by sending a Pacs.008 message to the SV IPS Engine.
2	SV IPS Engine		RTP expiration check	The SV IPS Engine verifies the RTP linked to a Payments and checks if it is involved in still valid or expired.
3	SV IPS Engine	Debtor FI	Payment Rejection (Pacs.002/RJCT)	The SV IPS Engine sends a rejection message (Pacs.002/RJCT) back to Debtor FI, indicating that the credit payment request could not be processed successfully.

2.1.6 AF: Attempt to Pay RtP after End of Lifecycle

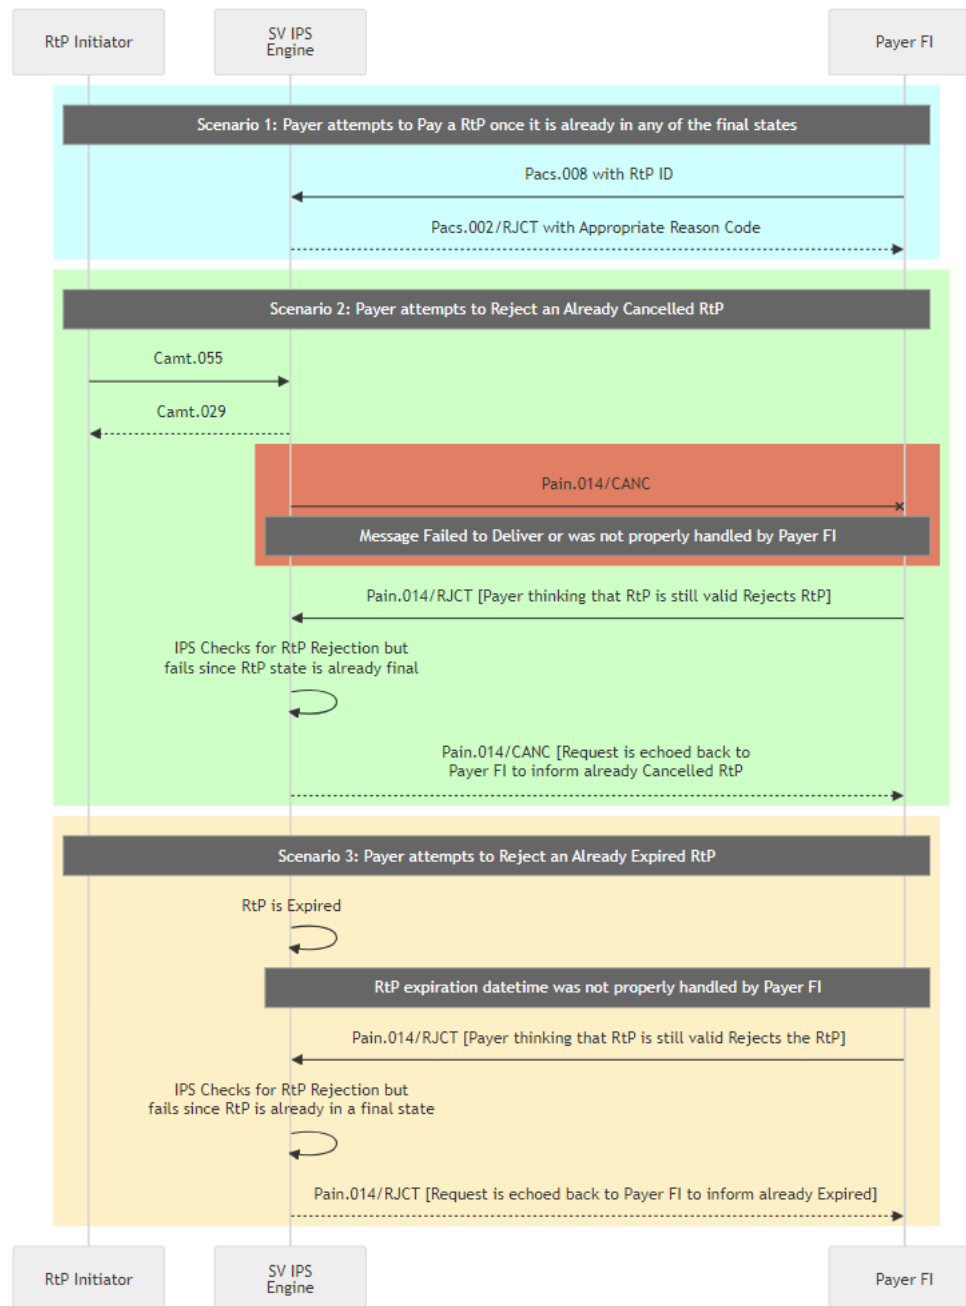

Description of each of the above scenarios:

Scenario 1: Payer attempts to Pay a RtP once it is already in any of the final states

Pacs.008 with RtP ID: This message indicates an attempt to initiate a payment associated with the Request to Pay. Pacs.008 is a message type used to carry out customer credit transfers.

Pacs.002/RJCT with Appropriate Reason Code: This message is a response from the IPS to the payer's financial institution (Payer FI) that the attempt to pay the RtP has been rejected because the RtP is already in a final state, meaning it cannot be paid again (e.g., it has already been settled or cancelled).

Scenario 2: Payer attempts to Reject an Already Cancelled RtP

Camt.055: This message is sent by RTP initiator to IPS to cancel the RTP. IPS will forward the same status of RTP to Payer FI.

Camt.029: This message type is a response message from the IPS indicating the status that RTP is marked as cancelled.

Pain.014/CANC: This message has to be sent to Payer FI but IPS failed to deliver the message for any reason. Now IPS has cancelled status of RTP but Payer FI thinks it is still a valid RTP.

Pain.014/RJCT: The Payer FI tries to send Reject RTP to IPS system, IPS system checks for the rejection of the RtP but fails since the RtP state is already final (cancelled). The system sends a rejection message back to the Payer FI to inform them that the RtP is already cancelled.


Scenario 3: Payer attempts to Reject an Already Expired RtP

RtP is Expired: Here, the payer is attempting to reject a payment request that has already expired.

RtP expiration datetime was not properly handled by Payer FI: This indicates a processing error on the part of the Payer FI, which did not correctly acknowledge or handle the expiration of the RtP.

Pain.014/RJCT: Similar to the previous scenario, despite the payer's attempt to reject the RtP, the IPS system fails to process the rejection because the RtP is already in a final state (expired). The system then sends a rejection message back to the Payer FI to inform them of the expiration status.

AG: Request to Pay Inquiry

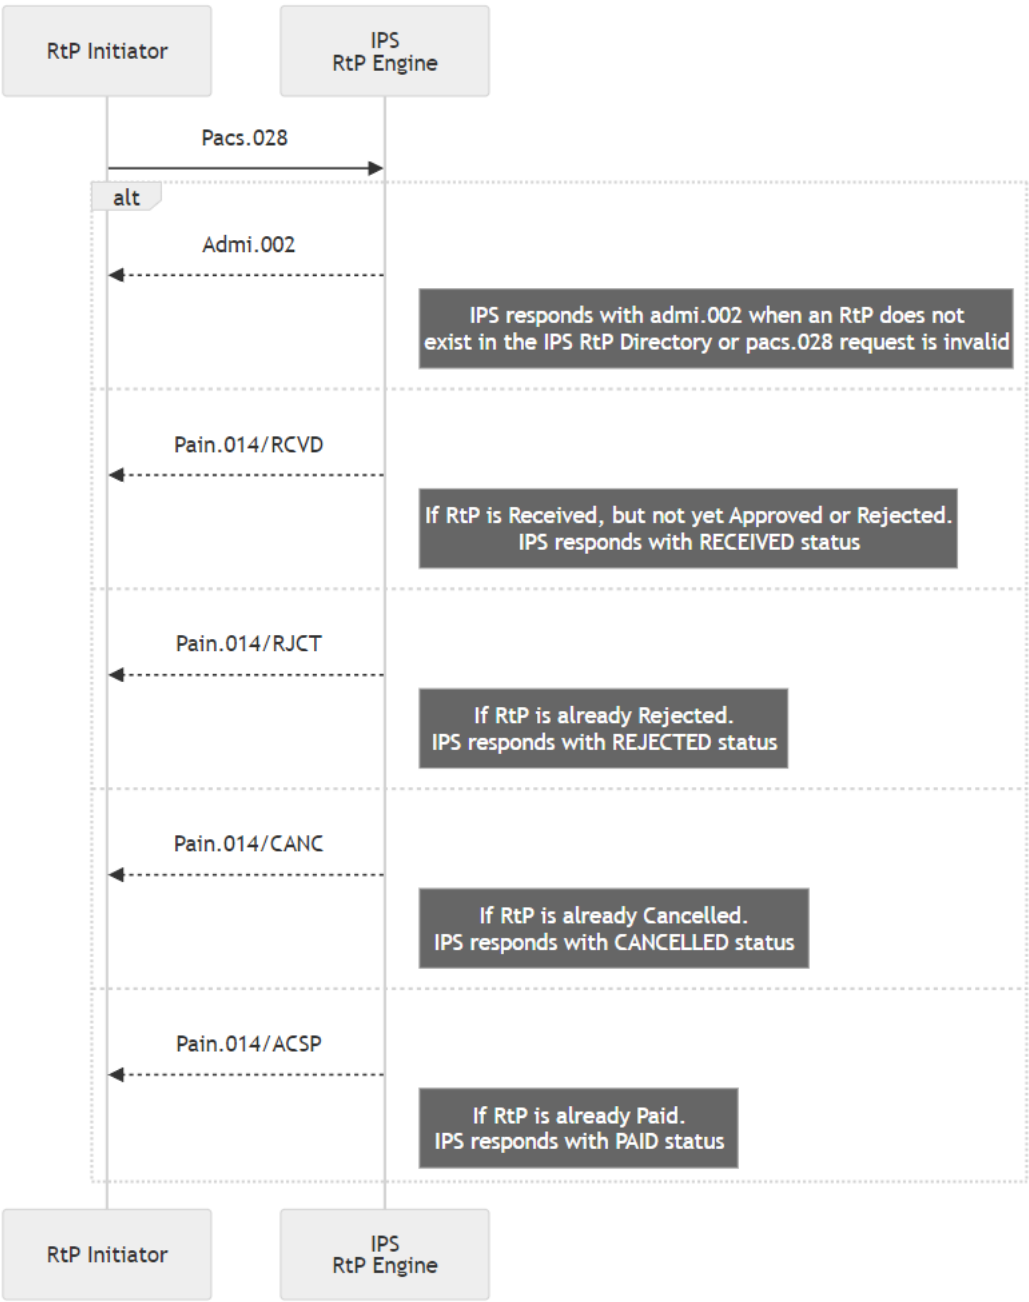

Step	From	To	Message	Description
1	RtP Initiator	IPS RtP Engine	Pacs.028	Initiates a Request to Pay transaction; checked for validity against the IPS RtP Directory.
2	IPS RtP Engine	RtP Initiator	Admi.002	Indicates RtP is not found or Pacs.028 is invalid, signifying issues with the initiation request.
3	IPS RtP Engine	RtP Initiator	Pain.014/RVCD	Acknowledges the receipt of the RtP; status is "RECEIVED", awaiting approval or rejection.
4	IPS RtP Engine	RtP Initiator	Pain.014/RJCT	Conveys that the RtP has been rejected; status is "REJECTED", and the request will not proceed.
5	IPS RtP Engine	RtP Initiator	Pain.014/CANC	Communicates that the RtP has been cancelled; status is "CANCELLED", and the request is terminated.
6	IPS RtP Engine	RtP Initiator	Pain.014/ACSP	Confirms the RtP has been paid; status is "PAID", signifying the completion of the transaction.

3 Business examples

3.1 Example of an RTP

3.1.1 Description of the main fields

Name	Definition
UETR	The Unique End-to-end Transaction Reference (UETR) is unique identifier, which facilitates tracking and tracing of RTP from origin to destination.
Message Id	Unique ID for the message check. It is generated by the initiating side and routed to the destination side as is.
End To End ID	Operation ID generated by the initiating side. It is used for investigation purposes.
Requested execution date	Carries the expiry date and time period of RTP.

Name	Definition
Creation Datetime	Date and time at which the message was created
Bic	Participant identifier.
Amount	Transfer amount.
Currency	Transfer currency.
Status	RTP status in IPS or the participant
Debtor	Party that owes an amount of money to the (ultimate) creditor
Debtor Account	Identification of the account of the debtor to which a debit entry will be made as a result of the transaction
Creditor	Party to which an amount of money is due
Creditor Account	Identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction

3.1.2 RTP request call (pain.013.001.10)

```
<?xml version="1.0" encoding="utf-8"?>
<Document xmlns="urn:iso:std:iso:2002:tech:xsd:pain.013.001.10">
  <CdtrPmtActvtnReq>
    <GrpHdr>
      <!--Unique ID for the message check. It is generated by the initiating
      side and routed to the destination side as is-->
      <MsgId>AWINETAAXXX2024071501460161500000</MsgId>
      <CreDtTm>2022-07-07T03:41:49.232</CreDtTm>
      <NbOfTxs>1</NbOfTxs>
      <!--Party initiating the creditor payment activation request-->
      <InitgPty>
        <Id>
          <OrgId>
            <AnyBIC>BIC</AnyBIC>
          </OrgId>
        </Id>
      </InitgPty>
    </GrpHdr>
    <PmtInf>
```

```

<!--Operation ID generated by the initiating side-->
  <PmtInfId>AWINETAAXXX2024071501460161500000</PmtInfId>
<!--Specifies the means of payment that will be used to move the amount
of money-->
  <PmtMtd>TRF</PmtMtd>
<!--Date at which the initiating party requests the payment-->
  <ReqdExctnDt>
    <Dt>2022-07-10</Dt>
    <DtTm>2022-07-10T03:41:49.232</DtTm>
  </ReqdExctnDt>
<!--Expiry date of RTP-->
  <XpryDt>
    <Dt>2022-07-15</Dt>
  </XpryDt>
<!--This name can be in Arabic but must be in UTF-8 encoding-->
  <Dbtr>
    <Nm>SOME PERSON</Nm>
    <PstlAdr>
      <AddrLine>SOME ADDRESS</AddrLine>
    </PstlAdr>
  </Dbtr>
<!--Identification of the account of the debtor to which a debit entry
will be made as a result of the transaction-->
  <DbtrAcct>
    <Id>
      <Othr>
        <Id>Account ID</Id>
      </Othr>
    </Id>
  </DbtrAcct>
  <DbtrAgt>
    <FinInstnId>
      <Othr>
        <Id>BIC</Id>
      </Othr>
    </FinInstnId>
  </DbtrAgt>
  <CdtTrfTx>
    <PmtId>
      <InstrId>AWINETAAXXX2024071501460164600000</InstrId>
      <EndToEndId>ef73139a-2efb-4279-aa27-5d9b350121cb</EndToEndId>
    </PmtId>
    <UETR>ef73139a-2efb-4279-aa27-5d9b350121cb</UETR>
  </CdtTrfTx>
  <PmtTpInf>
    <LclInstrm>
      <Prtry>CRTAM</Prtry>
    </LclInstrm>
  </PmtTpInf>
  <CtgyPurp>
    <Prtry>C2CRTP</Prtry>
  </CtgyPurp>
  <PmtCond>

```

```

        <EarlyPmtAllwd>true</EarlyPmtAllwd>
    </PmtCond>
<!--It is the transfer amount without any charges defined by the
debtor-->
    <Amt>
        <InstdAmt Ccy="PKR">100.00</InstdAmt>
    </Amt>
<!--Charge bearer is defined by IPS rules-->
    <ChrgBr>SLEV</ChrgBr>
<!-- BIC code of Creditor party-->
    <Cdtr>
        <Nm>MERCHANT ACCOUNT TITLE</Nm>
        <PstlAdr>
            <AdrLine>Free Format Address</AdrLine>
        </PstlAdr>
        <Othr>
<!--define merchant aliasing here currently any default value-->
            <Id>229999999</Id>
            <SchmeNm>
                <Prtry>ALAS</Prtry>
            </SchmeNm>
        </Othr>
    </Cdtr>
    <CdtrAgt>
        <FinInstnId>
            <Othr>
                <Id>BIC</Id>
            </Othr>
        </FinInstnId>
    </CdtrAgt>
    <CdtrAcct>
        <Id>
            <Othr>
                <Id>Account ID</Id>
            </Othr>
        </Id>
    </CdtrAcct>
<!--Defines operation purpose (gambling, flight tickets, online
purchase, etc.)-->
    <Purp>
        <Prtry>ONLPUR</Prtry>
    </Purp>
    <RmtInf>
        <Ustrd>SOME CONTEXT</Ustrd>
        <Strd>
            <RfrdDocInf>
                <Tp>
                    <CdOrPrtry>
<!--Referred document type-->
                        <Prtry>BILL</Prtry>
                    </CdOrPrtry>
                </Tp>
            </Strd>
        </RmtInf>
    </CdtTrfTx>
</PmtInf>
</CdtrPmtActvtnReq>
</Document>

```

3.1.3 Positive response message from IPS to payer's participant (pain.014.001.10)

```

<?xml version="1.0" encoding="utf-8"?>
<Document xmlns="urn:iso:std:iso:2002:tech:xsd:pain.014.001.10">
  <CdtrPmtActvtnReqStsRpt>
    <GrpHdr>
      <!--Unique ID for the message check. It is generated by the initiating
      side and routed to the destination side as is-->
      <MsgId>07034149000002021</MsgId>
      <CreDtTm>2022-07-07T03:42:00.232</CreDtTm>
      <!--Party initiating the creditor payment activation request-->
      <InitgPty>
        <Id>
          <OrgId>
            <AnyBIC>BIC</AnyBIC>
          </OrgId>
        </Id>
      </InitgPty>
    </GrpHdr>
    <OrgnlGrpInfAndSts>
      <!--Same message id as per pain.013 request message-->
      <OrgnlMsgId>AWINETAAXXX2024071501460161500000</OrgnlMsgId>
      <!--Name of request RTP message-->
      <OrgnlMsgNmId>pain.013.001.10</OrgnlMsgNmId>
      <!-- Original date time of request message-->
      <OrgnlCreDtTm>2022-07-07T03:41:49.232</OrgnlCreDtTm>
      <!--Status of RTP-->
      <GrpSts>RCVD</GrpSts>
    </OrgnlGrpInfAndSts>
    <OrgnlPmtInfAndSts>
      <!--Same as request message-->
      <OrgnlPmtInfId>AWINETAAXXX2024071501460161500000</OrgnlPmtInfId>
      <TxInfAndSts>
        <!--same as request instruction ID-->
        <OrgnlInstrId>AWINETAAXXX2024071501460164600000</OrgnlInstrId>
        <!--same as request End to End ID-->
        <OrgnlEndToEndId>ef73139a-2efb-4279-aa27-5d9b350121cb</OrgnlEndToEndId>
        <!--same as request UETR-->
        <OrgnlUETR>ef73139a-2efb-4279-aa27-5d9b350121cb</OrgnlUETR>
        <!--Status of RTP transaction-->
        <TxSts>RCVD</TxSts>
      </TxInfAndSts>
    </OrgnlPmtInfAndSts>
  </CdtrPmtActvtnReqStsRpt>
</Document>

```

3.1.4 Negative response message from IPS to payer's participant (pain.014.001.10)

```
<?xml version="1.0" encoding="utf-8"?>
<Document xmlns="urn:iso:std:iso:2002:tech:xsd:pain.014.001.10">
  <CdtrPmtActvtnReqStsRpt>
    <GrpHdr>
      <!--Unique ID for the message check. It is generated by the initiating
      side and routed to the destination side as is-->
      <MsgId>419711302703779712806</MsgId>
      <CreDtTm>2022-07-07T03:42:00.232</CreDtTm>
      <!--Party initiating the creditor payment activation request-->
      <InitgPty>
        <Id>
          <OrgId>
            <AnyBIC>BIC</AnyBIC>
          </OrgId>
        </Id>
      </InitgPty>
    </GrpHdr>
    <OrgnlGrpInfAndSts>
      <!--Same message id as per pain.013 request message-->
      <OrgnlMsgId>AWINETAAXXX2024071501460161500000</OrgnlMsgId>
      <!--Name of request RTP message-->
      <OrgnlMsgNmId>pain.013.001.10</OrgnlMsgNmId>
      <!--Original date time of request message-->
      <OrgnlCreDtTm>2022-07-07T03:41:49.232</OrgnlCreDtTm>
      <!--Status of RTP-->
      <GrpSts>RJCT</GrpSts>
    </OrgnlGrpInfAndSts>
    <OrgnlPmtInfAndSts>
      <!--Same as request message-->
      <OrgnlPmtInfId>AWINETAAXXX2024071501460161500000</OrgnlPmtInfId>
      <TxInfAndSts>
        <!--same as request instruction ID-->
        <OrgnlInstrId>AWINETAAXXX2024071501460164600000</OrgnlInstrId>
        <!--same as request Endto End ID-->
        <OrgnlEndToEndId>ef73139a-2efb-4279-aa27-5d9b350121cb</OrgnlEndToEndId>
        <!--same as request UETR-->
        <OrgnlUETR>ef73139a-2efb-4279-aa27-5d9b350121cb</OrgnlUETR>
        <!--Status of RTP transaction-->
        <TxSts>RJCT</TxSts>
        <StsRsnInf>
          <!--Reason for rejection will be provided by rejecting party-->
          <Rsn>
            <Prtry>Reason from source</Prtry>
          </Rsn>
          <AddtlInf>any additional Information about error</AddtlInf>
        </StsRsnInf>
      </TxInfAndSts>
    </OrgnlPmtInfAndSts>
  </CdtrPmtActvtnReqStsRpt>
</Document>
```

```

        </TxInfAndSts>
    </OrgnlPmtInfAndSts>
</CdtrPmtActvtnReqStsRpt>
</Document>

```

3.1.5 Example of an RTP status request (pacs.028.001.05)

For this section, please refer to document sv_ip_specification_payment_en_core_v1.1.1

3.1.6 Example of payment request (pacs.008.001.10)

For this section, please refer to document sv_ip_specification_payment_en_core_v1.1.1

3.1.7 Example of payment response (pacs.002.001.12)

For this section, please refer to document sv_ip_specification_payment_en_core_v1.1.1

3.1.8 Example of RTP cancel request(camt.055.001.10)

```

<?xml version="1.0" encoding="utf-8"?>
<Document xmlns="urn:iso:std:iso:20022:tech:xsd:camt.055.001.10">
    <CstmrPmtCxlReq>
        <Assgnmt>
            <!--Unique ID for the message check. It is generated by the initiating
            side and routed to the destination side as is-->
            <Id>07034149000099999</Id>
            <!--BIC of party which send cancelation request-->
            <Assgnr>
                <Agt>
                    <FinInstnId>
                        <Other>
                            <Id>BIC</Id>
                        </Other>
                    </FinInstnId>
                </Agt>
            </Assgnr>
            <!--BIC of party which receives cancelation request-->
            <Assgne>
                <Agt>
                    <FinInstnId>
                        <Other>
                            <Id>BIC</Id>
                        </Other>
                    </FinInstnId>
                </Agt>
            </Assgne>
            <CreDtTm>2022-07-07T03:41:52.232</CreDtTm>
        </Assgnmt>
    </CstmrPmtCxlReq>
</Document>

```

```

    <Case>
    <!--Unique ID assigned to request for investigation purpose-->
        <Id>07034149000099999</Id>
    <!--BIC of the party that initiates case-->
        <Cretr>
            <Agt>
                <FinInstnId>
                    <Other>
                        <Id>BIC</Id>
                    </Other>
                </FinInstnId>
            </Agt>
        </Cretr>
    </Case>
    <Undrlyg>
        <OrgnlPmtInfAndCxl>
    <!--Same payment information id as per pain.013 request message-->
        <OrgnlPmtInfId>07034149000002020</OrgnlPmtInfId>
        <OrgnlGrpInf>
    <!--Same message id as per pain.013 request message-->
        <OrgnlMsgId>07034149000002020</OrgnlMsgId>
    <!--Same message name as per pain.013 request message-->
        <OrgnlMsgNmId>pain.013.001.10</OrgnlMsgNmId>
    <!--Same message credit date time as per pain.013 request message-->
        <OrgnlCreDtTm>2022-07-07T03:41:49.232</OrgnlCreDtTm>
        </OrgnlGrpInf>
        <CxlRsnInf>
            <Rsn>
    <!--Reason for Cancellation of RTP-->
                <Prty>WRGAMT</Prty>
            </Rsn>
            <AddtlInf>WrongAmount</AddtlInf>
        </CxlRsnInf>
        <TxInf>
    <!--Same Instruction id as per pain.013 request message-->
            <OrgnlInstrId>07034149000002020</OrgnlInstrId>
        <OrgnlEndToEndId>9f9733fd160a42149644105e627d008c</OrgnlEndToEndId>
    <!--Same UETR as per pain.013 request message-->
            <OrgnlUETR>9f9733fd-160a-4214-9644-105e627d008c</OrgnlUETR>
            <OrgnlReqdExctnDt>
    <!--Same request execution date as per pain.013 request message-->
                <Dt>2022-07-10</Dt>
                <DtTm>2022-07-10T03:41:49.232</DtTm>
            </OrgnlReqdExctnDt>
        </TxInf>
    </OrgnlPmtInfAndCxl>
    </Undrlyg>
    </CstmrPmtCxlReq>
</Document>

```


3.1.9 Example of RTP cancel response(camt.029.001.10)

```
<?xml version="1.0" encoding="utf-8"?>
<Document xmlns="urn:iso:std:iso:2002:tech:xsd:camt.029.001.10">
  <RsltnOfInvstgtn>
    <Assgnmt>
      <!--Unique ID for the message check.-->
      <Id>07034149000099999</Id>
      <!--BIC of party which send cancelation request-->
      <Assgnr>
        <Agt>
          <FinInstnId>
            <Other>
              <Id>BIC</Id>
            </Other>
          </FinInstnId>
        </Agt>
      </Assgnr>
      <!--BIC of party which receives cancelation request-->
      <Assgne>
        <Agt>
          <FinInstnId>
            <Other>
              <Id>BIC</Id>
            </Other>
          </FinInstnId>
        </Agt>
      </Assgne>
      <CreDtTm>2022-07-07T03:41:52.232</CreDtTm>
    </Assgnmt>
    <RslvdCase>
      <!--refrence to case id of cancellation request-->
      <Id>07034149000099999</Id>
      <!--Same request execution date as per pain.013 request message-->
      <Cretr>
        <Agt>
          <FinInstnId>
            <Other>
              <Id>BIC</Id>
            </Other>
          </FinInstnId>
        </Agt>
      </Cretr>
    </RslvdCase>
    <!--status of cancellation request for e.g in below tag RJCR means
    RejectedCancellationRequest-->
    <Sts>
      <Conf>RJCR</Conf>
```

```

    </Sts>
    <CxlDtls>
      <OrgnlGrpInfAndSts>
        <!--Same message ID as per pain.013 request message-->
        <OrgnlMsgId>07034149000099999</OrgnlMsgId>
        <!--Same message name as per pain.013 request message-->
        <OrgnlMsgNmId>camt.055.001.10</OrgnlMsgNmId>
        <CxlStsRsnInf>
          <Rsn>
            <!--Reason for rejection of Cancellation request-->
            <Prtry>Reason for Rejct</Prtry>
          </Rsn>
          <AddtlInf>additional information on reject</AddtlInf>
        </CxlStsRsnInf>
      </OrgnlGrpInfAndSts>
    </CxlDtls>
  </RsltnOfInvstgtn>
</Document>

```

4 RTP request (pain.013.001.10)

4.1 Message structure

Messageelement/ Buildingblock	<XML Tag>	Mul.	Type	Used?
Message Root	<Document> <CdtrPmtActvtnReq>	[1..1]		Yes
Group Header	<GrpHdr>	[1..1]		Yes
Message Identification	<MsgId>	[1..1]	Text	Yes
Creation Datetime	<CreDtTm>	[1..1]	DateTime	Yes
Number Of Transactions	<NbOfTxS>	[1..1]	Text	Yes
Initiating Party	<InitgPty>	[1..1]		Yes
Payment Information	<PmtInf>	[1..*]		Yes
Payment Information Identification	<PmtInfId>	[0..1]		Yes
Payment Method	<PmtMtd>	[1..1]		Yes
Requested Execution Date	<ReqdExctnDt>	[0..1]		Yes
Expiry Date	<XpryDt>	[0..1]	Date	Yes
Debtor	<Dbtr>	[1..1]		Yes
Name	<Nm>	[0..1]		Yes
Postal Address	<PstlAdr>	[0..1]		Yes

Messageelement/ Buildingblock	<XML Tag>	Mul.	Type	Used?
Address Line	<AdrLine>	[0..1]		Yes
Debtor Account	<DbtrAcct>	[1..1]		Yes
Identification	<Id>	[1..1]		Yes
Other	<Othr>	[0..1]		Yes
Identification	<Id>	[1..1]		Yes
Debtor Agent	<DbtrAgt>	[0..1]		Yes
Financial Institution ID	<FinInstnId>	[0..1]		Yes
Other	<Othr>	[0..1]		Yes
ID	<Id>	[0..1]		Yes
Credit Transfer Transaction	<CdtTrfTx>	[1..1]		Yes
Payment ID	<PmtId>	[1..1]	Text	Yes
UETR	<UETR>	[1..1]	Text	Yes Mandato ry
Instruction ID	<InstrId>	[1..1]	Text	Yes
End To End ID	<EndToEndId>	[1..1]	Text	Yes
Payment Type Information	<PmtTpInf>	[1..1]		Yes
Local Instrument	<LclInstrm>	[0..1]		Yes

Messageelement/ Buildingblock	<XML Tag>	Mul.	Type	Used?
Proprietary	<Prtry>	[1..1]	Text	Yes
Category Purpose	<CtgyPurp>	[1..0]		Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
Payment Condition	<PmtCond>	[1..1]		Yes
Amount Modification Allowed	<AmtModAllwd>	[1..1]	True/False	No
Early Payment Allowed	<EarlyPmtAllwd>	[1..1]	True/False	Yes
Amount	<Amt>	[1..1]		
Instructed Amount	<InstdAmt>	[1..1]	Amount	Yes
Charge Bearer	<ChrgBr>	[1..1]		Yes
Creditor	<Cdtr>	[1..1]		Yes
Name	<Nm>	[0..1]		Yes
Postal Address	<PstlAdr>	[0..1]		Yes
Address Line	<AdrLine>	[0..1]		Yes
Other	<Othr>	[0..1]		Yes
Identification	<Id>	[1..1]		Yes
Scheme Name	<SchmeNm>	[1..1]		Yes
Proprietary	<Prtry>	[1..1]		Yes
Creditor Agent	<CdtrAgt>	[0..1]		Yes

Messageelement/ Buildingblock	<XML Tag>	Mul.	Type	Used?
Financial Institution ID	<FinInstnId>	[0..1]		Yes
Other	<Othr>	[0..1]		Yes
ID	<Id>	[0..1]		Yes
Creditor Account	<DbtrAcct>	[1..1]		Yes
Identification	<Id>	[1..1]		Yes
Other	<Othr>	[0..1]		Yes
Identification	<Id>	[1..1]		Yes
Purpose	<Purp>	[0..1]		Yes
Proprietary	<Prtry>	[1..1]		Yes
Remittance Information	<RmtInf>	[0..1]		Yes
Unstructured	<Ustrd>	[0..*]		Yes
Structured	<Strd>	[0..*]		Yes
Referred Document Info	<RfrdDocInf>	[0..1]		Yes
Type	<Tp>	[0..1]		Yes
Code Or Proprietary	<CdOrPrtry>	[0..1]		Yes
Proprietary	<Prtry>	[1..1]		Yes

4.2 Message building blocks

4.2.1 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics shared by all individual transactions included in the message.

GroupHeader contains the following elements.

Message root	<Document>/<CdtrPmtAc tvtnReq>	[1..1]		Yes
Group Header	<GrpHdr>	[1..1]		Yes
Message Identification	<MsgId>	[1..1]	Text	Yes
Creation DateTime	<CreDtTm>	[1..1]	DateTime	Yes
Number Of Transactions	<NbOfTxS>	[1..1]	Text	Yes
Initiating Party	<InitgPty>	[1..1]		Yes

Message Identification<MsgId>

Presence: [1..1]

Definition: Point to point reference assigned by the instructing party and sent to the next party in the chain to unambiguously identify the message.

Creation DateTime<CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created.

Datatype: "ISODatetime".

Number Of Transactions<NbOfTxS>

Presence: [1..1]

Definition: Number of individual transactions contained in the message.

Datatype: "Max15NumericText".

Initiating Party<InitgPty>

Presence: [1..1]

Definition: Party initiating the creditor payment activation request. This can either be the creditor himself or the party that initiates the request on behalf of the creditor. Initiating Party contains the following element:

Identification ID <Id>	[0..1]	Text
-------------------------------------	--------	------

Identification ID<Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a party.

contains following element:

Organisation ID <OrgId>	[1..1]	Text
--------------------------------------	--------	------

Organisation ID<OrgId>

Presence: [1..1]

Definition: Unique and unambiguous way to identify an organization

Organisation ID contains following element:

Any BIC<AnyBIC>	[0..1]	
------------------------------	--------	--

Any BIC<AnyBIC>

Presence: [0..1]

Definition: Business identification code of the organisation.

4.2.2 Message Body<body>

Payment Information<PmtInf>

Presence: [1..*]

Definition: Set of characteristics that applies to the debit side of the payment transactions included in the creditor payment initiation.

Payment Information contains the following elements:

Payment Information Identification	<PmtInfId>	[0..1]	
Payment Method	<PmtMtd>	[1..1]	
Requested Execution Date	<ReqdExctnDt>	[0..1]	
Expiry Date	<XpryDt>	[0..1]	Date
Debtor	<Dbtr>	[1..1]	
Name	<Nm>	[0..1]	
Postal Address	<PstlAdr>	[0..1]	
Address Line	<AdrLine>	[0..1]	
Debtor Account	<DbtrAcct>	[1..1]	
Identification	<Id>	[1..1]	
Other	<Othr>	[0..1]	
Identification	<Id>	[1..1]	
Debtor Agent	<DbtrAgt>	[0..1]	
Financial Institution ID	<FinInstnId>	[0..1]	
Other	<Othr>	[0..1]	
ID	<Id>	[0..1]	
Credit Transfer Transaction	<CdtTrfTx>	[1..1]	
Payment ID	<PmtId>	[1..1]	Text
UETR	<UETR>	[1..1]	Text

Instruction ID	<InstrId>	[1..1]	Text
End To End ID	<EndToEndId>	[1..1]	Text
Payment Type Information	<PmtTpInf>	[1..1]	
Local Instrument	<LclInstrm>	[0..1]	
Proprietary	<Prtry>	[1..1]	Text
Category Purpose	<CtgyPurp>	[1..0]	
Proprietary	<Prtry>	[1..1]	Text
Payment Condition	<PmtCond>	[1..1]	
Amount Modification Allowed	<AmtModAllwd>	[1..1]	True/False
Early Payment Allowed	<EarlyPmtAllwd>	[1..1]	True/False
Instructed Amount	<InstdAmt>	[1..1]	Amount
Charge Bearer	<ChrgBr>	[1..1]	
Creditor	<Cdtr>	[1..1]	
Name	<Nm>	[0..1]	
Postal Address	<PstlAdr>	[0..1]	
Address Line	<AdrLine>	[0..1]	
Other	<Othr>	[0..1]	
Identification	<Id>	[1..1]	
Scheme Name	<SchmeNm>	[1..1]	

Proprietary	<Prtry>	[1..1]	
Creditor Agent	<CdtrAgt>	[0..1]	
Financial Institution ID	<FinInstnId>	[0..1]	
Other	<Othr>	[0..1]	
ID	<Id>	[0..1]	
Creditor Account	<DbtrAcct>	[1..1]	
Identification	<Id>	[1..1]	
Other	<Othr>	[0..1]	
Identification	<Id>	[1..1]	
Purpose	<Purp>	[0..1]	
Proprietary	<Prtry>	[1..1]	
Remittance Information	<RmtInf>	[0..1]	
Unstructured	<Ustrd>	[0..*]	
Structured	<Strd>	[0..*]	
Referred Document Info	<RfrdDocInf>	[0..1]	
Type	<Tp>	[0..1]	
Code Or Proprietary	<CdOrPrtry>	[0..1]	
Proprietary	<Prtry>	[1..1]	

Payment Information Identification<PmtInfId>

Presence: [0..1]

Definition: Reference assigned by a sending party to unambiguously identify the payment information block within the message.

Datatype: "Max35Text".

Payment Method<PmtMtd>

Presence: [1..1]

Definition: Specifies the means of payment that will be used to move the amount of money.

Datatype: "Code"

Possible value

TRF: CreditTransfer Transfer of an amount of money in the books of the account servicer.

Requested Execution Date<ReqdExctnDt>

Presence: [0..1]

Definition: Date at which the initiating party requests the clearing agent to process the payment. If payment by cheque, the date when the cheque must be generated by the bank.

Usage: This is the date on which the debtor's account(s) is (are) to be debited.

Requested Execution Date contains one of the following elements:

Date<dt>	[1..1]	ISODate
-----------------------	--------	---------

Date<dt>

Presence: [1..1]

Definition: Specified date.

Datatype: "ISODate"

Expiry Date<XpryDt>

Presence: [0..1]

Definition: Date by which the debtor must have accepted or rejected the request.

Usage: Beyond this date, the request becomes void and cannot be processed anymore.

Expiry Date contains one of the following elements

Date<dt>	[1..1]	ISODate
-----------------------	--------	---------

Date<dt>

Presence: [1..1]

Definition: Specified date.

Datatype: "ISODate"

Debtor<Dbtr>

Presence: [1..1]

Definition: Party that owes an amount of money to the (ultimate) creditor.

Debtor contains the following elements

Name	<Nm>	[0..1]	
Postal Address	<PstlAdr>	[0..1]	

Name<Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Datatype: "Max140Text"

Postal Address<PstlAdr>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services

Postal Address contains the following elements

Address Line	<Adrline>	[0..1]	
---------------------	-----------	--------	--

Address Line<AdrLine>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Datatype: "Max70Text"

Debtor Account<DbtrAcct>

Presence: [0..1]

Definition: Account used to process charges associated with a transaction.

Debtor Account contains the following elements

Identification	<Id>	[0..1]	
-----------------------	------	--------	--

Identification<Id>

Presence: [0..1]

Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.

Identification contains one of the following elements.

Other	<Othr>	[0..1]	
--------------	--------	--------	--

Other<Othr>

Presence: [0..1]

Definition: Unique identification of an account, as assigned by the account servicer, using an identification scheme.

Other contains the following elements

Identification	<Id>	[1..1]	
-----------------------	------	--------	--

Identification<Id>

Presence: [0..1]

Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.

Debtor Agent<DbtrAgt>

Presence: [1..1]

Definition: Financial institution servicing an account for the debtor.

Debtor Agent contains the following elements

Financial Institution Identification	<FinInstnId>	[1..1]	
---	--------------	--------	--

Financial Institution Identification<FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution.

Financial Institution Identification contains the following elements

Other	<Othr>	[0..1]	
--------------	--------	--------	--

Other<Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme

Other contains the following elements

Identification	<Id>	[1..1]	
-----------------------	------	--------	--

Identification<Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Datatype: "Max35Text"

Credit Transfer Transaction<CdtTrfTx>

Presence: [1..*]

Definition: Payment processes required to transfer cash from the debtor to the creditor.

Credit Transfer Transaction contains the following elements

Payment ID	<PmtId>	[1..1]
UETR	<UETR>	[0..1]
Instruction ID	<InstrId>	[0..1]
End to End ID	<EndToEndId>	[1..1]
Payment Type Information	<PmtTpInf>	[0..1]
Local Instrument	<LclInstrm>	[0..1]
Proprietary	<Prtry>	[1..1]
Category Purpose	<CtgyPurp>	[0..1]
Proprietary	<Prtry>	[1..1]
Payment Condition	<PmtCond>	[1..1]
Amount Modification Allowed	<AmtModAllwd>	[1..1]
Early Payment Allowed	<EarlyPmtAllwd>	[1..1]
Amount	<Amt>	
Instructed Amount	<InstdAmt>	[1..1]
Charge Bearer	<ChrgBr>	[0..1]
Creditor	<Cdtr>	[1..1]
Name	<Nm>	[0..1]
Postal Address	<PstlAdr>	[0..1]
Address Line	<AdrLine>	[0..1]

Other	<Othr>	[0..1]
Identification	<Id>	[1..1]
Scheme Name	<SchmeNm>	[1..1]
Proprietary	<Prtry>	[1..1]
Creditor Agent	<CdtrAgt>	[0..1]
Financial Institution ID	<FinInstnId>	[0..1]
Other	<Othr>	[0..1]
ID	<Id>	[0..1]
Creditor Account	<DbtrAcct>	[1..1]
Identification	<Id>	[1..1]
Other	<Othr>	[0..1]
Identification	<Id>	[1..1]
Purpose	<Purp>	[0..1]
Proprietary	<Prtry>	[1..1]
Remittance Information	<RmtInf>	[0..1]
Unstructured	<Ustrd>	[0..*]
Structured	<Strd>	[0..*]
Referred Document Info	<RfrdDocInf>	[0..1]
Type	<Tp>	[0..1]
Code Or Proprietary	<CdOrPrtry>	[0..1]

Proprietary	<Prtry>	[1..1]
--------------------	---------	--------

Payment Identification<PmtId>

Presence: [1..1]

Definition: Set of elements used to reference a payment instruction.

Payment Identification contains the following elements

UETR	<UETR>	[0..1]
Instruction id	<InstrId>	[0..1]
End to End ID	<EndToEndId>	[1..1]

Instruction ID<InstrId>

Presence: [0..1]

Definition: Unique identification as assigned by an instructing party for an instructed party to unambiguously identify the instruction.

End to End ID<EndToEndId>

Presence: [1..1]

Definition: Unique identification assigned by the initiating party to unambiguously identify the transaction. This identification is passed on, unchanged, throughout the entire end-to-end chain

UETR<UETR>

Presence: [0..1]

Definition: Universally unique identifier to provide an end-to-end reference of a payment transaction.

Datatype: "UUIDv4Identifier"

Payment Type Information<PmtTpInf>

Presence: [0..1]

Definition: Set of elements used to further specify the type of transaction.

Payment Type Information contains the following elements

Local Instrument	<LclInstrm>	[0..1]
Category Purpose	<CtgyPurp>	[0..1]

Category Purpose <CtgyPurp>

Presence: [0..1]

Definition: Specifies the high level purpose of the instruction based on a set of pre-defined categories.

Usage: This field is used by the initiating party to provide information concerning the processing of the payment. It is likely to trigger special processing by any of the agents involved in the payment chain.

CategoryPurpose <CtgyPurp> contains one of the following element:

Proprietary <Prtry>	[0..1]	
---------------------	--------	--

Proprietary <Prtry>

Presence: [1..1]

Definition: Defines transaction channels and high-level category (Customer to Merchant payment, Mobile payment, Regular credit transfer, Request to pay etc.) in proprietary form.

Datatype: "Max35Text"

Possible values:

CodeName	Name	Definition
C2CCRT	C2C credit transfer	Regular Credit transfer transaction.
C2CRTP	C2C RequestToPay	Credit transfer with a reference to the Request to Pay operation that initiated this credit transfer.
C2BRTP	C2B RequestToPay	Credit transfer with reference when Business/merchant is requesting money from the consumer.

In case the field is not present in the message the default value will be set as C2CRTP.

Local Instrument <LclInstrm>

Presence: [0..1]

Definition: User community specific instrument.

LocalInstrument <LclInstrm> contains the following element:

Proprietary <Prtry>	[1..1]	Text
---------------------	--------	------

Proprietary <Prtry>

Presence: [1..1]

Datatype: "Max35Text"

Definition: Defines internal transaction processing mechanisms. This element will be used to identify the mode of transaction. as a proprietary code. Possible values:

CodeName	Name	Definition
CRTAM	CreditTransferAdviceMode	Payment initiated is in advice mode.
CRTRM	CreditTransferRegularMode	Payment initiated is in regular mode.

In case the field is not present in the message the default value will be set as CRTAM.

Payment Condition<PmtCond>

Presence: [0..1]

Definition: Conditions for the execution of the payment.

It contains following element

Early Payment Allowed	<EarlyPmtAllwd>	[1..1]
Amount Modification Allowed	<AmtModAllwd>	[1..1]

Early Payment Allowed<EarlyPmtAllwd>

Presence: [1..1]

Definition: Indicates if the debtor is allowed to pay before the requested execution date.

Datatype: One of the following values must be used

- Meaning When True: True
- Meaning When False: False

AmountModificationAllowed<AmtModAllwd>

Presence: [1..1]

Definition: Indicates if the debtor is allowed to pay a different amount than the requested amount.

Datatype: True/False

Amount <Amt>

Presence: [0..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Amount <Amt> contains one of the following elements

InstructedAmount	<InstdAmt>	[0..1]
-------------------------	------------	--------

Instructed Amount<InstrAmt>

Presence: [0..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Usage: This amount has to be transported unchanged through the transaction chain.

Datatype: "ActiveOrHistoricCurrencyAndAmount"

Charge Bearer<ChrgBr>

Presence: [1..1]

Definition: Specifies which party/parties will bear the charges associated with the processing of the payment transaction.

Creditor<Cdtr>

Presence: [1..1]

Definition: Party to which an amount of money is due.

Creditor contains the following elements

Name	<Nm>	[0..1]	
Postal Address	<PstlAdr>	[0..1]	

Name<Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Datatype: "Max140Text"

Postal Address<PstlAdr>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services

Postal Address contains the following elements

Address Line	<Adrline>	[0..1]	
---------------------	-----------	--------	--

Address Line<Adrline>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Datatype: "Max70Text"

Other<Othr>

Presence: [0..*]

Definition: Unique identification of an organisation, as assigned by an institution, using an identification scheme.

Other contains the following elements

Identification	<Id>	[1..1]	
Scheme Name	<SchmeNm>	[0..1]	

Identification<Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Datatype: "Max35Text"

Possible values:

- Alias of merchant if Prty set to ALAS

Scheme Name<SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

Scheme Name contains one of the following elements

Proprietary	<Prty>	[1..1]
--------------------	--------	--------

Proprietary<Prty>

Presence: [1..1]

Definition: Name of the identification scheme, in a free text form.

Datatype: "Max35Text"

Possible values:

- ALAS to define alias of merchant

Creditor Agent<CdtrAgt>

Presence: [1..1]

Definition: Financial institution servicing an account for the Creditor.

Creditor Agent contains the following elements

Financial Institution Identification	<FinInstnId>	[1..1]	
---	--------------	--------	--

Financial Institution Identification<FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution.

Financial Institution Identification contains the following elements

Other	<Othr>	[0..1]	
--------------	--------	--------	--

Other<Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme

Other contains the following elements

Identification	<Id>	[1..1]	
-----------------------	------	--------	--

Identification<Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Datatype: "Max35Text"

Creditor Account<CdtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.

Creditor Account contains the following elements

Identification	<Id>	[0..1]	
-----------------------	------	--------	--

Identification<Id>

Presence: [0..1]

Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.

Identification contains one of the following elements.

Other	<Othr>	[0..1]	
--------------	--------	--------	--

Other<Othr>

Presence: [0..1]

Definition: Unique identification of an account, as assigned by the account servicer, using an identification scheme.

Identification	<Id>	[0..1]	
-----------------------	------	--------	--

Identification<Id>

Presence: [0..1]

Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.

Purpose<Purp>

Presence: [0..1]

Definition: Underlying reason for the payment transaction. Usage: Purpose is used by the end-customers, that is initiating party, (ultimate) debtor. Purpose provides information concerning the operation purpose of the payment. Purpose contains one of the following elements.

Proprietary	<Prty>	[1..1]
--------------------	--------	--------

Proprietary<Prty>

Presence: [1..1]

Definition: Name of the operation purpose, in a proprietary form.

Datatype: "Max35Text"

Possible values:

extract from the dictionaries via auxiliary api service get dictionary method.

Remittance Information<RmtInf>

Presence: [0..1]

Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, such as commercial invoices in an accounts' receivable system.

Remittance Information contains the following elements

Unstructured	<Ustrd>	[0..*]
Structured	<Strd>	[0..*]

Unstructured<Ustrd>

Presence: [0..*]

Definition: Information supplied to enable the matching/reconciliation of an entry with the items that the payment is intended to settle, such as commercial invoices in an accounts' receivable system, in an unstructured form.

Datatype: "Max140Text"

Structured<Strd>

Presence: [0..*]

Definition: Information supplied to enable the matching/reconciliation of an entry with the items that the payment is intended to settle, such as commercial invoices in an accounts' receivable system, in a structured form.

Structure contains following elements:

Referred Document Info	<RfrdDocInf>	[0..*]	
Type	<Tp>	[0..1]	
Code Or Proprietary	<CdOrPrtry>	[0..1]	
Proprietary	<Prtry>	[1..1]	

Referred Document Information<RfrdDocInf>

Presence: [0..*]

Definition: Provides the identification and the content of the referred document.

It contains following element

Type	<Tp>	[0..1]	
-------------	------	--------	--

Type<Tp>

Presence: [0..1]

Definition: Specifies the type of referred document.

Type contains the following elements

Code Or Proprietary	<CdOrPrtry>	[0..1]	
----------------------------	-------------	--------	--

Code or Proprietary<CdOrPrty>

Presence: [1..1]

Definition: Provides the type details of the referred document.

Code or Proprietary contains following elements

Proprietary	<Prtry>	[1..1]	
--------------------	---------	--------	--

Proprietary<Prty>

Presence: [1..1]

Definition: Proprietary identification of the type of the remittance document.

Currently it will be used for BILL payment scenarios only. when debtor puts a reference to a bill paid for a merchant so this is information provided by the customer in most cases it is not mandatory

Datatype: "Max35Text"

5 RTP Response/RTP Status Update Request (pain.014.001.10)

Both the positive/negative response and RTP status Update Request messages have an identical structure.

5.1 Message structure (RTP response pain.014.001.10)

MessageElement/ BuildingBlock	<XML Tag>	Mul.	Type	Used?
Message root	<Document> <CdtrPmtActvtnReqStsRpt>	[1..1]		Yes
Group Header	<GrpHdr>	[1..1]		Yes
Message Identification	<MsgId>	[1..1]	Text	Yes
Creation DateTime	<CreDtTm>	[1..1]	DateTime	Yes
Initiating Party	<InitgPty>	[1..1]		Yes
Original Group Information and Status	<OrgnlGrpInfAndSts>	[1..1]		Yes
Original Message ID	<OrgnlMsgId>	[1..1]		Yes
Original Message Name ID	<OrgnlMsgNmId>	[1..1]		Yes
Original Credit DateTime	<OrgnlCreDtTm>	[0..1]		Yes
Group Status	<GrpSts>	[0..1]		Yes
Original Payment Information and Status	<OrgnlPmtInfAndSts>	[0..*]		Yes

MessageElement/ BuildingBlock	<XML Tag>	Mul.	Type	Used?
Original Payment Information ID	<OrgnlPmtInfId>	[1..1]		Yes
Transaction Status and Information	<TxInfAndSts>	[0..*]		Yes
Original UETR	<OrgnlUETR>	[0..1]		Yes Mandatory
Original Instruction ID	<OrgnlInstrId>	[0..1]		Yes
Original End to End ID	<OrgnlEndToEndId>	[0..1]		Yes
Transaction Status	<TxSts>	[0..1]		Yes
Status Reason Information	<StsRsnInf>	[0..*]		Yes
Reason	<Rsn>	[1..1]		Yes
Additional Information	<AddtlInfo>	[0..*]		Yes

5.2 Message building blocks

5.2.1 Group Header <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics shared by all individual transactions included in the message.

Group Header contains the following elements.

Message root	<Document> <CdtrPmtActvtnReqStsRpt>	[1..1]		Yes
---------------------	-------------------------------------	--------	--	-----

Group Header	<GrpHdr>	[1..1]		Yes
Message Identification	<MsgId>	[1..1]	Text	Yes
Creation DateTime	<CreDtTm>	[1..1]	DateTime	Yes
Initiating Party	<InitgPty>	[1..1]		Yes

Message Identification<MsgId>

Presence: [1..1]

Definition: Point to point reference assigned by the instructing party and sent to the next party in the chain to unambiguously identify the message.

Creation DateTime<CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created.

Datatype: "ISODatetime".

Initiating Party<InitgPty>

Presence: [1..1]

Definition: Party initiating the creditor payment activation request. This can either be the creditor himself or the party that initiates the request on behalf of the creditor. Initiating Party contains the following element:

Identification ID <Id>	[0..1]	
-------------------------------------	--------	--

Identification ID<Id>

Presence: [0..1]

Definition: Unique and unambiguous identification of a party
contains following element:

Organisation ID <OrgId>	[1..1]	
--------------------------------------	--------	--

Organisation ID<OrgId>

Presence: [1..1]

Definition: Unique and unambiguous way to identify an organization

Organisation ID contains following element:

Any BIC<AnyBIC>	[0..1]	
------------------------------	--------	--

Any BIC<AnyBIC>

Presence: [0..1]

Definition: Business identification code of the organisation.

5.2.2 Body <body>

Original Group Information and Status<OrgnlGrpInfAndSts>

Presence: [1..1]

Definition: Original group information concerning the group of transactions, to which the status report message refers to.

Original Group Information and Status contains the following elements

Original Message ID	<OrgnlMsgId>	[1..1]	
Original Message Name ID	<OrgnlMsgNmId>	[1..1]	
Original Credit DateTime	<OrgnlCreDtTm>	[0..1]	
Group Status	<GrpSts>	[0..1]	

Original Message Identification<OrgnlMsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the original instructing party, to unambiguously identify the original message.

Datatype: "Max35Text"

Original Message Name Identification<OrgnlMsgNmId>

Presence: [1..1]

Definition: Specifies the original message name identifier to which the message refers.

Datatype: "Max35Text"

Original Creation DateTime<OrgnlCreDtTm>

Presence: [0..1]

Definition: Date and time at which the original message was created.

Datatype: "ISODatetime"

Group Status<GrpSts>

Presence: [0..1]

Definition: Specifies the status of a group of transactions.

Possible Values:

ASCP – accepted

RJCT – rejected

Original Payment Information and Status<OrgnlPmtInfAndSts>

Presence: [0..*]

Definition: Information concerning the original payment information, to which the status report message refers.

Original Payment Information and Status contains the following elements.

Original Payment Information ID <OrgnlPmtInfId>	[1..1]	
--	--------	--

Original Payment Information Identification<OrgnlPmtInfId>

Presence: [1..1]

Definition: Unique identification, as assigned by the original sending party, to unambiguously identify the original payment information group.

Datatype: "Max35Text"

Transaction Information and Status<TrxInfAndSts>

Presence: [0..*]

Definition: Provides information on the original transactions to which the status report message refers.

Transaction Information and Status contains the following elements

Original UETR	<OrgnlUETR>	[0..1]	
Original Instruction ID	<TxInfAndSts>/<OrgnlInstrId>	[0..1]	
Original End to End ID	<TxInfAndSts>/<OrgnlEndToEndId>	[0..1]	
Transaction Status	<TxInfAndSts>/<TxSts>	[0..1]	

Original Instruction Identification<OrgnlInstrId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original instructing party for the original instructed party, to unambiguously identify the original instruction.

Datatype: "Max35Text"

Original End to End Identification<OrgnlEndToEndId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original initiating party, to unambiguously identify the original transaction.

Datatype: "Max35Text"

Original UETR<OrgnlUETR>

Presence: [0..1]

Definition: Universally unique identifier to provide the original end-to-end reference of a payment transaction.

Datatype: "UUIDv4Identifier"

Transaction Status<TrxSts>

Presence: [0..1]

Definition: Specifies the status of a transaction, as published in an external payment transaction status code list.

Possible Values:

- ASCP – for accepted RTP
- RJCT – for Rejected RTP
- CANC- for cancel RTP
- RCVD- for Received RTP

Status Reason Information<StsRsnInf>

Presence: [0..*]

Definition: Provides detailed information on the status reason.

Status Reason Information contains the following elements

Reason	<Rsn>	[0..1]		Yes
Additional Information	<AddtlInfo>	[0..*]		Yes

Reason<Rsn>

Presence: [0..1]

Definition: Specifies the reason for the status report.

Reason contains one following element

Proprietary	<Prty>	[1..1]
--------------------	--------	--------

Proprietary<Prty>

Presence: [1..1]

Definition: Name of the identification scheme, in a free text form.

Datatype: "Max35Text"

Possible values:

Reason	Reason tag	AdditionalInformation tag
Insufficient funds to proceed with the operation.	LTXD	Limit exceeded
OrgRtpExpd	ORXP	Original RTP is already expired.
OrgRtpPaid	ORPD	Original RTP is already paid.
Declinebypayer	DCBP	Decline by payer from participant end
Payertimeout	TXTO	Payer FI cannot deliver to Payer receive from participant end.
TxnNotFound	TNFN	TxID was not found in IPS
InvalidCurrency	INVC	Payment transaction amount or currency is invalid
DuplicateID	DTID	TxID duplicate in IPS
RequestNotFound	RQNF	Request not found
OrgRtpCanc	ORCD	Original RTP is already cancelled
OrgRtpDec	ORDC	Original RTP is already declined
InvalidCancReq	ICRQ	Invalid cancel request
InvalidDecReq	IDRQ	Invalid decline RTP Request

Additional Information<AddtlInfo>

Presence: [0..*]

Definition: Further details on the status reason.

Usage: Additional information can be used for several purposes such as the reporting of repaired information.

Datatype: "Max105Text"

6 RTP Cancel Request (camt055.001.10)

6.1 Message structure (RTPcancelRequest camt055.001.10)

MessageElement/ BuildingBlock	<XML Tag>	Mul.	Type	Used?
Message root	<Document> <CstmrPmtCxlReq>	[1..1]		Yes
Assignment	<Assgnmt>	[1..1]		Yes
Assignment ID	<Id>	[1..1]	Text	Yes
Creation DateTime	<CreDtTm>	[1..1]	DateTime	Yes
Assigner	<Assgnr>	[1..1]		Yes
Agent	<Agt>	[1..1]		Yes
Financial Institution ID	<FinInstnId>	[1..1]		Yes
Other	<Other>	[0..1]		Yes
ID	<Id>	[1..1]		Yes
Assignee	<Assgne>	[1..1]		Yes
Case	<Case>	[0..1]		Yes
Case ID	<Id>	[1..1]		Yes

Creator	<Cretr>	[1..1]		Yes
Original Payment Information and Cancel	<Undrlyg>/<OrgnlPmtInfAndCxl>	[0..*]		Yes
Original Payment Information ID	<OrgnlPmtInfId>	[1..1]		Yes
Original Group Info	<OrgnlGrpInf>	[0..1]		Yes
Original Message ID	<OrgnlMsgId>	[1..1]		Yes
Original Message Name ID	<OrgnlMsgNmId>	[1..1]		Yes
Original Credit DateTime	<OrgnlCreDtTm>	[0..1]	datetime	Yes
Cancel Reason Info	<CxlRsnInf>	[0..1]		Yes
Reason	<Rsn>	[1..1]		Yes
Proprietary	<Prtry>	[1..1]		Yes Madatory
Additional Info	<AddInfo>	[0..*]		Yes
Transaction Information	<TxInf>	[0..*]		Yes
Original Requested Execution Date	<OrgnlReqdExctnDt>	[0..1]		Yes
Date	<dt>	[0..1]	Date	Yes
Transaction Information and Status	<TxInfAndSts>	[0..*]		Yes
Original UETR	<OrgnlUETR>	[0..1]		Yes

Original Instruction ID	<OrgnlInstrId>	[0..1]		Yes
Original End to End ID	<OrgnlEndToEndId>	[0..1]		Yes

6.2 Message building blocks

6.2.1 Assignment <Assgnmt>

Presence: [1..1]

Definition: Identifies the assignment of an investigation case from an assigner to an assignee.

Usage: The assigner must be the sender of this confirmation and the assignee must be the receiver.

Assignment contains the following elements

Message root	<Document> <CstmrPmtCxlReq>	[1..1]	
Assignment	<Assgnmt>	[1..1]	
Assignment ID	<Id>	[1..1]	Text
Creation DateTime	<CreDtTm>	[1..1]	DateTime
Assigner	<Assgnr>	[1..1]	
Agent	<Agt>	[1..1]	
Financial Institution ID	<FinInstnId>	[1..1]	
Other	<Other>	[0..1]	
ID	<Id>	[1..1]	
Assignee	<Assgne>	[1..1]	

Assignment Identification<Id>

Presence: [1..1]

Definition: Uniquely identifies the case assignment.

Datatype: "Max35Text"

Assigner<Assgnr>

Presence: [1..1]

Definition: Party who assigns the case.

Usage: This is also the sender of the message.

Assigner contains one of the following elements

Agent	<Agt>	[1..1]	
--------------	-------	--------	--

Agent<Agt>

Presence: [1..1]

Definition: Identification of a financial institution.

Agent contains the following elements

Financial Institution Identification	<FinInstnId>	[1..1]	
---	--------------	--------	--

Financial Institution Identification<FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution.

Financial Institution Identification contains the following elements

Other	<Othr>	[0..1]	
--------------	--------	--------	--

Other<Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme

Other contains the following elements

Identification	<Id>	[1..1]	
-----------------------	------	--------	--

Identification<Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Datatype: "Max35Text"

Assignee<Assgne>

Presence: [1..1]

Definition: Party to which the case is assigned.

Usage: This is also the receiver of the message.

Assignee contains one of the following elements

Agent	<Agt>	[1..1]	
--------------	-------	--------	--

Agent<Agt>

Presence: [1..1]

Definition: Identification of a financial institution.

Agent contains the following elements

Financial Institution Identification	<FinInstnId>	[1..1]	
---	--------------	--------	--

Financial Institution Identification<FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution.

Financial Institution Identification contains the following elements

Other	<Othr>	[0..1]	
--------------	--------	--------	--

Other<Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme

Other contains the following elements

Identification	<Id>	[1..1]	
-----------------------	------	--------	--

Identification<Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Datatype: "Max35Text"

Creation DateTime<CredDtTm>

Presence: [1..1]

Definition: Date and time at which the assignment was created.

Datatype: "ISODateTime"

6.2.2 Underlying <Undrlyg>

Case<Case>

Presence: [0..1]

Definition: Identifies the investigation case.

Case contains the following elements

ID	<Id>	[1..1]	
Creator	<cretr>	[1..1]	

Identification<Id>

Presence: [1..1]

Definition: Uniquely identifies the case.

Datatype: "Max35Text"

Creator<Cretr>

Presence: [1..1]

Definition: Party that created the investigation case.

Creator contains one of the following elements

Agent	<Agt>	[1..1]	
--------------	-------	--------	--

Agent<Agt>

Presence: [1..1]

Definition: Identification of a financial institution.

Agent contains the following elements

Financial Institution Identification	<FinInstnId>	[1..1]	
---	--------------	--------	--

Financial Institution Identification<FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution.

Financial Institution Identification contains the following elements

Other	<Othr>	[0..1]	
--------------	--------	--------	--

Other<Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme

Other contains the following elements

Identification	<Id>	[1..1]	
-----------------------	------	--------	--

Identification<Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Datatype: "Max35Text"

Underlying<Undrlyg>

Presence: [1..*]

Definition: Identifies the payment instruction to be cancelled.

Original Payment Info and Cancel	<OrgnlPmtInfAndCxl>	[0..*]	
---	---------------------	--------	--

Original Payment Info and Cancel<OrgnlPmtInfAndCxl>

Presence: [0..*]

Definition: Provides information on the original (group of) transactions, to which the cancellation request refers.

It contains following element

Original Payment Information Identification	<OrgnlPmtInfId>	[1..1]	
--	-----------------	--------	--

Original Payment Information Identification<OrgnlPmtInfId>

Presence: [1..1]

Definition: Unique and unambiguous identifier of the original payment information block, as assigned by the original sending party.

Datatype: "Max35Text"

Original Group Information<OrgnlGrpInfo>

Presence: [0..1]

Definition: Information concerning the original group of transactions, to which the message refers.

Original Group Information contains the following elements

Original Message ID	<OrgnlMsgId>	[1..1]	
Original Message Name ID	<OrgnlMsgNmId>	[1..1]	
Original Credit DateTime	<OrgnlCreDtTm>	[0..1]	

Original Message Identification<OrgnlMsgId>

Presence: [1..1]

Definition: Point to point reference assigned by the original instructing party to unambiguously identify the original message.

Datatype: "Max35Text"

Original Message Name Identification<OrgnlMsgNmId>

Presence: [1..1]

Definition: Specifies the original message name identifier to which the message refers.

Datatype: "Max35Text"

Original Creation DateTime<OrgnlCreDtTm>

Presence: [0..1]

Definition: Original date and time at which the message was created.

Datatype: "ISODateTime"

Cancellation Reason Information<CxlRsnInfo>

Presence: [0..*]

Definition: Provides detailed information on the cancellation reason.

Cancellation Reason Information contains the following elements

Reason	<Rsn>	[0..1]	
Additional Info	<AddtlInfo>	[0..*]	Text

Reason<Rsn>

Presence: [0..1]

Definition: Specifies the reason for the cancellation.

Reason contains following element

Proprietary	<Prty>	[1..1]
--------------------	--------	--------

Proprietary<Prty>

Presence: [1..1]

Definition: Reason of cancellation, in a proprietary form.

Datatype: "Max35Text"

Reason	Reason tag	AdditionalInformation tag
WrongAmount	WAMT	Invalid amount.
invalidreceiverBIC	IVCT	Receiver BIC is not defined or invalid.
RequestNotFound	RQNF	Request not found
OrgRtpDec	ORDC	Original RTP is already declined

Additional Information<AddtlInfo>

Presence: [0..*]

Definition: Further details on the cancellation request reason.

Datatype: "Max105Text"

Transaction Information<TrxInfo>

Presence: [0..*]

Definition: Information concerning the original transactions, to which the cancellation request message refers.

Transaction Information contains the following elements

Original UETR	<OrgnlUETR>	[0..1]	
Original Instruction ID	<OrgnlInstrId>	[0..1]	
Original End to End ID	<OrgnlEndToEndId>	[0..1]	
Original Requested Execution Date	<OrgnlReqdExctnDt>	[0..1]	Datetime

Original Instruction Identification<OrgnlInstrId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original instructing party for the original instructed party, to unambiguously identify the original instruction.

Datatype: "Max35Text"

Original End to End Identification<OrgnlEndToEndId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original initiating party, to unambiguously identify the original transaction.

Datatype: "Max35Text"

Original UETR<OrgnlUETR>

Presence: [0..1]

Definition: Universally unique identifier to provide an end-to-end reference of a payment transaction.

Datatype: "UUIDv4Identifier"

Original Requested Execution Date<OrgnlReqdExctnDt>

Presence: [0..1]

Definition: Date at which the initiating party originally requested the clearing agent to process the payment.

Original Requested Execution Date contains following element

Date<dt>	[1..1]	ISODate
----------	--------	---------

Date<dt>

Presence: [1..1]

Definition: Specified date.

Datatype: "ISODate"

7 RTP Cancel Response (camt029.001.10)

7.1 Message structure (RTPcancelResponse camt029.001.10)

MessageElement/ BuildingBlock	<XML Tag>	Mul.	Type	Used?
Message root	<Document> <RsltnOfInvstgtn>	[1..1]		Yes
Assignment	<Assgnmt>	[1..1]		Yes
Assignment ID	<Id>	[1..1]	Text	Yes
Creation DateTime	<CreDtTm>	[1..1]	DateTime	Yes
Assigner	<Assgnr>	[1..1]		Yes
Agent	<Agt>	[1..1]		Yes
Financial Institution ID	<FinInstnId>	[1..1]		Yes
Other	<Other>	[0..1]		Yes
ID	<Id>	[1..1]		Yes
Assignee	<Assgne>	[1..1]		Yes
Resolved Case	<RslvdCase>	[0..1]		Yes
Case ID	<Id>	[1..1]		Yes
Creator	<Cretr>	[0..1]		Yes
Status	<Sts>	[0..1]		Yes

MessageElement/ BuildingBlock	<XML Tag>	Mul.	Type	Used?
Cancel Details	<CxlDtls>	[0..1]		Yes
Original Group Information and Cancel	<OrgnlGrpInfAndSts>	[0..*]		Yes
Original Group Info	<OrgnlGrpInf>	[0..1]		Yes
Original Message ID	<OrgnlMsgId>	[1..1]		Yes
Original Message Name ID	<OrgnlMsgNmId>	[1..1]		Yes
Cancel Status Reason Information	<CxlStsRsnInf>	[0..*]		Yes
Cancel Reason	<Rsn>	[0..1]		Yes
Proprietary	<Prtry>	[1..1]		Yes

7.2 Message building blocks

7.2.1 Assignment <Assgnmt>

Presence: [1..1]

Definition: Identifies the assignment of an investigation case from an assigner to an assignee.

Usage: The assigner must be the sender of this confirmation and the assignee must be the receiver

Assignment contains the following elements

Message root	<Document>/<Rs1tnOfInvstg tn>	[1..1]	
Assignment	<Assgnmt>	[1..1]	

Assignment ID	<Id>	[1..1]	Text
Creation DateTime	<CreDtTm>	[0..1]	DateTime
Assigner	<Assgnr>	[1..1]	
Agent	<Agt>	[1..1]	
Financial Institution ID	<FinInstnId>	[1..1]	
Other	<Other>	[0..1]	
ID	<Id>	[1..1]	
Assignee	<Assgne>	[1..1]	

Assignment Identification<Id>

Presence: [1..1]

Definition: Uniquely identifies the case assignment.

Datatype: "Max35Text"

Assigner<Assgnr>

Presence: [1..1]

Definition: Party who assigns the case.

Usage: This is also the sender of the message.

Assigner contains one of the following elements

Agent	<Agt>	[1..1]	
--------------	-------	--------	--

Agent<Agt>

Presence: [1..1]

Definition: Identification of a financial institution.

Agent contains the following elements

Financial Institution Identification	<FinInstnId>	[1..1]	
---	--------------	--------	--

Financial Institution Identification<FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution.

Financial Institution Identification contains the following elements

Other	<Othr>	[0..1]	
--------------	--------	--------	--

Other<Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme

Other contains the following elements

Identification	<Id>	[1..1]	
-----------------------	------	--------	--

Identification<Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Datatype: "Max35Text"

Assignee<Assgne>

Presence: [1..1]

Definition: Party to which the case is assigned.

Usage: This is also the receiver of the message.

Assignee contains one of the following elements

Agent	<Agt>	[1..1]	
--------------	-------	--------	--

Agent<Agt>

Presence: [1..1]

Definition: Identification of a financial institution.

Agent contains the following elements

Financial Institution Identification	<FinInstnId>	[1..1]	
---	--------------	--------	--

Financial Institution Identification<FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution.

Financial Institution Identification contains the following elements

Other	<Othr>	[0..1]	
--------------	--------	--------	--

Other<Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme

Other contains the following elements

Identification	<Id>	[1..1]	
-----------------------	------	--------	--

Identification<Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Datatype: "Max35Text"

Creation DateTime<CreDtTm>

Presence: [1..1]

Definition: Date and time at which the assignment was created.

Datatype: "ISODateTime"

7.2.2 CancellationDetails<CxIDtls>

Resolved Case<RslvdCase>

Presence: [0..1]

Definition: Identifies the investigation case.

Case contains the following elements

ID	<Id>	[1..1]	
Creator	<cretr>	[1..1]	

Identification<Id>

Presence: [1..1]

Definition: Uniquely identifies the case.

Datatype: "Max35Text"

Creator<Cretr>

Presence: [1..1]

Definition: Party that created the investigation case.

Creator contains one of the following elements

Agent	<Agt>	[1..1]	
--------------	-------	--------	--

Agent<Agt>

Presence: [1..1]

Definition: Identification of a financial institution.

Agent contains the following elements

Financial Institution Identification	<FinInstnId>	[1..1]	
---	--------------	--------	--

Financial Institution Identification<FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution.

Financial Institution Identification contains the following elements

Other	<Othr>	[0..1]	
--------------	--------	--------	--

Other<Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme

Other contains the following elements

Identification	<Id>	[1..1]	
-----------------------	------	--------	--

Identification<Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Datatype: "Max35Text"

Status<sts>

Presence: [1..1]

Definition: Indicates the status of the investigation.

Status contains one of the following elements

Confirmation	<Conf>	[1..1]	
---------------------	--------	--------	--

Confirmation<Conf>

Presence: [1..1]

Definition: Specifies the status of the investigation, in a coded form.

Possible Value:

RJCR - RejectedCancellationRequest

ACCR - AcceptedCancellationRequest

Original Group Information and Status<OrgnlGrpInfAndSts>

Presence: [0..1]

Definition: Provides information on the original cancellation message, to which the resolution refers.

Original Group Information contains the following elements

Original Message ID	<OrgnlMsgId>	[1..1]	
Original Message Name ID	<OrgnlMsgNmId>	[1..1]	
Cancellation Status Reason Information	<Cx1StsRsnInf>	[0..*]	

Original Message Identification<OrgnlMsgId>

Presence: [1..1]

Definition: Point to point reference assigned by the original instructing party to unambiguously identify the original message.

Datatype: "Max35Text"

Original Message Name Identification<orgnlMsgNmId>

Presence: [1..1]

Definition: Specifies the original message name identifier to which the message refers.

Datatype: "Max35Text"

Cancellation Status Reason Information<CxlStsRsnInf>

Presence: [0..*]

Definition: Provides detailed information on the cancellation status reason.

Cancellation Status Reason Information contains the following elements

Reason	<Rsn>	[0..1]	
Additional Info	<AddtlInfo>	[0..*]	Text

Reason<Rsn>

Presence: [0..1]

Definition: Specifies the reason for the cancellation.

Reason contains following element

Proprietary	<Prty>	[1..1]
--------------------	--------	--------

Proprietary

Presence: [1..1]

Definition: Reason, in a proprietary form.

Datatype: "Max35Text"

Reason	Reason tag	AdditionalInformation tag
OrgRtpExpd	ORXP	Original RTP is already expired.
OrgRtpPaid	ORPD	Original RTP is already paid.
OrgRtpCncld	ORCD	Original RTP is already Canceled.
TxnNotFound	TNFN	TxID was not found in IPS.

Additional Information<AddtlInfo>

Presence: [0..*]

Definition: Further details on the cancellation status reason.

Datatype: "Max105Text"