

NATIONAL SWITCH OF SIERRA LEONE

Phase 2 – Instant Payments

CONFIDENTIAL

INTERNAL USE ONLY

Important notice

All information contained in this documentation, as well as the software described in it, is proprietary to BPC Banking Technologies and its affiliates. BPC Banking Technologies reserves any and all intellectual property rights in respect of this document.

The Customer is granted the right to use this document in accordance with the relevant agreement entered into with BPC Banking Technologies. Except as permitted by the relevant license agreement, no part of this documentation may be reproduced, stored in a retrieval system, or transmitted in any form or by electronic, mechanical, recording, or any other means, without the prior written permission of BPC Banking Technologies.

The limited warranties provided in respect of this document are described in the relevant legal agreement entered into with BPC Banking Technologies. BPC Banking Technologies provides no other warranties, explicit or implied.

This document is confidential and proprietary and not intended for use by any person other than a named Customer.

SmartVista is the registered trademark of BPC Banking Technologies entities. Other company, product or service names mentioned herein may be trademarks or service marks of their respective owners.

For information regarding permissions, write to:

BPC Banking Technologies
Neuhofstrasse 5a
6340 Baar
Switzerland

Phone: +41 43 508 4024

E-mail: info@bpcbt.com

Web: www.bpcbt.com.

Distribution: Under NDA only

TABLE OF CONTENTS

Revision history	4
1. Introduction to Fast Payments service (FP)	5
2. The schemas of the flow	5
3. Testing flow	6
4. Register the customer	6
5. Link the alias to the existing customer	7
6. Link the Account to the existing Alias	8
7. Get the Alias details	9
8. Get the account details by the phone	9
9. Send the payment message (pacs.008)	11
10. Get the payment advice (pacs.002)	13
1 FIToFICustomerCreditTransfer (pacs.008.001.10)	15
1.1 Message structure (FIToFICustomerCreditTransfer pacs.008.001.10)	15
1.2 Message building blocks	18
1.2.1 GroupHeader <GrpHdr>	18
1.3 CreditTransferTransactionInformation <CdtTrfTxInf>	23
2 FIToFIPaymentStatusReport (pacs.002.001.12) — Response message	35
2.1 Message structure (FIToFIPaymentStatusReport pacs. 002.001.12)	35
2.2 Message building blocks	37
2.2.1 GroupHeader <GrpHdr>	37
2.2.2 TransactionInformationAndStatus <TxInfAndSts>	38
3 FIToFIPaymentStatusRequest (pacs.028.001.05)	50
3.1 Message structure (FIToFIPaymentStatusRequest pacs.028.001.05)	50
3.2 Message building blocks	50
3.2.1 GroupHeader <GrpHdr>	50
3.2.2 TransactionInformation <TxInf>	50

Revision history

Version	Date	Changes summary	Affected sections	Author
0.0	29 Nov 2023	Document created	ALL	Alex Agapov
0.1	11 Dec 2023	Document updated	ALL	Alex Agapov
0.2	13 Dec 2023	Updated examples	ALL	Alex Agapov Mehdi Lezbare
0.3	13 Dec 2023	Beautification	ALL	Evgeny Bystrov
0.4	19 Dec 2023	Added schemas	ALL	Alex Agapov
0.5	19 Jan 2024	Update	1. Intro. 8. Get the account details by phone.	Alex Agapov
0.6	31 Jan 2024	Added ISO20022 message formats description	Annex A	Alex Agapov

1. Introduction to Fast Payments service (FP)

FP is the REST service, which shall be called using HTTP methods GET, POST, PUT or DELETE.

The data formats are based on Data Transfer Object description (DTO).

The main external ID of the customer is the mobile phone number.

The main idea is: your customer enters the mobile phone number of the beneficiary to perform the payment. The participant sends the request to SaPS to get the list of the accounts, belonging to the beneficiary. For example, the result is the list: Afrimoney, Orange and RCB. All the account records contain BICs and the beneficiary's name.

We expect that the participant will show the following payment options: Africell, Orange, RCB.

The participant shall show a truncated name of the beneficiary. For example, if you get


```
"customer":{"id":41, "name":"Lithin", "surname":"Nasani", "nickName":"Lithin", "gender":"MALE",  
"birthDate":"1990-01-01", "document":"34123212", "type":"PERSON", "participant":null,  
"mobileNumber":"378244287", "documentValidityDate":"2024-12-11", "customerForAlias":null}
```


you may show something like the name and the first letter of the surname: "Lithin N." as the beneficiary's name to make your customer sure that he transfers money not to some "Alex A.". We believe there's no need to bother the customer with the account details, the payment process shall be simple.

The customer selects the destination (Africell, RCB, or Orange) and confirms the payment as usual for you as the sending participant, perhaps it's the OTP.

The sending participant shall populate the pacs.008 message with the account details of the customer (debtor) and the same for beneficiary (creditor) and send it to SaPS. SaPS guarantees the integrity of the information, the accuracy, reliability and non-repudiation. The message will be delivered to the counterparty, who shall process the credit operation and reply with pacs.002 message via SaPS, which will be delivered back to the sending participant.

2. The schemas of the flow

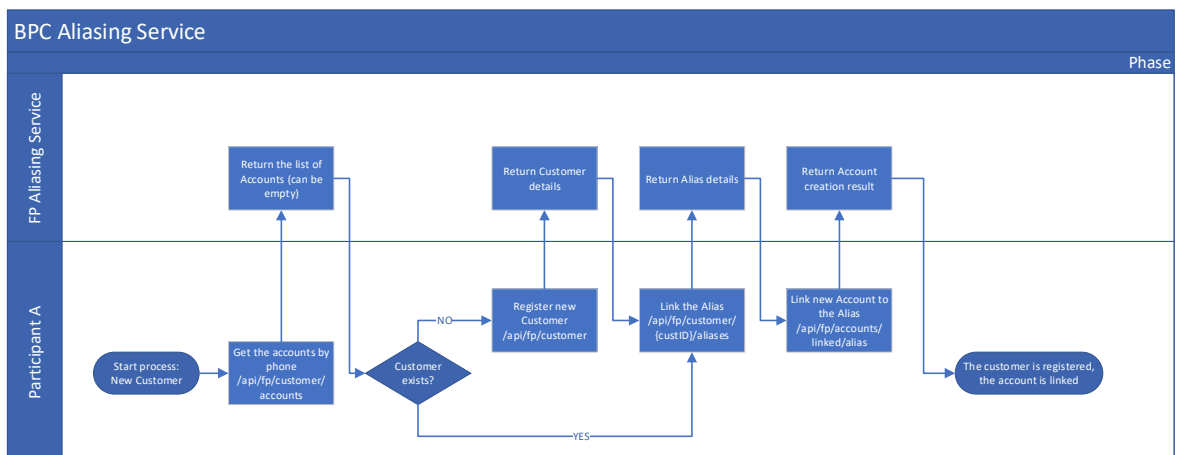

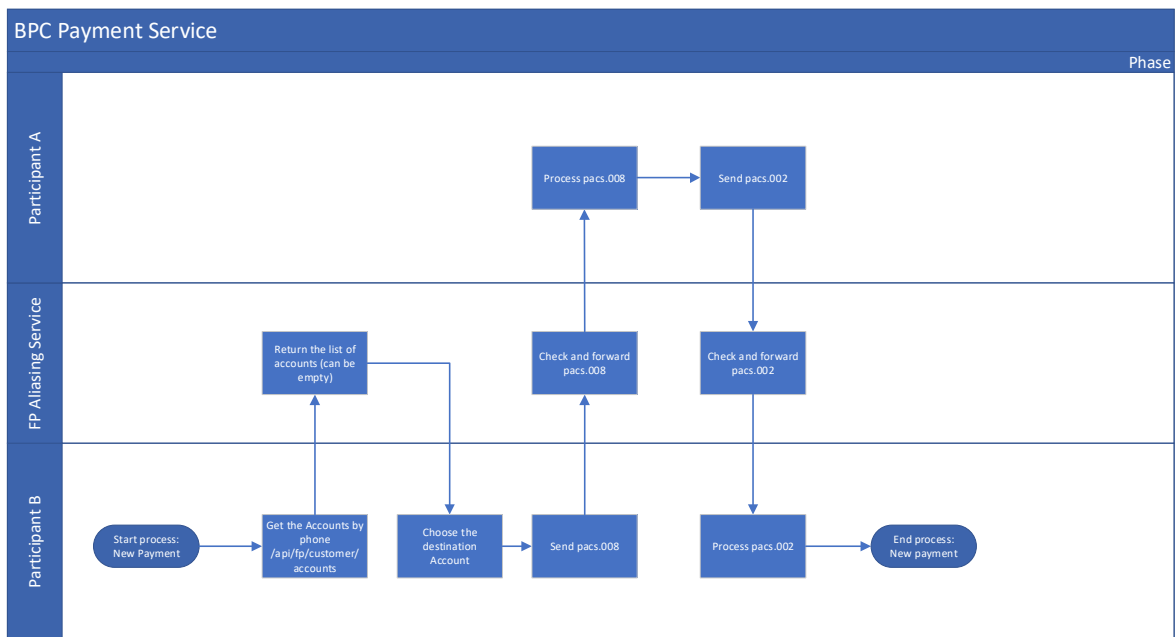

3. Testing flow

1. Register Customer (chapter 3)
2. Link the alias to the existing customer (chapter 4)
3. Link the account to the existing alias (chapter 5)
4. Get the alias details (chapter 6)
5. Get the account details by the phone (chapter 7)
6. Perform payment (chapters 8 and 9)

4. Register the customer

This call is used to create the Customer.

Method: POST

API URL: /api/tp/customer

Input: CustomerDTO

Input example:

```
{
  "name": "Mehdi",
  "surname": "Albert",
  "nickName": "Nick",
  "gender": "MALE",
  "birthDate": "1990-04-15",
  "document": "FE34123212",
  "type": "PERSON",
  "mobileNumber": "65889901",
  "documentValidityDate": "2024-12-11"
}
```

The scheme:

```
CustomerDTO {
  Id integer($int64)
  output only!
```

```

Name                string
Surname             string
nickname            string
Gender              string
birthdate           string($date-time)
Document            string
Type                stringEnum:
                    [ PERSON, COMPANY ]
Participant          string
mobileNumber        string
documentValidityDate string($date-time)
}

```

Output example:

```

{
  "errorCode":null,
  "errorDescription":null,
  "description":"Customer has been created!",
  "response":{
    "id":39,
    "name":"Mehdi",
    "surname":"Albert",
    "nickName":"Nick",
    "gender":"MALE",
    "birthDate":"1990-04-15",
    "document":"FE34123212",
    "type":"PERSON",
    "participant":null,
    "mobileNumber":"65889901",
    "documentValidityDate":"2024-12-11",
    "customerForAlias":null
  }
}

```

5. Link the alias to the existing customer

This call is used to link the Alias to the existing Customer, if you have one after the request of /api/fp/customer/accounts or after the creation of the Customer.

Method: POST

API URL: /api/fp/customer/{custID}/aliases

Input: AliasDTO

```

AliasDTO{
  Id                integer($int64)
                   output only!
  Type              string
  Value             string
  Status            integer($int32)
  expireDate        string($date-
                    time)
  startDate         string($date-
                    time)
  Accounts          [...]
  Customer          string
}

```

Input example:

API URL: /api/fp/customer/28/aliases

```

[
  {
    "type": "MOBILE",
    "value": "65889901",

```

```

        "status": 1,
        "startDate": "2023-01-11",
        "expireDate": "2026-12-11"
    }
]

```

Output example:

```

{
  "errorCode": null,
  "errorDescription": null,
  "description": null,
  "response": [
    {
      "id": 39,
      "type": "MOBILE",
      "value": "65889901",
      "status": 1,
      "expireDate": "2026-12-11",
      "startDate": "2023-01-11"
    }
  ]
}

```

6. Link the Account to the existing Alias

Method: POST

API URL: /api/fp/accounts/linked/alias

Input: AccountDTO

```

AccountDTO{
    Type                integer($int32)
    Iban                string
    accountNumber       string
    Status              integer($int32)
    aliasValue          string
    Bic                 string
    isDefault           bool
    Currency             string
}

```

Input example:

```

[ {
  "aliasValue": "65889901",
  "bic": "RCBKS LFR",
  "iban": "TEST00044",
  "accountNumber": "100007",
  "type": 0,
  "status": 1,
  "isDefault": false,
  "currency": "925"
} ]

```

Output example:

```

{
  "errorCode": null,

```



```
"errorDescription":null,
"description":null,
"response":1
}
```

7. Get the Alias details

Method: GET

API URL: /api/fp/alias/{alias}

Response body:

```
{
  "errorCode": null,
  "errorDescription": null,
  "description": null,
  "response": {
    "id": 39,
    "type": "MOBILE",
    "value": "65889901",
    "status": 1,
    "expireDate": "2026-12-11",
    "startDate": "2023-01-11",
    "accounts": [
      {
        "id": 14,
        "iban": "TEST00044",
        "accountNumber": "100007",
        "status": 1,
        "technicalCounter": null,
        "overDraftLimit": null,
        "netPosition": null,
        "minimumDeposit": null,
        "balance": null,
        "type": null,
        "remainingBalance": null,
        "lowLimit": null,
        "baseLimit": null,
        "highLimit": null,
        "currency": "925",
        "default": false,
        "customer": {
          "id": 39,
          "name": "Mehdi",
          "surname": "Albert",
          "nickName": "Nick",
          "gender": "MALE",
          "birthDate": "1990-04-15",
          "document": null,
          "type": "PERSON",
          "participant": null,
          "mobileNumber": "65889901",
          "documentValidityDate": null,
          "customerForAlias": null
        }
      }
    ]
  }
}
```

8. Get the account details by the phone

Please be so kind prior to register the Customer to check, if the mobile number is already registered.

This service is also used to get the account details for the further usage in the payment message pacs.008.

Method: POST

API URL: /api/fp/customer/accounts

Input: mobileNumber

Input example:

```
{
  "mobileNumber": "077000000"
}
```

Output: an object with the array of AccountDTO in **response**. In this case each AccountDTO will contain CustomerDTO.

Output example:

```
{
  "errorCode": null,
  "errorDescription": null,
  "description": null,
  "response": [
    {
      "id": 55,
      "iban": "iban077000000b",
      "accountNumber": "077000000",
      "status": 1,
      "technicalCounter": null,
      "overDraftLimit": null,
      "netPosition": null,
      "minimumDeposit": null,
      "balance": null,
      "type": 0,
      "remainingBalance": null,
      "lowLimit": null,
      "baseLimit": null,
    }
  ]
}
```

```

    "highLimit": null,
    "currency": "925",
    "bic": "ACELSLFR",
    "customer": {
      "id": 75,
      "name": "Joe",
      "surname": "Koroma",
      "nickName": "Ash",
      "gender": "MALE",
      "birthDate": "1990-04-15",
      "document": "SL077000000",
      "type": "PERSON",
      "participant": null,
      "mobileNumber": "077000000",
      "documentValidityDate": "2024-02-16",
      "customerForAlias": null
    },
    "default": false
  },
  {
    "id": 58,
    "iban": "iban077000000b",
    "accountNumber": "077000000",
    "status": 1,
    "technicalCounter": null,
    "overDraftLimit": null,
    "netPosition": null,
    "minimumDeposit": null,
    "balance": null,
    "type": 0,
    "remainingBalance": null,
    "lowLimit": null,
    "baseLimit": null,
    "highLimit": null,
    "currency": "925",
    "bic": "ACELSLFR",
    "customer": {
      "id": 75,
      "name": "Joe",
      "surname": "Koroma",
      "nickName": "Ash",
      "gender": "MALE",
      "birthDate": "1990-04-15",
      "document": "SL077000000",
      "type": "PERSON",
      "participant": null,
      "mobileNumber": "077000000",
      "documentValidityDate": "2024-02-16",
      "customerForAlias": null
    },
    "default": false
  }
]
}

```

Output example in case the Customer with the given mobile phone number isn't registered:

```

{
  "errorCode": null,
  "errorDescription": null,
  "description": null,
  "response": []
}

```

If the Customer doesn't exist, please register the Customer.

If the Customer exists, please add the account to the existing Customer.

9. Send the payment message (pacs.008)

This message is used to send the payment of your Customer to another Customer.

Please use the API call "Get account details by phone" to get the account details.

Example:

```
<fpenvelope xmlns="urn:iso:std:iso:20022:tech:xsd:payment_request"
xmlns:document="urn:iso:std:iso:20022:tech:xsd:pacs.008.001.10"
xmlns:header="urn:iso:std:iso:20022:tech:xsd:head.001.001.03">
  <header:apphdr>
    <header:fr>
      <header:fiid>
        <header:fininstnid>
          <header:othr>
            <header:id>ACELSLFR</header:id>
          </header:othr>
        </header:fininstnid>
      </header:fiid>
    </header:fr>
    <header:to>
      <header:fiid>
        <header:fininstnid>
          <header:othr>
            <header:id>GTBISLFR</header:id>
          </header:othr>
        </header:fininstnid>
      </header:fiid>
    </header:to>
    <header:bizmsgidr>ST231121.1329.B005</header:bizmsgidr>
    <header:msgdefidr>pacs.008.001.10</header:msgdefidr>
    <header:credt>2023-11-21T13:27:10.792+00:00</header:credt>
  </header:apphdr>
  <document:document>
    <document:fitoficstmrcdttf>
      <document:grphdr>
        <document:msgid>ST231121.1329.B005</document:msgid>
        <document:credttm>2023-11-
21T13:27:10.792+00:00</document:credttm>
        <document:nboftxs>1</document:nboftxs>
        <document:sttlminf>
          <document:sttlmmt>CLRG</document:sttlmmt>
          <document:clrsys>
            <document:prtry>FP</document:prtry>
          </document:clrsys>
        </document:sttlminf>
        <document:pmttpinf>
          <document:lclinstrm>
            <document:prtry>P2P</document:prtry>
          </document:lclinstrm>
        </document:pmttpinf>
        <document:instgagt>
          <document:fininstnid>
            <document:othr>
              <document:id>ACELSLFR</document:id>
            </document:othr>
          </document:fininstnid>
        </document:instgagt>
        <document:instdagt>
```

```

        <document:fininstnid>
            <document:othr>
                <document:id>GTBISLFR</document:id>
            </document:othr>
        </document:fininstnid>
    </document:instdagt>
</document:grphdr>
<document:cdtrftxinf>
    <document:pmtid>

<document:endtoendid>ST231121.1329.B005</document:endtoendid>
    <document:txid>ST231121.1329.B005</document:txid>
</document:pmtid>
    <document:intrbksttlmamt
ccy="SLE">10</document:intrbksttlmamt>
    <document:accptncdtm>2023-11-
21T13:27:10.792+00:00</document:accptncdtm>
    <document:instdamt ccy="SLE">10</document:instdamt>
    <document:chrgbr>SLEV</document:chrgbr>
    <document:dbtr>
        <document:nm>Test Test</document:nm>
        <document:pstladr>
            <document:adrline>Freetown</document:adrline>
        </document:pstladr>
    </document:dbtr>
    <document:dbtracct>
        <document:id>
            <document:othr>
                <document:id>123123212313</document:id>
                <document:schmenm>
                    <document:prtry>ACCT</document:prtry>
                </document:schmenm>
            </document:othr>
        </document:id>
    </document:dbtracct>
    <document:dbtragt>
        <document:fininstnid>
            <document:othr>
                <document:id>ACELSLFR</document:id>
            </document:othr>
        </document:fininstnid>
    </document:dbtragt>
    <document:cdtragt>
        <document:fininstnid>
            <document:othr>
                <document:id>GTBISLFR</document:id>
            </document:othr>
        </document:fininstnid>
    </document:cdtragt>
    <document:cdtr>
        <document:nm>MV</document:nm>
    </document:cdtr>
    <document:cdtracct>
        <document:id>
            <document:othr>
                <document:id>1234567890</document:id>
                <document:schmenm>
                    <document:prtry>ACCT</document:prtry>
                </document:schmenm>
            </document:othr>
        </document:id>

```

```

        </document:cdtracct>
        <document:rmtinf>
            <document:ustrd>Testing...</document:ustrd>
        </document:rmtinf>
    </document:cdttrftxinf>
</document:fitoficstmrcdttrf>
</document:document>
</fpenvelope>

```

10. Get the payment advice (pacs.002)

This message contains the information about the status of pacs.008 payment message sent to the Participant or from the Participant.

```

<fpenvelope xmlns="urn:iso:std:iso:20022:tech:xsd:payment_response"
xmlns:document="urn:iso:std:iso:20022:tech:xsd:pacs.002.001.12"
xmlns:header="urn:iso:std:iso:20022:tech:xsd:head.001.001.03">
    <header:apphdr>
        <header:fr>
            <header:fiid>
                <header:fininstnid>
                    <header:othr>
                        <header:id>GTBISLFR</header:id>
                    </header:othr>
                </header:fininstnid>
            </header:fiid>
        </header:fr>
        <header:to>
            <header:fiid>
                <header:fininstnid>
                    <header:othr>
                        <header:id>FP</header:id>
                    </header:othr>
                </header:fininstnid>
            </header:fiid>
        </header:to>
        <header:bizmsgidr>GTBISLFR2023112113270500890</header:bizmsgidr>
        <header:msgdefidr>pacs.002.001.12</header:msgdefidr>
        <header:cred>2023-11-21T01:27:05.891Z</header:cred>
        <header:rltd>
            <header:fr>
                <header:fiid>
                    <header:fininstnid>
                        <header:othr>
                            <header:id>FP</header:id>
                        </header:othr>
                    </header:fininstnid>
                </header:fiid>
            </header:fr>
            <header:to>
                <header:fiid>
                    <header:fininstnid>
                        <header:othr>
                            <header:id>GTBISLFR</header:id>
                        </header:othr>
                    </header:fininstnid>
                </header:fiid>
            </header:to>
        </header:rltd>
    </header:apphdr>

```

```

    </header:fininstnid>
  </header:fiid>
</header:to>
<header:bizmsgidr>ACELSLFR332513287868889205906</header:bizmsgidr>
<header:msgdefidr>pacs.008.001.10</header:msgdefidr>
<header:cred>2023-11-21T13:27:05.005Z</header:cred>
</header:rltd>
</header:apphdr>
<document:document>
  <document:fitofipmtstsrt>
    <document:grphdr>
      <document:msgid>GTBISLFR2023112113270500890</document:msgid>
      <document:credttm>2023-11-21T13:27:05.891Z</document:credttm>
      <document:instgagt>
        <document:fininstnid>
          <document:othr>
            <document:id>GTBISLFR</document:id>
          </document:othr>
        </document:fininstnid>
      </document:instgagt>
      <document:instdagt>
        <document:fininstnid>
          <document:othr>
            <document:id>ACELSLFR</document:id>
          </document:othr>
        </document:fininstnid>
      </document:instdagt>
    </document:grphdr>
    <document:orgnlgrpinfandsts>
      <document:orgnlmsgid>ACELSLFR332513287868889205906</document:orgnlmsgid>
      <document:orgnlsgnmid>pacs.008.001.10</document:orgnlsgnmid>
      <document:orgnlcredttm>2023-11-21T13:27:05.686Z</document:orgnlcredttm>
    </document:orgnlgrpinfandsts>
    <document:txinfandsts>
      <document:orgnlendtoendid>-</document:orgnlendtoendid>
      <document:orgnltxid>ST231121.1329.B005</document:orgnltxid>
      <document:txsts>ACSC</document:txsts>
      <document:acptncdttm>2023-11-
21T13:27:10.792+00:00</document:acptncdttm>
    <document:orgnltxref>
      <document:intrbksttlamt ccy="SLE">10</document:intrbksttlamt>
    <document:amt>
      <document:instdamt ccy="SLE">10</document:instdamt>
    </document:amt>
    <document:dbtr>
      <document:pty>
        <document:nm>MV</document:nm>
        <document:pstladr>
          <document:adrline>Freetown</document:adrline>
        </document:pstladr>
      </document:pty>
    </document:dbtr>
    <document:dbtracct>
      <document:id>
        <document:othr>
          <document:id>123123212313</document:id>
        </document:othr>
      <document:schmenm>
        <document:prtry>ACCT</document:prtry>
      </document:schmenm>
    </document:dbtracct>
  </document:document>
</document:document>

```

```

</document:dbtracct>
<document:cdtracct>
  <document:id>
    <document:othr>
      <document:id>1234567890</document:id>
      <document:schmenm>
        <document:prtry>ACCT</document:prtry>
      </document:schmenm>
    </document:othr>
  </document:id>
</document:cdtracct>
</document:orgnltxref>
</document:txinfandsts>
</document:fitofipmtstsrpt>
</document:document>
</fpenvelope>

```

ANNEX A. ISO20022 MESSAGES FORMATTING.

1 FIToFICustomerCreditTransfer (pacs.008.001.10)

1.1 Message structure (FIToFICustomerCreditTransfer pacs.008.001.10)

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Message root	<Document> <FIToFICstmrCdtTrf>	[1..1]		Yes
GroupHeader	<GrpHdr>	[1..1]		Yes
MessageIdentification	<MsgId>	[1..1]	Text	Yes
CreationDateTime	<CreDtTm>	[1..1]	DateTime	Yes
NumberOfTransactions	<NbOfTx>	[1..1]	Text	Yes
SettlementInformation	<SttlmInf>	[1..1]		Yes
SettlementMethod	<SttlmMtd>	[1..1]		Yes
ClearingSystem	<ClrSys>	[0..1]		Yes
Proprietary	Prtry>	[1..1]	Max35Text	Yes
PaymentTypeInformation	<PmtTpInf>	[0..1]	±	Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
LocalInstrument	<LclInstrm>	[0..1]		Yes
Proprietary	<Prtry>	[1..1]	Max35Tex	Yes
InstructingAgent	<InstgAgt>	[0..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
InstructedAgent	<InstdAgt>	[0..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
CreditTransferTransactionInformation	<CdtTrfTxInf>	[1..*]		Yes
PaymentIdentification	<PmtId>	[1..1]	±	Yes
EndToEndIdentification	<EndToEndId>	[1..1]	Max35Text	Yes
TransactionIdentification	<TxId>	[0..1]	Max35Text	Mandatory
PaymentTypeInformation	<PmtTpInf>	[0..1]	±	Yes
CategoryPurpose	<CtgyPurp>	[0..1]	±	Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
InterbankSettlementAmount	<IntrBkSttlmAmt>	[0..1]	Amount	Yes
AcceptanceDateTime	<AcceptncDtTm>	[0..1]	DateTime	Yes
InstructedAmount	<InstdAmt>	[0..1]	Amount	Yes
ChargeBearer	<ChrgBr>	[1..1]	CodeSet	Yes
Debtor	<Dbtr>	[1..1]	±	Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Name	<Nm>	[0..1]	Text	Yes
PostalAddress	<PstlAdr>	[0..1]	±	Yes
AddressLine	<AdrLine>	[0..7]	Text	Yes
DebtorAccount	<DbtrAcct>	[1..1]		Yes
Identification	<Id>	[0..1]	±	Yes
Other	<Othr>	[1..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
SchemeName	<SchmeNm>	[0..1]		Yes
Proprietary	<Prty>	[1..1]	Text	Yes
DebtorAgent	<DbtrAgt>	[1..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
CreditorAgent	<CdtrAgt>	[1..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
Creditor	<Cdtr>	[1..1]	±	Yes
Name	<Nm>	[0..1]	Text	Yes
CreditorAccount	<CdtrAcct>	[0..1]		Yes
Identification	<Id>	[0..1]	±	Yes
Other	<Othr>	[1..1]	±	Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Identification	<Id>	[1..1]	Text	Yes
SchemeName	<SchmeNm>	[0..1]		Yes
Proprietary	<Prty>	[1..1]	Text	Yes
InstructionForNextAgent	<InstrForNxtAgt>	[0..*]	±	Yes
InstructionInformation	<InstrInf>	[0..1]	Text	Yes
RemittanceInformation	<RmtInf>	[0..1]		Yes
Structured	<Strd>	[0..*]	±	Yes
Number	<Nb>	[0..1]	Text	Yes
Type	<Tp>	[0..1]	±	Yes
CodeOrProprietary	<CdOrPrtry>	[1..1]	±	Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
Unstructured	<Ustrd>	[0..1]	Text	Yes

1.2 Message building blocks

1.2.1 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics shared by all individual transactions included in the message.

GroupHeader <GrpHdr> contains the following elements:

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type
MessageIdentification	<MsgId>	[1..1]	Text
CreationDateTime	<CreDtTm>	[1..1]	DateTime
NumberOfTransactions	<NbOfTx>	[1..1]	Text
SettlementInformation	<SttlmInf>	[1..1]	
SettlementMethod	<SttlmMtd>	[1..1]	
ClearingSystem	<ClrSys>	[0..1]	

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type
Proprietary	Prtry>	[1..1]	Max35Text
PaymentTypeInformation	<PmtTpInf>	[0..1]	±
LocalInstrument	<LclInstrm>	[0..1]	
Proprietary	<Prtry>	[1..1]	Max35Tex
InstructingAgent	<InstgAgt>	[0..1]	±
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±
Other	<Othr>	[0..1]	±
Identification	<Id>	[1..1]	Text
InstructedAgent	<InstdAgt>	[0..1]	±
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±
Other	<Othr>	[0..1]	±
Identification	<Id>	[1..1]	Text

MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the instructing party, and sent to the next party in the chain to unambiguously identify the message.

Datatype: "Max35Text"

CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created.

Datatype: "ISODateTime"

NumberOfTransactions <NbOfTxs>

Presence: [1..1]

Definition: Number of individual transactions contained in the message.

Datatype: "Max15NumericText"

SettlementInformation <SttlmInf>

Presence: [1..1]

Definition: Specifies the details on how the settlement of the transaction(s) between the instructing agent and the instructed agent is completed.

SettlementInformation <SttlmInf> contains the following elements:

Message Element <XML Tag>	Mult.	Type
SettlementMethod <SttlmMtd>	[1..1]	CodeSet
ClearingSystem <ClrSys>	[0..1]	
Proprietary <Prtry>	[1..1]	Text

SettlementMethod <SttlmMtd>

Presence: [1..1]

Definition: Method used to settle the (batch of) payment instructions. It is always CLRG.

Datatype: "SettlementMethod2Code"

CodeName	Name	Definition
INDA	InstructedAgent	Settlement is done by the agent instructed to execute a payment instruction.
INGA	InstructingAgent	Settlement is done by the agent instructing and forwarding the payment to the next party in the payment chain.
CLRG	ClearingSystem	Settlement is done through a payment clearing system.

ClearingSystem <ClrSys>

Presence: [0..1]

Definition: Specification of a pre-agreed offering between clearing agents or the channel through which the payment instruction is processed.

ClearingSystem <ClrSys> contains one of the following elements:

Message Element <XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Clearing system identification in a proprietary form. Currently the only value used is FP.

Datatype: "Max35Text"

PaymentTypeInformation <PmtTpInf>

Presence: [0..1]

Definition: Set of elements used to further specify the type of transaction.

PaymentTypeInformation <PmtTpInf> contains the following element:

Message Element <XML Tag>	Mult.	Type
LocalInstrument <LclInstrm>	[0..1]	

LocalInstrument <LclInstrm>

Presence: [0..1]

Definition: User community specific instrument.

LocalInstrument <LclInstrm> contains the following element:

Message Element <XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Specifies the local instrument, as a proprietary code. Possible values:

- P2B
- P2P

Datatype: "Max35Text"

InstructingAgent <InstgAgt>

Presence: [0..1]

Definition: Agent that instructs the next party in the chain to carry out the (set of) instruction(s).

InstructingAgent <InstgAgt> contains the following:

Message Element <XML Tag>	Mult.	Type
FinancialInstitutionIdentification <FinInstnId>	[1..1]	±

FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognized or proprietary identification scheme.

FinancialInstitutionIdentification <FinInstnId> contains the following element:

Message Element <XML Tag>	Mult.	Type
Other <Othr>	[0..1]	±

Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Other <Othr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Text

Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Datatype: "Max35Text"

InstructedAgent <InstdAgt>

Presence: [0..1]

Definition: Agent that is instructed by the previous party in the chain to carry out the (set of) instruction(s).

InstructedAgent <InstdAgt> contains the following elements:

Message Element <XML Tag>	Mult.	Type
FinancialInstitutionIdentification <FinInstnId>	[1..1]	±

FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognized or proprietary identification scheme.

FinancialInstitutionIdentification <FinInstnId> contains the following element:

Message Element <XML Tag>	Mult.	Type
Other <Othr>	[0..1]	±

Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Other <Othr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Text

Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Datatype: "Max35Text"

1.3 CreditTransferTransactionInformation <CdtTrfTxInf>

Presence: [1..*]

Definition: Set of elements providing information specific to the individual credit transfer(s).

CreditTransferTransactionInformation <CdtTrfTxInf> contains the following elements:

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
PaymentIdentification	<PmtId>	[1..1]	±	Yes
EndToEndIdentification	<EndToEndId>	[1..1]	Max35Text	Yes
TransactionIdentification	<TxId>	[0..1]	Max35Text	Mandatory
PaymentTypeInformation	<PmtTpInf>	[0..1]	±	Yes
CategoryPurpose	<CtgyPurp>	[0..1]	±	Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
InterbankSettlementAmount	<IntrBkSttlmAmt>	[0..1]	Amount	Yes
AcceptanceDateTime	<AcceptncDtTm>	[0..1]	DateTime	Yes
InstructedAmount	<InstdAmt>	[0..1]	Amount	Yes
ChargeBearer	<ChrgBr>	[1..1]	CodeSet	Yes
Debtor	<Dbtr>	[1..1]	±	Yes
Name	<Nm>	[0..1]	Text	Yes
PostalAddress	<PstlAdr>	[0..1]	±	Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
AddressLine	<AdrLine>	[0..7]	Text	Yes
DebtorAccount	<DbtrAcct>	[1..1]		Yes
Identification	<Id>	[0..1]	±	Yes
Other	<Othr>	[1..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
SchemeName	<SchmeNm>	[0..1]		Yes
Proprietary	<Prty>	[1..1]	Text	Yes
DebtorAgent	<DbtrAgt>	[1..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
CreditorAgent	<CdtrAgt>	[1..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
Creditor	<Cdtr>	[1..1]	±	Yes
Name	<Nm>	[0..1]	Text	Yes
CreditorAccount	<CdtrAcct>	[0..1]		Yes
Identification	<Id>	[0..1]	±	Yes
Other	<Othr>	[1..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
SchemeName	<SchmeNm>	[0..1]		Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Proprietary	<Prty>	[1..1]	Text	Yes
InstructionForNextAgent	<InstrForNxtAgt>	[0..*]		Yes
InstructionInformation	<InstrInf>	[0..1]	Text	Yes
RemittanceInformation	<RmtInf>	[0..1]		Yes
Structured	<Strd>	[0..*]		Yes
Number	<Nb>	[0..1]	Text	Yes
Type	<Tp>	[0..1]		Yes
CodeOrProprietary	<CdOrPrtry>	[1..1]		Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
Unstructured	<Ustrd>	[0..1]	Text	Yes

PaymentIdentification <PmtId>

Presence: [1..1]

Definition: Set of elements used to reference a payment instruction.

PaymentIdentification <PmtId> contains the following elements:

MessageElement<XML Tag>	Mult.	Type
EndToEndIdentification <EndToEndId>	[1..1]	Text
TransactionIdentification <TxId>	[0..1]	Text

EndToEndIdentification <EndToEndId>

Presence: [1..1]

Definition: Unique identification, as assigned by the initiating party, to unambiguously identify the transaction. This identification is passed on, unchanged, throughout the entire end-to-end chain.

Datatype: "Max35Text"

TransactionIdentification <TxId>

Presence: [0..1]

Definition: Unique identification, as assigned by the first instructing agent, to unambiguously identify the transaction that is passed on, unchanged, throughout the entire interbank chain.

Note: This is a mandatory tag.

Datatype: "Max35Text"

PaymentTypeInformation <PmtTpInf>

Presence: [0..1]

Definition: Set of elements used to further specify the type of transaction.

PaymentTypeInformation <PmtTpInf> contains the following element:

MessageElement<XML Tag>	Mult.	Type
CategoryPurpose <CtgyPurp>	[0..1]	

CategoryPurpose <CtgyPurp>

Presence: [0..1]

Definition: Specifies the high level purpose of the instruction based on a set of pre-defined categories.

Usage: This is used by the initiating party to provide information concerning the processing of the payment. It is likely to trigger special processing by any of the agents involved in the payment chain.

CategoryPurpose <CtgyPurp> contains one of the following element:

MessageElement<XML Tag>	Mult.	Type
Proprietary <Prtry>	[0..1]	

Proprietary <Prtry>

Presence: [1..1]

Definition: Category purpose, in a proprietary form. For bill payments and government payments, the value is set to BILL. For other type of payments, the PmtTpInf > CtgyPurp > Prtry structure is absent.

Datatype: "Max35Text"

InterbankSettlementAmount <IntrBkSttlmAmt>

Presence: [1..1]

Definition: Amount of money moved between the instructing agent and the instructed agent.

Datatype: "ActiveCurrencyAndAmount"

AcceptanceDateTime <AcptncDtTm>

Presence: [0..1]

Definition: Point in time when the payment order from the initiating party meets the processing conditions of the account servicing agent. This means that the account servicing agent has received the payment order and has applied checks such as authorization, availability of funds.

Datatype: "ISODatetime"

InstructedAmount <InstdAmt>

Presence: [0..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Usage: This amount has to be transported unchanged through the transaction chain.

Datatype: "ActiveOrHistoricCurrencyAndAmount"

ChargeBearer <ChrgBr>

Presence: [1..1]

Definition: Specifies which party/parties will bear the charges associated with the processing of the payment transaction.

Datatype: "ChargeBearerType1Code"

CodeName	Name	Definition
DEBT	BorneByDebtor	All transaction charges are to be borne by the debtor.
CRED	BorneByCreditor	All transaction charges are to be borne by the creditor.
SHAR	Shared	In a credit transfer context, means that transaction charges on the sender side are to be borne by the debtor, transaction charges on the receiver side are to be borne by the creditor. In a direct debit context, means that transaction charges on the sender side are to be borne by the creditor, transaction charges on the receiver side are to be borne by the debtor.
SLEV	FollowingServiceLevel	Charges are to be applied following the rules agreed in the service level and/or scheme.

Debtor <Dbtr>

Presence: [1..1]

Definition: Party that owes an amount of money to the (ultimate) creditor.

Debtor <Dbtr> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Name <Nm>	[0..1]	Text
PostalAddress <PstlAdr>	[0..1]	±

Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Datatype: "Max140Text"

PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services.

PostalAddress <PstlAdr> contains the following elements:

MessageElement<XML Tag>	Mult.	Type
AddressLine <AdrLine>	[0..7]	Text

DebtorAccount <DbtrAcct>

Presence: [1..1]

Definition: Unambiguous identification of the account of the debtor to which a debit entry will be made as a result of the transaction.

DebtorAccount <DbtrAcct> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Identification <Id>	[0..1]	±

Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.

Identification <Id> contains one of the following element:

MessageElement<XML Tag>	Mult.	Type
Other <Othr>	[0..1]	±

Other <Othr>

Presence: [1..1]

Definition: Unique identification of an account, as assigned by the account servicer, using an identification scheme.

Other <Othr> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Text
SchemeName <SchmeNm>	[0..1]	

Identification <Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Datatype: "Max34Text"

SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

SchemeName <SchmeNm> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Name of the identification scheme, in a free text form.

Datatype: "Max35Text"

DebtorAgent <DbtrAgt>

Presence: [1..1]

Definition: Financial institution servicing an account for the debtor.

DebtorAgent <DbtrAgt> contains the following elements:

MessageElement<XML Tag>	Mult.	Type
FinancialInstitutionIdentification <FinInstnId>	[1..1]	±

FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognised or proprietary identification scheme.

FinancialInstitutionIdentification <FinInstnId> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Other <Othr>	[0..1]	±

Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Other <Othr> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Text

Identification <Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Datatype: "Max34Text"

CreditorAgent <CdtrAgt>

Presence: [1..1]

Definition: Financial institution servicing an account for the creditor.

CreditorAgent <CdtrAgt> contains the following element:

MessageElement<XML Tag>	Mult.	Type
FinancialInstitutionIdentification <FinInstnId>	[1..1]	±

FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognized or proprietary identification scheme.

FinancialInstitutionIdentification <FinInstnId> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Other <Othr>	[0..1]	±

Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Other <Othr> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Text

Identification <Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Datatype: "Max34Text"

Creditor <Cdtr>

Presence: [1..1]

Definition: Party to which an amount of money is due.

Creditor <Cdtr> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Name <Nm>	[0..1]	Text

Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Datatype: "Max140Text"

CreditorAccount <CdtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.

CreditorAccount <CdtrAcct> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Identification <Id>	[0..1]	±

Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.

Identification <Id> contains one of the following element:

MessageElement<XML Tag>	Mult.	Type
Other <Othr>	[1..1]	±

Other <Othr>

Presence: [1..1]

Definition: Unique identification of an account, as assigned by the account servicer, using an identification scheme.

Other <Othr> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Text
SchemeName <SchmeNm>	[0..1]	

Identification <Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Datatype: "Max34Text"

SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

SchemeName <SchmeNm> contains the following element:

MessageElement<XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Name of the identification scheme, in a free text form.

Datatype: "Max35Text"

InstructionForNextAgent <InstrForNxtAgt>

Presence: [0..*]

Definition: Further information related to the processing of the payment instruction that may need to be acted upon by the next agent.

Note: This element is mandatory for bill payments and government payment. This tag contains the BIC of the biller participant or the government participant, which must be notified after payment completion.

InstructionForNextAgent <InstrForNxtAgt> contains the following element:

Message Element <XML Tag>	Mult.	Type
InstructionInformation <InstrInf>	[0..1]	Text

InstructionInformation <InstrInf>

Presence: [0..1]

Definition: Further information complementing the coded instruction or instruction to the next agent that is bilaterally agreed or specific to a user community.

Datatype: "Max140Text"

RemittanceInformation <RmtInf>

Presence: [0..1]

Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, such as commercial invoices in an accounts' receivable system.

RemittanceInformation <RmtInf> contains the following element:

Message Element <XML Tag>	Mult.	Type
Structured <Strd>	[0..*]	
Unstructured <Ustrd>	[0..*]	Text

Structured <Strd>

Presence: [0..*]

Definition: Information supplied to enable the matching/reconciliation of an entry with the items that the payment is intended to settle, such as commercial invoices in an accounts' receivable system, in a structured form.

Note: This element is mandatory for bill payments. This structure contains references to the bill number and bill type.

Structured <Strd> contains the following elements:

Message Element <XML Tag>	Mult.	Type
Number <Nb>	[0..1]	Text
Type <Tp>	[0..1]	Text

Number <Nb>

Presence: [0..1]

Definition: Unique and unambiguous identification of the referred document.

Datatype: "Max35Text"

Type <Tp>

Presence: [0..1]

Definition: Specifies the type of referred document.

Type <Tp> contains the following element:

Message Element <XML Tag>	Mult.	Type
CodeOrProprietary <CdOrPrtry>	[1..1]	

CodeOrProprietary <CdOrPrtry>

Presence: [1..1]

Definition: Provides the type details of the referred document.

CodeOrProprietary <CdOrPrtry> contains one of the following element:

Message Element <XML Tag>	Mult.	Type
Proprietary <Prtry>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Proprietary identification of the type of the remittance document.

Datatype: "Max35Text"

Unstructured <Ustrd>

Presence: [0..*]

Definition: Information supplied to enable the matching/reconciliation of an entry with the items that the payment is intended to settle, such as commercial invoices in an accounts' receivable system, in an unstructured form.

Datatype: "Max140Text"

2 FIToFIPaymentStatusReport (pacs.002.001.12) — Response message

Both the positive and negative response messages have an identical structure.

2.1 Message structure (FIToFIPaymentStatusReport pacs. 002.001.12)

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Message root	<Document> <FIToFIPmtStsRpt>	[1..1]		Yes
GroupHeader	<GrpHdr>	[1..1]		Yes
MessageIdentification	<MsgId>	[1..1]	Text	Yes
CreationDateTime	<CreDtTm>	[1..1]	DateTime	Yes
InstructingAgent	<InstgAgt>	[0..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
InstructedAgent	<InstdAgt>	[0..1]	±	Yes
FinancialInstitutionIdentification	<FinInstnId>	[0..1]	±	Yes
Other	<Othr>	[0..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
TransactionInformationAndStatus	<TxInfAndSts>	[0..*]		Yes
OriginalEndToEndIdentification	<OrgnlEndToEndId>	[0..1]	Text	Yes
OriginalMessageNameIdentification	<OrgnlGrpInf>	[0..1]	±	Yes
OriginalMessageNameIdentification	<OrgnlMsgNmId>	[1..1]	Text	Yes
OriginalMessageIdentification	<OrgnlMsgId>	[1..1]	Text	Yes
OriginalTransactionIdentification	<OrgnlTxId>	[0..1]	Text	Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
TransactionStatus	<TxSts>	[0..1]	CodeSet	Yes
StatusReasonInformation	<StsRsnInf>	[0..*]	±	Yes
Originator	<Orgtr>	[0..1]	±	Yes
Reason	<Rsn>	[0..1]	±	Yes
Proprietary	<Prtry>	[1..1]	Text	Yes
AcceptanceDateTime	<AcptncDtTm>	[0..1]	DateTime	Yes
OriginalTransactionReference	<OrgnlTxRef>	[0..1]		Yes
InterbankSettlementAmount	<IntrBkSttlmAmt>	[0..1]	Amount	Yes
Amount	<Amt>	[0..1]	±	Yes
InstructedAmount	<InstdAmt>	[1..1]	Amount	Yes
Debtor	<Dbtr>	[0..1]	±	Yes
Party	<Pty>	[1..1]	±	Yes
Name	<Nm>	[0..1]	Text	Yes
PostalAddress	<PstlAdr>	[0..1]	±	Yes
AddressLine	<AdrLine>	[0..7]	Text	Yes
DebtorAccount	<DbtrAcct>	[0..1]		Yes
Identification	<Id>	[0..1]	±	Yes
Other	<Othr>	[1..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
SchemeName	<SchmeNm>	[0..1]		Yes
Proprietary	<Prty>	[1..1]	Text	Yes
CreditorAccount	<CdtrAcct>	[0..1]		Yes
Identification	<Id>	[0..1]	±	Yes

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Other	<Othr>	[1..1]	±	Yes
Identification	<Id>	[1..1]	Text	Yes
SchemeName	<SchmeNm>	[0..1]		Yes
Proprietary	<Prty>	[1..1]	Text	Yes
Creditor	<Cdtr>	[0..1]	±	Yes
Party	<Pty>	[1..1]	±	Yes
Name	<Nm>	[0..1]	Text	Yes
PostalAddress	<PstlAdr>	[0..1]	±	Yes
AddressLine	<AdrLine>	[0..7]	Text	Yes

2.2 Message building blocks

2.2.1 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics shared by all individual transactions included in the status report message.

GroupHeader <GrpHdr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
MessageIdentification <MsgId>	[1..1]	DateTime
CreationDateTime <CreDtTm>	[0..1]	±
InstructingAgent <InstgAgt>	[0..1]	±

MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the instructing party, and sent to the next party in the chain to unambiguously identify the message.

Datatype: "Max35Text"

CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created.

Datatype: "ISODatetime"

InstructingAgent <InstgAgt>

Presence: [0..1]

Definition: Agent that instructs the next party in the chain to carry out the (set of) instruction(s).

InstructingAgent <InstgAgt> contains the following:

Message Element <XML Tag>	Mult.	Type
FinancialInstitutionIdentification <FinInstnId>	[1..1]	±

FinancialInstitutionIdentification <FinInstnId>

Presence: [1..1]

Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognized or proprietary identification scheme.

FinancialInstitutionIdentification <FinInstnId> contains the following element:

Message Element <XML Tag>	Mult.	Type
Other <Othr>	[0..1]	±

Other <Othr>

Presence: [0..1]

Definition: Unique identification of an agent, as assigned by an institution, using an identification scheme.

Other <Othr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Text

Identification <Id>

Presence: [1..1]

Definition: Unique and unambiguous identification of a person.

Datatype: "Max35Text"

2.2.2 TransactionInformationAndStatus <TxInfAndSts>

Presence: [0..*]

Definition: Information concerning the original transactions, to which the status report message refers.

TransactionInformationAndStatus <TxInfAndSts> contains the following elements:

Message Element <XML Tag>	Mult.	Type
OriginalEndToEndIdentification <OrgnlEndToEndId>	[0..1]	Text
OriginalMessageNameIdentification <OrgnlGrpInf>	[0..1]	±
OriginalMessageNameIdentification <OrgnlMsgNmId>	[1..1]	Text
OriginalMessageIdIdentification <OrgnlMsgId>	[1..1]	Text
OriginalTransactionIdentification <OrgnlTxId>	[0..1]	Text
TransactionStatus <TxSts>	[0..1]	CodeSet
AcceptanceDateTime <AcptncDtTm>	[0..1]	DateTime
OriginalTransactionReference <OrgnlTxRef>	[0..1]	
InterbankSettlementAmount <IntrBkSttlmAmt>	[0..1]	Amount
Amount <Amt>	[0..1]	±
InstructedAmount <InstdAmt>	[1..1]	Amount
Debtor <Dbtr>	[0..1]	±
Party <Pty>	[1..1]	±
Name <Nm>	[0..1]	Text
PostalAddress <PstlAdr>	[0..1]	±
AddressLine <AdrLine>	[0..7]	Text
DebtorAccount <DbtrAcct>	[0..1]	
Identification <Id>	[0..1]	±
Other <Othr>	[1..1]	±
Identification <Id>	[1..1]	Text
SchemeName <SchmeNm>	[0..1]	
<Prt>	[1..1]	Text
CreditorAccount <CdtrAcct>	[0..1]	
Identification <Id>	[0..1]	±

Message Element <XML Tag>	Mult.	Type
Other <Othr>	[1..1]	±
Identification <Id>	[1..1]	Text
SchemeName <SchmeNm>	[0..1]	
Proprietary <Prty>	[1..1]	Text
Creditor <Cdtr>	[0..1]	±
Party <Pty>	[1..1]	±
Name <Nm>	[0..1]	Text
PostalAddress <PstlAdr>	[0..1]	±
AddressLine <AdrLine>	[0..7]	Text

OriginalEndToEndIdentification <OrgnlEndToEndId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original initiating party, to unambiguously identify the original transaction.

Datatype: "Max35Text"

OriginalGroupInformation <OrgnlGrpInf>

Presence: [0..1]

Definition: Point to point reference, as assigned by the original instructing party, to unambiguously identify the original message.

OriginalGroupInformation <OrgnlGrpInf> contains the following elements:

Message Element <XML Tag>	Mult.	Type
OriginalMessageIdentification <OrgnlMsgId>	[1..1]	Text
OriginalMessageNameIdentification <OrgnlMsgNmId>	[1..1]	Text

OriginalMessageIdentification <OrgnlMsgId>

Presence: [1..1]

Definition: Point to point reference assigned by the original instructing party to unambiguously identify the original message.

Datatype: "Max35Text"

OriginalMessageNameIdentification <OrgnMsgNmId>

Presence: [1..1]

Definition: Specifies the original message name identifier to which the message refers, for example, pacs.003.001.01 or MT103.

Datatype: "Max35Text"

OriginalTransactionIdentification <OrgnTxId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original first instructing agent, to unambiguously identify the transaction.

Datatype: "Max35Text"

TransactionStatus <TxSts>

Presence: [0..1]

Definition: Specifies the status of a transaction, in a coded form.

Datatype: "ExternalPaymentTransactionStatus1Code"

StatusReasonInformation <StsRsnInf>

Mult: [0..*]

Definition: Provides detailed information on the status reason.

StatusReasonInformation <StsRsnInf> consists of the following elements:

Message Element <XML Tag>	Mult.	Type
Originator <Orgtr>	[0..1]	±
Reason <Rsn>	[0..1]	
Proprietary <Prtry>	[1..1]	Text
AdditionalInformation <AddtlInf>	[0..*]	Max105Text

Originator <Orgtr>

Mult: [0..1]

Definition: Party that issues the status (a bank or SVIP).

Originator <Orgtr> consists of the following elements:

Message Element <XML Tag>	Mult.	Type
Identification <Id>	[0..1]	
OrganisationIdentification <OrgId>	[1..1]	
Other <Othr>	[0..*]	

Message Element <XML Tag>	Mult.	Type
Identification <Id>	[1..1]	Max140Text

Reason <Rsn>

Mult: [0..1]

Definition: Specifies the reason for the status report.

Reason <Rsn> contains one of the following elements:

Message Element <XML Tag>	Mult.	Type
Reason <Rsn>	[0..1]	
Proprietary <Prtry>	[1..1]	Text

<Prtry>

Mult: [1..1]

Format:

- maxLength: 4
- minLength: 1

The list of possible values is provided in the table below.

Name	Code	Definition
Missing	MISS	SVIP did not receive a response from the payee's bank.
NotPerformed	NOVF	SVIP failed to send a request to the payee's bank.
TechnicalError	ERRR	Technical error for example, an invalid XSD.
WrongBIC	WBIC	Bank's BIC was not found in SVIP.
LimitExceed	LTXD	Limit exceeded in SVIP.
DuplicateTransactionID	DTID	TxID duplicate in SVIP.
TransactionNotFound	TNFN	TxID was not found in SVIP.
IncorrectTransactionId	ITID	Request from a bank contains the incorrect TxID.

AcceptanceDateTime <AcptncDtTm>

Presence: [0..1]

Definition: Point in time when the payment order from the initiating party meets the processing conditions of the account servicing agent. This means that the account servicing agent has received the payment order and has applied checks such as authorization, availability of funds.

Datatype: "ISODatetime"

OriginalTransactionReference <OrgnlTxRef>

Presence: [0..1]

Definition: Key elements used to identify the original transaction that is being referred to.

OriginalTransactionReference <OrgnlTxRef> contains the following elements:

Message Element <XML Tag>	Mult.	Type
InterbankSettlementAmount <IntrBkSttlmAmt>	[0..1]	Amount
Amount <Amt>	[0..1]	±
InstructedAmount <InstdAmt>	[1..1]	Amount
Debtor <Dbtr>	[0..1]	±
Party <Pty>	[1..1]	±
Name <Nm>	[0..1]	Text
PostalAddress <PstlAdr>	[0..1]	±
AddressLine <AdrLine>	[0..7]	Text
DebtorAccount <DbtrAcct>	[0..1]	
Identification <Id>	[0..1]	±
Other <Othr>	[1..1]	±
Identification <Id>	[1..1]	Text
SchemeName <SchmeNm>	[0..1]	
<Pty>	[1..1]	Text
CreditorAccount <CdtrAcct>	[0..1]	
Identification <Id>	[0..1]	±
Other <Othr>	[1..1]	±
Identification <Id>	[1..1]	Text

Message Element <XML Tag>	Mult.	Type
SchemeName <SchmeNm>	[0..1]	
Proprietary <Prty>	[1..1]	Text
Creditor <Cdtr>	[0..1]	±
Party <Pty>	[1..1]	±
Name <Nm>	[0..1]	Text
PostalAddress <PstlAdr>	[0..1]	±
AddressLine <AdrLine>	[0..7]	Text

InterbankSettlementAmount <IntrBkSttlmAmt>

Presence: [0..1]

Definition: Amount of money moved between the instructing agent and the instructed agent.

Datatype: "ActiveOrHistoricCurrencyAndAmount"

Amount <Amt>

Presence: [0..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Amount <Amt> contains the following element:

Message Element <XML Tag>	Mult.	Type
InstructedAmount <InstdAmt>	[1..1]	Amount

InstructedAmount <InstdAmt>

Presence: [1..1]

Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.

Datatype: "ActiveOrHistoricCurrencyAndAmount"

Debtor <Dbtr>

Presence: [0..1]

Definition: Party that owes an amount of money to the (ultimate) creditor.

Debtor <Dbtr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
<Pty>	[1..1]	±

Party <Pty>

Presence: [1..1]

Definition: Identification of a person or an organization.

Party <Pty> contains the following element:

Message Element <XML Tag>	Mult.	Type
<Nm>	[0..1]	Text
<PstlAdr>	[0..1]	±

Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Datatype: "Max140Text"

PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services.

PostalAddress <PstlAdr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
AddressLine <AdrLine>	[0..7]	Text

AddressLine <AdrLine>

Presence: [0..7]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Datatype: "Max70Text"

DebtorAccount <DbtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the debtor to which a debit entry will be made as a result of the transaction.

DebtorAccount <DbtrAcct> contains the following elements:

Message Element <XML Tag>	Mult.	Type
<Id>	[0..1]	±

Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.

Identification <Id> contains the following elements:

Message Element <XML Tag>	Mult.	Type
<Othr>	[1..1]	±

Other <Othr>

Presence: [1..1]

Definition: Unique identification of an account, as assigned by the account servicer, using an identification scheme.

Other <Othr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
<Id>	[1..1]	Text
<SchmeNm>	[0..1]	

Identification <Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Datatype: "Max34Text"

SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

SchemeName <SchmeNm> contains the following element:

Message Element <XML Tag>	Mult.	Type
<Prty>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Name of the identification scheme, in a free text form.

Datatype: "Max35Text"

CreditorAccount <CdtrAcct>

Presence: [0..1]

Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction.

CreditorAccount <CdtrAcct> contains the following elements:

Message Element <XML Tag>	Mult.	Type
<Id>	[0..1]	±

Identification <Id>

Presence: [0..1]

Definition: Unique and unambiguous identification for the account between the account owner and the account servicer.

Identification <Id> contains the following elements:

Message Element <XML Tag>	Mult.	Type
<Othr>	[1..1]	±

Other <Othr>

Presence: [1..1]

Definition: Unique identification of an account, as assigned by the account servicer, using an identification scheme.

Other <Othr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
<Id>	[1..1]	Text
<SchmeNm>	[0..1]	

Identification <Id>

Presence: [1..1]

Definition: Identification assigned by an institution.

Datatype: "Max34Text"

SchemeName <SchmeNm>

Presence: [0..1]

Definition: Name of the identification scheme.

SchemeName <SchmeNm> contains the following element:

Message Element <XML Tag>	Mult.	Type
<Prty>	[1..1]	Text

Proprietary <Prtry>

Presence: [1..1]

Definition: Name of the identification scheme, in a free text form.

Datatype: "Max35Text"

Creditor <Cdtr>

Presence: [0..1]

Definition: Party to which an amount of money is due.

Creditor <Cdtr> contains the following element:

Message Element <XML Tag>	Mult.	Type
<Pty>	[1..1]	±

Party <Pty>

Presence: [1..1]

Definition: Identification of a person or an organization.

Party <Pty> contains the following elements:

Message Element <XML Tag>	Mult.	Type
<Nm>	[0..1]	Text
<PstlAdr>	[0..1]	±

Name <Nm>

Presence: [0..1]

Definition: Name by which a party is known and which is usually used to identify that party.

Datatype: "Max140Text"

PostalAddress <PstlAdr>

Presence: [0..1]

Definition: Information that locates and identifies a specific address, as defined by postal services.

PostalAddress <PstlAdr> contains the following element:

Message Element <XML Tag>	Mult.	Type
AddressLine <AdrLine>	[0..7]	Text

AddressLine <AdrLine>

Presence: [0..7]

Definition: Information that locates and identifies a specific address, as defined by postal services, presented in free format text.

Datatype: "Max70Text"

3 FIToFIPaymentStatusRequest (pacs.028.001.05)

3.1 Message structure (FIToFIPaymentStatusRequest pacs.028.001.05)

MessageElement/ BuildingBlock	<XML Tag>	Mult.	Type	Used?
Message root	<Document> <FIToFIPmtStsReq>	[1..1]		Yes
GroupHeader	<GrpHdr>	[1..1]	±	Yes
MessageIdentification	<MsgId>	[1..1]	Text	Yes
CreationDateTime	<CreDtTm>	[1..1]	Date Time	Yes
TransactionInformation	<TxInf>	[0..*]		Yes
OriginalTransactionIdentification	<OrgnlTxId>	[0..1]	Text	Yes

3.2 Message building blocks

3.2.1 GroupHeader <GrpHdr>

Presence: [1..1]

Definition: Set of characteristics shared by all individual transactions included in the status request message.

GroupHeader <GrpHdr> contains the following elements:

Message Element <XML Tag>	Mult.	Type
MessageIdentification <MsgId>	[1..1]	Text
CreationDateTime <CreDtTm>	[1..1]	DateTime

MessageIdentification <MsgId>

Presence: [1..1]

Definition: Point to point reference, as assigned by the instructing party, and sent to the next party in the chain to unambiguously identify the message.

Datatype: "Max35Text"

CreationDateTime <CreDtTm>

Presence: [1..1]

Definition: Date and time at which the message was created.

Datatype: "ISODatetime"

3.2.2 TransactionInformation <TxInf>

Presence: [0..*]

Definition: Information concerning the original transaction, to which the status request message refers.

TransactionInformation <TxInf> contains the following elements:

Message Element <XML Tag>	Mult.	Type
OriginalTransactionIdentification <OrgnTxId>	[0..1]	Text

OriginalTransactionIdentification <OrgnTxId>

Presence: [0..1]

Definition: Unique identification, as assigned by the original first instructing agent, to unambiguously identify the transaction. The tag must contain the **TxId** value of the original instruction.

Datatype: "Max35Text"