

Googling trends in conservation biology using R

Appendix 1

Raphael Proulx¹, Philippe Massicotte¹, and Marc P  pino¹

¹Department of environmental sciences, UQTR

October 24, 2013

1 Introduction

We developed a R package named *GTrendsR* that provides an interface for retrieving and displaying the information returned online by Google Trends in the R console. To install the package (hosted on CRAN repository), simply type the following command in the R console.

```
library(devtools)
install_bitbucket("GTrendsR", "persican")
library("GTrendsR")
```

Basically, the package has three functions that need to be invoked in a specific order by the user.

1. *ch = gConnect(usr, psw)* – Create a connection with Google Trends service.
2. *data = gTrends(ch, geo = location, query = query)* – Perform a **query** at the specified location **geo**.
3. *gTrendsMap(data)* – Plot maps showing results of the query and the regions and cities levels.

2 Connecting to Google Trends service

In order to perform Google Trends queries, the user needs to own a free Google account. The connection to Google Trends service is then established using account information as follow.

```
usr = "username@gmail.com"
psw = "yourpassword"
ch = gConnect(usr, psw)
```

3 Perform a query

A Google Trends query is simply made using the *gTrends* function. The user need to provide three parameters. First, a valid Google service connection **ch** returned by the function *gConnect*. The second parameter **geo** is the geographic location where the query will be performed. This argument should be a string of two characters. To obtain a list of valid country codes supported by Google Trends, the user can simply type:

```
data(countries)
```

The third and last parameter **query** is a string containing the keywords to use. For example, the following query will search for **NHL** keyword in **Canada**.

	CODE	COUNTRY
1	AF	Afghanistan
2	AL	Albania
3	DZ	Algeria
4	AS	American Samoa
5	AD	Andorra
6	AO	Angola

Table 1: Example of country codes.

```
location = "CA"
query = "NHL"
data = gTrends(ch, geo = location, query = query)
```

3.1 Structure of returned data

```
## [1] "Google login successful!"
```

The data returned by *gTrends* is a list of seven *dataframe* described as follow.

SearchInfo – Contains the date and the keyword(s) used for the query.

```
data$SearchInfo

##      Web.Search.interest..nhl                      SearchTerms
## 1      Canada; 2004 - present Web Search interest: nhl Canada; 2004 - present
```

Weeks – Contains the RAW results of the query.

```
head(data$WeeklyHits)

##           sDates Hits      Dates Months Years Days
## 1 2004-01-04 - 2004-01-10 26 2004-01-04      01 2004    04
## 2 2004-01-11 - 2004-01-17 24 2004-01-11      01 2004    11
## 3 2004-01-18 - 2004-01-24 26 2004-01-18      01 2004    18
## 4 2004-01-25 - 2004-01-31 23 2004-01-25      01 2004    25
## 5 2004-02-01 - 2004-02-07 24 2004-02-01      02 2004     01
## 6 2004-02-08 - 2004-02-14 24 2004-02-08      02 2004     08
```

Regions – Contains the hits for the top 15 regions of the country where the query has been performed.

```
data$Regions

##           Regions Hits
## 1           Alberta 100
## 2   British Columbia  98
## 3             Nunavut  96
## 4           Manitoba  88
## 5           Ontario  82
## 6           Quebec  75
## 7       Nova Scotia  74
## 8       Newfoundland  71
## 9 Northwest Territories  70
## 10 Prince Edward Island  68
```

```
## 11      Saskatchewan 68
## 12      New Brunswick 66
## 13      Yukon Territory 59
```

Cities – Same as regions but for cities.

```
data$Cities
```

```
##      Cities Hits
## 1  Edmonton 100
## 2   Calgary  91
## 3 Vancouver  90
## 4  Winnipeg  89
## 5   Ottawa  85
## 6  Montreal  80
## 7   Toronto  78
## 8    Surrey  75
## 9   Halifax  69
## 10 St John's  68
## 11   London  64
## 12  Victoria  63
## 13  Hamilton  60
## 14 Saskatoon  59
## 15  Burnaby  59
```

TopSearches – Top searches related to the keyword(s) used for the query.

```
head(data$TopSearches)
```

```
##      Keywords Hits
## 1    nhl draft  80
## 2 nhl standings  75
## 3         tsn   65
## 4    nhl tsn   65
## 5    nhl scores  65
## 6 nhl schedule  50
```

MonthlyHits – Contains the normalized results of the query rescaled by dividing the number of search hits obtained for a given country, or region, by the maximum number of hits obtained over the specified period. This temporal serie match the visual display provided upon a query on Google Trends web site.

```
head(data$MonthlyHits)
```

```
##  Months Years Hits      Dates
## 1     01  2004 32.04 2004-01-01
## 2     02  2004 40.45 2004-02-01
## 3     03  2004 39.16 2004-03-01
## 4     04  2004 61.49 2004-04-01
## 5     05  2004 38.83 2004-05-01
## 6     06  2004 20.39 2004-06-01
```

4 Plot the trends and the distribution maps

A query to Google Trends can be rapidly visualized using the *gTrendsMap* function as follow (see Figure 1):

```
gTrendsMap(data)
```

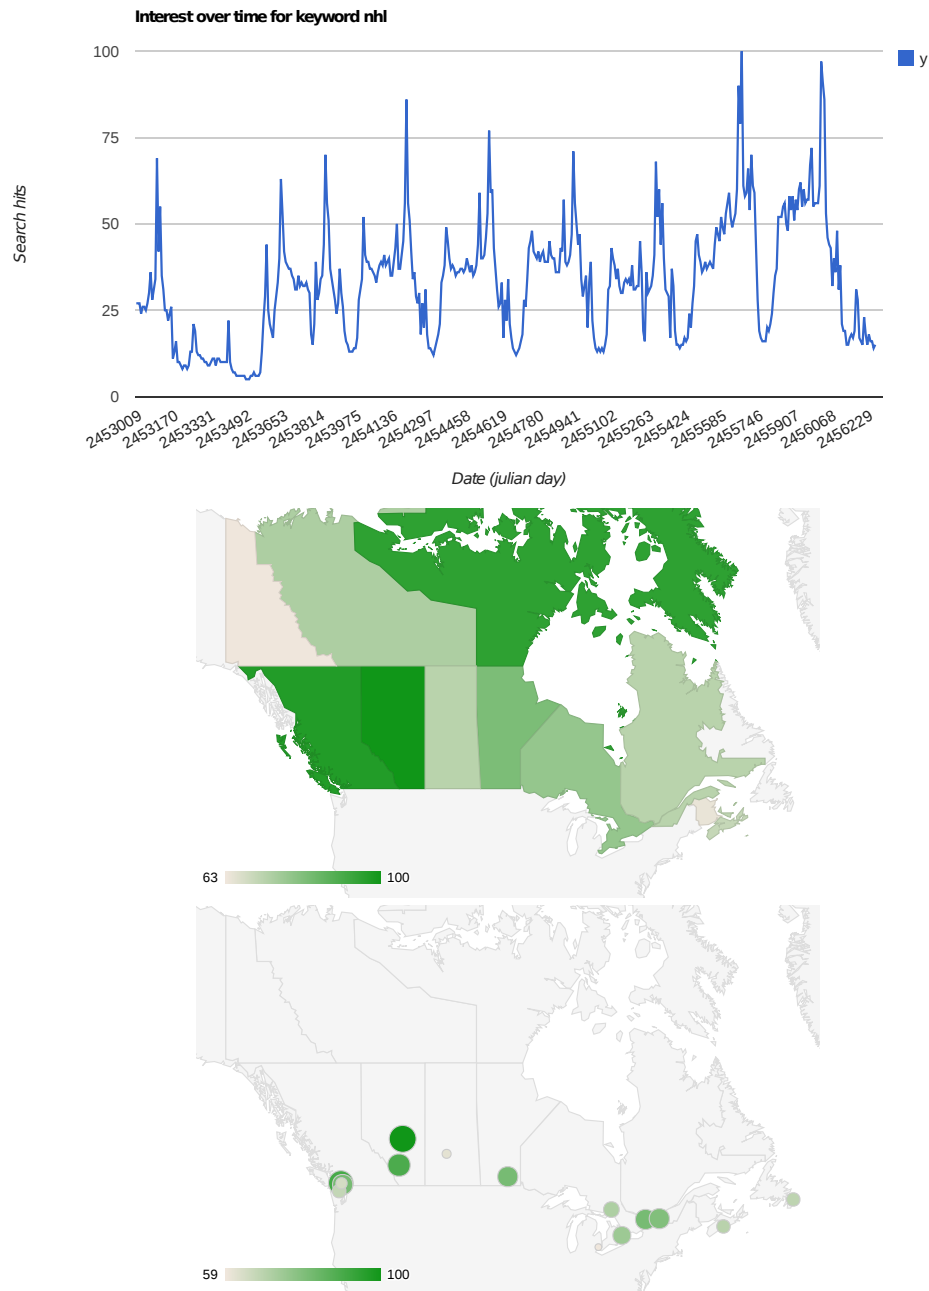


Figure 1: Distribution map for search term *NHL* in *Canada*.