

Vivado 2024.2 is available on the ZITI PCs via a container. However, it is recommended to install the tools on your machine, partly because the ZITI PCs might not be available outside course hours. To assist you with the installation we have summarised the procedure below.

[Vivado Design Suite User Guide: Release Notes, Installation, and Licensing \(UG973\)](#) contains hardware requirements, detailed installation guide as well as answers to common issues.

1. Create an [AMD](#) account.
2. We will be working with 2024.2. Obtain a copy of the web installer for [Vivado Design Tools](#). AMD only supports x86 based windows and linux machines. MAC machines with x86 processors generally run vivado within a virtual machine. **MAC machines with ARM processors tend to be very problematic.**
3. Accurately fill in the US Government export approval form.
4. Start the installer and provide the user credentials

The screenshot shows the 'AMD Unified Installer for FPGAs & Adaptive SoCs 2024.1 - Select Install Type (on catcomp01)' window. The window has a title bar with standard Windows controls. Below the title bar, the text 'Select Install Type' is displayed. A sub-header reads: 'Please select install type and provide your AMD.com E-mail Address and password for authentication.' The AMD logo is in the top right corner. The main content area is divided into two sections. The first section, 'User Authentication', contains instructions: 'Please provide your AMD user account credentials to download the required files. If you don't have an account, [please create one](#). If you forgot your password, you can [reset it here](#).' Below this are input fields for 'E-mail Address' (containing '@uni-heidelberg.de') and 'Password'. The second section, 'Download and Install Now', is selected with a radio button. It contains the text: 'Select your desired device and tool installation options and the installer will download and install just what is required.' Below this is another option, 'Download Image (Install Separately)', which is unselected. It contains the text: 'The installer will download an image containing all devices and tool options for later installation. Use this option if you wish to install a full image on a network drive or allow different users maximum flexibility when installing.' At the bottom left, copyright information is shown: 'Copyright © 1986-2022 Xilinx, Inc. All rights reserved. Copyright © 2022-2024 Advanced Micro Devices, Inc. All rights reserved.' At the bottom right are three buttons: '< Back', 'Next >', and 'Cancel'.

AMD Unified Installer for FPGAs & Adaptive SoCs 2024.1 - Select Install Type (on catcomp01)

Select Install Type

Please select install type and provide your AMD.com E-mail Address and password for authentication.

User Authentication

Please provide your AMD user account credentials to download the required files.
If you don't have an account, [please create one](#). If you forgot your password, you can [reset it here](#).

E-mail Address

Password

☒ Download and Install Now

Select your desired device and tool installation options and the installer will download and install just what is required.


☐ Download Image (Install Separately)

The installer will download an image containing all devices and tool options for later installation. Use this option if you wish to install a full image on a network drive or allow different users maximum flexibility when installing.


Copyright © 1986-2022 Xilinx, Inc. All rights reserved.
Copyright © 2022-2024 Advanced Micro Devices, Inc. All rights reserved.

< Back Next > Cancel

Check Vitis and click Next

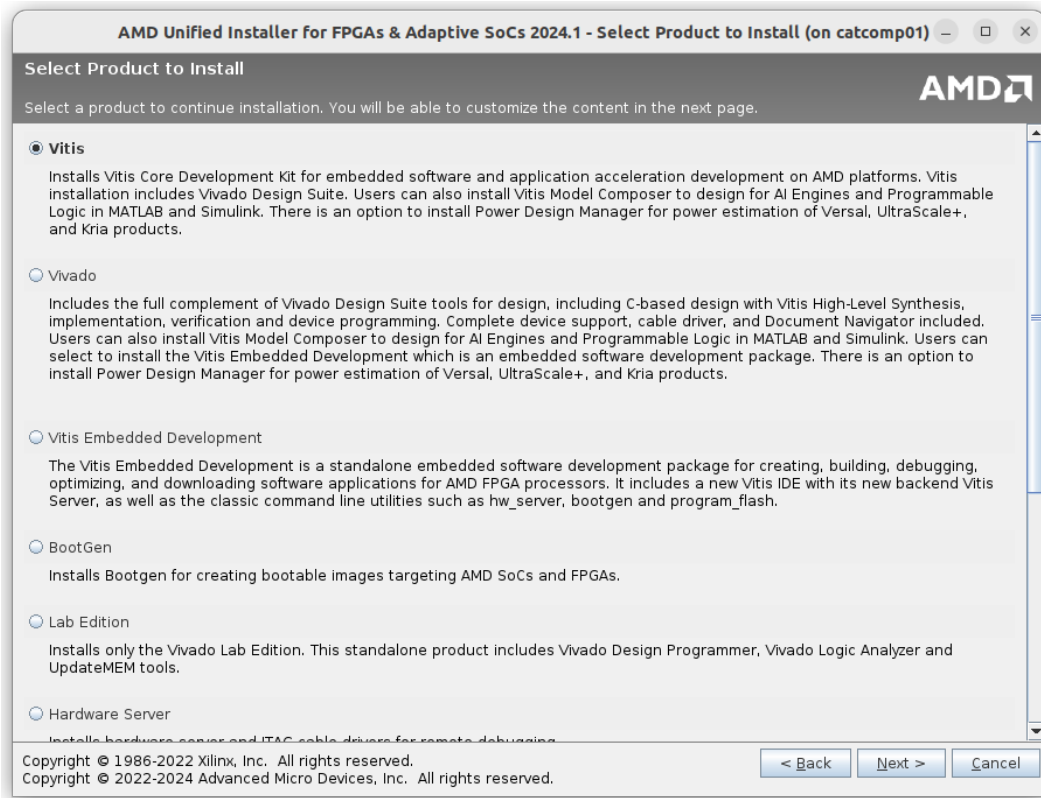


Check support for at least Zynq 7000 devices.

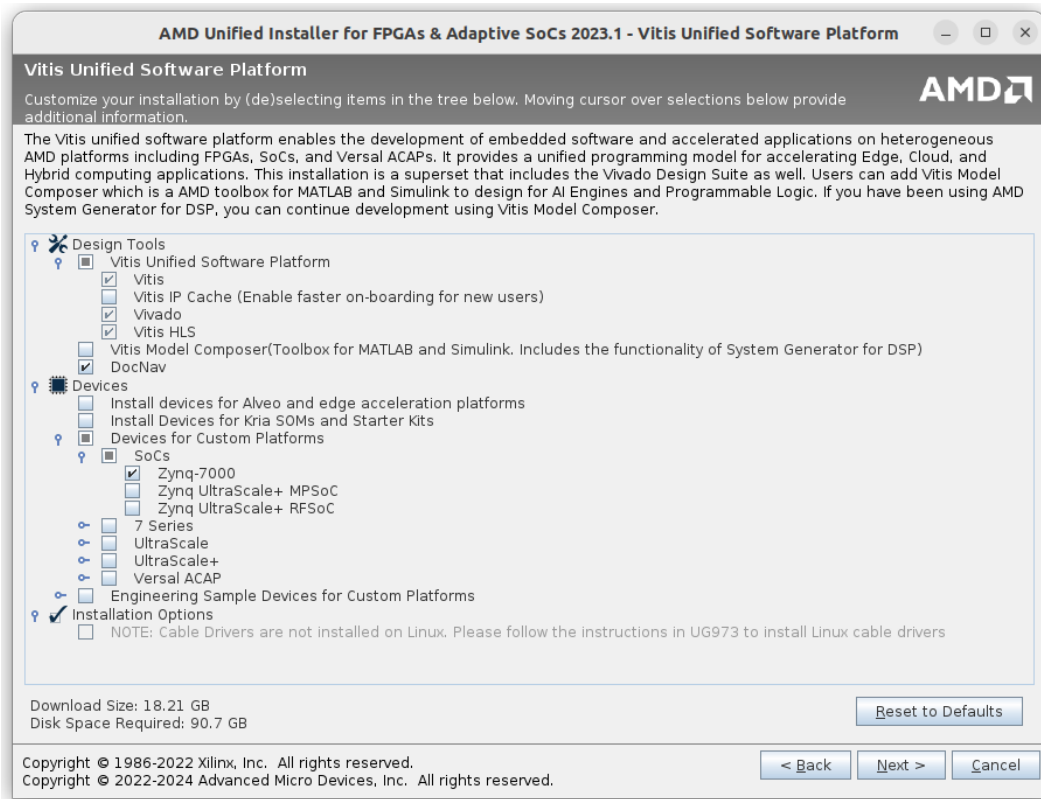


VERY IMPORTANT: Check the box that installs the cable drivers, if you are installing on windows. You won't be able to program the device without it! For linux users please see [UG973](#).

Accept licenses

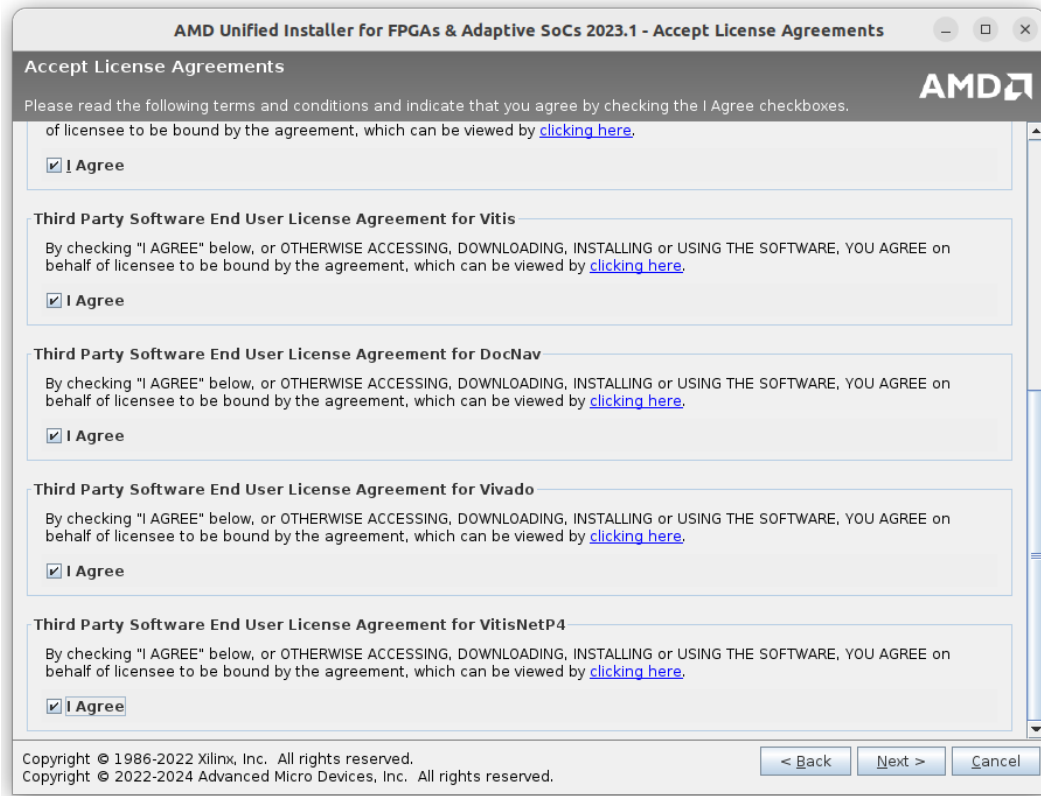

Specify installation location and install. Install location should be kept as short as possible and free of spaces.

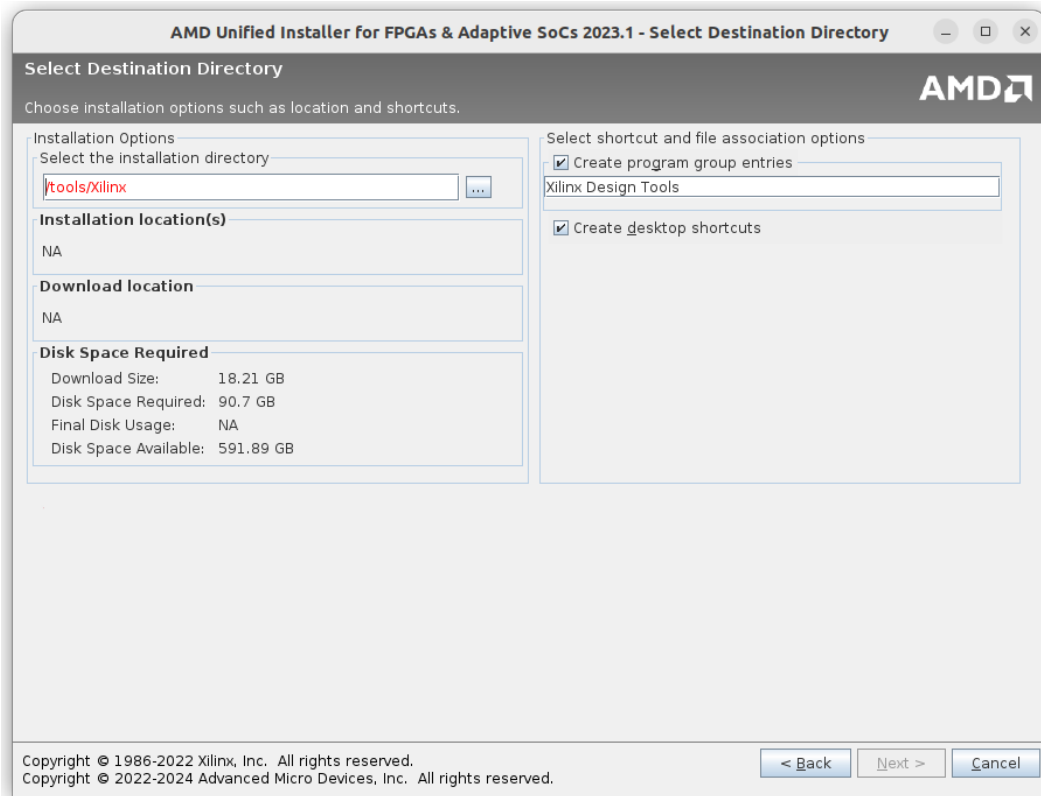

That's it! Wait for the installation to complete and you're all set to program AMD FPGA devices.