

CHANNEL Z0

DOC NO. RL-Z0-A REV. A RIPOSTE LABORATORIES

CONTENTS

▶ How it works	2
▶ Repository map	2
Station scripts	4
▶ Quickstart	5
▶ Configuration, all of it	6
▶ The sponsor	6
▶ License	7
▶ Brand	7


CHANNEL Z0 • CH 0 • DESIG RL-Z0
a local channel, for locals
a Riposte Laboratories transmission

An old-style TV channel built on new plumbing: one linear channel that runs 24/7 from a machine in a house, with scheduled shows, locally submitted commercials, station bumpers, a nightly flagship (**GROUND ZERO** — alien street interviews conducted via baguette), and a midnight sign-off to colour bars, exactly as civilization intended.

This repository is the whole station: the playout configuration, the uplink, the tower, the storefront website, and the operating manual.

SEC.01

HOW IT WORKS

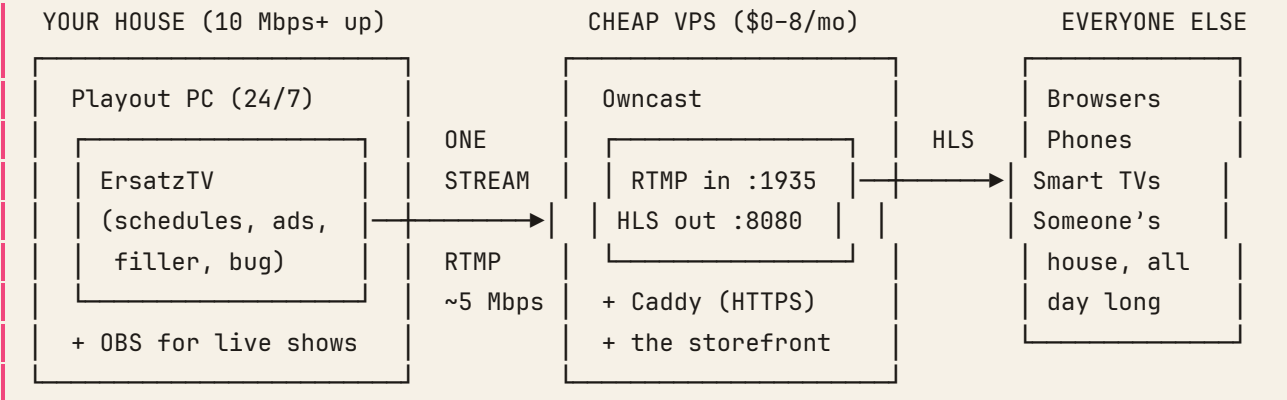

Exactly one stream ever leaves the house. The VPS does the crowd work, so a residential connection can run a channel with an unlimited audience. Latency is ~20 seconds and that is fine, because this is television, not a phone call.

SEC.02

REPOSITORY MAP

PATH	WHAT IT IS
<code>docs/build-guide.</code> <code>mdRL-Z0-BUILD-GUIDE</code>	Start here. The full station build, Phase 0 → on-air
<code>docs/programming.</code> <code>mdRL-Z0-PROGRAMMING</code>	The broadcast week. The full schedule, the show bible, and the ErsatzTV mapping

Continued on next page

(Continued)

PATH	WHAT IT IS
docs/archive-fetch. mdRL-Z0-ARCHIVE-FETCH	Stocking the library. Public-domain intake from the Internet Archive
docs/clustering. mdRL-Z0-CLUSTERING	More than one machine. Node roles, failover, and what can't be load-balanced
docs/self-hosting. mdRL-Z0-SELF-HOSTING	Run master control on a homelab – Proxmox & TrueNAS, GPU passthrough, tips
docs/gear-and-costs. mdRL-Z0-GEAR-AND-COSTS	Hardware picks, VPS comparison, bandwidth math, budgets
docs/weather.mdRL-Z0-WEATHER	On-air graphics. The bug, the weather desk, the crawl, and the traps in ErsatzTV's graphics engine
docs/ad-standards. mdRL-Z0-AD-STANDARDS	The one-page rulebook for locally submitted commercials
docs/ideas.mdRL-Z0-IDEAS	The writers' room – what's shipped, what's next
site/index.html	The storefront – live player (pause, volume, full screen), program grid, ad submissions (Riposte Labs design language)
site/retro/index.html	The original CRT-and-wood-cabinet version, preserved
site/_headers · site/_redirects	Cloudflare headers + short links (/watch, /lab)
vps/ vps/peertube/	The tower: Owncast docker-compose.yml + Caddyfile (and vps/peertube/ – a peer-to-peer alternative tower)
playout/	Master control: compose.yml (containerized), ErsatzTV launcher, uplink supervisor, now-playing bridge
tools/	Station scripts – see below
wrangler.jsonc	Cloudflare Worker config (serves site/ as static assets at ch0.ripostelabs.xyz)
.env.example	Domains, stream key, media root, tokens – copy, fill, never commit
.github/workflows/deploy-pages.yml	Alternative host: GitHub Pages, run manually (Cloudflare is primary, via its Git integration)

STATION SCRIPTS

SCRIPT	JOB
tools/bootstrap-node.sh	Stand up a node from a bare machine – playout, tower, or worker (manual <code>RL-Z0-CLUSTERING</code>)
tools/make-media-tree.sh	Create the media library layout on the playout PC
tools/z0-weather.sh	The weather desk – renders the corner card, the crawl and the forecast segment (manual <code>RL-Z0-WEATHER</code>)
tools/wire-graphics.py	Wires the graphics elements and forecast slots into the broadcast week (manual <code>RL-Z0-WEATHER</code>)
tools/fetch-archive.sh	Stock the library from archive.org – public domain only, resumable (manual <code>RL-Z0-ARCHIVE-FETCH</code>)
tools/make-proxies.sh	Build a test library – tiny stand-ins with identical runtimes, for trying schedules
tools/test-failover.sh	Prove the cluster fails over and never double-publishes
tools/test-generators.sh	Prove the card generators still make cards – arguments, text, 1080p/30 conformance
tools/test-broadcast.sh	Fire a live test pattern at the tower (build guide, Phase 1.5)
tools/test-player-controls.mjs	Drive the storefront player in a real browser – pause/resume-at-live, mute + volume, full screen (needs the channel on air)
tools/check-ad.sh	Screen a submitted spot: length, codecs, true loudness (read-only)
tools/normalize-ad.sh	Clear a submitted spot for air: 1080p/30, loudness-normalized
tools/make-colorbars.sh	Generate the midnight sign-off bars (with optional silence)
tools/make-testcard.sh	Generate the station test card – the branded signal-check pattern with a 1 kHz line-up tone
tools/make-signoff.sh	Generate the nightly sign-off – the "broadcast day concludes" card dissolving into colour bars
tools/make-ident.sh	Generate station idents – the "NOW WATCHING CHANNEL Z0" bumpers

Continued on next page

(Continued)

SCRIPT	JOB
<code>tools/make-slate.sh</code>	Generate slate cards – technical difficulties, sign-off, please stand by
<code>tools/make-bug.sh</code>	Generate the channel bug (watermark PNG) for ErsatzTV

SEC. 03

QUICKSTART

The short version – the build guide `RL-Z0-BUILD-GUIDE` has every command.

- 1. Phase 0 – names.** A domain, a VPS, two DNS records. See `gear-and-costs` `RL-Z0-GEAR-AND-COSTS` for picking the VPS (spoiler: it can be \$0).
- 2. Phase 1 – the tower.** On the VPS: `vps/docker-compose.yml` up, Caddy configured, then immediately change Owncast's default admin password and stream key. Prove the pipe with `tools/test-broadcast.sh`.
- 3. Phase 2 – master control.** On the playout PC (or a homelab box – see `self-hosting` `RL-Z0-SELF-HOSTING`): `tools/make-media-tree.sh`, fill the library (`tools/fetch-archive.sh --all` stocks the public-domain half – see `archive-fetch` `RL-Z0-ARCHIVE-FETCH`), then either `playout/ersatztv.sh` or the whole containerized stack with `cd playout && docker compose up -d`. Build the schedule and ad-break filler in the ErsatzTV UI.
- 4. Phase 3 – the uplink.** The `uplink` service in `playout/compose.yml` carries one stream to the tower and reconnects forever (or install the bare-metal `playout/z0-uplink.service`). Optionally add the now-playing bridge: `docker compose --profile nowplaying up -d`. You now run a television station.
- 5. Phase 4 – the storefront.** Edit the `WATCH_HOST` + `AD_EMAIL` lines at the top of `site/index.html`. Cloudflare serves it via **Workers Static Assets**, wired to this repo through Cloudflare's Git integration (`wrangler.jsonc` points `assets` at `site/`) – every push to `main` auto-deploys. Live at `ch0.ripostelabs.xyz`.
- 6. Phase 5 – go live sometimes.** OBS to the same RTMP key for Ground Zero remotes and Lab Hour.
- 7. Phase 6 – more machines (optional).** `tools/bootstrap-node.sh` stands up a node from a bare box in one command, and a second playout node on the same shared

media becomes a standby that takes over if the first dies. Note what this does and doesn't buy you – a linear channel can't be load-balanced, only made redundant. See `clusteringRL-Z0-CLUSTERING`.

SEC.04

CONFIGURATION, ALL OF IT

- ▶ `.env` (from `.env.example`) – domains, stream key, channel URL, media root, and (optional) the Owncast token for the now-playing bridge. Used by the compose stack, the uplink, and the tools.
- ▶ `site/index.html CONFIG` block – stream URL, Owncast base (for the ON AIR light, receiver count, and the live NOW SHOWING title), ad-submission email, chat and lab links. Also the `P2P_*` keys (WebRTC segment sharing, on by default – viewers offload the tower for each other) and `PEERTUBE_EMBED` (set it to run the PeerTube tower's player instead; see `vps/peertube/`).
- ▶ **Everything else** lives in the ErsatzTV and Owncast admin UIs, documented in the build guide.

Two secrets, both in `.env` (gitignored) and nowhere else: the **stream key** (the world vs. your airwaves) and, if you run the marquee, an **Owncast access token**. Cloudflare needs no secret in the repo – its Git integration deploys the storefront on every push on its own.

SEC.05

THE SPONSOR

Channel Z0 is sponsored by **Riposte Laboratories** (`ripostelabs.xyz`) – an engineering company that transforms discarded plastic and end-of-life battery cells into durable, modular products. Between programs, you'll see what the lab has been building lately. The storefront speaks the lab's design language: paper, ink, one red, spec sheets, and esh's checkers.

PARRY • RIPOSTE • RECYCLE • REPEAT ♻

SEC.06

LICENSE

Code and configuration are MIT. The **Channel Z0** and **Ground Zero** names, show concepts, and the Riposte Laboratories marks and brand language are not granted by the licence – build your own station with this plumbing, but make it yours. (The Prelinger Archive material the guide points at is public domain; anything you air still has to be yours to air. See docs/ad-standards.md_{RL-Z0-AD-STANDARDS.})

This station concludes its broadcast day at midnight. Colour bars until sunrise.

SEC.07

BRAND

This project follows the Riposte Laboratories design system – published at ripostelabs.xyz/brand. See BRAND.md_{RL-Z0-A} for what conforms, what deliberately diverges, and why.

DOC NO. RL-Z0-AREV. A • EST. 2026 PARRY ♻️ RIPOSTE ♻️ RECYCLE ♻️ REPEAT
Riposte Laboratories Inc.

SOURCE README.md SHA 47e775fe29b9 BUILT 2026-08-13