


ls

- **Usage** Used for displaying all the files inside a given directory. When no directory is specified, ls displays the files in th current working directory
- **Formula**
    - `ls+option+directory`
- **Examples**

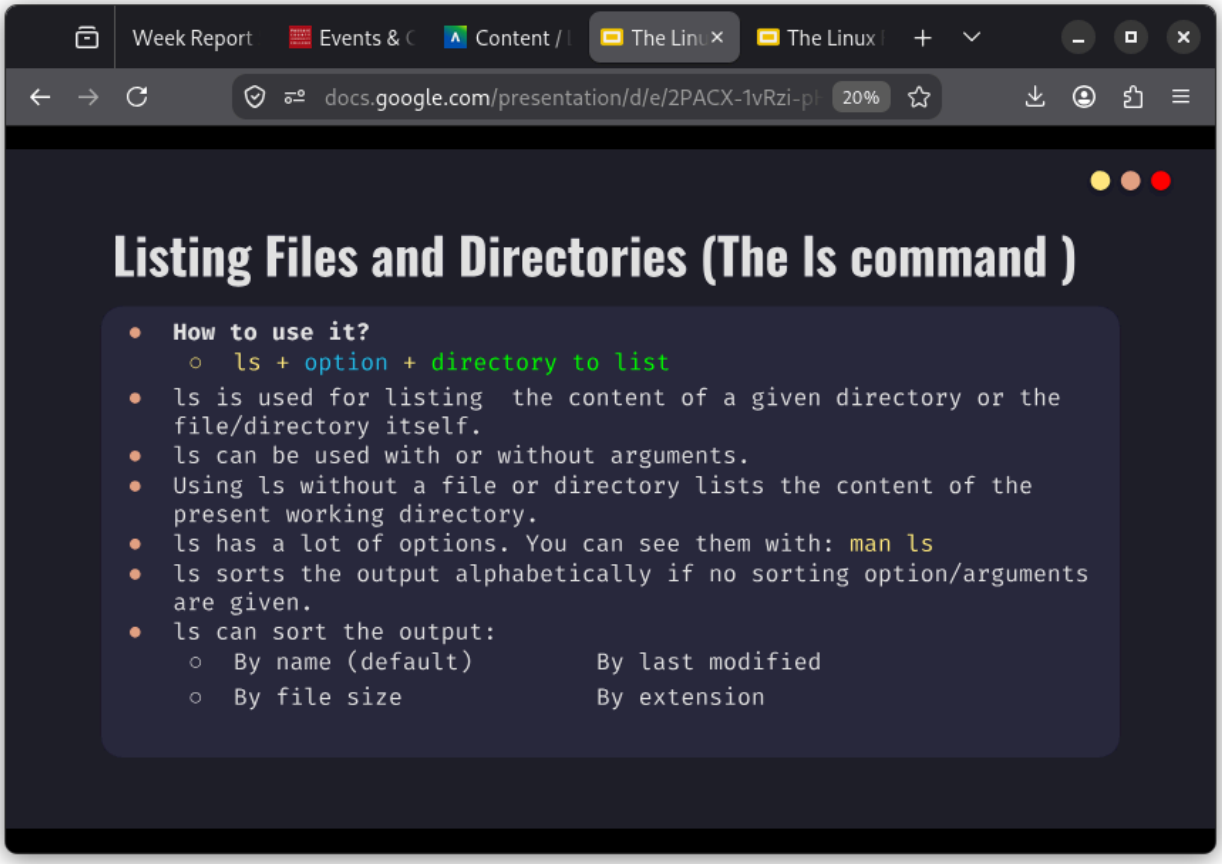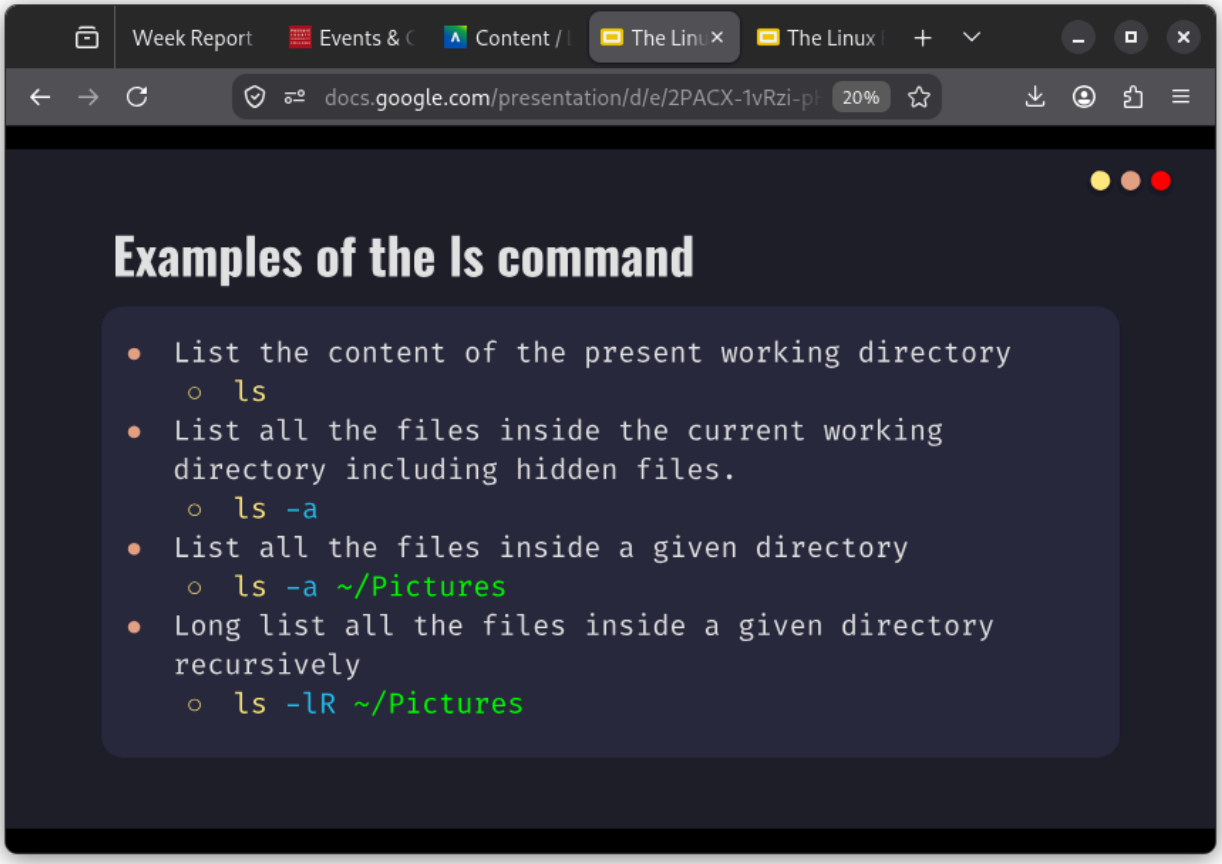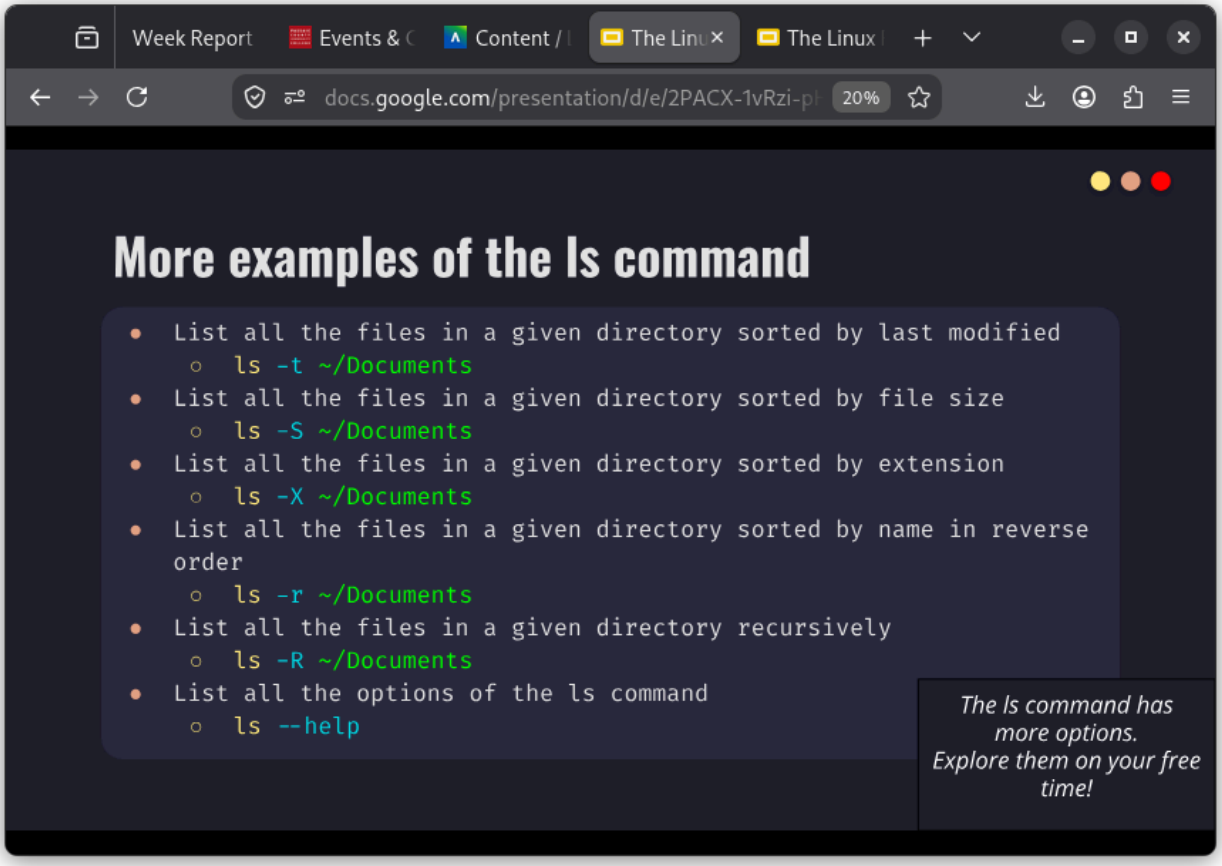


Week Report
Events &
Content /
The Linu
The Linux
docs.google.com/presentation/d/e/2PACX-1vRzi-p
20%
Examples of the ls command
List the content of the present working directory
ls
List all the files inside the current working directory including hidden files.
ls -a
List all the files inside a given directory
ls -a ~/Pictures
Long list all the files inside a given directory recursively
ls -lR ~/Pictures


Week Report
Events &
Content /
The Linu
The Linux
docs.google.com/presentation/d/e/2PACX-1vRzi-p
20%
More examples of the ls command
List all the files in a given directory sorted by last modified
ls -t ~/Documents
List all the files in a given directory sorted by file size
ls -S ~/Documents
List all the files in a given directory sorted by extension
ls -X ~/Documents
List all the files in a given directory sorted by name in reverse order
ls -r ~/Documents
List all the files in a given directory recursively
ls -R ~/Documents
List all the options of the ls command
ls --help
The ls command has more options. Explore them on your free time!

pwd

- **Usage**

- used for displaying the current working directory(where you are currently working)


- **Formula**
  - `pwd`
- **Examples**
  - type `pwd` home/amazingg <---this will appear

cd

- **Usage**
  - used for changing the current working directory.When no directory is given,cd changes the current working directory to the home directory of the current user.
- **Formula**
- `cd+destination`
- Destination can be an absolute path or a relative path.
- **Example**
- If you want to go to your home directory you can use:
  - cd
  - cd~
  - cd `$home`
- If you want to go to the previous current working directory you can use
  - **cd ~



Relative path

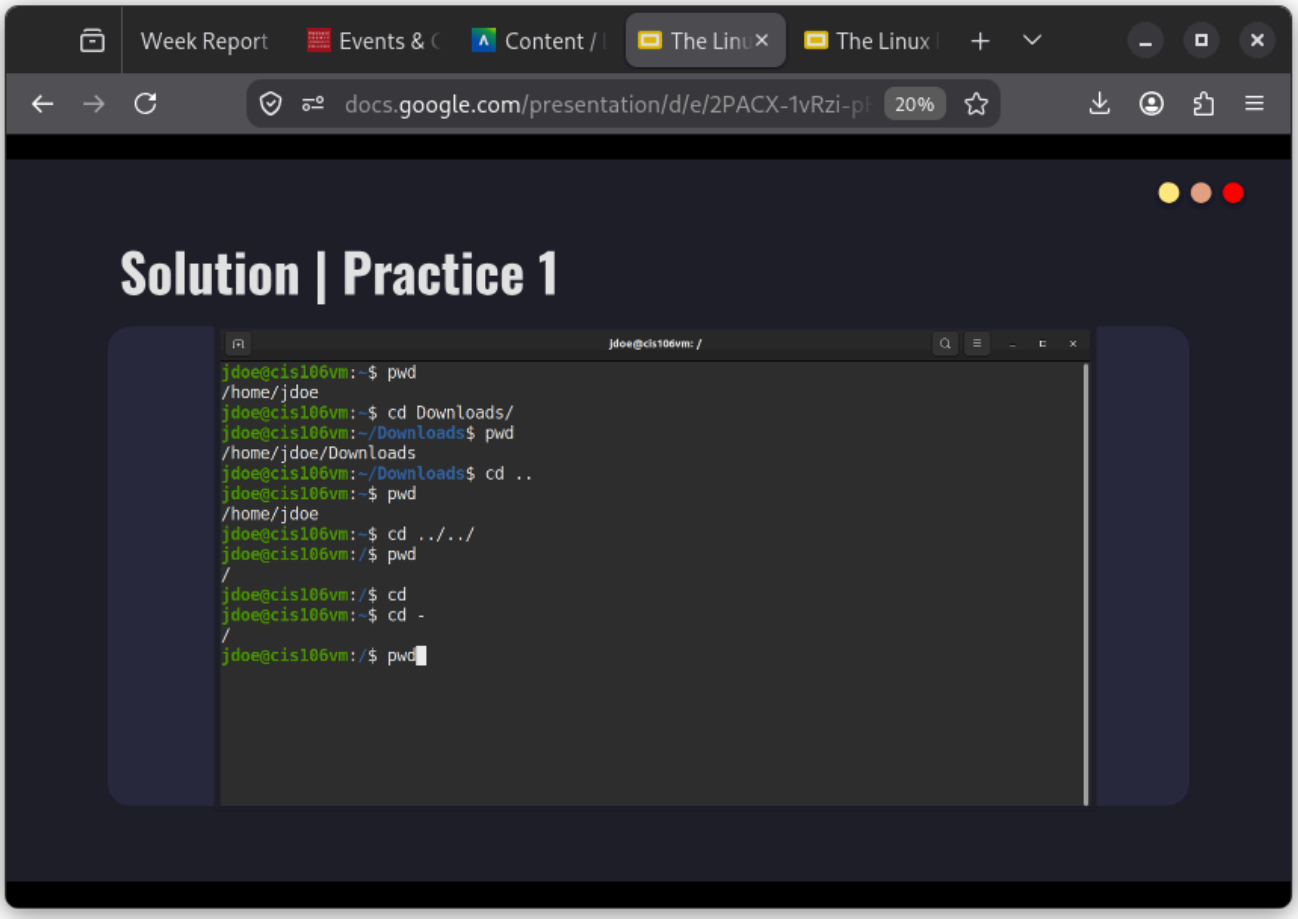

What is a variable?

Variables allow you to temporarily store information within the shell script for use with other commands in the script.A variable is a container or placeholder for data

How do I use a variable?

```
user="Bob"
```

What is an environment variable?

Environment variables are used by the shell to track specific system information.Environment variable are typed in capital letter.This helps to differentiate them from user defined. Type their name starting with a dollar sign$ Example: `echo MONEYSIGNuser` to display the current user

Create a shell script called: **`script_env_var.sh`**

Save the script in the "**`Scripts`**" directory located in your home directory. You should have this directory already but if you don't, create it.

Open a terminal and type the **`env`** command to list all the environment variables.


In your script use the **`echo`** command to display the following:

a. The current user

b. The current shell

c. The current user's home directory absolute path

d. The path variable (this is an important variable! read here.)

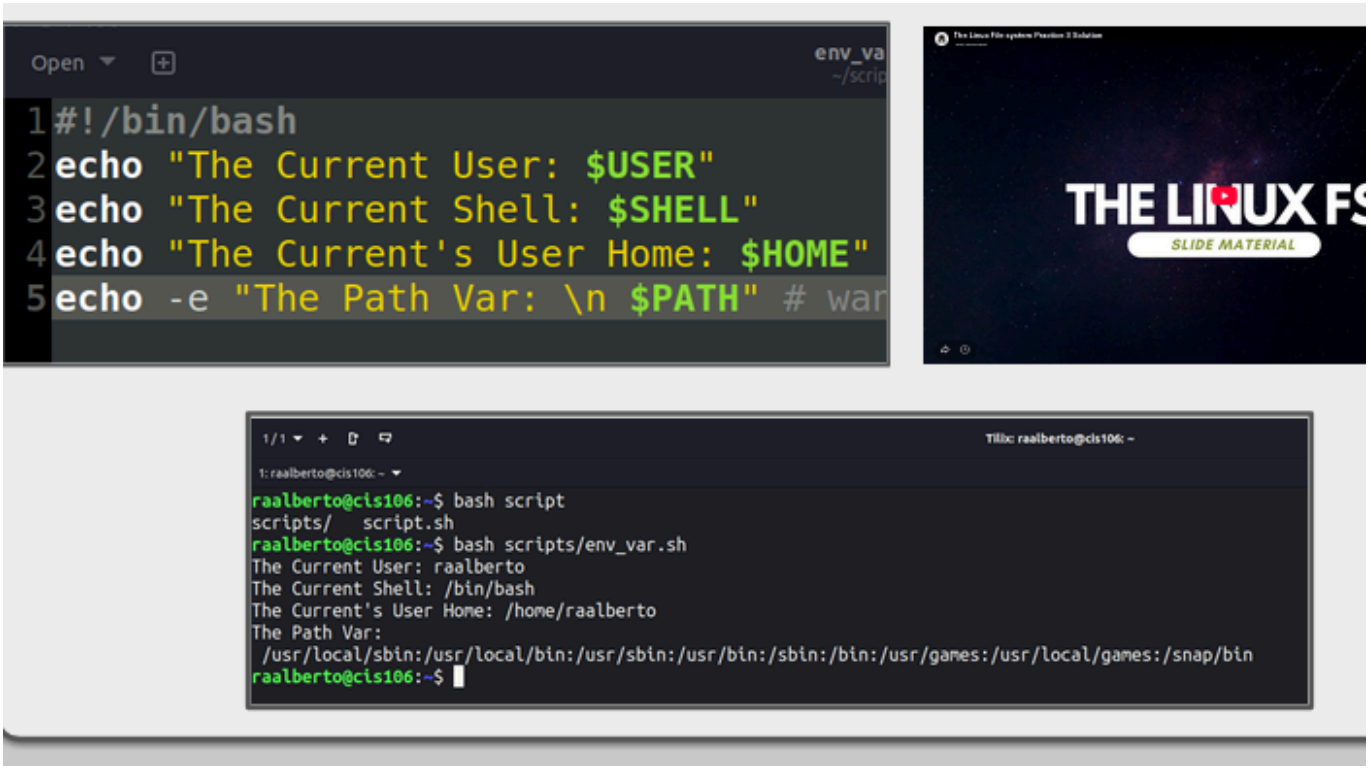



What is a user defined variable?

Allows you to temporarily store data and use it throughout the script-just like any other programming language.User variables are created by the user and exist only in the script and subshell that runs the script.

1. Create a shell script called: **script_usr_var.sh**
2. Save the script in the "**Scripts**" directory located in your home directory.
3. Create 4 variables that store the following information:
   a. Name
   b. Age
   c. Email address
   d. Phone number
4. Assign random values to each variable. For example:
   a. name="bob"
   b. age=47
   c. email=1123@mail.com
   d. phone=123-333-4477
4. Display the values of each variable in an **echo** command in the following way:
   a. Name: name_variable_here
   b. Age: age_variable here
   c. Email address: email_variable here
   d. Phone number: phone_variable here
5. Modify the script to include an **echo** command that will display "**User info**"
6. Add a tab at the beginning of each **echo** statement that uses a variable. Save and run the script.





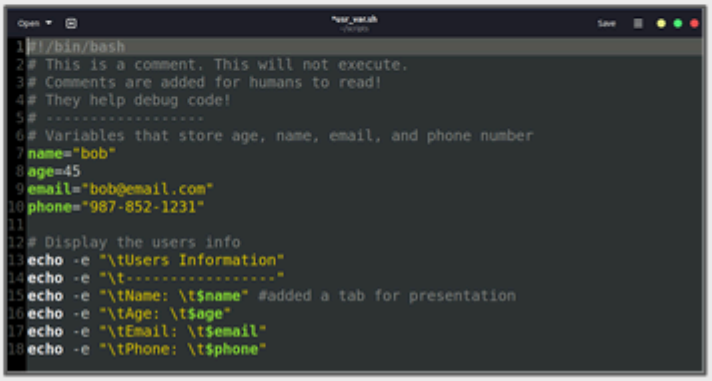

What is the root directory?

Contains all the files and subdirectories that makes your computer

What does "Parent Directory" mean?

You are always working inside a particular directory and you can move forward to a subdirectory or backwards to the previous directory.

What does "Current working directory" mean?

The directory where you are at the moment or present working directory.

What is an absolute path? Include an example

the location of a file starting a the root of the file system. **Example**

- /home/john/downloads/song.mp3 IT BEGINS WITH THIS /

What is a relative path? Include an example

THe location of a file startig from the current working directory or a directory that is located inside the current working directory. **Example**

- Downloads/song.mp3 IT DOES NOT BEGIN WITH /

What is the difference between “Your home directory” and “The home directory”?

When you open your terminal emulator , your current working directory is your home directory. It refers to your user's home directory. For example , /home/adrian is the home directory of the user adrian. THe phrase "the home directory" refers to the home directory located in the root. This: /home