
PLUGINUI

# Plug-in Host

User manual of the modular VST3 and VST 2 host

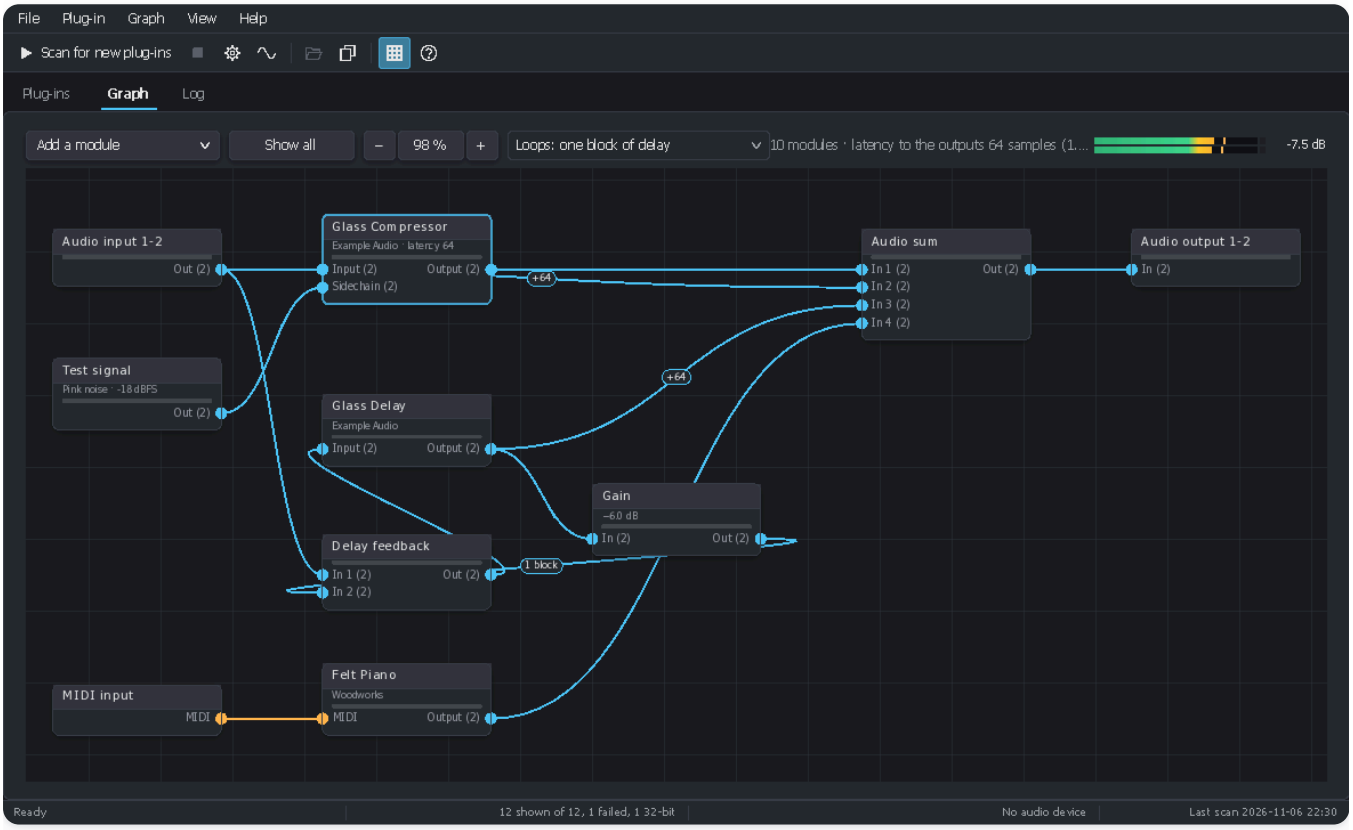


Development version after PluginUI 0.4.0 · November 8, 2026

asm8086 — github.com/asm8086/PluginUI · MIT License

## Contents


Overview 3

Installation and first start 4

Getting started: your first graph 5

The main window 6

The plug-in list 8

Finding the installed plug-ins 10

Audio and MIDI 11

The graph 14

The modules and their settings 17

Plug-in windows 19

The log 20

Keyboard shortcuts 21

Troubleshooting 23

Files and command line 24

# 1 Overview

**Plug-in Host** is an audio plug-in host for Windows. It loads the **VST3** and **VST 2** plug-ins installed on the computer, plays them live through the sound card (**ASIO** or **WASAPI**) and connects them like a modular rack: each plug-in, each input or output, each signal generator is a *module*, and *cables* carry audio and MIDI from one module to another.

Use it to:

- try a plug-in quickly, without opening a digital audio workstation (DAW);
- build an effect chain or an instrument to play live, with the lowest latency the sound card allows;
- build parallel, multiband or feedback processing;
- test your own plug-ins while you develop them (detailed log, state saved and restored, latency shown).

The window has three tabs:

- **Plug-ins**: the list of the installed plug-ins, with search, filters, sorting and details;
- **Graph**: the modules that play and their cables;
- **Log**: the messages of the session (plug-ins loaded or refused, files, audio device).

Plug-in Host is part of PluginUI, a C# user interface library for audio plug-ins. It shares its settings, its plug-in list and its graph files with `pluginhost`, the command line host (see chapter 14).

# 2 Installation and first start

## Requirements

- Windows 10 or 11, 64-bit (x64 or ARM64).
- A sound card: its ASIO driver for the lowest latency, otherwise the Windows sound device (WASAPI).
- 64-bit VST3 or VST 2 plug-ins. 32-bit plug-ins are listed, marked “32-bit”, but do not load.

## From a release

1. On the Releases page of the project, download `PluginHost-<version>-win-x64.zip` (or `…-win-arm64.zip` for an ARM PC).
2. Unzip it into a folder of your choice. No installation and no .NET runtime are needed: `PluginHost.exe` is a native program.
3. Start `PluginHost.exe`. If Windows SmartScreen shows a warning (the program is not signed), click **More info** then **Run anyway**.

## From the sources

With the .NET 10 SDK and the cloned repository:

```
# for debugging
dotnet run --project tools/PluginHost.Desktop
# one native PluginHost.exe
dotnet publish tools/PluginHost.Desktop -c Release -r win-x64 -p:PublishAot=true
```

In Visual Studio, open the solution and start the **PluginHost.Desktop** project.

## At the first start

The plug-in list is empty: start a scan with `F5` (chapter 6), then choose your sound card in **File > Audio and MIDI** (`Ctrl` + `Shift` + `A`, chapter 7). The Graph tab already holds a minimal graph: an audio input, a MIDI input and an audio output.

> **Language.** The interface follows the language of Windows (English or French). **View > Language** changes it; it applies at the next start.


# 3 Getting started: your first graph

This tutorial sends a guitar (or a microphone) plugged into input 1 of the sound card through a virtual amplifier, then a delay, to outputs 1 and 2. Use the plug-ins you have instead.

1. **Choose the sound card. File > Audio and MIDI**: choose **ASIO** and the driver of your card (or **WASAPI** and your devices), with its inputs, then **OK**. The status bar shows the device, its sample rate and its buffer.
2. **Find the plug-ins.** Press `F5`. The progress shows in the status bar; the list fills in when the scan is complete.
3. **Start from a blank graph. File > New graph** (`Ctrl` + `N`): an audio input, a MIDI input and an audio output.
4. **Add the amplifier.** In the **Plug-ins** tab, type its name in the search box (`Ctrl` + `F`) and double-click its row. It arrives in the graph, already connected to the MIDI input and to the free audio output, and the **Graph** tab shows.
5. **Connect the input.** Drag from the *Out* connector of the **Audio input** module to the input connector of the amplifier. Only the compatible connectors light up while you drag.
6. **Add the delay.** Go back to the list (`Ctrl` + `1`) and double-click the delay. As the audio output already has a cable, the delay arrives without an output cable.
7. **Insert the delay.** Drag from the output of the amplifier to the input of the delay, then from the output of the delay to the input of **Audio output**: the new cable replaces the old one, since an input takes one cable.
8. **Adjust.** Double-click a plug-in to open its window (its interface, its presets). Play: the meter at the right of the graph's bar shows the output level and the highest peak in dB.
9. **Save. File > Save the graph** (`Ctrl` + `S`). The `.pluginui-graph` file keeps the modules, the cables and the settings of each plug-in. The current graph also comes back by itself at the next start.

> **Tip.** To hear the amplifier and the delay in parallel rather than in series, add an **Audio sum** module (**Add a module**), connect both plug-ins to its inputs and its output to **Audio output**. Signals are added only by a sum.


# 4 The main window

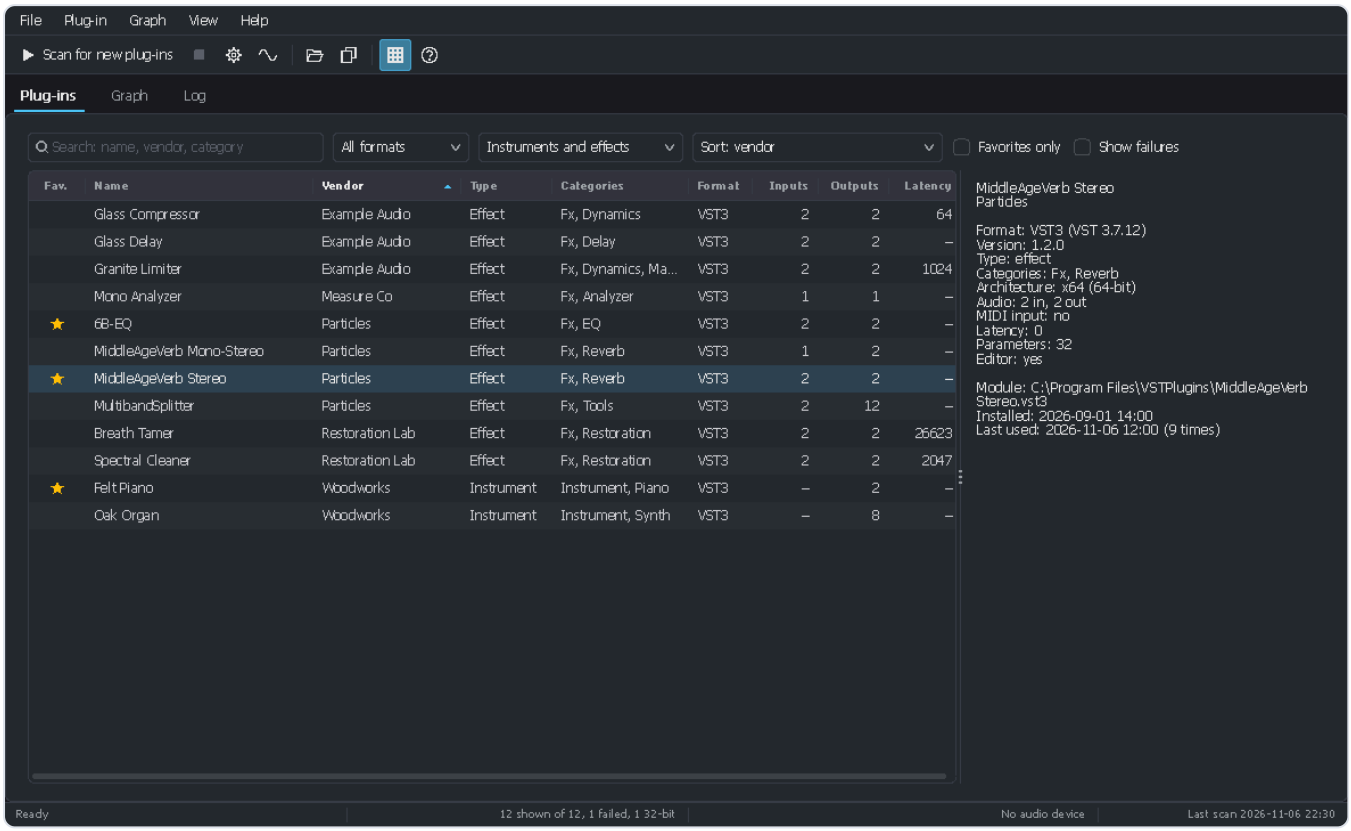


The main window, Plug-ins tab, with the details pane on the right.

## Menus

| Menu | Content |
|---|---|
| File | New graph, Open a graph, Save the graph, Save the graph as; Scan for new plug-ins, Scan everything again, Stop the scan; Plug-in folders; Audio and MIDI; Exit. |
| Plug-in | Add to the graph, Favorite, Show in Explorer, Copy the path, Ignore the module. |
| Graph | Add a module, Rename the module, Loop delay. |
| View | Plug-in list, Graph, Log; Search; Details pane; Full screen; Columns; Light theme; Language. |
| Help | About (version and credits). |

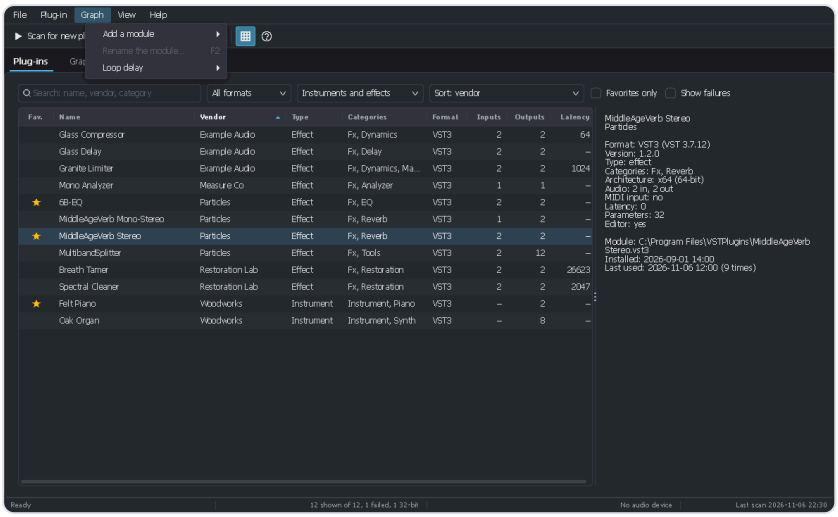


The View menu.

## Tool bar

From left to right: **Scan for new plug-ins**, **Stop the scan**, **Plug-in folders** (gear), **Audio and MIDI** (wave), **Add to the graph**, **Copy the path**, **Details pane** and **About**. Hovering a button shows what it does and its shortcut.

## Status bar

It shows the progress of a scan or the last message, the number of plug-ins shown (and failed), the audio device with its sample rate and buffer, and the date of the last scan. Its messages fade after a few seconds but stay in the log.

## Theme, full screen

**View > Light theme** (`Ctrl` + `T`) switches between the dark and the light theme. **Full screen** (`F11`, `Esc` to leave) gives the whole screen to the window. The chosen tab, the columns, the filters, the theme and the sound card come back at the next start.

# 5 The plug-in list


## Search and filter

The bar above the list holds:

- the **search box** (`Ctrl` + `F`): name, vendor or category;
- the **format**: all, VST3 or VST2;
- the **kind**: instruments and effects, instruments only, effects only;
- the **sort**: name, vendor, category, format, input or output channels, latency, installation date, recently used, most used, favorites first, folder, status;
- **Favorites only** and **Show failures** (the plug-ins the scan could not load, in red, and the 32-bit plug-ins, in amber).

## Sort and choose the columns

Click a column header to sort the list; click again for the reverse order. Right-click the header (or **View > Columns**) to show or hide columns: favorite, name, vendor, type, categories, format, inputs, outputs, sidechain, MIDI, latency, parameters, editor, version, installed, last used, uses, folder, architecture, status. Drag the edge of a header to change its width.

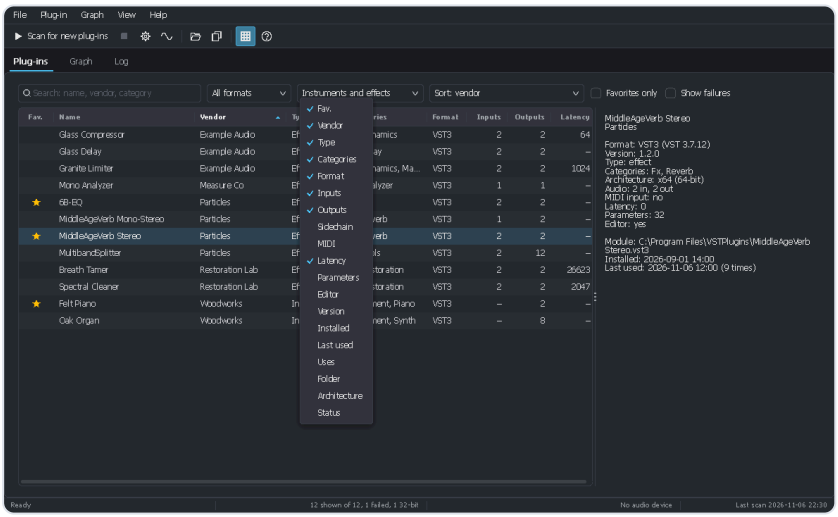


Right-click the header to choose the columns.

## The details pane

**View > Details pane** (`Ctrl` + `I`) shows on the right all that is known about the selected plug-in: format and SDK version, version, categories, architecture (x64, 32-bit x86…), input and output buses, MIDI input, latency (in samples and milliseconds), number of parameters, whether it has an editor, file path, dates, number of uses and, for a failed plug-in, the reason of the failure.

## The Plug-in menu

It also opens with a right click on a row, or with the Menu key of the keyboard:

- **Add to the graph** ( `Enter` , double-click, `Ctrl` + `O` );
- **Favorite** ( `Ctrl` + `D` ): a star marks the plug-ins you use often;
- **Show in Explorer** and **Copy the path** ( `Ctrl` + `Shift` + `C` );
- **Ignore the module**: removes the file from the list and from later scans (for a plug-in that causes trouble).


# 6 Finding the installed plug-ins

## Start a scan

- **Scan for new plug-ins** ( `F5` ) opens only the files that are new or changed since the last scan: it is quick.
- **Scan everything again** ( `Shift` + `F5` ) opens every file again.
- **Stop the scan** interrupts it: the list then stays as it was.

Each file is opened in a **separate process**: a plug-in that crashes or hangs during the scan is marked as failed, without stopping Plug-in Host. The list changes only when the scan is complete; the status bar gives its summary (modules scanned, unchanged, removed, failed) and the log lists the failures.


## Plug-in folders

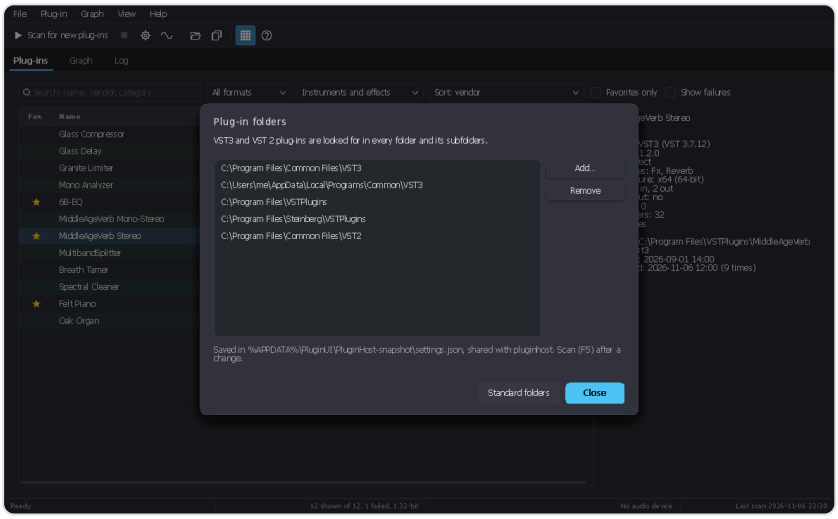


File > Plug-in folders.

**File > Plug-in folders** ( `Ctrl` + `Shift` + `F` ) holds one list of folders, each searched with its subfolders for both formats. **Standard folders** brings back the usual Windows folders (for example `C:\Program Files\Common Files\VST3` and the known VST 2 folders). After a change, start a scan.

# 7 Audio and MIDI

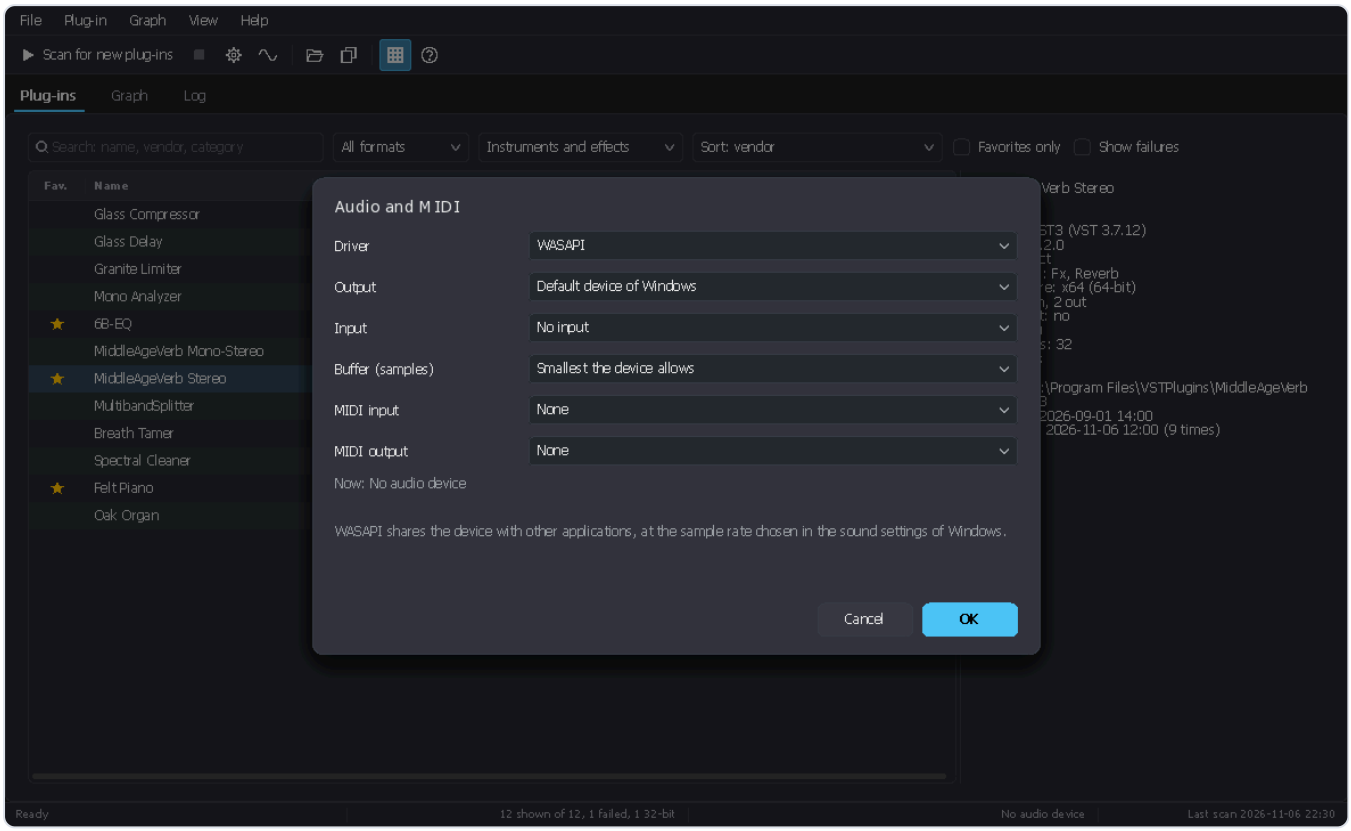



File > Audio and MIDI, with WASAPI.

**File > Audio and MIDI** (`Ctrl` + `Shift` + `A`) chooses the driver and the ports:

## WASAPI (the Windows sound device)

- Output device and input device.
- Buffer size: by default the smallest the device allows, often under 3 ms at 48 kHz.
- The device stays shared with the other applications, at the rate set in the sound settings of Windows.

## ASIO (the sound card's driver)

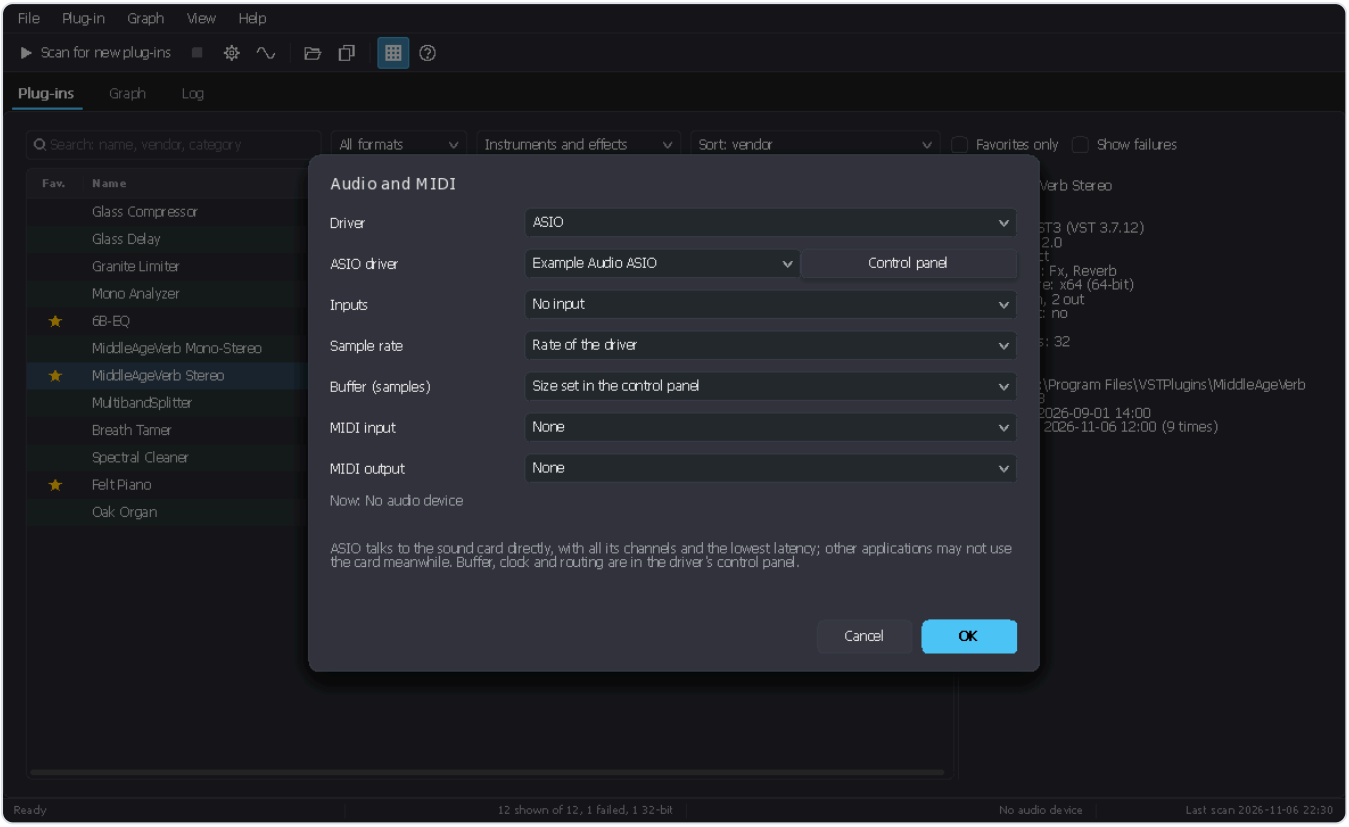


The ASIO settings.

- The **driver** of the card and its **Control panel** (buffer, clock, routing). The panel opens while the driver runs: choose the driver first and click **OK**.
- The **inputs**: none, or all those of the card.
- The **sample rate**: the driver's, or 44.1 to 192 kHz when the card accepts it.
- The **buffer**: the control panel's by default.

Every output of the card is available. When the control panel changes the buffer or the rate, Plug-in Host restarts the driver by itself.

## MIDI

The **MIDI input port** feeds the **MIDI input** modules of the graph (a master keyboard, for example); the **MIDI output port** receives what reaches the **MIDI output** modules.


## Without a sound card

With **No audio device** as driver, or when the device cannot be opened, the graph runs on a 48 kHz clock with a silent output: the plug-ins, their editors and their parameters behave as in a DAW.

## Output level

The meter at the right of the graph's bar shows the level of the first two outputs. On its right, the **highest peak** in dB since the meter was last clicked (for example `-7.5 dB`, or `+1.2 dB` in red when the signal goes over 0 dBFS). A click clears it.

# 8 The graph

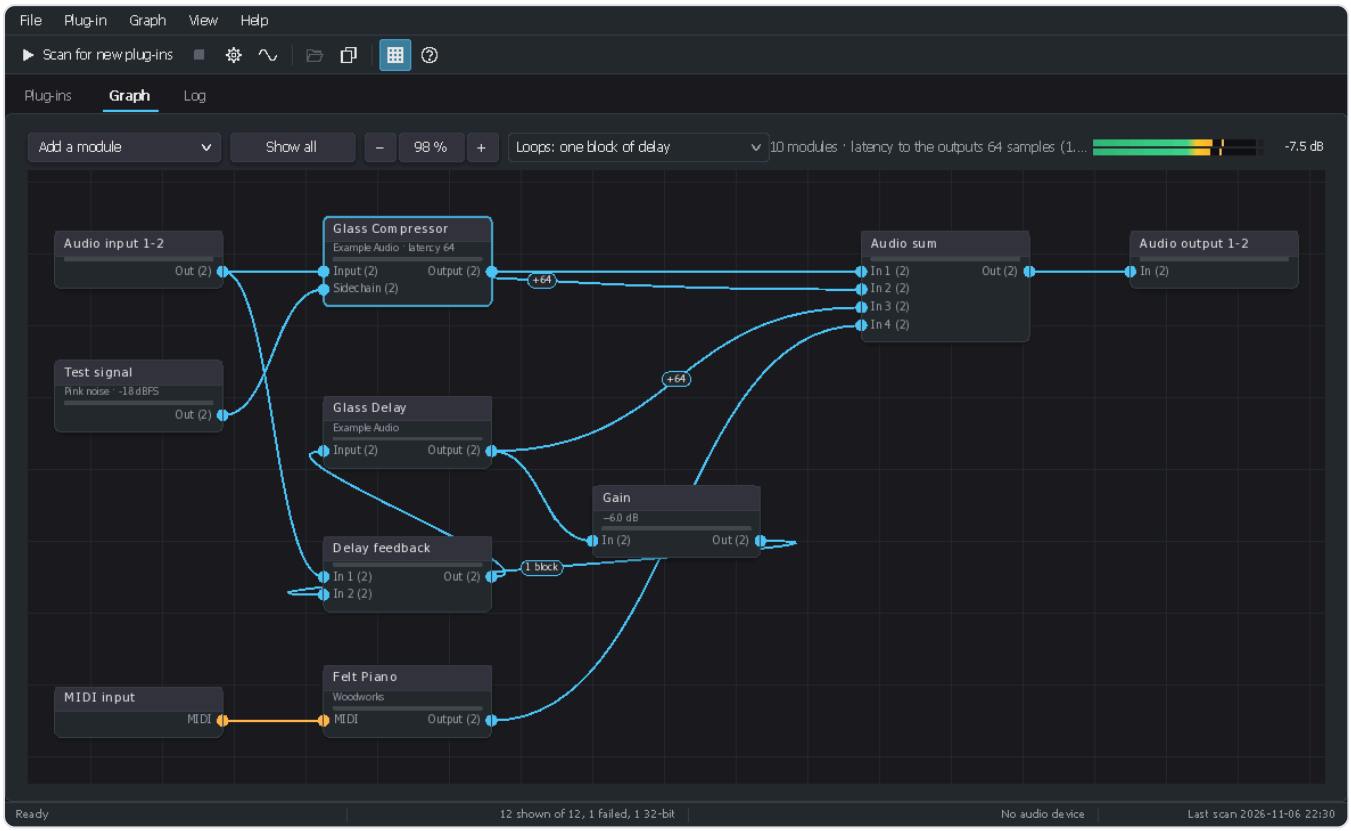


A graph: two sources, a compressor with a side chain, a delay with a feedback loop, a piano, a sum and an output.

## Principle

What plays is a **graph of modules** joined by **cables**. The inputs of a module are on the left, its outputs on the right; each connector shows its channel count, for example `In (2)`. Audio connectors are blue, MIDI connectors orange.

- An **output** feeds as many cables as wanted.
- **An input takes one cable**: a new cable replaces the old one. Signals are added only in an **Audio sum** or a **MIDI merge** module.
- A mono signal entering a stereo input feeds both channels; two channels entering a mono input are averaged; otherwise the first channels match. The **Muxer** and **Demuxer** modules join or split channels explicitly.
- A plug-in plays as long as its module is in the graph, whether its window is open or not.

## Adding modules

- **A plug-in**: double-click (or `Enter`) its row in the list. Its MIDI input is connected to the **MIDI input** module and its main output to an **Audio output** module that has no cable yet.
- **Other modules**: the **Add a module** button of the bar, **Graph > Add a module**, or a right click on an empty place of the graph (the module goes there).

## Cabling

- **Draw a cable**: drag from a connector to another, from an output or from an input. Only the compatible connectors light up: audio to audio, MIDI to MIDI.
- **Move or remove a cable**: grab its end at the input and pull it away; drop it on another input to move it, or on an empty place to remove it. A click on a cable selects it; `Delete` removes it.
- **With the keyboard**: the menu of a module (right click, `Shift` + `F10`) offers **Connect**, with every compatible input, and **Disconnect**. Screen readers use them too.

## Loops


A cable may go back and close a loop, for a feedback for instance. A plug-in processes whole blocks of samples: the cable that closes the loop, drawn **dashed** with the label `1 block`, therefore delivers its signal **one block late**.

- **Loops** in the graph's bar (or **Graph > Loop delay**) runs the modules of loops in sub-blocks of 16, 32, 64 or 128 samples: the delay becomes that sub-block, at the cost of more calls to their plug-ins.
- **Break the loop here**, in the menu of a cable, chooses which cable of the loop carries the delay.

## Latency

Some plug-ins have a latency (a look-ahead limiter, a linear-phase equalizer...). An **Audio sum** delays its inputs so that paths of different latency arrive aligned: the delay added shows on the cable, for example `+64`. It can be turned off in the settings of the sum. The graph's bar shows the latency up to the outputs, in samples and milliseconds.

## The menu of a module

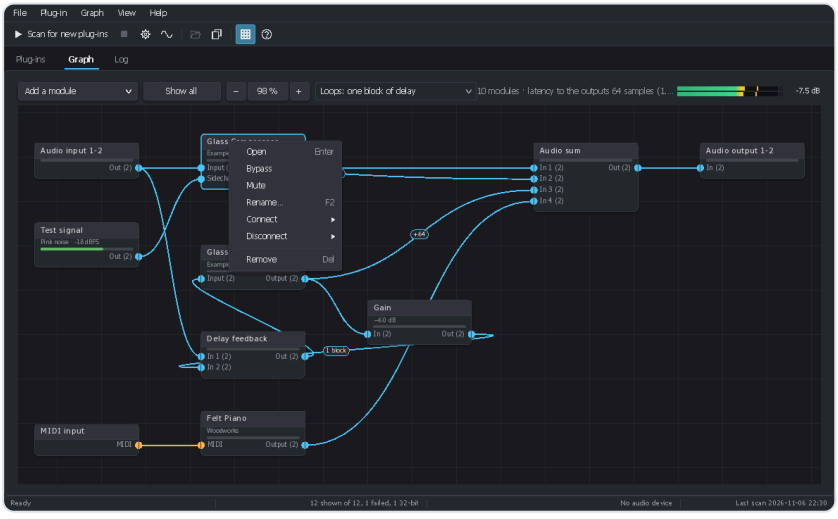


Right click on a module.

- **Open** (double-click, `Enter`): the window of the plug-in, or the settings of the module.
- **Bypass** and **Mute** (plug-ins). A bypassed or muted module is dimmed, with a badge.

- **Rename** ( `F2` ).
- **Connect** and **Disconnect**.
- **Remove** ( `Delete` ): the settings of a plug-in are then lost; Plug-in Host asks first.

## Moving around the graph

- **Move the view**: drag an empty place (or the middle button, or `Alt` +drag). The wheel scrolls, `Shift` +wheel sideways; scroll bars appear when the graph does not fit.
- **Zoom**: `Ctrl` +wheel around the mouse, `+` and `−`, or the **−** and **+** buttons of the bar, from 10 % to 250 %. The percentage between the two buttons shows the zoom; a click on it (or `Ctrl` + `0` ) goes back to the actual size.
- **Show all** ( `Home` ) fits the graph in the window.

## Placing and selecting modules

- Drag the header of a module to move it. Modules snap to a grid that holds their first connector: two aligned modules get straight cables. `Shift` while dragging places them freely.
- `Shift` +drag on an empty place selects several modules with a rectangle; `Ctrl` +click adds or removes a module from the selection; the selection moves together.
- With the keyboard: `Ctrl` + `←` / `Ctrl` + `→` select the previous or next module, `Ctrl` + `A` all; the arrows move the selection ( `Shift` for farther).

## Graph files


- **New graph** ( `Ctrl` + `N` ): an audio input, a MIDI input and an audio output.
- **Open a graph** ( `Ctrl` + `Shift` + `O` ), **Save the graph** ( `Ctrl` + `S` ), **Save the graph as** ( `Ctrl` + `Shift` + `S` ).
- A `.pluginui-graph` file keeps the modules, their names, their places, the cables and the state of each plug-in. Plug-in Host asks whether to save the changes before closing or opening another graph.
- The graph as it was when the host closed comes back at the next start, even if it was never saved under a name.

> **Missing plug-in.** A plug-in that cannot be found when a graph is opened (uninstalled, moved) stays as a **MISSING** module: silent, dimmed, with its cables and its settings, and saved back unchanged. The reason is in its tooltip, in the message shown by a double-click and in the log. Reinstall it, scan ( `F5` ) and open the graph again.


# 9 The modules and their settings

A double-click on a module that is not a plug-in opens the **window of its settings**. They apply at once, and the window can stay open while the graph plays, next to others.

| Module | Role and settings |
|---|---|
| Plug-in | One connector per bus (main, side chain…) with its channel count, plus MIDI in and out. Its window is described in chapter 10. |
| Audio input | Input channels of the device: first channel, channel count, gain. Channels the device does not have stay silent. |
| Audio output | To output channels of the device: first channel, channel count, gain, mute. Several outputs on the same channels add up. |
| Test signal | Sine, square, sawtooth, triangle, white noise, pink noise, sweep or impulses: frequency (start of sweeps), end and duration of sweeps, interval of impulses, level in dBFS, channel count. |
| Audio file | Plays a WAV file, resampled to the device rate: file, loop, pause, gain, channel count. |
| MIDI input | The notes of the MIDI input port: all channels or one. |
| Keyboard | An on-screen keyboard, played with the mouse or the computer keyboard: MIDI channel, lowest octave. Its window can be enlarged. |
| MIDI output | Sends what reaches it to the MIDI output port. |
| Gain | A large knob and a dB entry, polarity inversion, mute, channel count, level meter. |
| Audio sum | Adds its inputs: number of inputs (2 to 32), channel count, gain of the first eight inputs, alignment of the inputs on the latency of their paths. |
| MIDI merge | Joins several MIDI streams in time order: number of inputs, alignment on the latency. |
| Muxer | Joins several mono cables into one cable of several channels (L and R into stereo): number of inputs. |
| Demuxer | The reverse: splits the channels of a cable into mono outputs. |

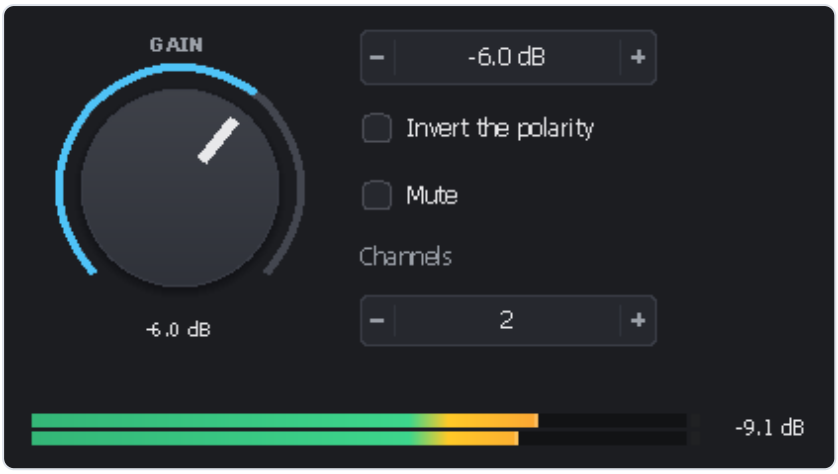


The window of a Gain module.

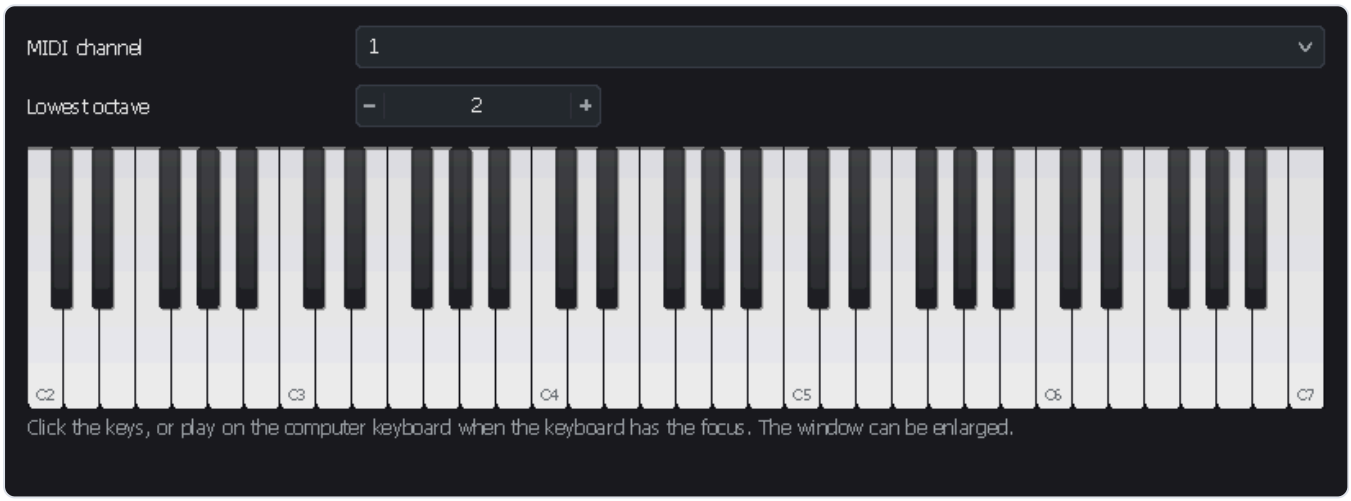


The window of a Keyboard module.

# 10 Plug-in windows

A double-click on a plug-in module opens its window. It shows:

- the plug-in's **editor**, at the size it asks for, resizable when it allows it;
- or the **generic parameter table** when it has no editor (the **Parameters** button shows it otherwise). Values are typed as the plug-in displays them (`-6 dB`, `Warm`) or as normalized values, from 0 to 1.

## The top bar


- **Load preset** and **Save preset**: `.vstpreset` files for VST3 plug-ins, `.fxp` / `.fxb` for VST 2 ones. They are exchanged with DAWs.
- **Parameters**: the generic table.
- **Full screen** (`F11`): the plug-in window on the whole screen, for a stage or a second monitor. `Esc` or the button leaves it; when the plug-in's editor has the keyboard, click the top bar first.
- On the right: latency, number of inputs and outputs, sample rate.

## The bottom bar

- **Bypass**: the main input goes straight to the main output.
- **Mute**: silences the outputs of the plug-in.
- The level meter of its output, with the highest peak in dB (a click clears it).
- For an instrument, an **on-screen keyboard** whose notes go to this plug-in; the notes of the MIDI input port light up its keys.

Closing the window closes the editor only: the plug-in keeps playing in the graph. Several windows can be open at once.

# 11 The log

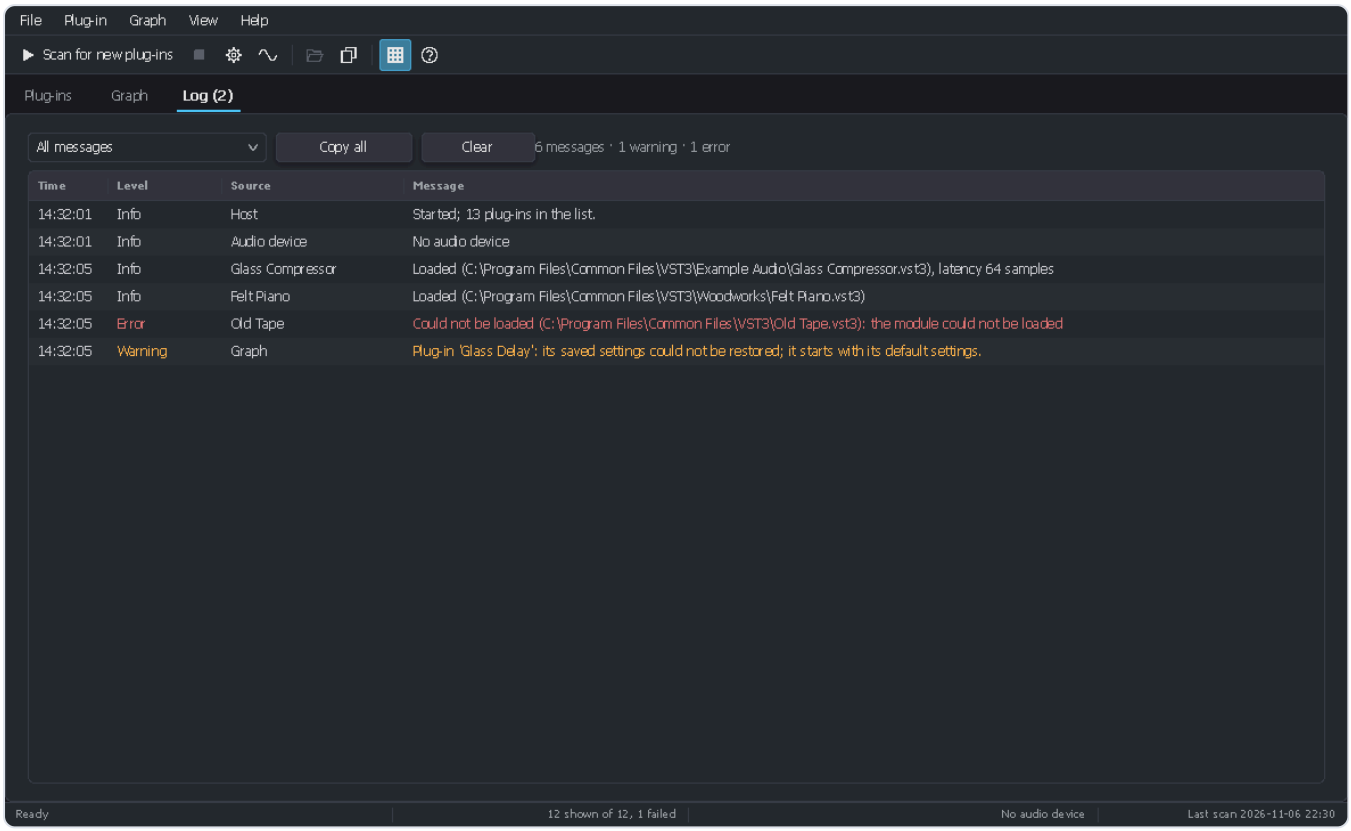


The Log tab.

The **Log** tab (`Ctrl` + `3`) lists the messages of the session, with their time, level (Info, Warning, Error) and source:

- the start and the audio device;
- each plug-in loaded, with its file and its latency, or refused, with the reason;
- the graphs opened and saved, and what could not be restored;
- the presets that could not be loaded or saved;
- the plug-ins a scan could not load;
- every message of the status bar.

The drop-down list shows all messages, warnings and errors, or errors only. **Copy all** puts the messages shown in the clipboard (time, level, source and message separated by tabs); the right click copies the selected rows. The title of the tab counts the warnings and errors, for example **Log (2)**. **Clear** empties the list.

> **Reporting a problem.** Copy the log with **Copy all** and paste it in your message: it tells which file was loaded, with which result.

# 12 Keyboard shortcuts

## Everywhere

| Keys | Action |
|---|---|
| `Ctrl` + `1` / `2` / `3` | Plug-ins / Graph / Log tab |
| `Ctrl` + `N` | New graph |
| `Ctrl` + `Shift` + `O` | Open a graph |
| `Ctrl` + `S` | Save the graph |
| `Ctrl` + `Shift` + `S` | Save the graph as |
| `F5` / `Shift` + `F5` | Scan for new plug-ins / scan everything again |
| `Ctrl` + `Shift` + `F` | Plug-in folders |
| `Ctrl` + `Shift` + `A` | Audio and MIDI |
| `Ctrl` + `T` | Light or dark theme |
| `F11` / `Esc` | Full screen / leave it |
| `F1` | About |

## Plug-in list

| Keys | Action |
|---|---|
| `Ctrl` + `F` | Go to the search box |
| `Enter`, double-click, `Ctrl` + `O` | Add the plug-in to the graph |
| `Ctrl` + `D` | Favorite |
| `Ctrl` + `Shift` + `C` | Copy the path |
| `Ctrl` + `I` | Details pane |
| Menu key | Menu of the plug-in |

## Graph

| Keys | Action |
|---|---|
| `Enter`, double-click | Open the selected module |
| `F2` | Rename the module |
| `Delete` | Remove the selection or the selected cable |
| `Ctrl` + `←` / `→` | Previous / next module |
| `Ctrl` + `A` | Select all |
| Arrows (`Shift`: farther) | Move the selection |
| `Home` | Show all |
| `+` / `−` / `Ctrl` + `0` | Zoom in / zoom out / actual size |
| `Shift` + `F10`, Menu key | Menu of the selection |
| `Ctrl` +wheel | Zoom around the mouse |
| Wheel / `Shift` +wheel | Scroll / sideways |
| Drag the background | Move the view (also the middle button, `Alt` +drag) |
| `Shift` +drag the background | Select with a rectangle (`Ctrl`: add) |
| `Shift` while moving a module | Place it off the grid |

# 13 Troubleshooting

First, open the **Log** tab. Most problems are explained there.

**I hear nothing.**

Check that the status bar shows your sound card (and not *No audio device*); otherwise open **Audio and MIDI**. Then check that the last module is connected to an **Audio output** on the right channels, and that no module is **muted** or **bypassed** (badge on the module). The small meters in the modules show where the signal stops.

**The ASIO driver does not open.**

An ASIO driver often serves one application at a time: close the DAW or the player that uses it, then choose the driver again. The exact message is in the log.

**The sound crackles.**

Raise the buffer size (ASIO control panel, or the WASAPI setting). Loops in sub-blocks (**Graph > Loop delay**) also cost more processing: go back to *One block*.

**A plug-in is missing from the list.**

Tick **Show failures**: if it shows in red, the details pane ( `Ctrl` + `I` ) gives the reason. Otherwise, check that its folder is in **Plug-in folders** and use **Scan everything again** ( `Shift` + `F5` ). A 32-bit plug-in shows in amber with the status “32-bit”: Plug-in Host, a 64-bit program, cannot load it.

**A module shows MISSING.**

The plug-in could not be loaded when the graph was opened; double-click the module to read the reason. Its cables and settings are kept: reinstall it or scan again, then open the graph again.

**A plug-in starts with its default settings.**

The log then shows a warning: the plug-in refused the saved state. The details in parentheses (result code, bytes read, interfaces asked for) help to understand why; attach them to a bug report.

**A plug-in crashes during the scan.**

The scan marks it as failed without stopping Plug-in Host. To stop seeing it, choose **Ignore the module** in the Plug-in menu.

**The graph is too large for the window.**

**Show all** ( `Home` ) fits it, the **−** / **+** buttons zoom, and dragging the background moves the view.

**The interface settings are lost or odd.**

Close Plug-in Host and rename `gui.json` in the settings folder (chapter 14): it starts again from the defaults.

# 14 Files and command line

## The settings folder

Plug-in Host keeps its files in `%APPDATA%\PluginUI\PluginHost`, usually `C:\Users\<name>\AppData\Roaming\PluginUI\PluginHost`:

| File | Content |
|---|---|
| `settings.json` | The plug-in folders, the ignored modules (`IgnoredModules`), the time given to each file during a scan. Shared with `pluginhost`. |
| `plugins.json` | The list of the plug-ins found, with favorites and uses. Shared with `pluginhost`. |
| `gui.json` | The interface settings: theme, language, columns, filters, details pane, sound card, MIDI ports, tab, last graph. |
| `session.pluginui-graph` | The graph of the last session, opened again at start. |

`PluginHost.exe --config <folder>` uses another settings folder, for example for a separate stage setup.

## The command line

`pluginhost`, the command line host (`pluginhost-cli-<version>-win-x64.zip`), shares the folders, the plug-in list and the graph files. It can, for example, render offline a graph prepared in Plug-in Host:

```
pluginhost graph mastering.pluginui-graph -i mix.wav -o master.wav
pluginhost graph pads.pluginui-graph --midi chords.mid -o pads.wav --tail 4
```

Its other commands (scan, processing a file, rendering MIDI, measuring a response, presets) are described in the host guide, which also covers the `PluginUI.Host` library for developers.

Plug-in Host — User manual · November 8, 2026 · asm8086 · github.com/asm8086/PluginUI · MIT License.
The screenshots are made by Plug-in Host itself with stand-in plug-ins.