



# Simulation of bosonic qubits using tensor networks

Jean-Baptiste Bertrand<sup>1</sup> and Baptiste Royer<sup>1</sup>

1. Institut quantique, Université de Sherbrooke, Sherbrooke, Qc. J1K 2R1, Canada

## Abstract


Creating qubits that are resilient to errors is a necessary step in creating quantum computers. A very promising way of accomplishing this is to encode qubits into the large Hilbert space of quantum harmonic oscillators. This idea leads to a whole class of Quantum Error Correcting codes (QEC codes) called bosonic codes. Many popular codes exists but this work but the work here presented mainly focuses on GKP (Gottesman-Kitaev-Preskill) codes. When developing such codes, it is essentiel to be able to know how they perform under different noise models. However, the useful large Hilbert space harmonic oscillators here becomes a problem as system with even just a few oscillators rapidly become very challenging to simulate. Here, we propose a combination of different methods that would enable fast simulation of large bosonic systems. Namely, we discuss the uses of tensors networks, the selection of a simulation (the BP+ basis), and the use Monte-Carlo simulation (MC). We also present a few preliminary simulation results using these techniques.

## GKP states

Insert gkp 0 and 1 here

## Tensor netowrks

T

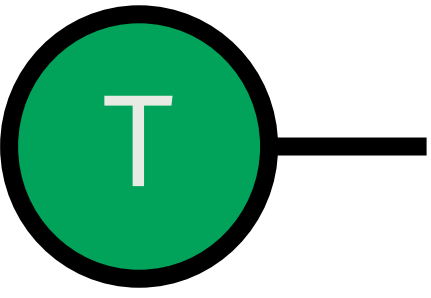

## Title 4

## Title 5

## Title 6

## Discussion

## References

- [1] First author et al. Journal ref **number** (year)
- [2] First author et al. Journal ref **number** (year)
- [3] First author et al. Journal ref **number** (year)

## Acknowledgements

This work was funded by the Canada First Research Excellence Fund, the National Science and Engineering Council and the Fonds de Recherche du Québec - Nature et Technologies. This work was done in collaboration with Nord Quantique.



Université de  
Sherbrooke



**NSERC**  
**CRSNG**

Fonds de recherche  
Nature et  
technologies

Québec

