







DLI Accelerated Data Science Teaching Kit

Lecture 11.4 – RAPIDS and Spark



The Accelerated Data Science Teaching Kit is licensed by NVIDIA, Georgia Institute of Technology, and Prairie View A&M University under the Creative Commons Attribution-NonCommercial 4.0 International License.








What is RAPIDS Accelerator for Spark?

- Accelerate Spark distributed computing framework using GPUs, via
 - RAPIDS cuDF library
 - Accelerated shuffle based on UCX (GPU-to-GPU communication)
- Existing Spark applications run with no code change
 - Launch Spark with RAPIDS accelerator (plugin jar)
 - Enable configuration setting

```
spark.conf.set('spark.rapids.sql.enabled','true')
```














Spark 3.0 Offers Unified AI framework for ETL + ML/DL

Single pipeline from data input to model training

Spark 3.0

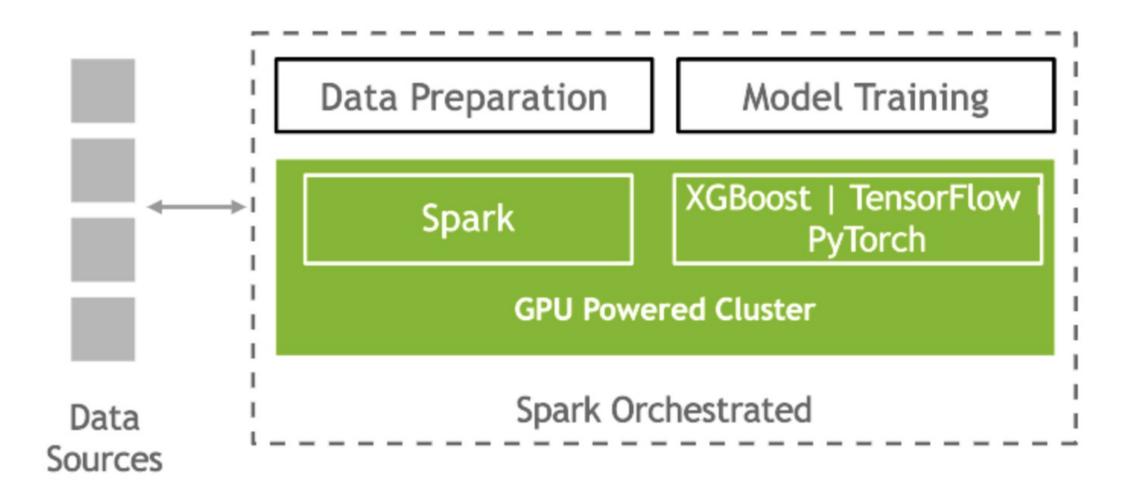






Accelerating Spark with RAPIDS

Higher speed, and lower costs

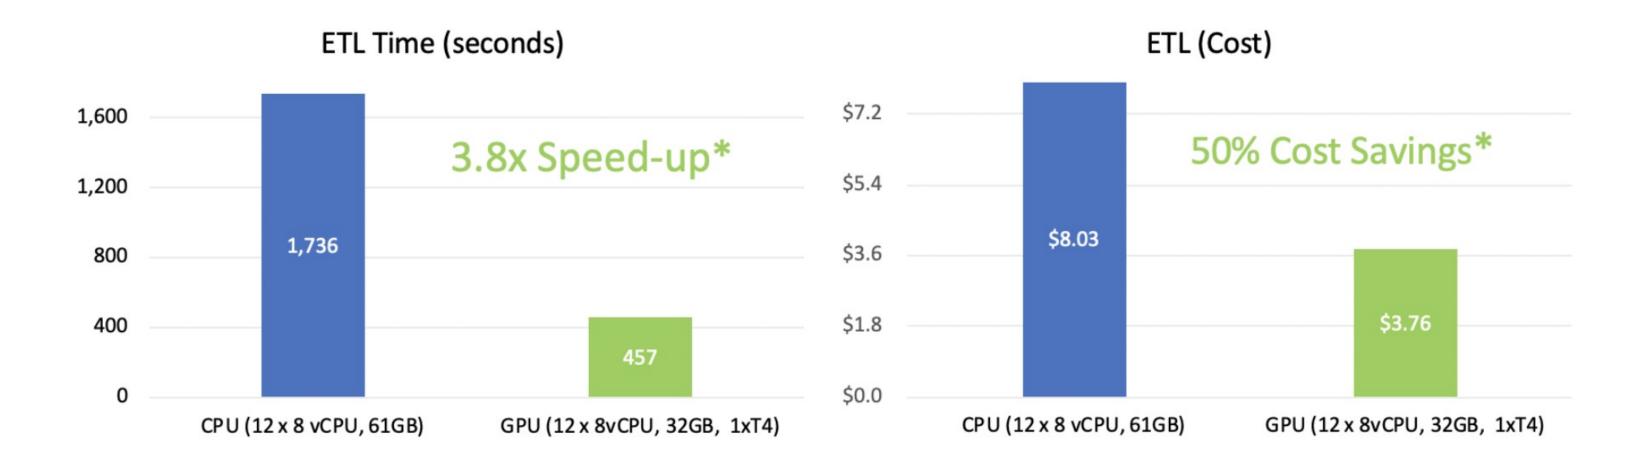

^{*}ETL for FannieMae Mortgage Dataset (~200GB) as shown in our demo. Costs based on Cloud T4 GPU instance market price & V100 GPU price on Databricks Standard edition








Accelerating Spark with RAPIDS on AWS

Higher speed, and lower costs

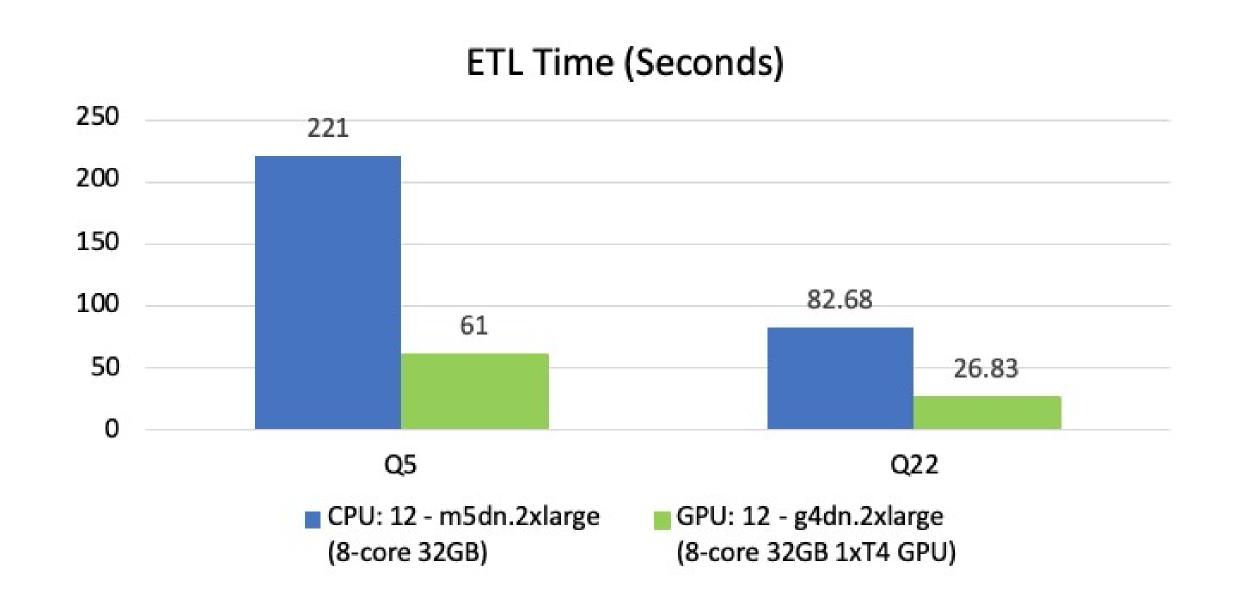

~3.5x Speed-up ~40% Cost Savings

Based on TPCx-BB like Queries #5 & #22 with 1TB scale factor input







GPU Scheduling Example: Starting Code

```
./bin/spark-shell --master yarn --executor-cores 2 \
   --conf spark.driver.resource.gpu.amount=1 \
   --conf spark.driver.resource.gpu.discoveryScript=/opt/spark/getGpuResources.sh \
   --conf spark.executor.resource.gpu.amount=2 \
   --conf spark.executor.resource.gpu.discoveryScript=./getGpuResources.sh \
   --conf spark.task.resource.gpu.amount=1 \
   --files examples/src/main/scripts/getGpusResources.sh
```







GPU Scheduling Example: Discovery Script







GPU Scheduling Example: Assignments API


```
// Task API
val context = TaskContext.get()
val resources = context.resources()
val assignedGpuAddrs = resources("gpu").addresses
// Pass assignedGpuAddrs into TensorFlow or other AI
code
// Driver API
scala> sc.resources("gpu").addresses
Array[String] = Array(0)
```







GPU Scheduling Example: Schedule API

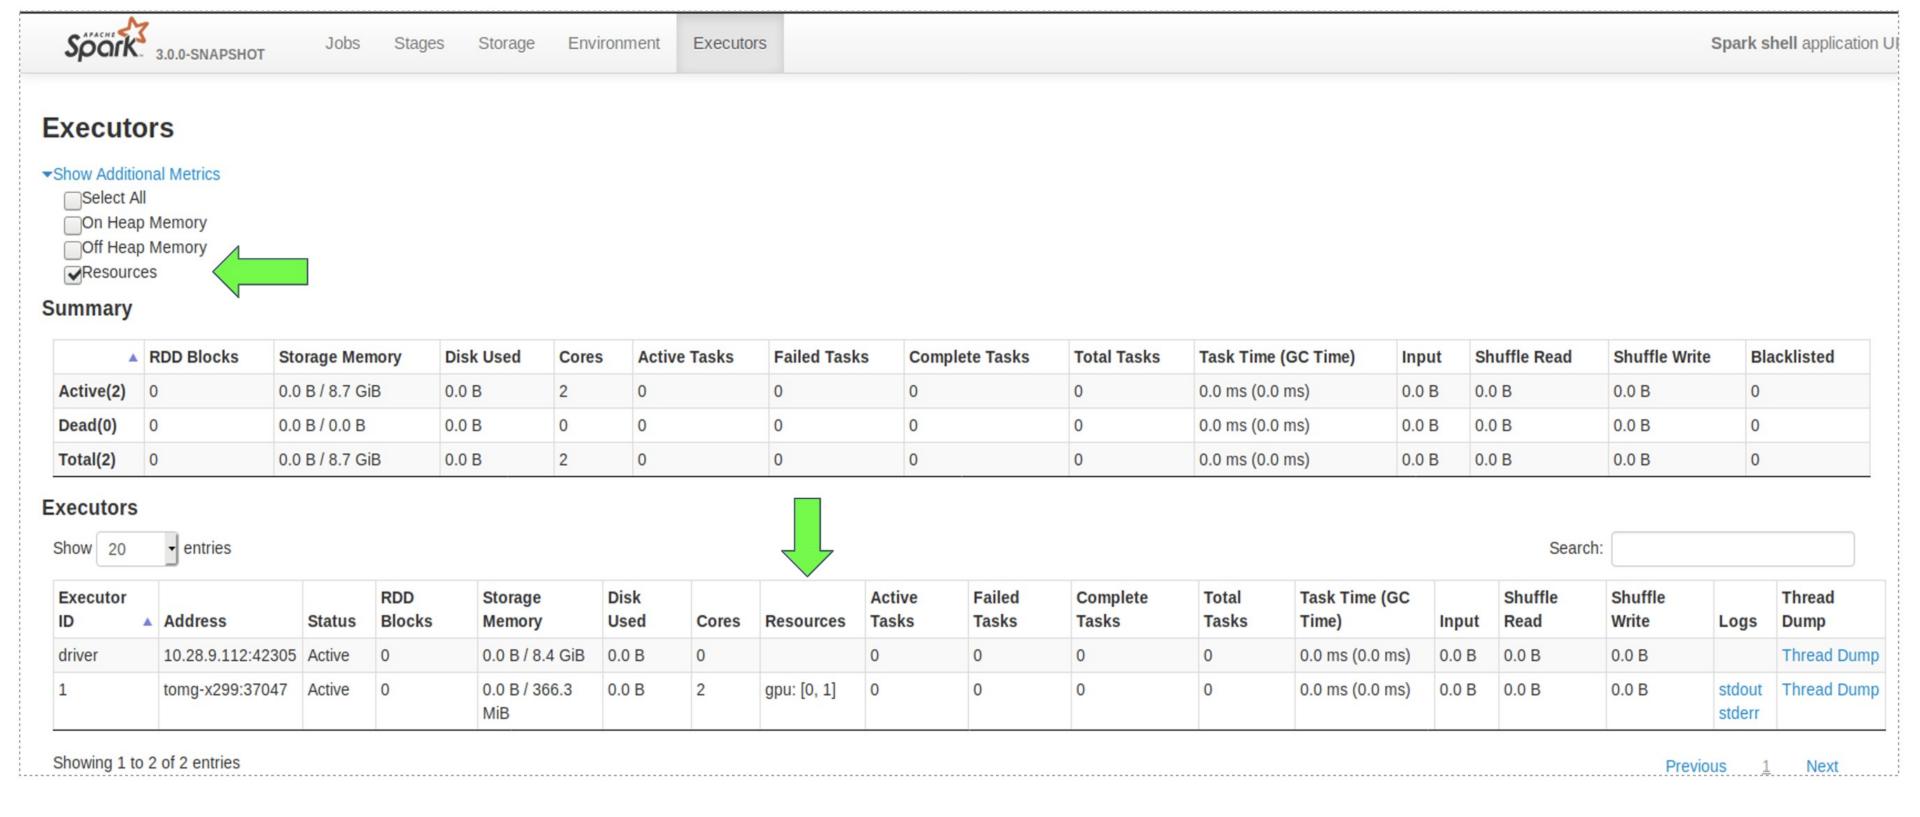





Sparks + RAPIDS Resources

- https://nvidia.github.io/spark-rapids/https://nvidia.github.io/spark-rapids/
- https://github.com/nvidia/spark-rapids/
- https://www.nvidia.com/en-us/deep-learning-ai/solutions/data-science/apache-spark-3/
- https://ngc.nvidia.com









DLI Accelerated Data Science Teaching Kit

Questions?