

Tasks:

- 1. Open Kali Linux or any Linux machine.**
- 2. Execute the following commands and note their purpose:**

- **pwd**
- **ls**
- **ls -la**
- **cd**
- **mkdir**
- **rmdir**
- **touch**
- **cp**
- **mv**
- **cat**
- **clear**
- **history**
- **whoami**

- 3. Create the following directory structure:**

CyberSecurity/

```
|— Notes
|— Reports
|— Tools
|— Assignments
```

- 4. Inside each folder, create at least 3 files using the terminal.**
- 5. Rename one file and move it to another folder.**
- 6. Copy a file from one folder to another.**
- 7. Display file contents using:**
 - **cat**
 - **less**
- 8. Find information about your system using:**
 - **uname -a**
 - **hostname**
 - **ip a**
 - **df -h**
 - **free -h**
- 9. Create a text file containing:**
 - **Your Name**
 - **Internship Name**
 - **Today's Date**

10. Use terminal commands only (avoid GUI where possible).

Assignment:

Create a report containing:

- 1. Screenshot of all created folders.**
- 2. Screenshot of terminal commands used.**
- 3. Explanation of each command.**
- 4. System information collected.**
- 5. Challenges faced and solutions.**

Without using the file manager:

- Create 10 files**
- Move 5 files**
- Delete 3 files**
- Create 2 new folders**
- Display all folder contents**

Submission:

PDF or Word Document with screenshots.

Objective

To learn and perform basic Linux terminal operations including directory management, file creation, file manipulation, system information gathering, and command-line navigation without using the graphical file manager.

Task 1: Basic Linux Commands

1. pwd Command


Command

```
pwd
```

Purpose

The pwd (Print Working Directory) command displays the full path of the current working directory.

Screenshot

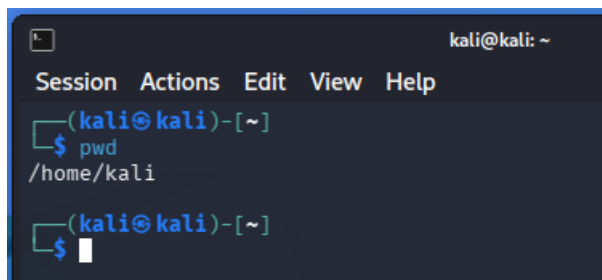A screenshot of a Linux terminal window. The title bar shows 'kali@kali: ~'. The terminal has a menu bar with 'Session', 'Actions', 'Edit', 'View', and 'Help'. The prompt is '(kali@kali)-[~]'. The user enters '\$ pwd' and the output is '/home/kali'. The prompt is then '(kali@kali)-[~]' with a cursor.

2. ls Command


Command

```
ls
```

Purpose

The ls command lists all files and directories present in the current directory.

Screenshot

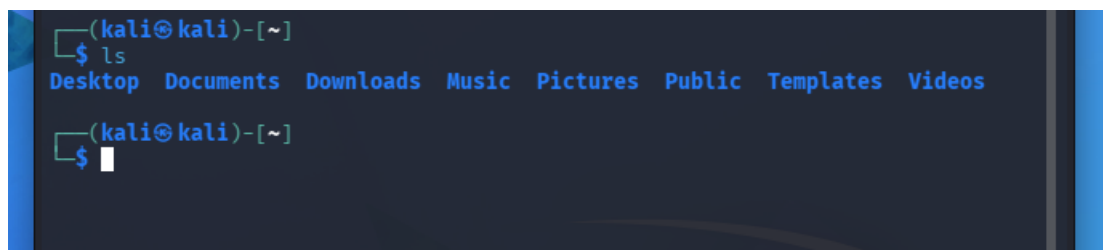A screenshot of a Linux terminal window. The title bar shows 'kali@kali: ~'. The terminal has a menu bar with 'Session', 'Actions', 'Edit', 'View', and 'Help'. The prompt is '(kali@kali)-[~]'. The user enters '\$ ls' and the output is 'Desktop Documents Downloads Music Pictures Public Templates Videos'. The prompt is then '(kali@kali)-[~]' with a cursor.

3. ls -la Command


Command

ls -la

Purpose

Displays all files including hidden files with detailed information such as permissions, owner, size, and modification date.

Screenshot

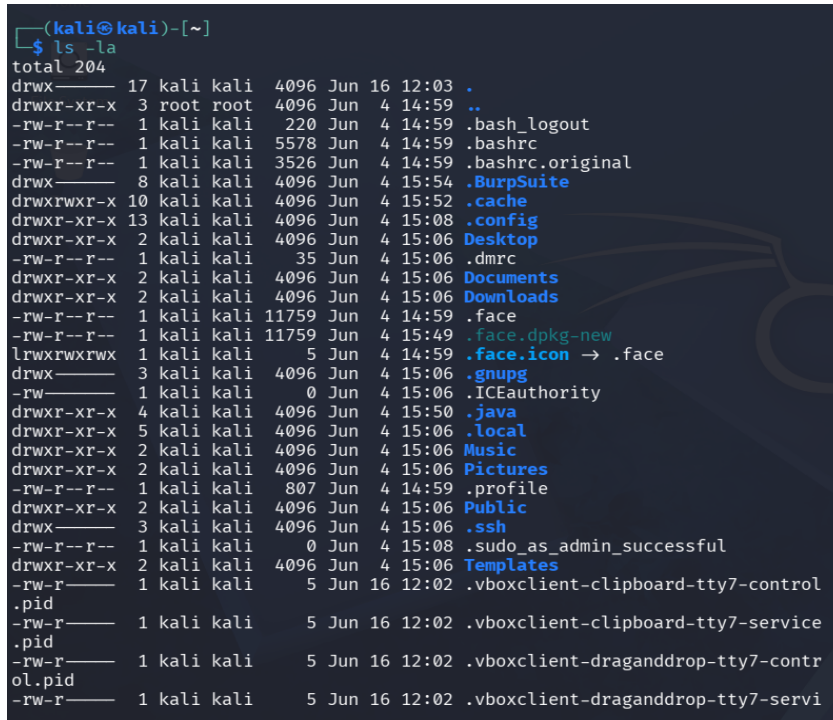

```
(kali㉿kali)-[~]
└─$ ls -la
total 204
drwx----- 17 kali kali 4096 Jun 16 12:03 .
drwxr-xr-x  3 root root 4096 Jun  4 14:59 ..
-rw-r--r--  1 kali kali  220 Jun  4 14:59 .bash_logout
-rw-r--r--  1 kali kali 5578 Jun  4 14:59 .bashrc
-rw-r--r--  1 kali kali 3526 Jun  4 14:59 .bashrc.original
drwx-----  8 kali kali 4096 Jun  4 15:54 .BurpSuite
drwxrwxr-x 10 kali kali 4096 Jun  4 15:52 .cache
drwxr-xr-x 13 kali kali 4096 Jun  4 15:08 .config
drwxr-xr-x  2 kali kali 4096 Jun  4 15:06 .Desktop
-rw-r--r--  1 kali kali  35 Jun  4 15:06 .dmrc
drwxr-xr-x  2 kali kali 4096 Jun  4 15:06 .Documents
drwxr-xr-x  2 kali kali 4096 Jun  4 15:06 .Downloads
-rw-r--r--  1 kali kali 11759 Jun  4 14:59 .face
-rw-r--r--  1 kali kali 11759 Jun  4 15:49 .face.dpkg-new
lrwxrwxrwx  1 kali kali  5 Jun  4 14:59 .face.icon → .face
drwx-----  3 kali kali 4096 Jun  4 15:06 .gnupg
-rw-----  1 kali kali  0 Jun  4 15:06 .ICEauthority
drwxr-xr-x  4 kali kali 4096 Jun  4 15:50 .java
drwxr-xr-x  5 kali kali 4096 Jun  4 15:06 .local
drwxr-xr-x  2 kali kali 4096 Jun  4 15:06 .Music
drwxr-xr-x  2 kali kali 4096 Jun  4 15:06 .Pictures
-rw-r--r--  1 kali kali  807 Jun  4 14:59 .profile
drwxr-xr-x  2 kali kali 4096 Jun  4 15:06 .Public
drwx-----  3 kali kali 4096 Jun  4 15:06 .ssh
-rw-r--r--  1 kali kali  0 Jun  4 15:08 .sudo_as_admin_successful
drwxr-xr-x  2 kali kali 4096 Jun  4 15:06 .Templates
-rw-r-----  1 kali kali  5 Jun 16 12:02 .vboxclient-clipboard-tty7-control
.pid
-rw-r-----  1 kali kali  5 Jun 16 12:02 .vboxclient-clipboard-tty7-service
.pid
-rw-r-----  1 kali kali  5 Jun 16 12:02 .vboxclient-draganddrop-tty7-contr
ol.pid
-rw-r-----  1 kali kali  5 Jun 16 12:02 .vboxclient-draganddrop-tty7-servi
```

4. cd Command

Command


cd Desktop

cd ~

Purpose

The cd (Change Directory) command is used to navigate between directories.

Screenshot

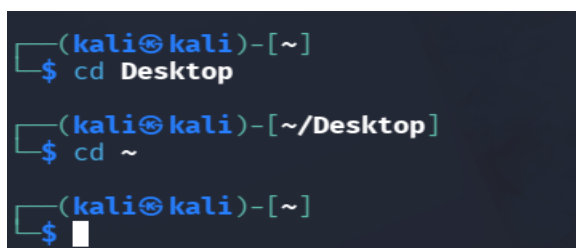

```
(kali㉿kali)-[~]
└─$ cd Desktop

(kali㉿kali)-[~/Desktop]
└─$ cd ~

(kali㉿kali)-[~]
└─$
```

5. mkdir Command


Command

mkdir TestFolder

Purpose

The mkdir (Make Directory) command creates a new directory.

Screenshot

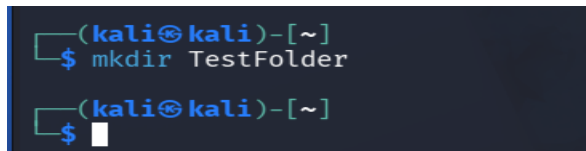

```
(kali㉿kali)-[~]  
$ mkdir TestFolder  
  
(kali㉿kali)-[~]  
$
```

6. rmdir Command


Command

rmdir TestFolder

Purpose

The rmdir command removes an empty directory.

Screenshot

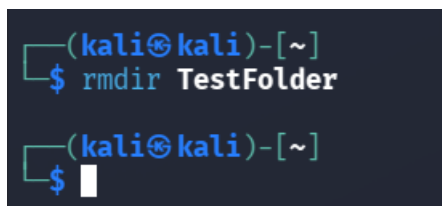

```
(kali㉿kali)-[~]  
$ rmdir TestFolder  
  
(kali㉿kali)-[~]  
$
```

7. touch Command


Command

touch file1.txt

Purpose

The touch command creates an empty file.

Screenshot

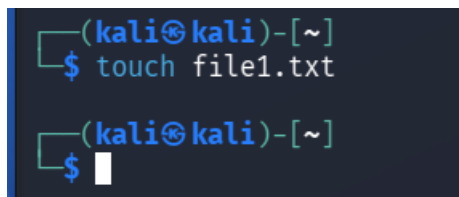

```
(kali㉿kali)-[~]  
$ touch file1.txt  
  
(kali㉿kali)-[~]  
$
```

8. cp Command

Command

```
cp file1.txt copyfile.txt
```

Purpose

The cp command copies a file from one location to another.

Screenshot

A terminal window with a dark background. The prompt is (kali@kali)-[~]. The command cp file1.txt copyfile.txt is entered and executed. The prompt returns to (kali@kali)-[~].

```
(kali@kali)-[~]  
$ cp file1.txt copyfile.txt  
  
(kali@kali)-[~]  
$
```

9. mv Command


Command

```
mv copyfile.txt renamedfile.txt
```

Purpose

The mv command is used to move files or rename them.

Screenshot

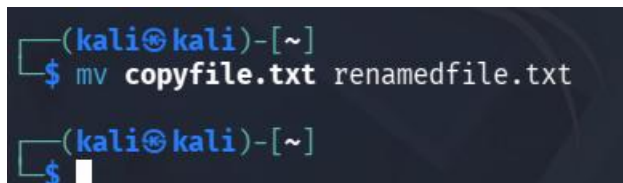A terminal window with a dark background. The prompt is (kali@kali)-[~]. The command mv copyfile.txt renamedfile.txt is entered and executed. The prompt returns to (kali@kali)-[~].

```
(kali@kali)-[~]  
$ mv copyfile.txt renamedfile.txt  
  
(kali@kali)-[~]  
$
```

10. cat Command


Command

```
cat renamedfile.txt
```

Purpose

The cat command displays the contents of a file.

Screenshot

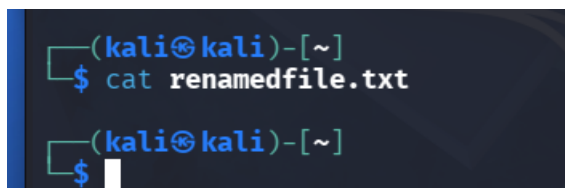A terminal window with a dark background. The prompt is (kali@kali)-[~]. The command cat renamedfile.txt is entered and executed. The prompt returns to (kali@kali)-[~].

```
(kali@kali)-[~]  
$ cat renamedfile.txt  
  
(kali@kali)-[~]  
$
```

11. clear Command


Command

clear

Purpose

The clear command clears all text displayed in the terminal window.

Screenshot



12. history Command


Command

history

Purpose

The history command displays previously executed commands.

Screenshot

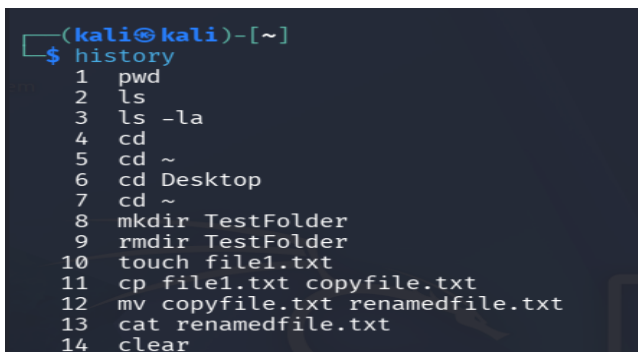

13. whoami Command


Command

whoami

Purpose

The whoami command displays the current logged-in username.

Screenshot

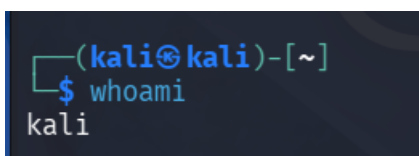

Task 2: Creating the Directory Structure

Objective

To create a structured directory hierarchy for organizing cybersecurity-related files and folders using Linux terminal commands.

Required Directory Structure

CyberSecurity/

├── Notes

├── Reports

├── Tools

└── Assignments

Step 1: Create Main Directory

Command Used

```
mkdir CyberSecurity
```

Purpose

The mkdir command was used to create a new directory named **CyberSecurity**.

Result

The CyberSecurity directory was created successfully.

Step 2: Navigate into the Directory

Command Used

```
cd CyberSecurity
```

Purpose

The cd (Change Directory) command was used to move into the CyberSecurity directory.

Result

Successfully entered the CyberSecurity directory.

Step 3: Create Subdirectories

Command Used

```
mkdir Notes Reports Tools Assignments
```

Purpose

This command created four subdirectories:

- Notes
- Reports
- Tools
- Assignments

Result

All required subdirectories were created successfully inside the CyberSecurity directory.

Step 4: Verify Directory Structure

Command Used

tree


Purpose

The tree command was used to display the directory hierarchy in a tree-like format.

Observation

The directory structure was created successfully and verified using the tree command. No files were present at this stage, and all required folders were available for future file management tasks.

Screenshot

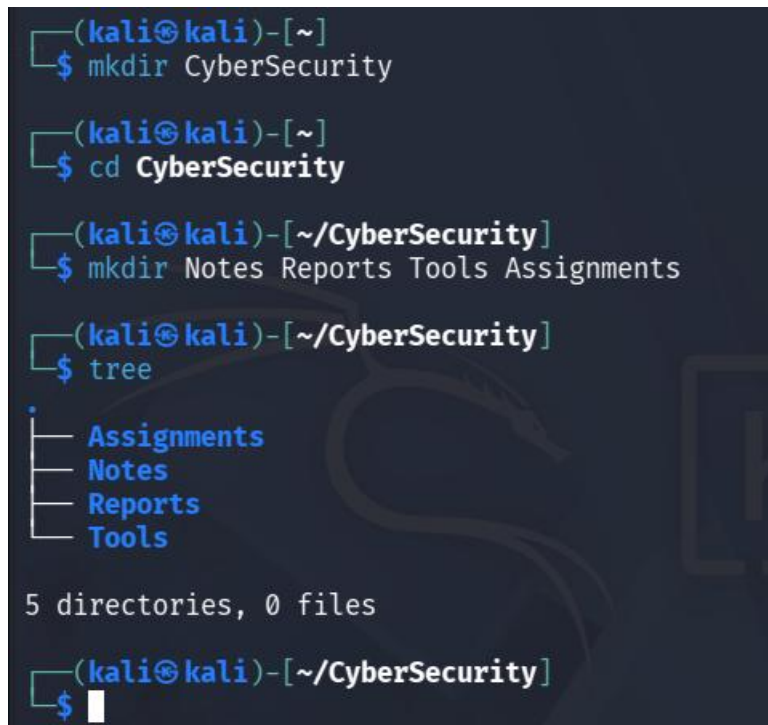

```
(kali㉿kali)-[~]
$ mkdir CyberSecurity

(kali㉿kali)-[~]
$ cd CyberSecurity

(kali㉿kali)-[~/CyberSecurity]
$ mkdir Notes Reports Tools Assignments

(kali㉿kali)-[~/CyberSecurity]
$ tree
.
├── Assignments
├── Notes
├── Reports
└── Tools

5 directories, 0 files

(kali㉿kali)-[~/CyberSecurity]
$
```

Task 3: Creating Files in Each Folder

Objective

To create files inside the previously created directories using Linux terminal commands and verify their creation.

Step 1: Create Files in Notes Folder

Commands Used

```
touch Notes/note1.txt
```

```
touch Notes/note2.txt
```

```
touch Notes/note3.txt
```

Purpose

The touch command was used to create three text files inside the Notes directory.

Result

The following files were created:

- note1.txt
- note2.txt
- note3.txt

Step 2: Create Files in Reports Folder

Commands Used

```
touch Reports/report1.txt
```

```
touch Reports/report2.txt
```

```
touch Reports/report3.txt
```

Purpose

To create three report files inside the Reports directory.

Result

The following files were created:

- report1.txt
- report2.txt
- report3.txt

Step 3: Create Files in Tools Folder

Commands Used

```
touch Tools/tool1.txt
```

```
touch Tools/tool2.txt
```

```
touch Tools/tool3.txt
```

Purpose

To create three files inside the Tools directory.

Result

The following files were created:

- tool1.txt
- tool2.txt
- tool3.txt

Step 4: Create Files in Assignments Folder

Commands Used

```
touch Assignments/assign1.txt
```

```
touch Assignments/assign2.txt
```

```
touch Assignments/assign3.txt
```

Purpose

To create three assignment files inside the Assignments directory.

Result

The following files were created:

- assign1.txt
- assign2.txt
- assign3.txt

Step 5: Verify File Creation

Command Used: tree

Purpose

The tree command was used to display the complete directory structure and verify that all files were created successfully.

Observation

All required files were successfully created inside their respective folders. The directory structure was verified using the tree command.

Screenshot

```
Session Actions Edit View Help
(kali㉿kali)-[~/CyberSecurity]
$ touch Notes/note1.txt
(kali㉿kali)-[~/CyberSecurity]
$ touch Notes/note2.txt
(kali㉿kali)-[~/CyberSecurity]
$ touch Notes/note3.txt
(kali㉿kali)-[~/CyberSecurity]
$ touch Reports/report1.txt
(kali㉿kali)-[~/CyberSecurity]
$ touch Reports/report2.txt
(kali㉿kali)-[~/CyberSecurity]
$ touch Reports/report3.txt
(kali㉿kali)-[~/CyberSecurity]
$ touch Tools/tool1.txt
(kali㉿kali)-[~/CyberSecurity]
$ touch Tools/tool2.txt
(kali㉿kali)-[~/CyberSecurity]
$ touch Tools/tool3.txt
(kali㉿kali)-[~/CyberSecurity]
$ touch Assignments/assign1.txt
(kali㉿kali)-[~/CyberSecurity]
$ touch Assignments/assign2.txt
(kali㉿kali)-[~/CyberSecurity]
$ touch Assignments/assign3.txt
```

```
(kali㉿kali)-[~/CyberSecurity]
$ tree
.
├── Assignments
│   ├── assign1.txt
│   ├── assign2.txt
│   └── assign3.txt
├── Notes
│   ├── note1.txt
│   ├── note2.txt
│   └── note3.txt
├── Reports
│   ├── report1.txt
│   ├── report2.txt
│   └── report3.txt
└── Tools
    ├── tool1.txt
    ├── tool2.txt
    └── tool3.txt

5 directories, 12 files
```

Task 4: Renaming and Moving Files

Objective

To learn how to rename a file and move it from one directory to another using Linux terminal commands.

Step 1: Rename a File

Command Used

```
mv Notes/note1.txt Notes/linux_notes.txt
```

Purpose

The mv command was used to rename the file note1.txt to linux_notes.txt within the Notes directory.

Explanation


- mv = Move/Rename command
- Notes/note1.txt = Existing file name
- Notes/linux_notes.txt = New file name

Result

The file was successfully renamed from **note1.txt** to **linux_notes.txt**.

Verification command: tree

Screenshot

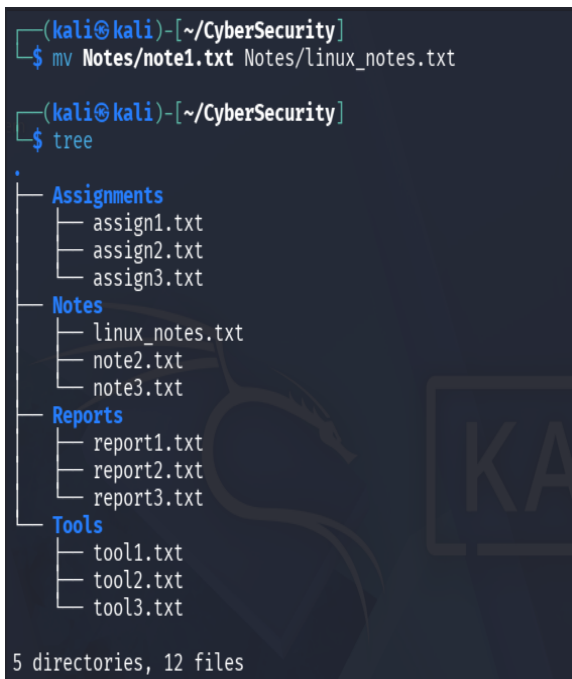

```
(kali@kali)-[~/CyberSecurity]
$ mv Notes/note1.txt Notes/linux_notes.txt

(kali@kali)-[~/CyberSecurity]
$ tree
.
├── Assignments
│   ├── assign1.txt
│   ├── assign2.txt
│   └── assign3.txt
├── Notes
│   ├── linux_notes.txt
│   ├── note2.txt
│   └── note3.txt
├── Reports
│   ├── report1.txt
│   ├── report2.txt
│   └── report3.txt
└── Tools
    ├── tool1.txt
    ├── tool2.txt
    └── tool3.txt

5 directories, 12 files
```

Step 2: Move the File to Another Folder

Command Used

```
mv Notes/linux_notes.txt Reports/
```

Purpose

The mv command was used to move the file linux_notes.txt from the Notes directory to the Reports directory.

Explanation


- mv = Move command
- Notes/linux_notes.txt = Source file
- Reports/ = Destination folder

Result

The file was successfully moved from the Notes folder to the Reports folder.

Verification command :tree

Screenshot

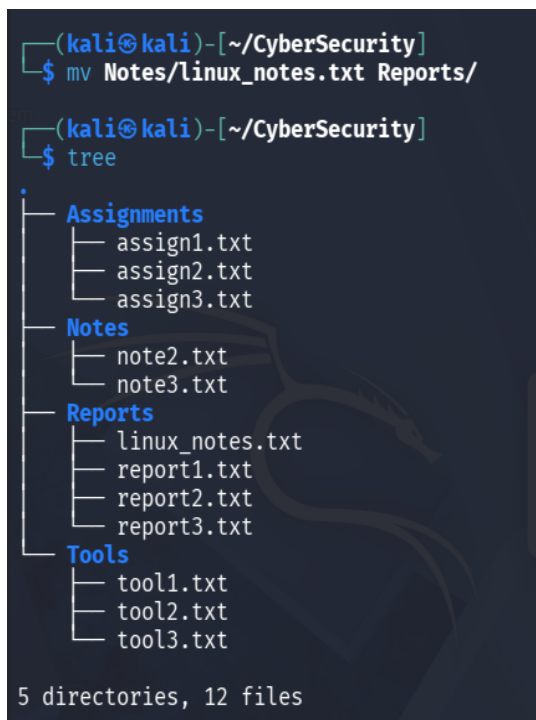

```
(kali㉿kali)-[~/CyberSecurity]
$ mv Notes/linux_notes.txt Reports/

(kali㉿kali)-[~/CyberSecurity]
$ tree
.
├── Assignments
│   ├── assign1.txt
│   ├── assign2.txt
│   └── assign3.txt
├── Notes
│   ├── note2.txt
│   └── note3.txt
├── Reports
│   ├── linux_notes.txt
│   ├── report1.txt
│   ├── report2.txt
│   └── report3.txt
└── Tools
    ├── tool1.txt
    ├── tool2.txt
    └── tool3.txt

5 directories, 12 files
```

Observation

The mv command successfully performed both operations:

1. Renamed the file from note1.txt to linux_notes.txt.
2. Moved the renamed file from the Notes directory to the Reports directory.

Task 5: Copying a File Between Directories

Objective

To learn how to copy a file from one directory to another using the Linux cp command.

Step 1: Copy the File

Command Used

```
cp Reports/linux_notes.txt Assignments/
```

Purpose

The cp (copy) command was used to create a duplicate copy of the file linux_notes.txt and place it inside the Assignments directory.

Explanation

- cp = Copy command
- Reports/linux_notes.txt = Source file
- Assignments/ = Destination folder

Result

The file linux_notes.txt was successfully copied from the Reports folder to the Assignments folder.

Step 2: Verify the Copy Operation

Command Used

```
tree
```

Purpose

The tree command was used to verify that the copied file exists in both locations.

Observation

The file was copied successfully without affecting the original file. The original file remained in the Reports directory while a duplicate copy was created in the Assignments directory.

Screenshot

```
(kali㉿kali)-[~/CyberSecurity]
$ cp Reports/linux_notes.txt Assignments/

(kali㉿kali)-[~/CyberSecurity]
$ tree
.
├── Assignments
│   ├── assign1.txt
│   ├── assign2.txt
│   ├── assign3.txt
│   └── linux_notes.txt
├── Notes
│   ├── note2.txt
│   └── note3.txt
├── Reports
│   ├── linux_notes.txt
│   ├── report1.txt
│   ├── report2.txt
│   └── report3.txt
└── Tools
    ├── tool1.txt
    ├── tool2.txt
    └── tool3.txt

5 directories, 13 files
```


Task 6: Displaying File Contents

Objective

To learn how to view the contents of a file using the Linux cat and less commands.

Step 1: Add Content to the File

Command Used

```
echo "Linux Commands Practical" > Reports/linux_notes.txt
```

Purpose

The echo command was used to write text into the file linux_notes.txt.

Result

The text was successfully added to the file.

Step 2: Display File Contents Using cat

Command Used

```
cat Reports/linux_notes.txt
```

Purpose


The cat command displays the contents of a file directly on the terminal.

Result

The terminal displayed:

Linux Commands Practical

Screenshot

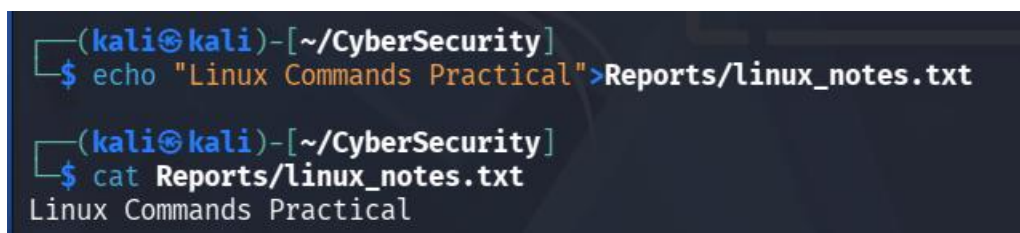

```
(kali㉿kali)-[~/CyberSecurity]
$ echo "Linux Commands Practical">Reports/linux_notes.txt

(kali㉿kali)-[~/CyberSecurity]
$ cat Reports/linux_notes.txt
Linux Commands Practical
```

Step 3: Display File Contents Using less

Command Used

```
less Reports/linux_notes.txt
```

Purpose

The less command allows users to view file contents page by page and scroll through large files easily.


Result

The contents of the file were displayed in the less viewer.


Exit Command

To return to the terminal: q

Screenshot



```
(kali㉿kali)-[~/CyberSecurity]  
$ less Reports/linux_notes.txt
```

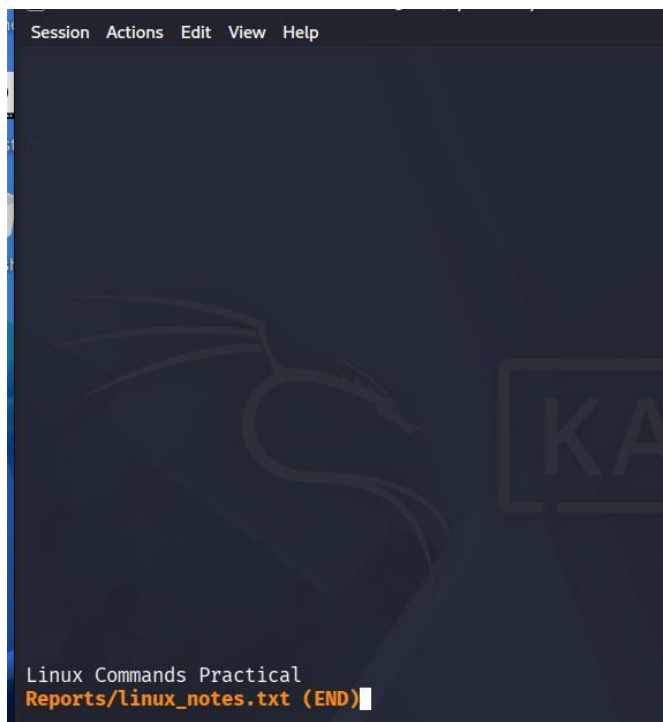

Observation

- The cat command displayed the entire file content immediately.
- The less command opened the file in a viewer mode and allowed scrolling through the content.
- The file content was successfully displayed using both commands.

Task 7: System Information Collection

Objective

To gather information about the Linux system, including kernel details, hostname, IP address, disk usage, and memory usage using terminal commands.

1. Display Kernel and System Information

Command Used

```
uname -a
```


Purpose

The `uname -a` command displays detailed information about the operating system, kernel version, architecture, and host system.

Result

The command displayed Linux kernel information and system architecture details.

Screenshot

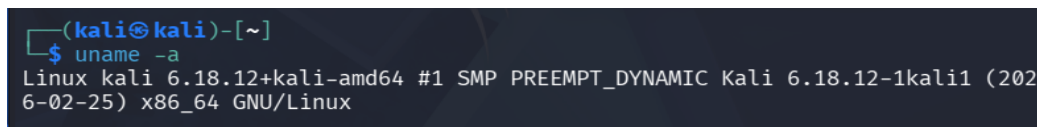

```
(kali㉿kali)-[~]  
$ uname -a  
Linux kali 6.18.12+kali-amd64 #1 SMP PREEMPT_DYNAMIC Kali 6.18.12-1kali1 (202  
6-02-25) x86_64 GNU/Linux
```

2. Display Hostname

Command Used

```
hostname
```

Purpose

The `hostname` command displays the name assigned to the system on the network.

Result

The system hostname was displayed successfully.

Screenshot



```
(kali㉿kali)-[~]  
$ hostname  
kali
```

3. Display IP Address Information

Command Used

ip a

Purpose

The ip a command displays network interface information, including IP addresses, MAC addresses, and network status.

Result

The network configuration and IP address details were displayed.

Screenshot

```
(kali㉿kali)-[~]
$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group def
  ault qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP g
  roup default qlen 1000
    link/ether 08:00:27:19:e0:dc brd ff:ff:ff:ff:ff:ff
    inet 10.0.2.15/24 brd 10.0.2.255 scope global dynamic noprefixroute eth0
        valid_lft 83187sec preferred_lft 83187sec
    inet6 fd17:625c:f037:2:3acd:8772:57f5:20a6/64 scope global temporary dyna
  mic
        valid_lft 86353sec preferred_lft 14353sec
    inet6 fd17:625c:f037:2:a00:27ff:fe19:e0dc/64 scope global dynamic mngtmpa
  ddr noprefixroute
        valid_lft 86353sec preferred_lft 14353sec
    inet6 fe80::a00:27ff:fe19:e0dc/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
```

4. Display Disk Space Usage

Command Used

df -h

Purpose

The df -h command displays disk space usage of all mounted file systems in a human-readable format.

Result

Information about total, used, and available disk space was displayed.

Screenshot

```
(kali㉿kali)-[~]
$ df -h
Filesystem      Size  Used Avail Use% Mounted on
udev            883M   0    883M   0% /dev
tmpfs           198M  976K   197M   1% /run
/dev/sda1       24G   18G   4.3G   81% /
tmpfs           986M   4.0K   986M   1% /dev/shm
tmpfs           986M  108K   986M   1% /tmp
none            1.0M   0    1.0M   0% /run/credentials/getty@tty1.service
tmpfs           198M  112K   198M   1% /run/user/1000
none            1.0M   0    1.0M   0% /run/credentials/systemd-journald.servi
ce
```

5. Display Memory Usage

Command Used

free -h


Purpose

The free -h command displays RAM and swap memory usage in a human-readable format.

Result

The system's memory utilization details were displayed successfully.

Screenshot

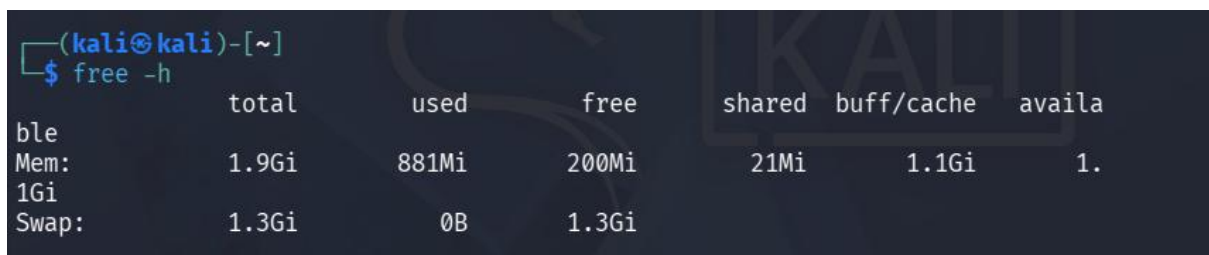

```
(kali㉿kali)-[~]  
$ free -h
```

	total	used	free	shared	buff/cache	availa
Mem:	1.9Gi	881Mi	200Mi	21Mi	1.1Gi	1.
Swap:	1.3Gi	0B	1.3Gi			

Observation

The Linux system information was successfully collected using terminal commands. The commands provided details regarding:

- Operating System and Kernel Version
- System Hostname
- Network Interfaces and IP Addresses
- Disk Storage Usage

RAM and Swap Memory Usage

Task 8: Creating a Personal Information File

Objective

To create a text file using Linux terminal commands and store personal information such as name, internship name, and current date.

Step 1: Create a Text File

Command Used

```
nano myinfo.txt
```

Purpose

The nano command was used to create and edit a text file named myinfo.txt.

Result

A new text file was opened in the Nano text editor.

Step 2: Enter Required Information

Content Entered

Name: Amee Vaishnav

Internship Name: Cyber Security internship

Date: DD/MM/YYYY

Step 3: Save the File

Key Combinations Used

Ctrl + O

Enter

Ctrl + X

Purpose

- **Ctrl + O** → Save file
- **Enter** → Confirm filename
- **Ctrl + X** → Exit Nano editor

Result

The file was saved successfully and Nano editor was closed.

Step 4: Verify File Contents


Command Used

```
cat myinfo.txt
```

Purpose

The cat command was used to display the contents of the file and verify that the information was saved correctly.

Screenshot

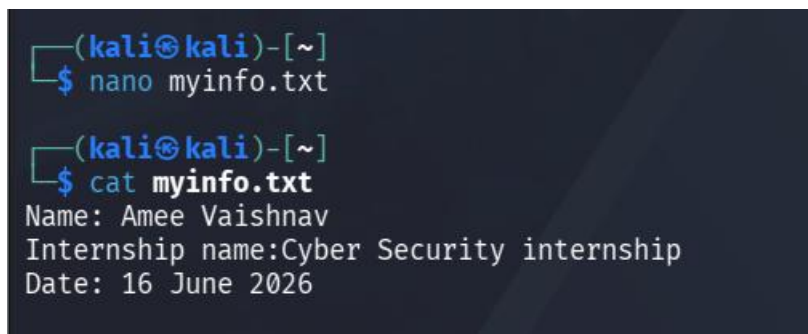A screenshot of a terminal window with a dark background. The prompt is (kali@kali)-[~]. The first command entered is nano myinfo.txt. The second command entered is cat myinfo.txt, which outputs the following text: Name: Ameer Vaishnav, Internship name: Cyber Security internship, and Date: 16 June 2026.

```
(kali@kali)-[~]  
$ nano myinfo.txt  
  
(kali@kali)-[~]  
$ cat myinfo.txt  
Name: Ameer Vaishnav  
Internship name: Cyber Security internship  
Date: 16 June 2026
```

Observation

The file myinfo.txt was successfully created using the Nano text editor. The required information was entered, saved, and verified using the cat command.

Task 9: Additional Assignment

Step 1: Create 10 Files

Command Used

```
touch file1.txt file2.txt file3.txt file4.txt file5.txt file6.txt file7.txt file8.txt file9.txt file10.txt
```

Purpose

The touch command was used to create ten empty text files in the current directory.


Result

Ten files were successfully created.

Verification

```
ls
```

Screenshot

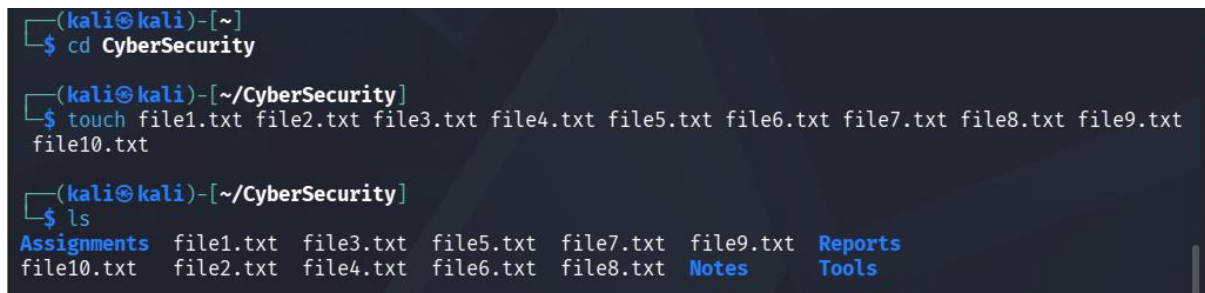

```
(kali㉿kali)-[~]  
$ cd CyberSecurity  
  
(kali㉿kali)-[~/CyberSecurity]  
$ touch file1.txt file2.txt file3.txt file4.txt file5.txt file6.txt file7.txt file8.txt file9.txt  
file10.txt  
  
(kali㉿kali)-[~/CyberSecurity]  
$ ls  
Assignments  file1.txt  file3.txt  file5.txt  file7.txt  file9.txt  Reports  
file10.txt  file2.txt  file4.txt  file6.txt  file8.txt  Notes     Tools
```

Step 2: Create 2 New Folders

Command Used

```
mkdir FolderA FolderB
```

Purpose

The mkdir command was used to create two new directories named FolderA and FolderB.


Result

Both folders were created successfully.

Verification

```
ls
```

Screenshot

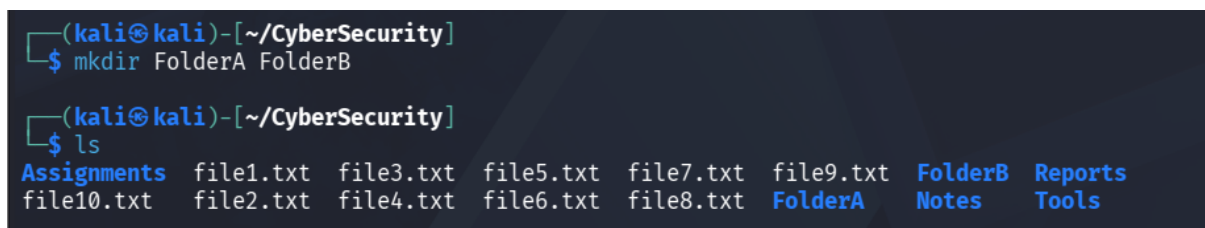

```
(kali㉿kali)-[~/CyberSecurity]  
$ mkdir FolderA FolderB  
  
(kali㉿kali)-[~/CyberSecurity]  
$ ls  
Assignments  file1.txt  file3.txt  file5.txt  file7.txt  file9.txt  FolderB  Reports  
file10.txt  file2.txt  file4.txt  file6.txt  file8.txt  FolderA  Notes    Tools
```


Step 3: Move 5 Files

Commands Used

```
mv file1.txt FolderA/  
mv file2.txt FolderA/  
mv file3.txt FolderA/  
mv file4.txt FolderA/  
mv file5.txt FolderA/
```


Purpose

The mv command was used to move files into different folders.

Verification

tree

Screenshot

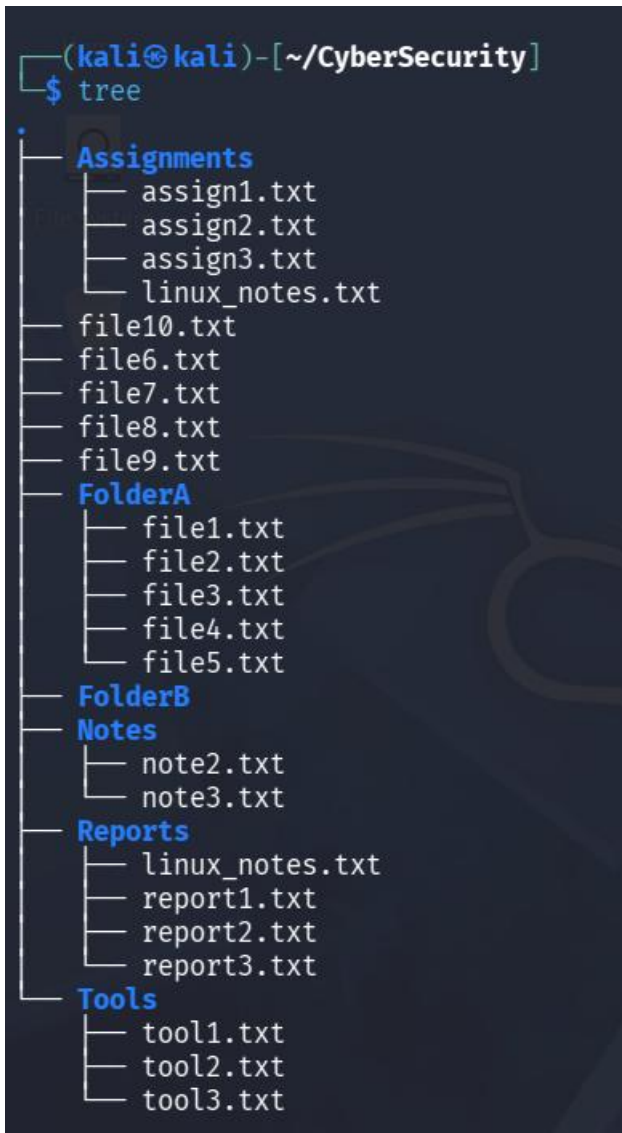

```
(kali@kali)-[~/CyberSecurity]  
$ tree  
.  
├── Assignments  
│   ├── assign1.txt  
│   ├── assign2.txt  
│   ├── assign3.txt  
│   └── linux_notes.txt  
├── file10.txt  
├── file6.txt  
├── file7.txt  
├── file8.txt  
├── file9.txt  
├── FolderA  
│   ├── file1.txt  
│   ├── file2.txt  
│   ├── file3.txt  
│   ├── file4.txt  
│   └── file5.txt  
├── FolderB  
├── Notes  
│   ├── note2.txt  
│   └── note3.txt  
├── Reports  
│   ├── linux_notes.txt  
│   ├── report1.txt  
│   ├── report2.txt  
│   └── report3.txt  
└── Tools  
    ├── tool1.txt  
    ├── tool2.txt  
    └── tool3.txt
```

Step 4: Delete 3 Files

Commands Used

```
rm file6.txt  
rm file7.txt  
rm file8.txt
```

Purpose

The rm command was used to remove unwanted files.


Result

Three files were successfully deleted from the directory.

Verification

```
ls
```

Screenshot

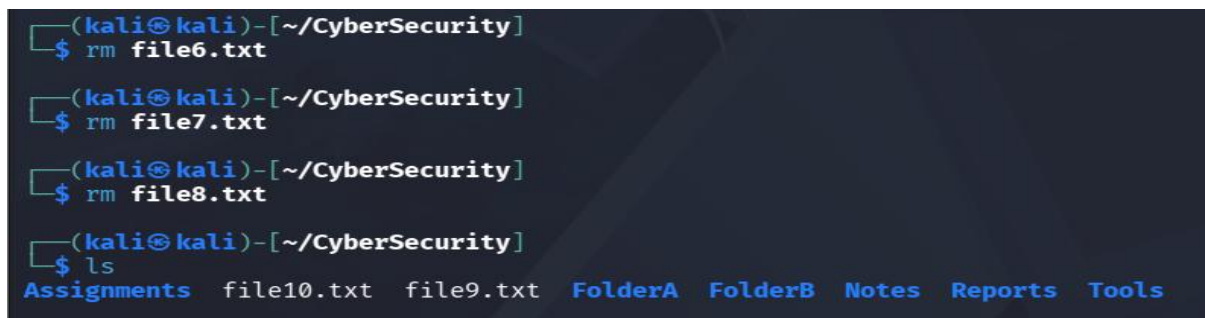

```
(kali㉿kali)-[~/CyberSecurity]  
$ rm file6.txt  
  
(kali㉿kali)-[~/CyberSecurity]  
$ rm file7.txt  
  
(kali㉿kali)-[~/CyberSecurity]  
$ rm file8.txt  
  
(kali㉿kali)-[~/CyberSecurity]  
$ ls  
Assignments  file10.txt  file9.txt  FolderA  FolderB  Notes  Reports  Tools
```

Step 5: Display All Folder Contents

Command Used

tree

Alternative Command

ls -R


Purpose

To display the complete directory structure and verify all file operations.

Result

The final directory structure was displayed successfully

Screenshot

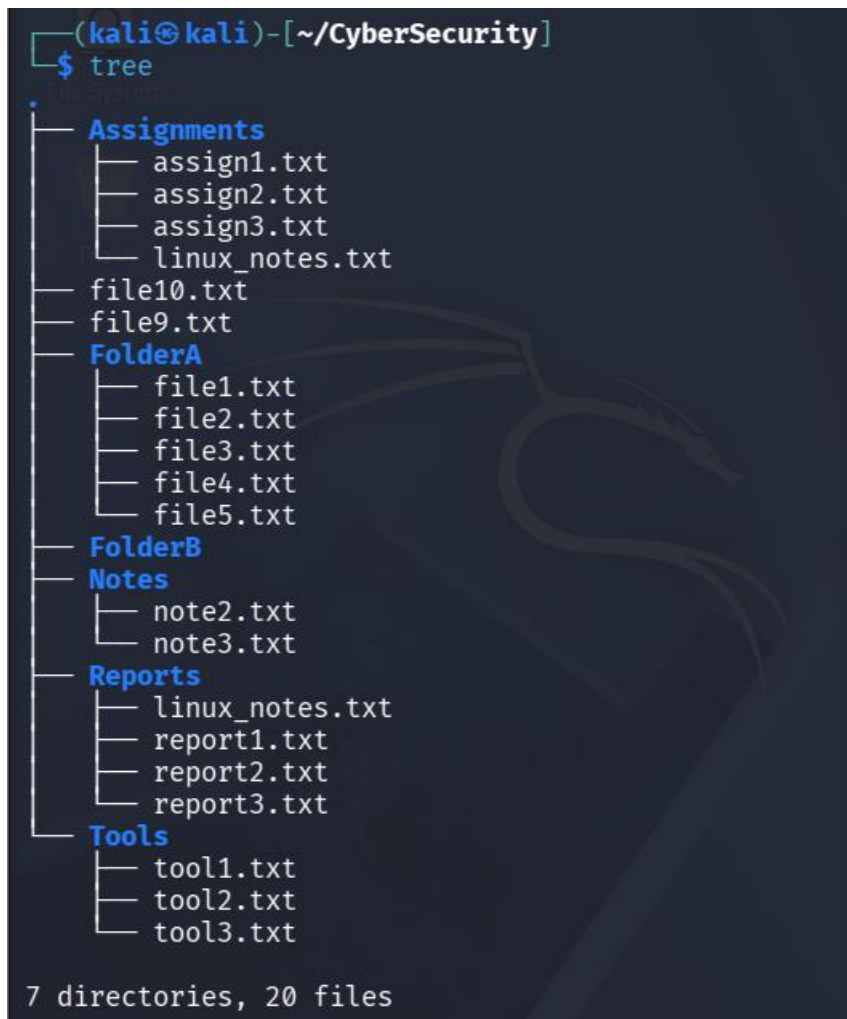

```
(kali㉿kali)-[~/CyberSecurity]
$ tree
.
├── Assignments
│   ├── assign1.txt
│   ├── assign2.txt
│   ├── assign3.txt
│   └── linux_notes.txt
├── file10.txt
├── file9.txt
├── FolderA
│   ├── file1.txt
│   ├── file2.txt
│   ├── file3.txt
│   ├── file4.txt
│   └── file5.txt
├── FolderB
├── Notes
│   ├── note2.txt
│   └── note3.txt
├── Reports
│   ├── linux_notes.txt
│   ├── report1.txt
│   ├── report2.txt
│   └── report3.txt
└── Tools
    ├── tool1.txt
    ├── tool2.txt
    └── tool3.txt

7 directories, 20 files
```

Challenges Faced and Solutions

Challenge Faced	Solution
Difficulty locating files	Used pwd and ls commands
Exiting less command	Pressed q to quit
Navigation mistakes	Verified path using pwd command
File movement confusion	Used tree command for verification

Conclusion

This practical successfully demonstrated the use of essential Linux commands for directory navigation, file management, and system information gathering. All tasks were performed using terminal commands only, without using the graphical file manager. The experiment improved understanding of Linux command-line operations, file handling, and system administration basics.