



$p = 1$: fixed-domain MLE of the RBF kernel parameters (log scale) ($\sigma_0^2 = 1$, $\ell_0 = 0.25$, $\tau_0^2 = 0.01$; 1000 replicates per n)

(a) $\log \sigma^2$

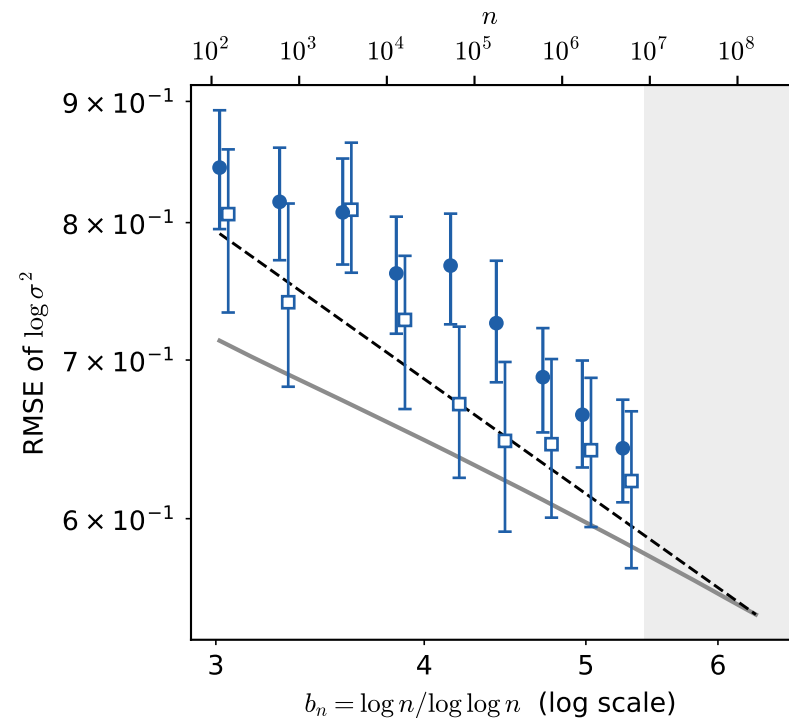


- RMSE (fitted slope = -0.49)
- IQR/1.349 (fitted slope = -0.49)
- Asymptotic SD (fitted slope = -0.35)
- - - Theoretical rate $\propto b_n^{-p/2}$ (slope = -0.5)

(b) $\log \ell$

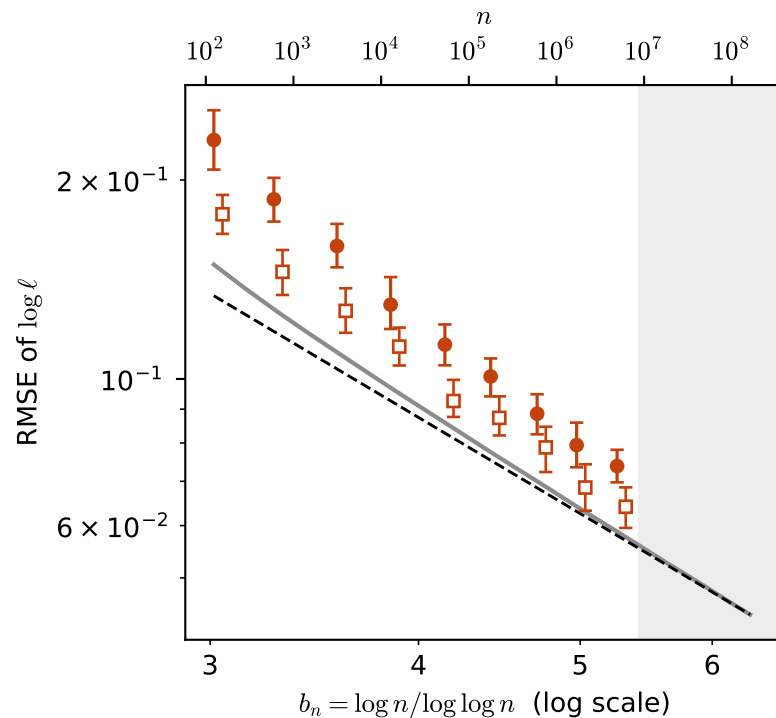


- RMSE (fitted slope = -2.05)
- IQR/1.349 (fitted slope = -1.81)
- Asymptotic SD (fitted slope = -1.66)
- - - Theoretical rate $\propto b_n^{-(p+2)/2}$ (slope = -1.5)

(c) $\log \tau^2$

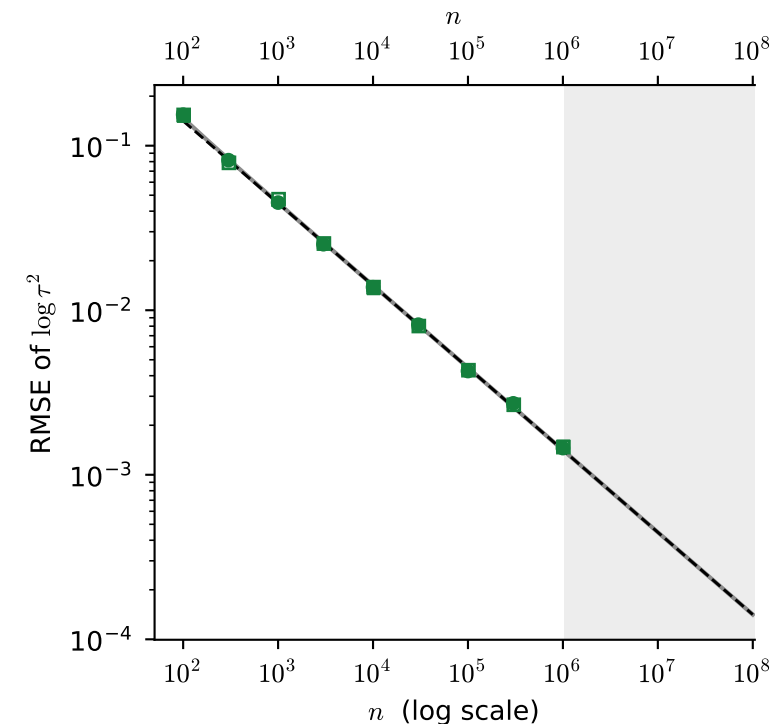


- RMSE (fitted slope = -0.50)
- IQR/1.349 (fitted slope = -0.50)
- Asymptotic SD (fitted slope = -0.50)
- - - Theoretical rate $\sqrt{2} n^{-1/2}$ (slope = -0.5)

(d) normal Q-Q, $\log \sigma^2$

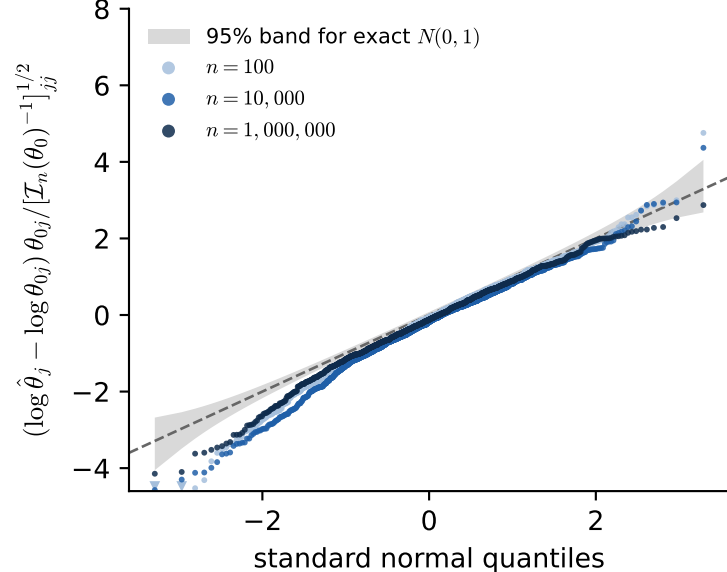

(e) normal Q-Q, $\log \ell$

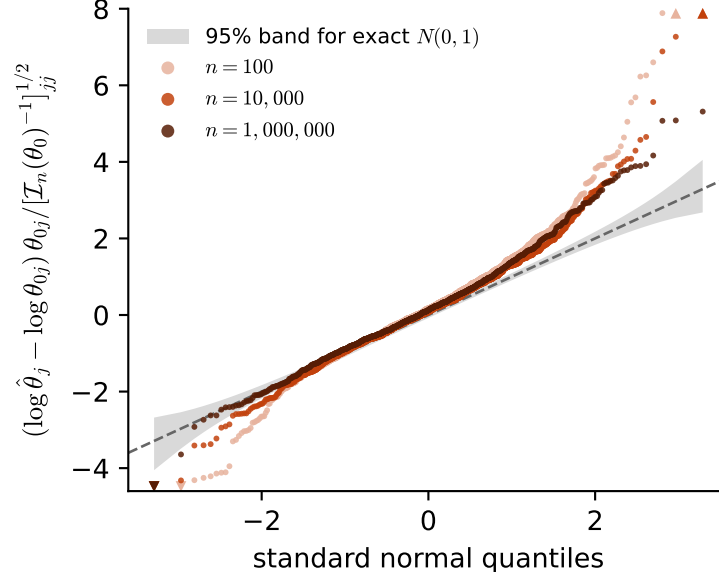

(f) normal Q-Q, $\log \tau^2$

