

FAKE NEWS DETECTION WITH NLP

KAROLINA BAKALARZ


AMELIA BIEDA

AGNIESZKA STASZKIEWICZ

ALEKSANDRA SZCZUR



PROJECT ROADMAP

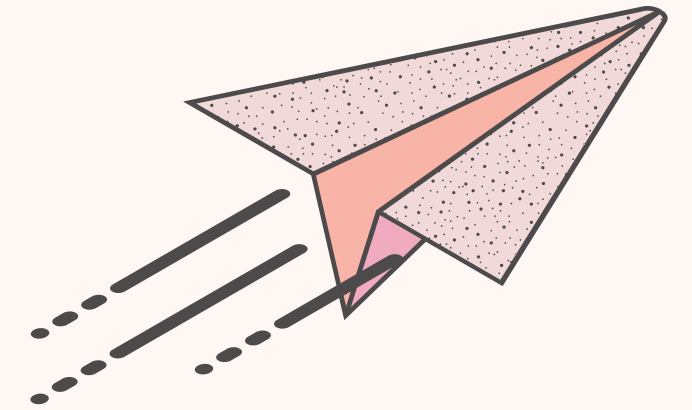

1. Fine-tune the RoBERTa model on the LIAR Dataset.


State-of-the-art deep
learning model for natural
language processing.



Benchmark for fake news
detection, based on politicians'
and social-media statements.



PROJECT ROADMAP

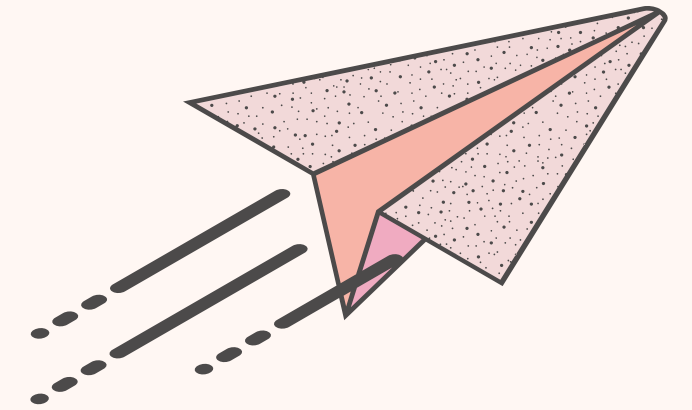

1. Fine-tune the RoBERTa model on the LIAR Dataset.
2. Develop an ensemble model with TF-IDF & XGBoost.


Term Frequency-Inverse Document Frequency
calculates which words are rare and important.



Combining insights from both text and metadata
to make a precise prediction.



PROJECT ROADMAP

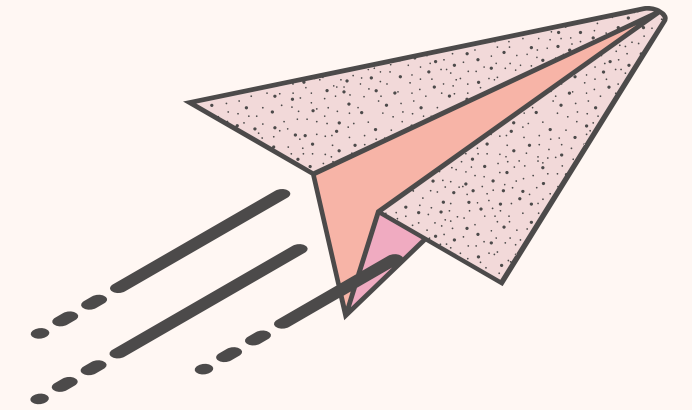


1. Fine-tune the RoBERTa model on the LIAR Dataset.
2. Develop an ensemble model with TF-IDF & XGBoost.
3. Implement attention visualisations.



Heat maps that show exactly which words the model focused on when flagging a statement as fake.

PROJECT ROADMAP

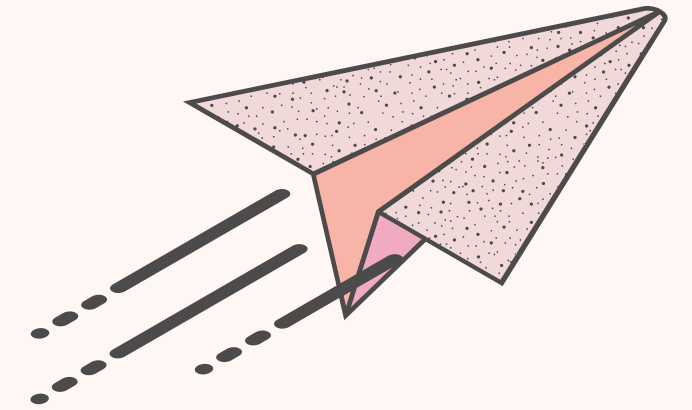


1. Fine-tune the RoBERTa model on the LIAR Dataset.
2. Develop an ensemble model with TF-IDF & XGBoost.
3. Implement attention visualisations.
4. Incorporate multimodal analysis.



Merges the raw text of a claim with external context.

PROJECT ROADMAP

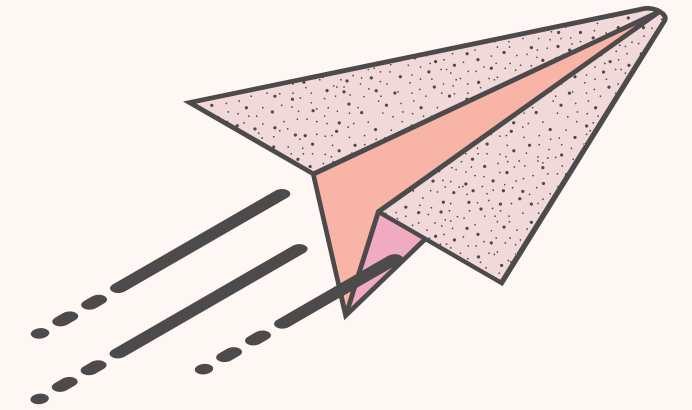

1. Fine-tune the RoBERTa model on the LIAR Dataset.
2. Develop an ensemble model with TF-IDF & XGBoost.
3. Implement attention visualisations.
4. Incorporate multimodal analysis.
5. Deploy as a functional Web Application.

THANK YOU

