

Try/Catch for Integration Error Handling Course Activities

Table of Contents

About the Activities	3
Activity 1: Try/Catch for Error Handling	4
Before you begin	5
Create Folders and Install Processes	6
Review of the Installed Process Components	7
Test the Process without Error Handling	14
Add a Try/Catch step to Handle Errors	15
Capture and Report Errors	17
Email the Errors	23
Finalize the Catch Path	26
Final Test	27
Activity 1 Wrap-Up	28
Activity 2: Nested Try/Catch	29
Simulate a Disk V2 Connector Failure and Test the Process	30
Add the Nested Try/Catch	32
Configure the Catch Path	34
Finalize the Catch Path	39
Final Test and Evaluation	40
Activity 2 Wrap-Up	42



About the Activities

To complete the Activities, log into the [Boomi Platform](#) with your Training Account and proceed with the instructions. We recommend completing the activities in order, as they build on each other.



Activity 1: Try/Catch for Error Handling

You will enhance the GreenTrack Delivery process by implementing robust **error handling**. This exercise simulates real-world failures and challenges you to build resilience into the integration flow using Boomi's **Try/Catch** logic.

In this activity, you will complete the following:

- Create folders and install a prebuilt integration process
- Analyze how and why a process fails
- Implement a **Try/Catch** step to handle errors gracefully
- Capture and report errors using the process component



Before you begin

This activity uses the **Boomi Training (Mail)** connection. Before you begin, be sure it is available in your account. If not, install "**#Connections - II**" from the Process Library.

Reference: [Install a Process from the Process Library.](#)



Create Folders and Install Processes

1. Create a folder named **Try Catch** in the root folder.

Reference: [Create a Folder.](#)

2. Install the **GreenTrack Delivery Process** from the **Process Library** and place it in the **Try Catch** folder.

Reference: [Install a Process from the Process Library.](#)

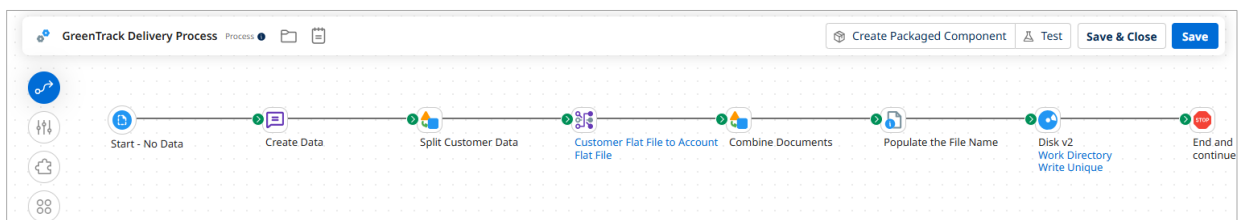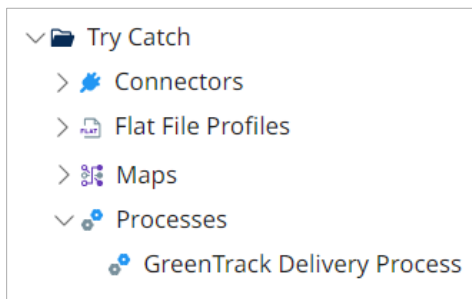

Review of the Installed Process Components

This section helps you understand the process flow and identify where failures occur before applying the **Try/Catch** logic.

1. **Message step:** Simulates loading customer records. Each line is a single record.

 **Message Step** 

To transform incoming document data into a free-form message using a combination of static and dynamic variables, use the Message step. The Message step is often used to construct email messages.

Display Name

Create Data

Option

☐ Combine documents into a single message 

Message

CUST001,John,Smith,123 Main St,Apt
4B,90210,,john.smith@example.com
CUST002,Emily,Jones,456 Oak
Ave,,10001,USA,emily.jones@example.com
CUST003,Liam,Brown,789 Pine Rd,Unit
12,30303,USA,liam.brown@example.com
CUST004,Sophia,White,321 Maple St,Suite 3C,60614,USA,
CUST005,James,Johnson,654 Elm

Variables

{1} Example variable

OK

Cancel

Example Data:

CUST001, John, Smith, 123 Main St, Apt
4B, 90210, , john.smith@example.com
CUST002, Emily, Jones, 456 Oak
Ave, , 10001, USA, emily.jones@example.com
CUST003, Liam, Brown, 789 Pine Rd, Unit
12, 30303, USA, liam.brown@example.com
CUST004, Sophia, White, 321 Maple St, Suite 3C, 60614, USA,
CUST005, James, Johnson, 654 Elm
Dr, , 75201, USA, james.johnson@example.com
CUST006, Olivia, Garcia, 987 Cedar Ln, Floor
5, 94105, USA, olivia.garcia@example.com
CUST007, Noah, Martinez, 147 Birch
Blvd, , 19103, USA, noah.martinez@example.com
CUST008, Ava, Lee, 258 Willow Way, Bldg
A, 77005, USA, ava.lee@example.com
CUST009, William, Anderson, 369 Spruce
Ct, , 33101, USA, william.anderson@example.com
CUST010, Mia, Taylor, 741 Aspen Pl, Ste
101, 80202, USA, mia.taylor@example.com

Note: Some records (e.g., email) lack the required fields, which will cause the **Map** step to fail.

2. **Split the Data:** Split the file by line with no column headers. The source profile is a **Customer Flat File** with fields assigned by position.

 **Data Process Step** ⓘ

To manipulate document data with your process, use the Data Process step. This step provides multiple options for data manipulation, like splitting or combining documents and zipping or unzipping data. You can add one or more processing steps, which execute according to their sequential order and operate on the data output from the previous processing step.

Display Name

Processing Steps

Data Process Properties ⓘ

+ × ↕ ⬆

Split Documents

Processing Step ⓘ

Split Documents ▼

Profile Type

Flat File ▼

Split Options ⓘ

Batch Count ⓘ

0


Split Options

☒ Split By Line
☐ Split By Profile

Headers Option


☒ No Column Headers
☐ Remove first line as Column Headers
☐ Retain first line as Column Headers

3. **View Map Input Profile:** The **Customer Flat File** is the input profile.

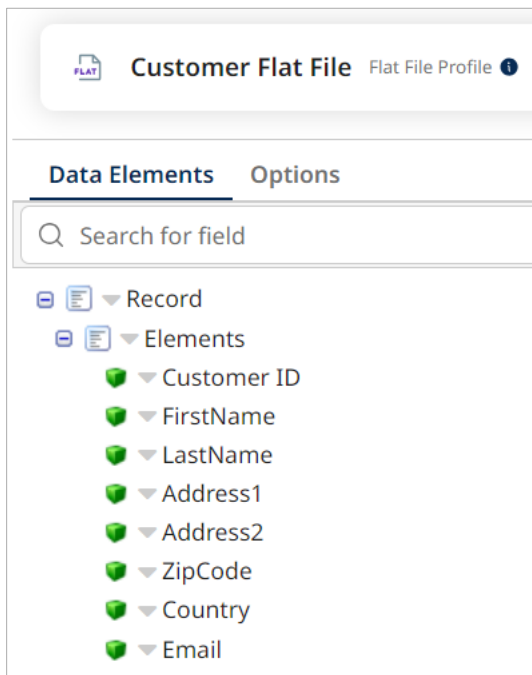

Note: To view, open the Map.

4. **View Map Output Profile:** The **Account Flat File** also includes a **Status** field.

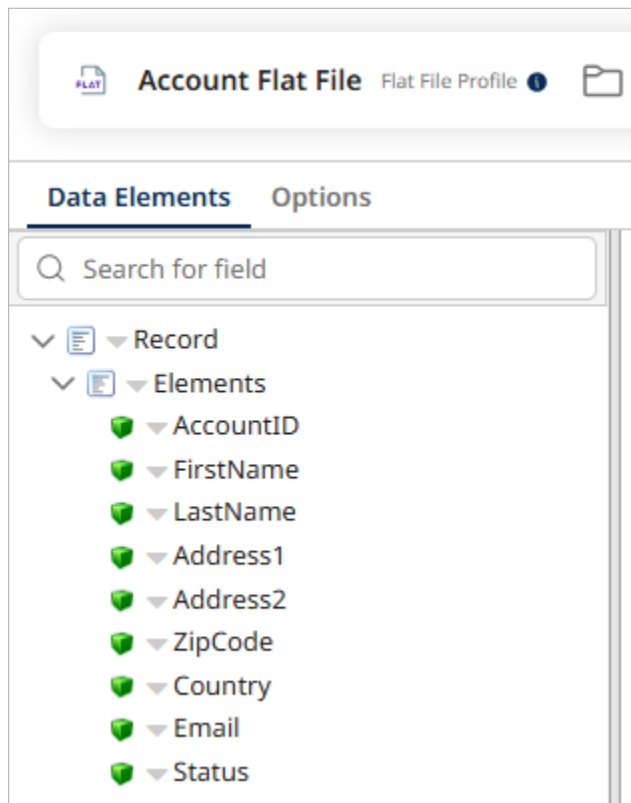

Note: To view, open the Map.

- 5. Map:** Transforms source into destination format. Errors occur here if any required fields are missing.

- 6. Combine the Data:** A **Data Process** step merges all processed records into a single document.

7. **Set the Output Filename:** Use a **Set Properties** step to assign a static file name.



Set Properties Step i

The Set Properties step allows you to set values for various document and process properties. These properties can be used to set outbound connector attributes such as file name or email subject, or store certain values in memory to facilitate the integration. The property values can be comprised of static and/or dynamic values.

Display Name

Properties to Set	Property Value i
+ ✎ ✖ Disk v2 - File Name	+ ✎ ✖ ⬆ ⬇ Static value of 'GreenTrackOut.dat'

8. **Write the File:** A **Disk v2** connector writes the final document to disk.



Connector Step i

Use connector steps to get data into and out of a process. Most processes have one "get" connector and one or more "send" connectors. The Connector step uses a combination of predefined connection and operation components to establish where and how to get or send data.

General Parameters

Display Name

Connector i

Use the Disk connector to read and write from the underlying file system of the host machine where the Atom is running.
Learn more about [this connector](#). [↗](#)

Connection i

Action



Operation i

Test the Process without Error Handling

1. Test the process.

Reference: [How to Test Your Process.](#)


2. The **Map** step fails due to missing values required by the output profile.

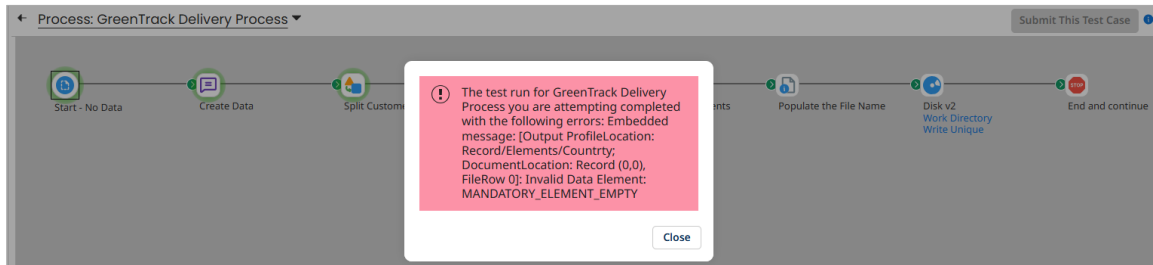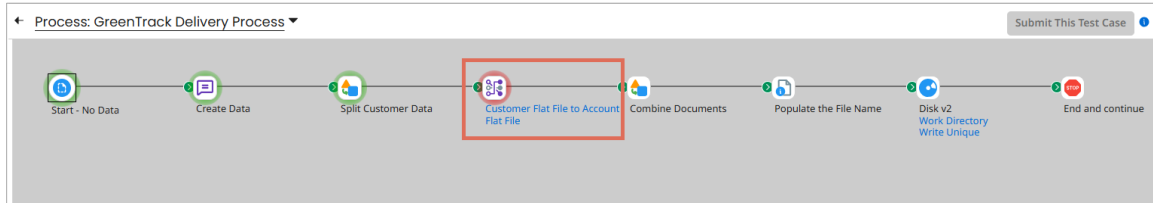

✓ *This failure demonstrates the need for error handling. Review the error logs to identify which records failed.*

Add a Try/Catch step to Handle Errors

1. Insert a **Try/Catch** step before the **Map** step to intercept document-level mapping errors.

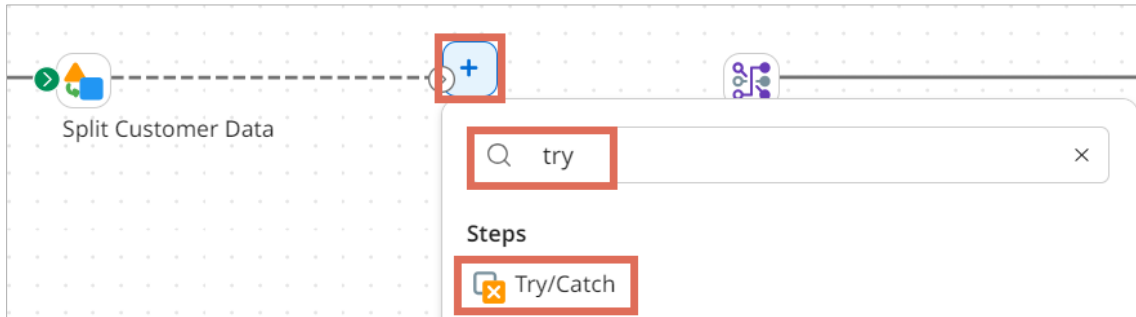

2. Review the **Try/Catch** step, keep the default settings, and select **OK**:
 - Retry Count: **0** (ensures failed documents are routed to the Catch path immediately)
 - Failure Trigger: **Document Errors**

Try/Catch Step i

To capture unexpected process-level or document-level errors, use the Try/Catch step. Documents that fail along the Try path are then either retried or passed to the Catch path for further processing. Documents handled with a Try/Catch step are not reported as failed in Process Reporting.

Display Name

Retry Count (required) i

Failure Trigger


Document Errors ▼

OK

Cancel

Note: Retry Count must be 0 when using **Document Errors**.

3. Connect the **Try** path to the **Map** step. Leave the **Catch** path unconnected to observe how Boomi skips failed documents.

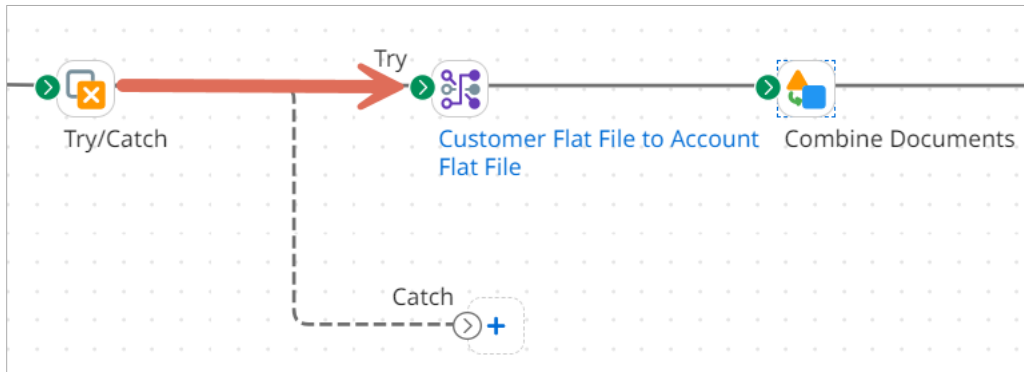


4. Retest the process. It should now process four valid records, skipping the failed ones. No error handling is configured yet on the Catch path.

Reference: [How to Test Your Process.](#)

Capture and Report Errors

1. Add a **Message** step to the **Catch** path.

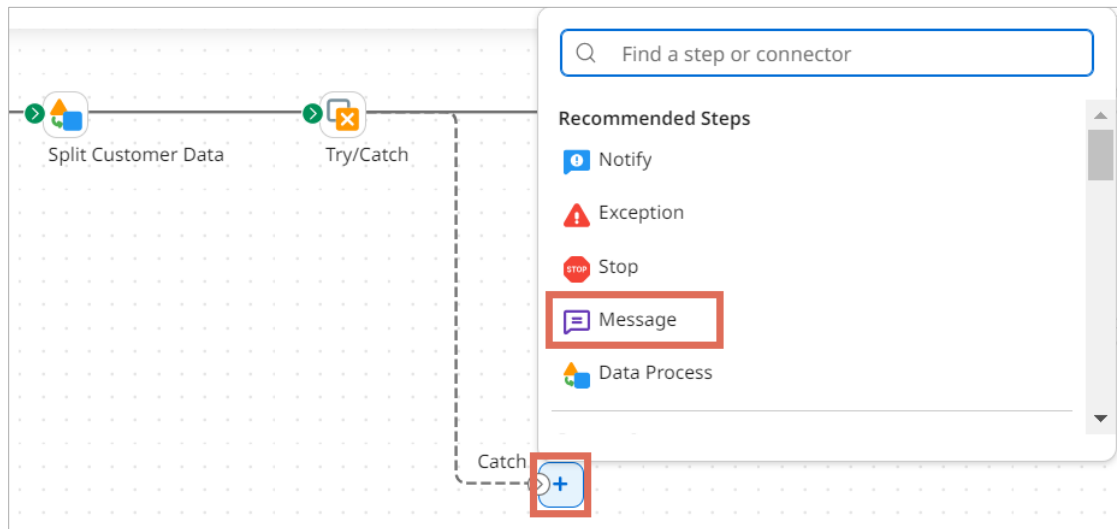

2. Configure the **Message** step:

- Display Name: **Error Messages**
- Check **Combine documents into a single message**
- Enter the following message:

Error: {1}

Account: {2}

(Enter line break or hard return)


Message Step ?

To transform incoming document data into a free-form message using a combination of static and dynamic variables, use the Message step. The Message step is often used to construct email messages.

Display Name	Error Messages
Option	☒ Combine documents into a single message ?
Message	Error: {1} Account: {2} -----

3. Configure the first variable.

- Type: **Document Property**
- Document Property: select the **magnifying glass** to open a new window.

Parameter Value

Type	Document Property
Document Property	Choose... 

4. Configure the following and then select **OK**:

- Property Type: **Document Property**
- Source Type: **Meta Data**
- Property: **Try/Catch Message**

Note: The **Try/Catch Message** is one of the error messages Boomi captures internally and makes available to capture and display

Choose Property

Property Type	Document Property	▼
Source Type ⓘ	Meta Data	▼
Property (required)	Try/Catch Message	▼

CancelOK

5. Select **OK**.

Parameter Value

Type

Document Property

Document Property

Base - Try/Catch Message

Cancel

OK

6. Configure the second variable and select **OK**:
 - Type: **Current Data** (the failed document content)

Note: Choosing "Current Data" allows you to include the entire document content that caused the error, providing full context in the error report.

Parameter Value

Type

Current Data

No configuration Necessary

Cancel

OK

7. Select **OK** to save the step to the process.

 **Message Step** 

To transform incoming document data into a free-form message using a combination of static and dynamic variables, use the Message step. The Message step is often used to construct email messages.

Display Name

Error Messages

Option

☒ Combine documents into a single message 

Message

Error: {1}
Account: {2}

Variables

{1} Document Property - Base - Try/Catch Message


OK

Cancel

Email the Errors

Do not modify the data. Let error-handling logic manage the expected **Map** step failures.

1. Add a **Mail** connector after the **Error Messages** step.

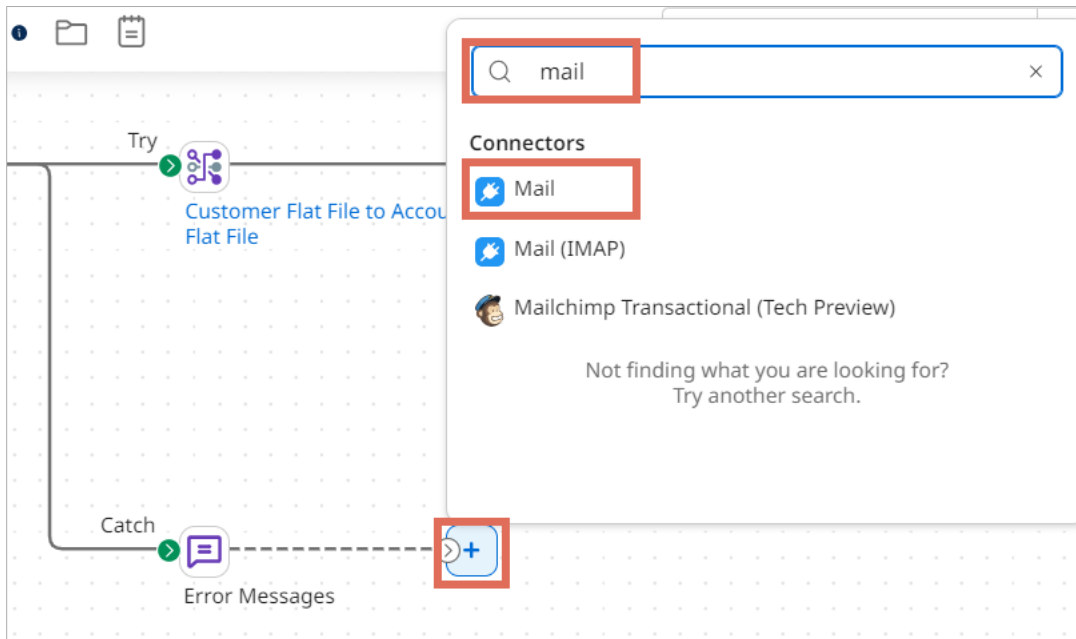

2. Configure the **Mail** connector:

- Connection: **Boomi Training (Mail)**
- Action: **Send**
- Select the plus (+) icon to create a new **Operation**.



Connector Step ⁱ

Use connector steps to get data into and out of a process. Most processes have one "get" connector and one or more "send" connectors. The Connector step uses a combination of predefined connection and operation components to establish where and how to get or send data.

General Parameters

Display Name

Connector ⁱ

Mail ▼

Use the Mail connector to read email from a POP email server and send email to an SMTP email server.
Learn more about [this connector](#). [↗](#)

Connection ⁱ

Boomi Training (Mail) ✎ ✕

Action

Send ▼

Operation ⁱ

Choose... +

3. Configure the Mail Operation:

- Operation Name: **Report Error**
- From: **boomitrain@gmail.com**
- To: **your email address**
- Subject: **Issue with Map Data**
- Disposition: **Inline**

Note: This ensures the email content is displayed directly in the email body

- Content Type: **text/plain**

4. Select **Save and Close**, and **OK** to save the connector.

Report Error Mail Operation

Save & Close Save

Options Archiving Tracking Caching

Connector Action Send

From boomitrain@gmail.com

To Your Email Address


Subject Issue with Map Data

Disposition Inline

Content Type text/plain

Finalize the Catch Path

1. Add a **Stop** step after the **Mail** Connector and Save your process.

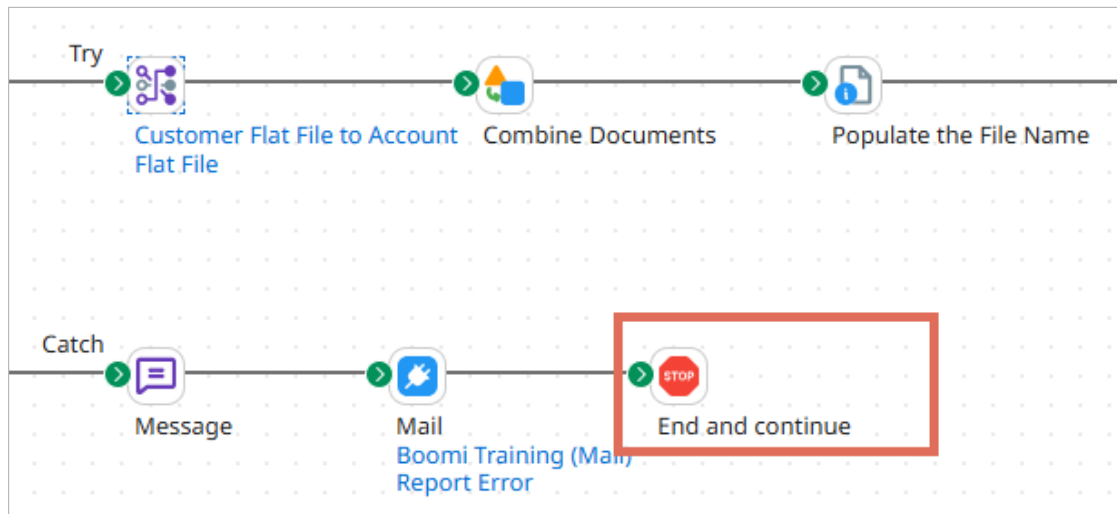


Final Test

1. Test the GreenTrack Delivery Process.

Reference: [How to Test Your Process.](#)

2. Check your email. You should receive an error report like this:

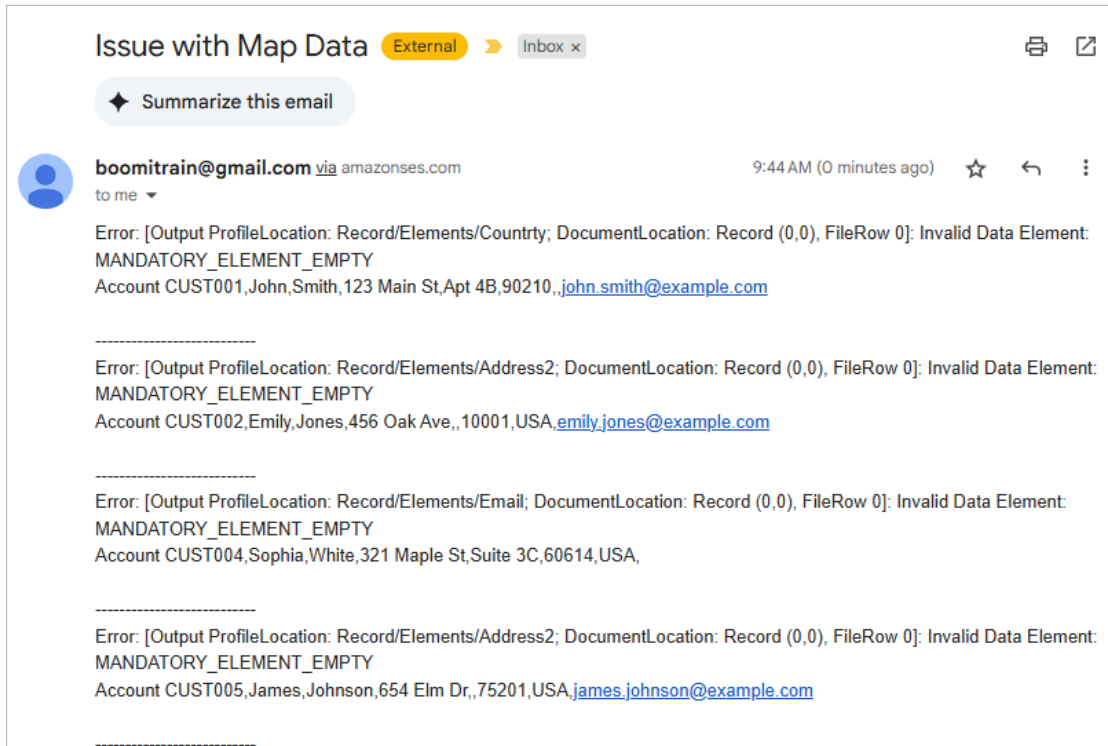

Note: If your email didn't arrive, check your spam or verify the Mail connector's settings.

Activity 1 Wrap-Up

You've successfully implemented error handling in the GreenTrack Delivery process by:

- Isolating and routing failed records via **Try/Catch**
- Preserving valid data through uninterrupted processing
- Capturing and reporting errors for downstream resolution



Activity 2: Nested Try/Catch

The **Disk V2** connector occasionally fails. You'll add a **nested Try/Catch** inside the original **Try** path to enhance the process. The nested **Try/Catch** logs connector-level errors using a **Notify** step (instead of emailing them), while the outer **Try/Catch** handles document-level issues.

By the end of this activity, you will be able to:

- Reuse your previous **Try/Catch** approach for a new failure type
- Simulate a failure in the **Disk V2** connector
- Configure a nested **Try/Catch** with a **Notify** step for connector failures
- Validate that both kinds of errors are correctly handled and logged

Simulate a Disk V2 Connector Failure and Test the Process

Simulating a **Disk V2** connector failure allows you to test the robustness of your process's error handling. This controlled failure will help you validate that error capture and logging are working as expected.

1. Open the **Disk V2 Operation (Write Unique)**.


Modify the settings to simulate failure:

- Uncheck **Return Application Error Responses**
- Uncheck **Create directory if it doesn't exist**
- Select **Save and Close**.


2. Test the process. You should now see two types of failures:

- **Map** errors due to missing fields
- **Disk** errors due to the directory not being available

Reference: [How to Test Your Process.](#)

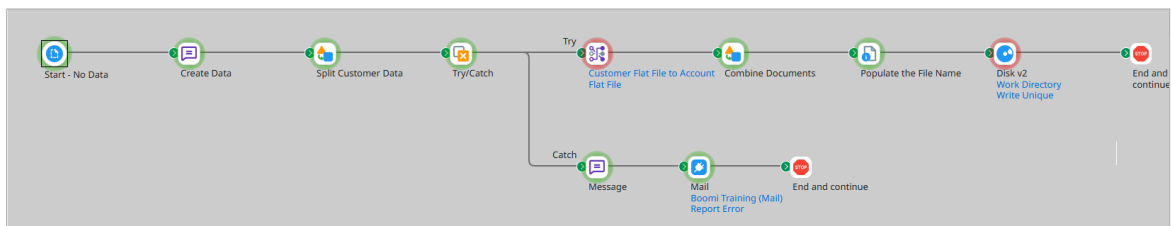


3. The previous activity addressed the **Map** error; this focuses on the **Disk V2** failure. On the test execution page:
- Double-click the **Disk V2** step.
 - Navigate to the **Logs**.
 - Locate and open the failed message to examine the error details.
 - Select **Close** to close the log window once you have reviewed the error.

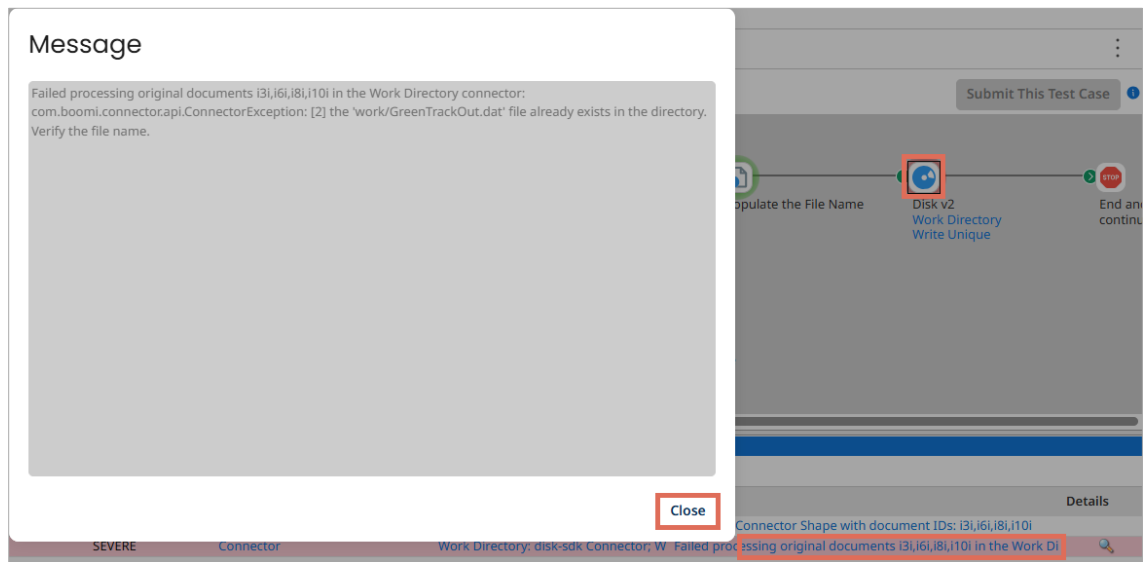


Add the Nested Try/Catch

Because the **Disk V2** connector is prone to intermittent failure, insert a **nested Try/Catch** after the **Map** step. It lets you handle connector-level errors (e.g., inability to write to disk).

- To insert the nested **Try/Catch**:
 - Disconnect the **Map** step from the **Data Process** step.
 - Select the plus (+) icon to open the menu.
 - Type "try" into the search bar, then select **Try/Catch** from the results.

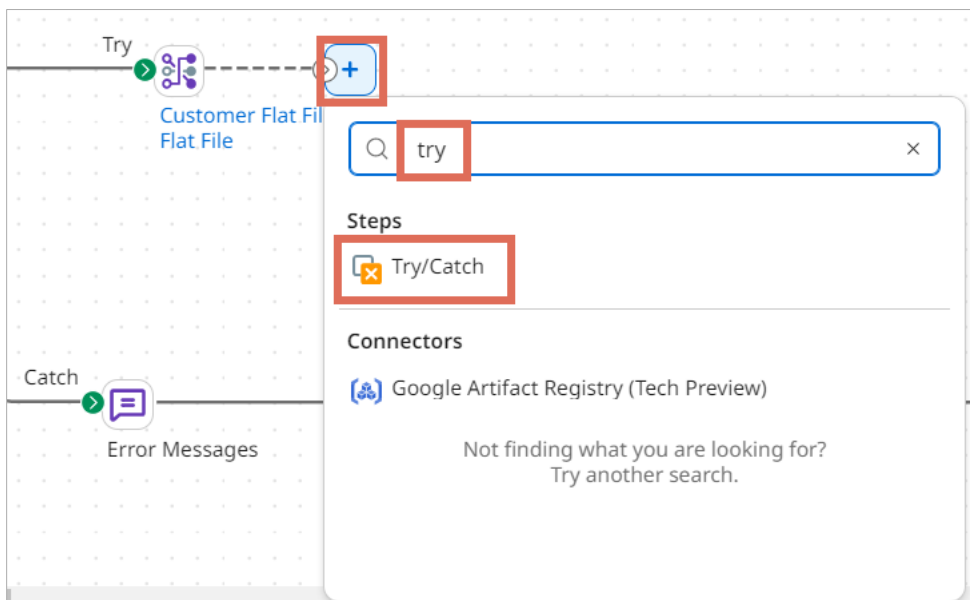

- Attach the **Try path** to the **Combine Documents Data Process** step.

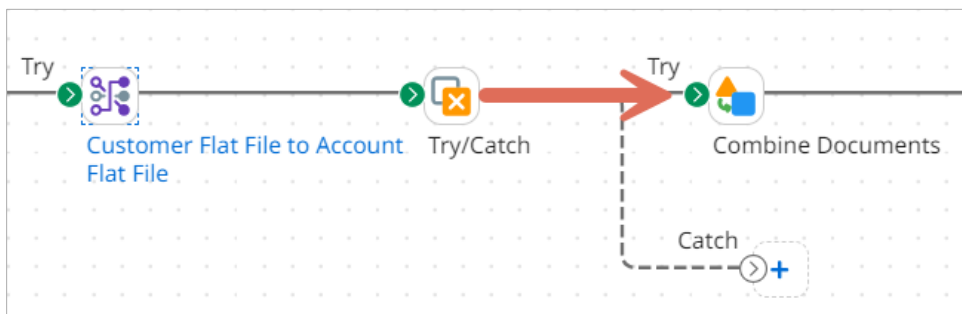

3. Configure the **Try/Catch** step with the following errors:

- Display Name: **Try Catch Disk V2**
- Retry Count: **2**
- Failure Trigger: **All Errors**
- Select **OK** to save the configuration.

Note: Boomi applies the **Retry Count** only when the process is deployed and ignores it during test mode

 **Try/Catch Step** 

To capture unexpected process-level or document-level errors, use the Try/Catch step. Documents that fail along the Try path are then either retried or passed to the Catch path for further processing. Documents handled with a Try/Catch step are not reported as failed in Process Reporting.

Display Name

Try Catch Disk V2

Retry Count (required) 

2

Failure Trigger

All Errors 


OK

Cancel

Configure the Catch Path

Add a **Notify** step to the **Catch** path to separate logged errors from those sent via email. This step will write the failed document details to the process log.

1. To add a new step:
 - Select the plus (+) symbol at the end of the **Catch** path.
 - Select the **Notify** step to add to the process.

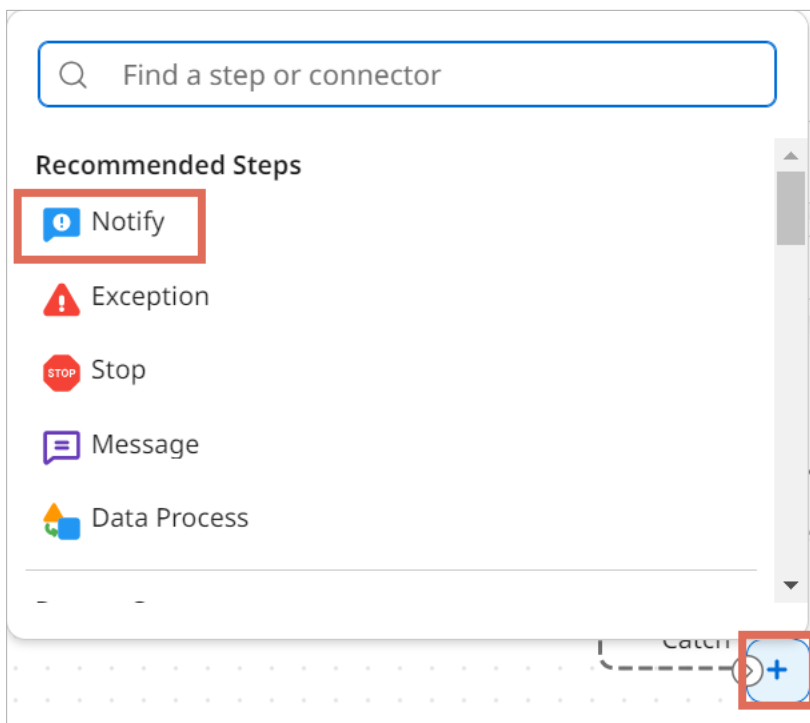

2. Configure the **Notify** step:

- Display Name: **Notify for Nested Try/Catch**
- Title: **Notify for Nested Try/Catch**
- Message Level: **Information**
- Message:
Error: {1}
Account: {2}

(Enter line break or hard return)


 **Notify Step** 

To write user-defined notifications to the process log for monitoring and troubleshooting purposes, use the Notify step. Optionally, you can also generate events that can be received via email alerts, RSS feed, and the platform API. Notification messages can include a combination of static content and dynamic variables. The Notify step does not modify document data.

Display Name	Notify for Nested Try/Catch
Title	Notify for Nested Try/Catch
Message Level	☒ Information ☐ Warning ☐ Error
Message	Error: {1} Account: {2} -----

3. Configure the first variable.

- Type: **Document Property**
- Document Property: Select the **magnifying glass** to open a new window.

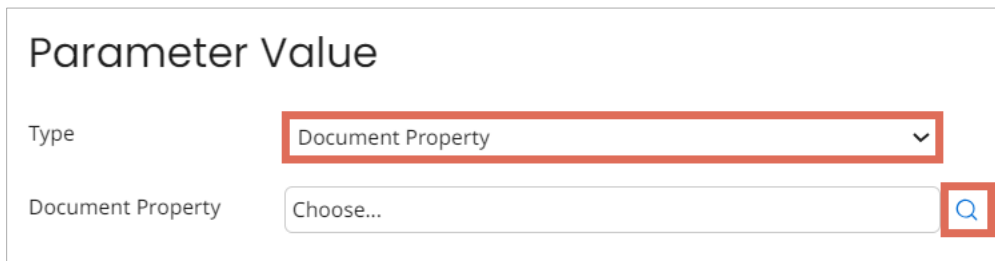


The 'Parameter Value' dialog box contains two fields. The 'Type' field is a dropdown menu with 'Document Property' selected and is highlighted with a red border. The 'Document Property' field is a text input with 'Choose...' and a magnifying glass icon to its right, also highlighted with a red border.

4. Configure the following and select **OK**:

- Property Type: **Document Property**
- Source Type: **Meta Data**
- Property: **Try/Catch Message**

Note: The **Try/Catch Message** is one of the error messages Boomi captures internally and makes available to capture and display

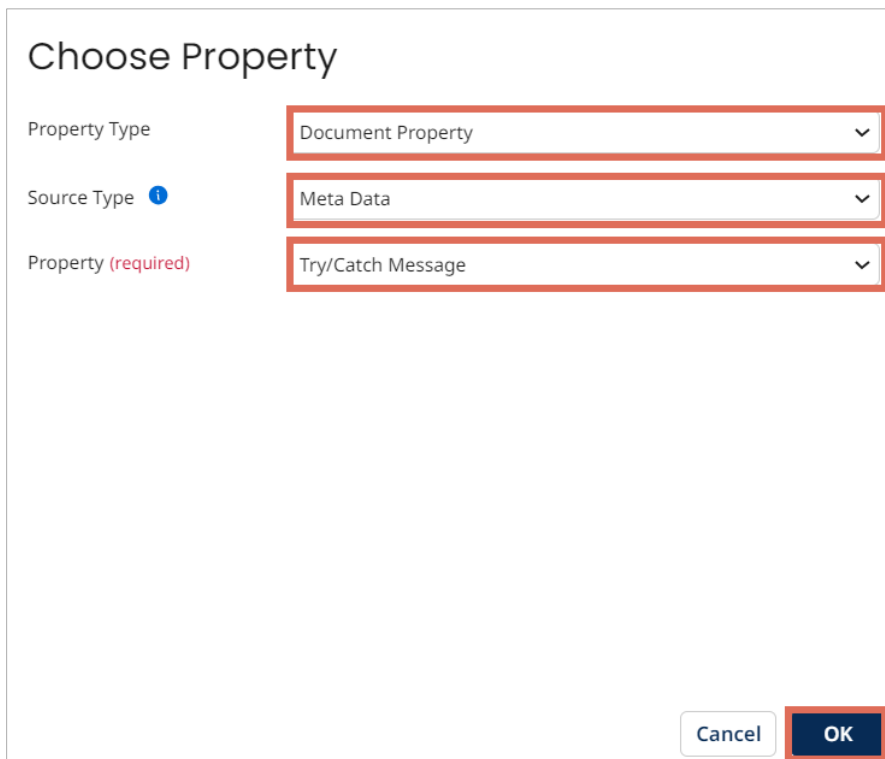

The 'Choose Property' dialog box features three dropdown menus, each highlighted with a red border. The 'Property Type' dropdown is set to 'Document Property'. The 'Source Type' dropdown, which includes an information icon, is set to 'Meta Data'. The 'Property (required)' dropdown is set to 'Try/Catch Message'. At the bottom right, there are 'Cancel' and 'OK' buttons, with the 'OK' button highlighted by a red border.

5. Select **OK**.

Parameter Value

Type

Document Property

Document Property


Base - Try/Catch Message

Cancel

OK

6. Configure the second variable and select **OK**:
 - Type: **Current Data** (the failed document content)

Note: Choosing "Current Data" allows you to include the entire document content that caused the error, providing full context in the error report.

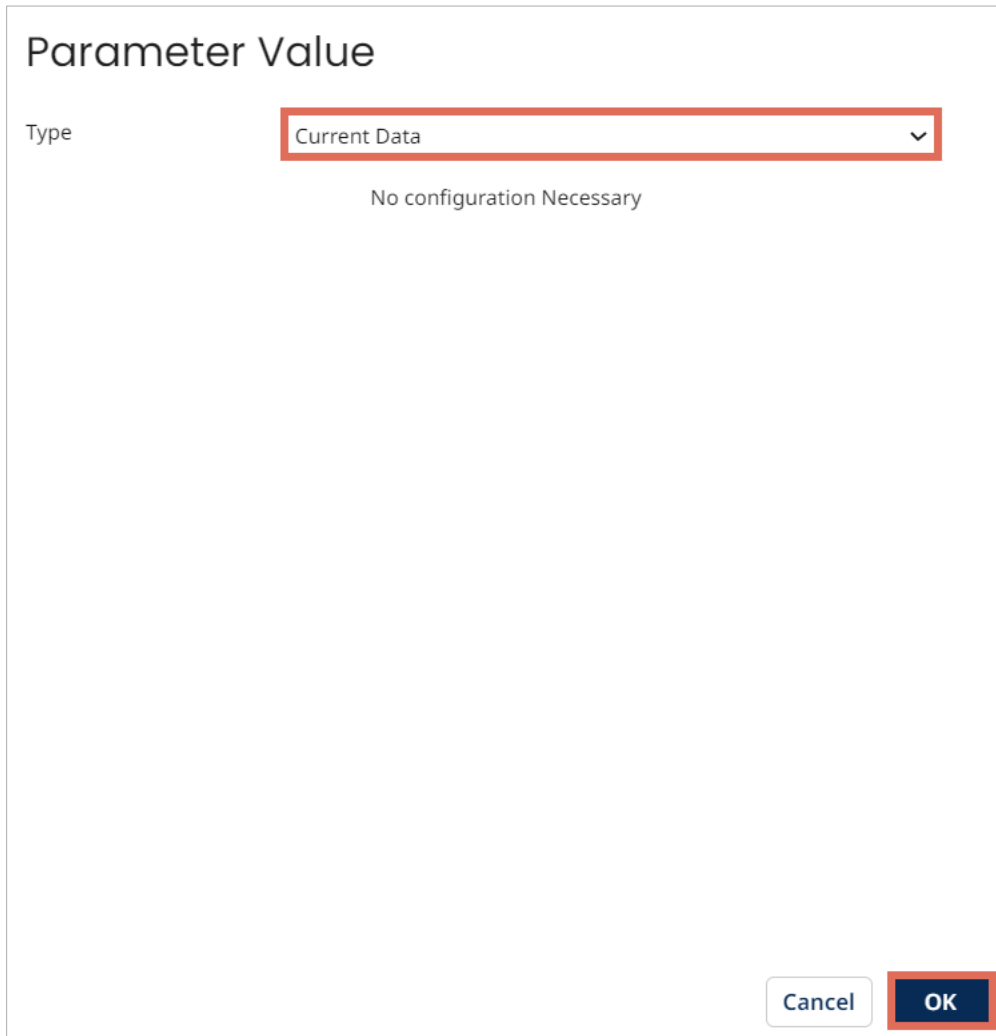

The image shows a dialog box titled "Parameter Value". It has a label "Type" on the left. To the right of the label is a dropdown menu with "Current Data" selected. Below the dropdown, the text "No configuration Necessary" is displayed. At the bottom right of the dialog, there are two buttons: "Cancel" and "OK". The "OK" button is highlighted with a red border.

Parameter Value

Type Current Data


No configuration Necessary

Cancel OK

7. Select **OK** to save the step.

Finalize the Catch Path

1. Add a **Stop** step after the **Notify** step. **Save** your process.

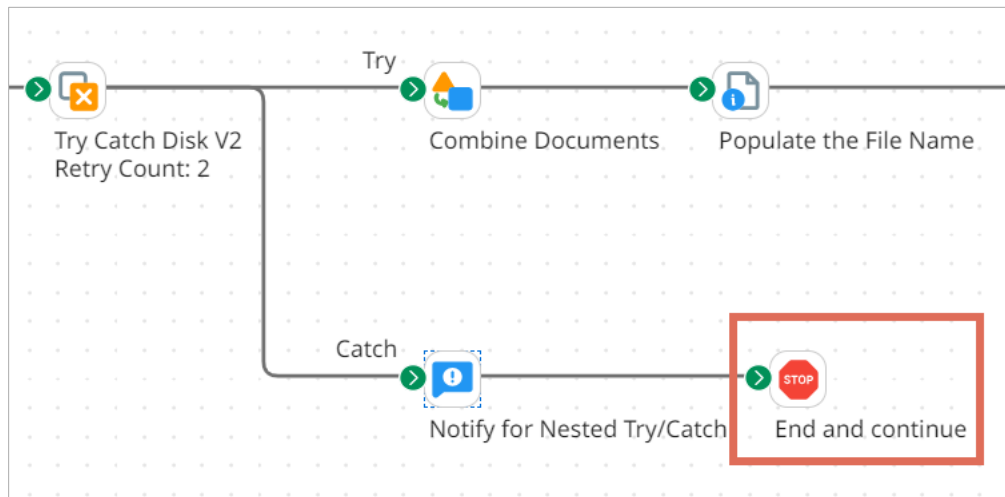


Final Test and Evaluation

1. Test the **GreenTrack Delivery Process**.



Reference: [How to Test Your Process.](#)

Note: The retry does not take effect until you deploy the process

2. Place your focus on the **Disk V2** step and view the logs. Select the error message to see the error: the 'work/GreenTrackOut.dat' file already exists in the directory.

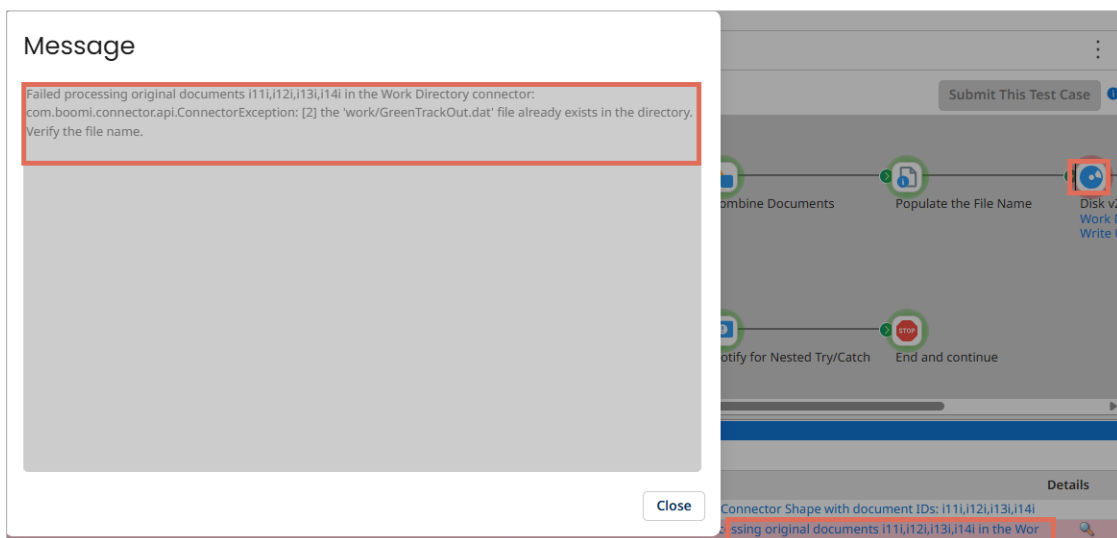

3. Compare the email output of the first activity to this activity. The result of this activity contains the Status field data 'Transformation Complete.' It is because the **Nested Try/Catch** occurred after the **Map** step.

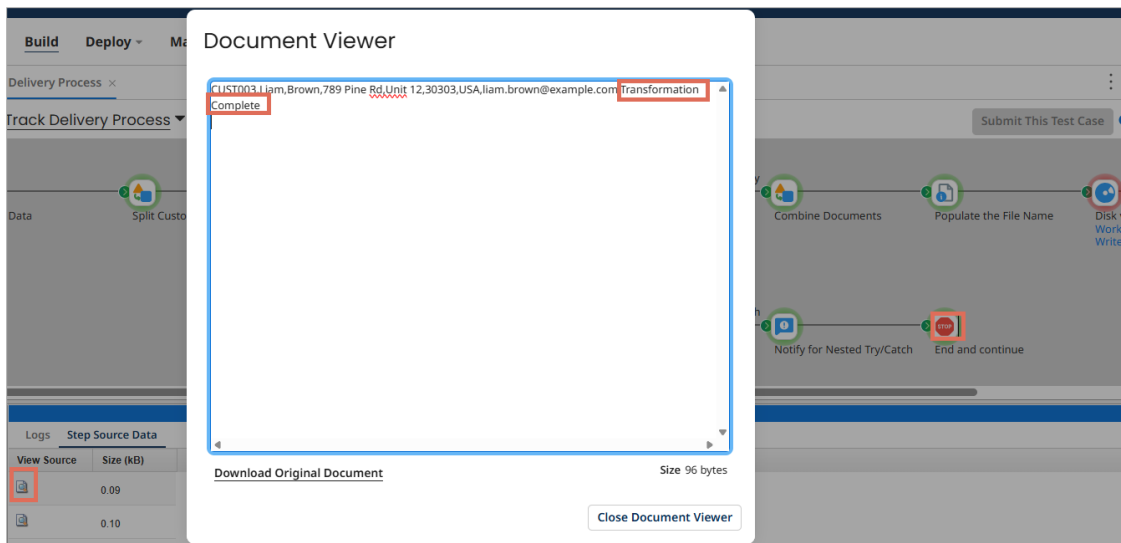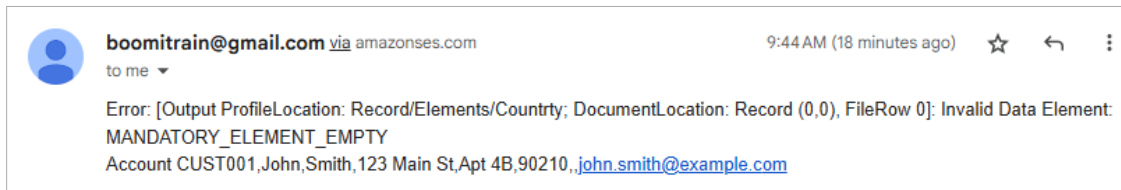

Activity 2 Wrap-Up

You've successfully implemented **nested error handling** to improve process resilience:

- Simulated a connector failure
- Nested a **Try/Catch** after the **Map** step to catch connector-specific issues
- Logged connector failures using a **Notify** step
- Preserved visibility while preventing duplicate emails

This layered strategy improves both observability and reliability in your Boomi integration.



INTELLECTUAL PROPERTY

This software and documentation are furnished under a software license, service agreement, or nondisclosure agreement; are protected by intellectual property laws; and may be used or copied only in accordance with the terms of the applicable agreement or with the written permission of Boomi, LP ("Boomi").

EXCEPT AS SET FORTH IN THE TERMS AND CONDITIONS IN THE LICENSE AGREEMENT FOR THIS PRODUCT, BOOMI (TOGETHER WITH BOOMI TOPCO, LP AND ITS DIRECT AND INDIRECT SUBSIDIARIES) ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTIES RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL BOOMI OR ITS AFFILIATES BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION OR LOSS OF, DAMAGE TO, OR CORRUPTION OF DATA OR INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS THIS SOFTWARE AND ITS DOCUMENTATION, EVEN IF PARTIES HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. The contents of this document are subject to change without notice and are not warranted to be error-free. If you find any errors, please report them to us in writing.

If you have any questions regarding the use of this material, contact:

Boomi, LP

Attn: Legal Dept.

Legal-Notice@boomi.com

With a copy to:

Boomi, LP – Legal Department, 1 W Elm Street, Conshohocken, PA 19428

Copyrights and Trademarks

Copyright © 2024 Boomi, LP. All rights reserved. Boomi, the Boomi 'b' logo or astronaut logo, AtomSphere, Atom, Molecule, and Mashery are registered trademarks of Boomi, LP and/or its affiliates in the United States and/or other countries, as are other names and marks. Other marks appearing herein may be trademarks of their respective owners.