

The boomi logo is displayed in white lowercase text on a purple-to-pink gradient background. The background features abstract, wavy line patterns and large, overlapping circular shapes.

# **Utilizing Extensions Activities**

# Table of Contents

|                                                                                                                                         |    |
|-----------------------------------------------------------------------------------------------------------------------------------------|----|
| Utilizing Extensions Activities.....                                                                                                    | 1  |
| Table of Contents.....                                                                                                                  | 2  |
| About the Activities.....                                                                                                               | 3  |
| Activity 1: Environment Specific .....                                                                                                  | 4  |
| Create a Liberty Lux subfolder and install the Liberty Lux Customers process from the Process Library. ....                             | 5  |
| In the Liberty Lux Customer connection component, replace the hard-coded username, password, and database name with a placeholder. .... | 6  |
| Define the extensions for your component in the extension dialog and save the process. ....                                             | 8  |
| Test the process in test mode, providing extension values. ....                                                                         | 10 |
| Package and Deploy the Process to the target environment(s). ....                                                                       | 13 |
| Set the extension values in the environment(s) and execute the process .....                                                            | 16 |
| Activity 2: Process Property .....                                                                                                      | 20 |
| Create a Liberty Lux Print folder and install the Customer Print process from the Process Library. ....                                 | 21 |
| Create and Configure the Process Property .....                                                                                         | 22 |
| Define the extension for your component in the extension dialog and save the process. ....                                              | 28 |
| Test the process in test mode and extend the value. ....                                                                                | 30 |
| Package and Deploy the Process to the target environment. ....                                                                          | 32 |
| Set the extension values in the environment and execute the process. ....                                                               | 34 |
| Activities Wrap-Up .....                                                                                                                | 39 |



# About the Activities

To complete the Activities, log into the [Boomi Enterprise Platform](#) with your Training Account and proceed with the instructions. We recommend completing the activities in order, as they build on each other.



## Activity 1: Environment Specific

In this activity, a developer from Liberty Lux Bangkok has finished building a process to load customer data for the marketing team to use. You install the process from the process library and create its environment-specific extensions for test and production.

The activities are:

- Create a Liberty Lux subfolder and install the Liberty Lux Customers process from the Process Library.
- In the Liberty Lux Customer connection component, replace the hard-coded username, password, and database name with a placeholder.
- Define the extensions for your component in the extension dialog and save the process.
- Test the process in test mode, providing extension values.
- Package and Deploy the Process to the target environment(s).
- Set the extension values in the environment(s) and execute the process.

## Create a Liberty Lux subfolder and install the Liberty Lux Customers process from the Process Library.

1. Navigate to **Component Explorer** and create a folder for your process called **Liberty Lux**.


**Note:** Unsure how to create a folder? Check out [Create a Folder](#).

2. Install **Liberty Lux Customers** from the **Process Library**.

**Note:** Unsure how to Install a Process from the Process Library? Check out [Install a Process from the Process Library](#).

In the Liberty Lux Customer connection component, replace the hard-coded username, password, and database name with a placeholder.

1. Open the Build page's Database Connection Component (Liberty Lux Customer).

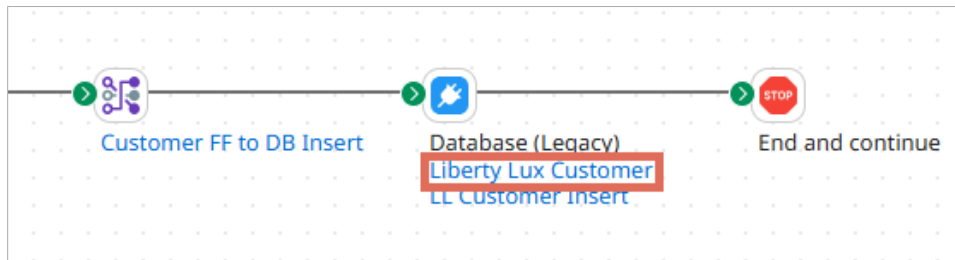

2. Set the **User Name, Password, and Database Name** to **\*\*\*SET AS EXTENSION\*\*\*** and select **Save & Close**.

### Database (Legacy) Connection

The authentication details and location of the hosted Database.


|                    |                                                             |
|--------------------|-------------------------------------------------------------|
| Database URL       | jdbc:mysql://traindb1.boomi.com:3306/***SET AS EXTENSION*** |
| Driver Type        | MySQL                                                       |
| Class Name         | com.mysql.jdbc.Driver                                       |
| User Name          | ***SET AS EXTENSION***                                      |
| Password           | <Encrypted>                                                 |
| Host               | traindb1.boomi.com                                          |
| Port               | 3306                                                        |
| Database Name      | ***SET AS EXTENSION***                                      |
| Additional Options |                                                             |



**Note:** Your password will show "Click to Set" until you type it in. Then it will change to "Encrypted."

## Define the extensions for your component in the extension dialog and save the process.

1. In the Build canvas, select the **Extensions** icon to specify your extensions.

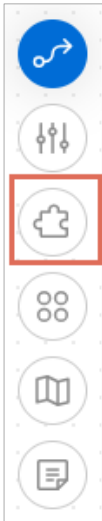

2. Select the **User**, **Password**, and **DB Name** boxes, and **OK**.

**Note:** Because the process only has one connection component, it is the only accessible connection.

**Extensions**

Connection Settings   Operation Settings   Partner Settings   Dynamic Process Properties   Process Properties   Object Definitions   Data Maps   Cross Reference   PGP

Connection: Liberty Lux Customer

Select extensible properties

- ☐ Driver Type
- ☒ User
- ☒ Password
- ☐ Host
- ☐ Port
- ☒ DB Name
- ☐ Additional Options
- ☐ Class Name
- ☐ Connection URL
- ☐ Write SQL To File?

\*\*\*NOTE: The Connection list contains all connections included in this process or any of its sub-processes.

Cancel   **OK**




3. **Save** the Process.

**Note:** Please disregard any messages stating "No changes were made."

## Test the process in test mode, providing extension values.

1. Select **Test** on the Build page to run the process.

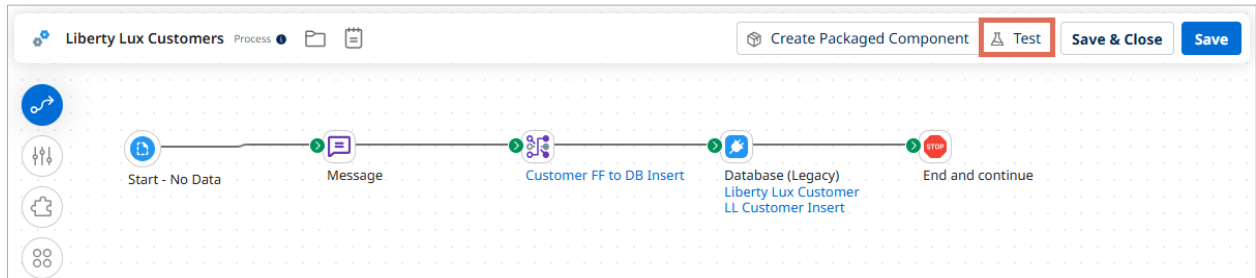

2. Select the **Test Training Cloud** as the Runtime and expand **Test Extensions**.

The screenshot shows the 'Test' configuration dialog. The 'Test Training Cloud' dropdown is selected and highlighted with a red box. The 'Test Extensions' section is expanded and highlighted with a red box. The 'Cancel' and 'OK' buttons are at the bottom right.

3. Select **Liberty Lux Customer** from the Connection drop-down. Uncheck each **Use connection component value**, and enter the following:

| Extendable Properties | Test           |
|-----------------------|----------------|
| User                  | LLCustomerTest |
| Password              | LLCustomerTest |
| DB Name               | LLCustomerTest |

**Note:** When entering **LLCustomerTest**, be sure there are no spaces when copying and pasting.

### Test

Test Training Cloud

▼ Test Extensions

Connection Settings

Partner Settings

Dynamic Process Properties

Cross Reference

PGP

Process Properties

Connection

Liberty Lux Customer

User

LLCustomerTest

☐ Use connection component value

Password

<Encrypted>

☐ Use connection component value

DB Name


LLCustomerTest

☐ Use connection component value

Cancel

OK

- Select **OK**. Remember, the goal of this activity is to connect to the database.

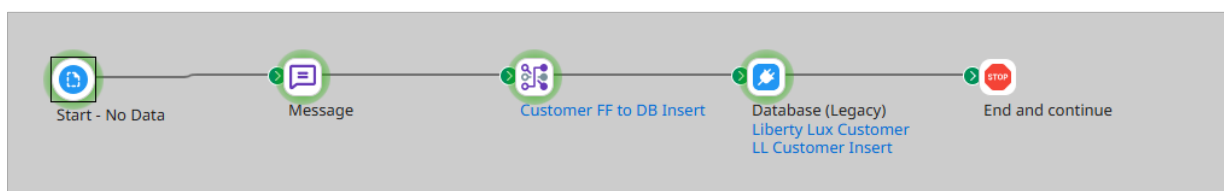

**Note:** The connection component has placeholders, and the User, Password, and Database Names are set in the extension dialog. The procedure would fail at the Database (Legacy) Connector step if you had not set the extensions in the extension dialog.

5. Test the process in Test Mode by inputting the extension values in the tables below.

| Extendable Properties | Production |
|-----------------------|------------|
| User                  | LLCustomer |
| Password              | LLCustomer |
| DB Name               | LLCustomer |

| Extendable Properties | Test           |
|-----------------------|----------------|
| User                  | LLCustomerTest |
| Password              | LLCustomerTest |
| DB Name               | LLCustomerTest |

*It is performed to check that the production User Name, Password, and DB name are proper and functional.*



## Package and Deploy the Process to the target environment(s).

**Note:** Not sure how to Package and Deploy? Check out [How to Package and Deploy a Process](#).

1. Package your process with the following details:

- **Version for all: EXT-MONYYYY-01**
- **Packaged Notes for All: Added Extensions**
- **Sharing: Not allowed**

### Create Packaged Components: Add Details

Optionally apply details to the newest version of your packaged components. When you have multiple packaged components selected at one time, the details you specify are applied in bulk to all selected components, though each selected component results in its own individual version.

| Component Name        | Latest Version <span>?</span> | Latest Notes | Action                                   |
|-----------------------|-------------------------------|--------------|------------------------------------------|
| Liberty Lux Customers | None                          | None         | <a href="#">View Included Components</a> |

Version for all

EXT-APR2024-01

If you do not supply a name, a version number is automatically generated for each individual packaged component, and increments based on the latest version number.

Package Notes for All

Added Extensions

3984 characters remaining.

Sharing ?

☒ Not Allowed

☐ Allowed

This setting is ignored for components that cannot be shared.

Cancel

Back: Select Components

Create Packaged Component (1)

2. Deploy your process with the following details:

- **Deployment Environment: Test**
- **Deployment Notes: Added Extensions**

**Deploy: Select Environment**  
Select the environment in which to deploy your packaged component(s), and optionally add notes about the deployment.

Deployment Environment

Test

Deployment Notes

Added Extensions

3984 characters remaining.

Cancel

Next: Select Versions

**Note:** During deployment, Boomi verifies your account for available connection licenses. If you do not have enough available licenses, you will need to undeploy processes that are no longer in use to regain them.

- To deploy the process to the Production Environment, go to the **Actions** menu and select **Deploy to Different Environment**.

**Deployments**

After you have successfully built and packaged your components and processes, you are now ready to deploy them to a Test or Production environment. Use the Deployments page to create new deployments of your packaged components and manage all active deployments. The Action menu allows you to view detailed deployment history of the selected packaged component. [Learn more.](#)

**Deploy Packaged Component**

Past Week | Add Filter

| Actions                                                                                                                                                                                                                                    | Component Name        | Component Type | Package Version | Branch | Environment | Deployment Date      | Deployed By          | Deployment Notes |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|----------------|-----------------|--------|-------------|----------------------|----------------------|------------------|
|                                                                                                                                                                                                                                            | Liberty Lux Customers | Process        | EXT-APR2025-01  | main   | Test        | 23 Apr 2025 12:09:54 | userboomii@gmail.com | Added Extensions |
| <div><div>Deploy to Different Environment</div><div>Rollback</div><div>Undeploy</div><div>Deployment History</div><div>Compare Deployments</div><div>Copy to Component Explorer</div><div>Create Hotfix Branch from Deployment</div></div> |                       |                |                 |        |             |                      |                      |                  |

- Select **Production** as the **Deployment Environment**, enter **Added Extensions** for the **Deployment Notes**, and finish deploying.

**Deploy to Different Environment: Select Environment**

Select another environment in which to deploy the selected packaged component version. This will not remove the packaged component from the current environment.

| Name                  | Version        | Package Notes    | Latest Deployment Notes |
|-----------------------|----------------|------------------|-------------------------|
| Liberty Lux Customers | EXT-APR2025-01 | Added Extensions | Added Extensions        |


Deployment Environment (required)

Deployment Notes


3984 characters remaining.

## Set the extension values in the environment(s) and execute the process


1. Navigate to **Runtime Management**.

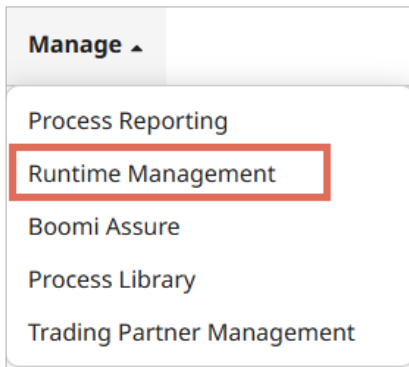

2. Choose the **Test** environment.



3. Select **Environment Extensions**.

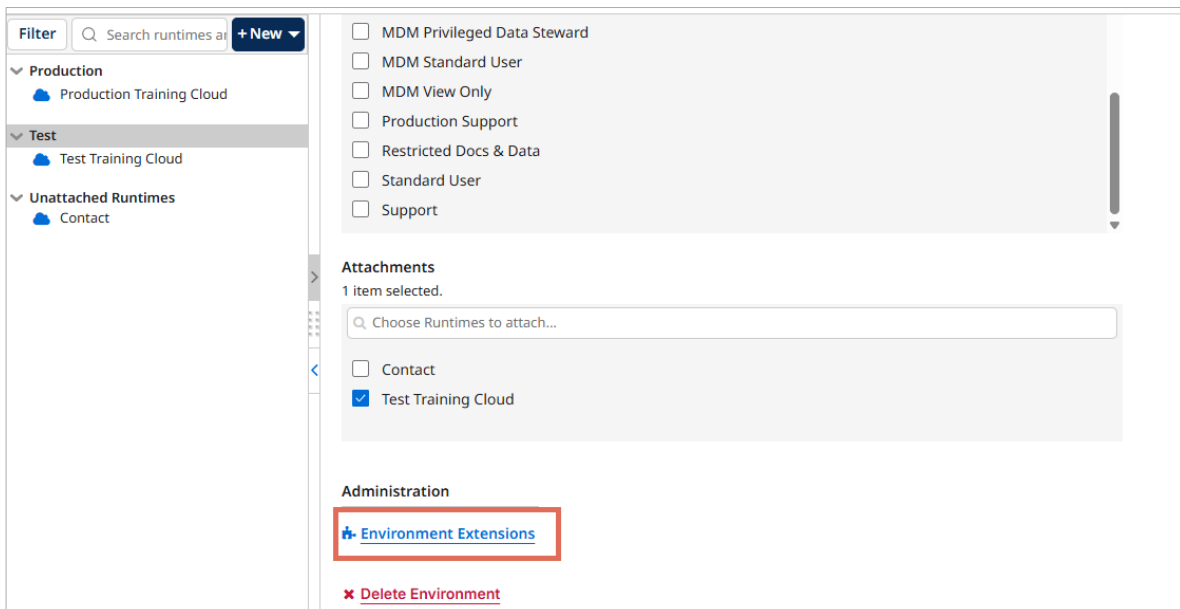

4. Select the connection **Liberty Lux Customer** and uncheck each **Use Connection Component Values** box. Enter the following and select **OK**.

|                 |                       |
|-----------------|-----------------------|
| <b>User</b>     | <b>LLCustomerTest</b> |
| <b>Password</b> | <b>LLCustomerTest</b> |
| <b>DB Name</b>  | <b>LLCustomerTest</b> |

Extensions

Process Filter: All [Show Audit Logs](#)

Connection Settings: Connection: Liberty Lux Customer

Operation Settings: User: LLCustomerTest ☐ Use connection component value

Partner Settings: Password: <Encrypted> ☐ Use connection component value

Dynamic Process Properties: DB Name: LLCustomerTest ☐ Use connection component value

Process Properties: PGP

Cross Reference: Data Maps

Cancel OK

5. Repeat 1 to 4 in this section to set these values by selecting **Production**.

|                 |                   |
|-----------------|-------------------|
| <b>User</b>     | <b>LLCustomer</b> |
| <b>Password</b> | <b>LLCustomer</b> |
| <b>DB Name</b>  | <b>LLCustomer</b> |

**Extensions**

Process Filter: All [Show Audit Logs](#)

**Connection Settings**

Connection: Liberty Lux Customer

User: LLCustomer

☐ Use connection component value

Password: <Encrypted>


☐ Use connection component value

DB Name: LLCustomer

☐ Use connection component value

Cancel OK

6. Navigate to **Process Reporting**.

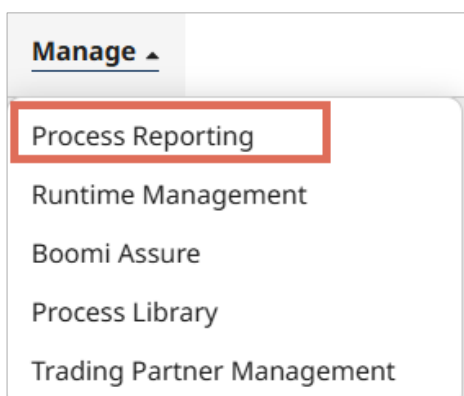

7. You can run the process by selecting **Execute Process** in both the Production and Test Environments. Your process should run successfully.

**Executions** [Execute Process](#) Auto Refresh is Off ☐

Past Hour

| Time                 | Process               | Actions | Runtime                   | In | Out | Elapsed Time | Error Message |
|----------------------|-----------------------|---------|---------------------------|----|-----|--------------|---------------|
| 23 Apr 2025 13:27:19 | Liberty Lux Customers |         | Test Training Cloud       | 1  | 1   | 0:04         |               |
| 23 Apr 2025 13:26:51 | Liberty Lux Customers |         | Production Training Cloud | 1  | 1   | 0:04         |               |

All Errors Pending Successes

This concludes the activity. If you still have trouble comprehending extensions, repeat the [Set the extension values in the environment\(s\)](#) section, appending a 1 to one of the values, and then run the process section. You should receive an error like the one below.

## Error Message

```
Access denied for user 'LLCustomer'@ '%' to database 'LLCustomer1'
```



## Activity 2: Process Property

In this activity, Liberty Lux Bangkok wants to modify the Liberty Lux Customer Print process to extend the process property to convert the PRINT\_STATUS value to Y during its annual execution. Because it is an infrequent event, the team does not want to change, repack, and redeploy the process. Extending a process property is an excellent method to improve Liberty Lux Bangkok's existing process. The activities are:

- Create a Liberty Lux Print folder and install the Customer Print process from the Process Library.
- Create and Configure the Process Property.
- Define the extension for your component in the extension dialog and save the process.
- Test the process in test mode and extend the value.
- Package and Deploy the Process to the target environment.
- Set the extension values in the environment and execute the process.

## Create a Liberty Lux Print folder and install the Customer Print process from the Process Library.

1. Navigate to **Component Explorer** and create a folder called **Liberty Lux Print**.

**Note:** Not sure how to create a folder? Check out [Create a Folder](#).

2. Install **Liberty Lux Customers Print** from the **Process Library**.

**Note:** Not sure how to Install a Process from the Process Library? Check out [Install a Process from the Process Library](#).

## Create and Configure the Process Property

When creating the Process Property, use N and Y. N is the default value.

1. Select the eclipse (three dots) on the process canvas or right-click next to the **Liberty Lux Print** folder and select **New Component**. For the Type, choose **Process Property** and **Create**.

**Note:** To access the Process Property, scroll or enter the value in the text box.



The screenshot shows a 'Create Component' dialog box. It has a title bar at the top. Below the title, there is a label 'Type' followed by a dropdown menu. The dropdown menu is open, showing 'Process Property' as the selected option. To the right of the dropdown menu, there are two buttons: 'Cancel' and 'Create'. The 'Create' button is highlighted with a red border.

2. In the **Title** field, **PRINT\_STATUS** and select the **plus icon (+)** to add a new process property. For the **Label**, enter **Print Status** and select the **plus icon (+)** next to **Allowed Values**.

Print Status Process Property

Print Status

Key 9786a1d9-b469-4599-9dc7-6ad0684781d9

Data Type String

Persist ☐ Select to persist the value across subsequent executions

Label (required) Print Status

Help Text

Default Value

Allowed Values + -

3. Enter an **N** in the **Value** field and **No** in the **Label** field. Select **OK**.

Value N

Label No

Cancel OK

4. Select the **plus icon (+)** next to **Allowed Values**. Enter a **Y** in the **Value** field and **Yes** in the **Label** field. Select **OK**.

Label (required)

Value

Y

Label

Yes

Cancel OK

Allowed Values + ✎ ✕ ↕ ⬇

5. Verify the default status is **No** and select **Save and Close**.

Print Status Process Property

Save & Close Save

+ ×

Print Status

Key 9786a1d9-b469-4599-9dc7-6ad0684781d9

Data Type String

Persist ☐ Select to persist the value across subsequent executions

Label (required) Print Status


Help Text

Default Value No


Allowed Values + ✎ ✕ ↕ ⬇

No (N)  
Yes (Y)

6. Open Map **Customer FF to DB Insert Print**.

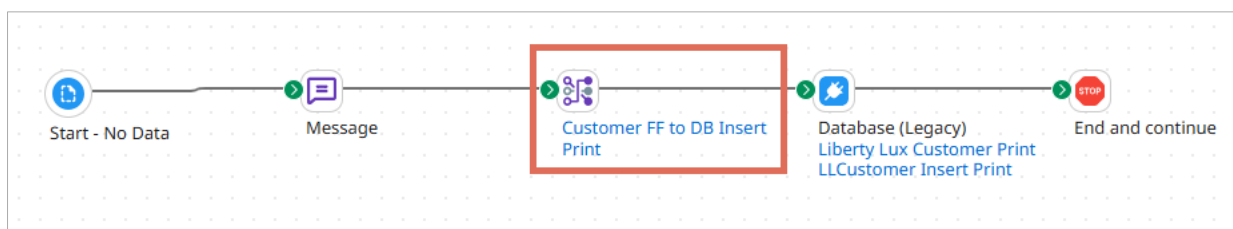

7. Select the **plus icon (+)** in the **Functions** area to add a function to the Map. From the **Category** menu, choose **Properties**, then select **Get Process Property**, and **OK**.

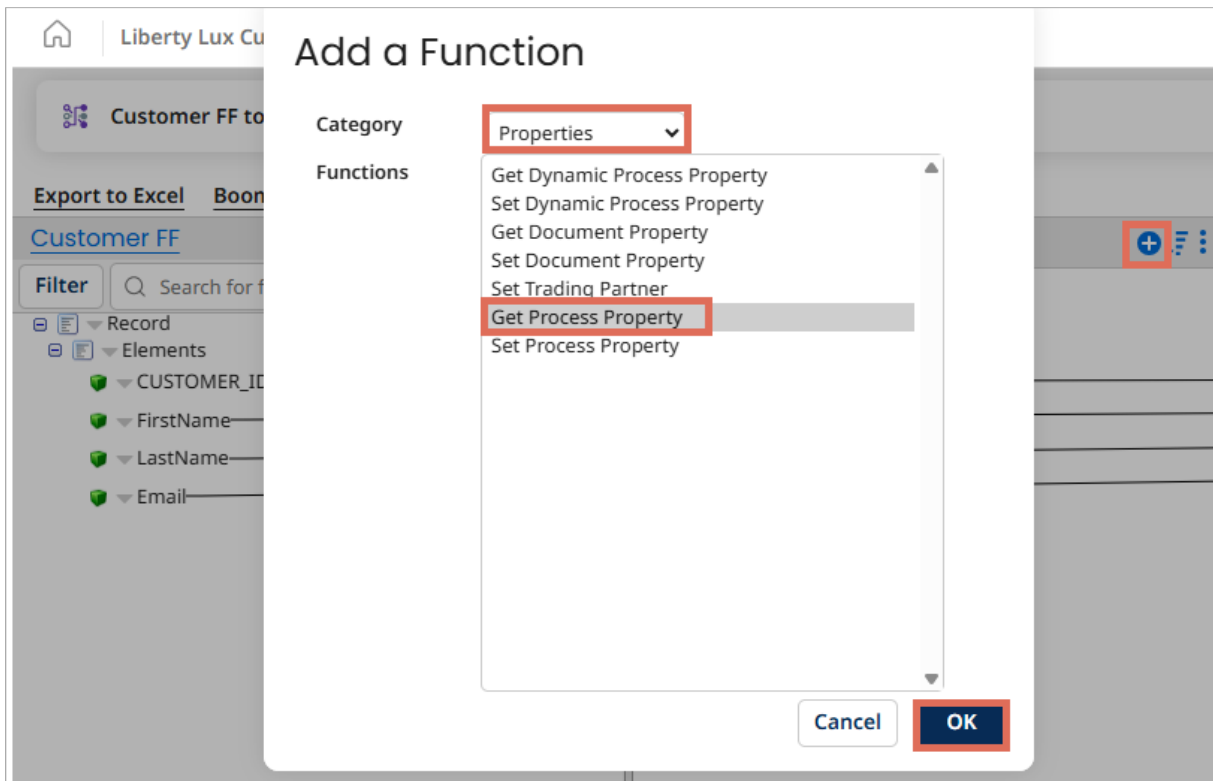

**Note:** Select the plus icon next to Elements and Fields to expand the profiles.

8. Choose **Print\_Status** as the Process Property. It automatically fills in the Process Property Name, then select **OK**.

**Get Process Property**

Process Property (required)

Process Property Name

**OK** Cancel

9. Map the result of the **Set Process Property** to the **PRINT\_STATUS** field, then select **Save and Close**.

**Customer FF to DB Insert Print** Map

Boomi Suggest Clear all mappings

**Customer FF** Choose

Filter Search for field

Record

Elements

- CUSTOMER\_ID
- FirstName
- LastName
- Email

**Functions**

Get Process Property

Print Status

**Customer Insert DBI** Choose

Filter Search for field

Statement


Fields

- CUSTOMER\_ID
- FIRSTNAME
- LASTNAME
- EMAIL
- PRINT\_STATUS


Import **Save & Close** Save

10. On the process canvas, **Save** the process and select **Test** to run the process without extending the process property.

**Note:** Unsure how to test your process? Check out [How to Test Your Process](#).

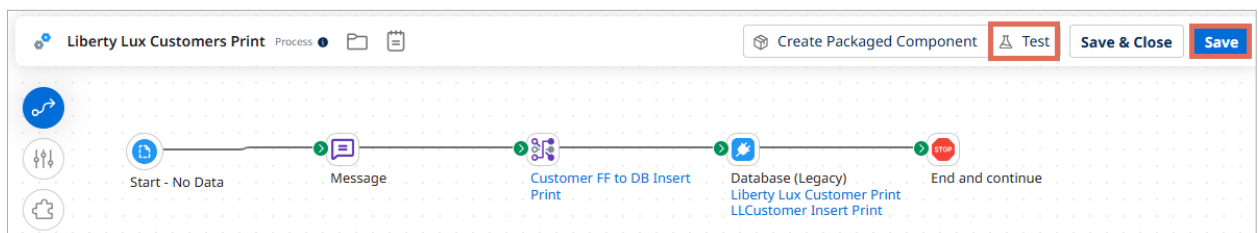

11. To see your output in the Document Viewer, select the **Database (Legacy) Connector**, the **Connection Data** tab, and select the document under **View**.

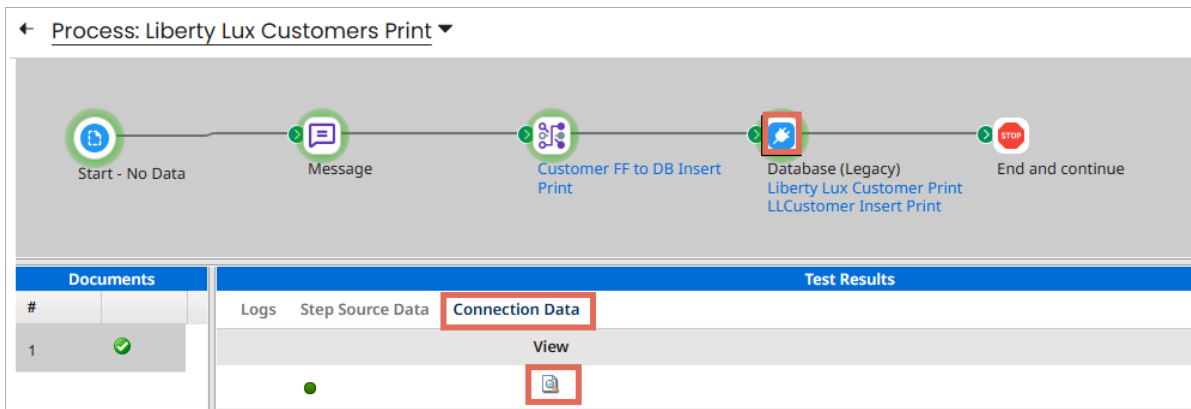

12. Review the output in the document viewer. The **PRINT\_STATUS** value is 'N', the default value. Select **Close Document Viewer**.

### Document Viewer

```


DBSTART|8ee382ce-eb88-4320-a816-
82182f86ab9f|2|@|BEGIN|2|@|OUT_START|3|@|443|^|Noah|^|Byrum|^|noah@consolidated-
research.net|^|N|#|243|^|Olivia|^|Tarter|^|oli-tart@egl-
inc.info|^|N|#|OUT_END|3|@|END|2|@|DBEND|8ee382ce-eb88-4320-a816-
82182f86ab9f|2|@|
  
```

Size 253 bytes

**Close Document Viewer**

## Define the extension for your component in the extension dialog and save the process.

1. Select the **Extensions** icon on the process canvas to specify your extensions.



2. Choose the **Process Properties** hyperlink. From the Select dropdown, select PRINT\_STATUS, check the **PRINT\_STATUS** checkbox, and select **OK**.

Extensions

Connection Settings   Operation Settings   Partner Settings   Dynamic Process Properties   **Process Properties**   Object Definitions   Data Maps   Cross Reference   PGP

Select   Print Status ▾

|                                     |              |
|-------------------------------------|--------------|
| <input checked="" type="checkbox"/> | Print Status |
|-------------------------------------|--------------|

\*\*\*NOTE: The list contains all Process Properties included in this process or any of its sub-processes

Cancel   **OK**




3. **Save** the Process.

**Note:** *Please disregard any messages stating no modifications were made.*


## Test the process in test mode and extend the value.

- Be sure to use the Test Training Cloud.
- To verify your output, check your file in the document viewer. You should see your extended value displayed.

1. Select **Test** on the process canvas to run the process.

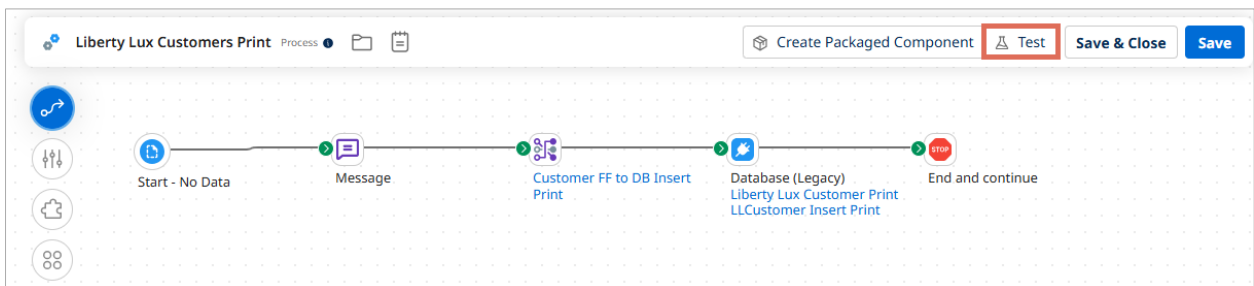

2. Select the **Test Training Cloud** as the Runtime and expand **Test Extensions**.

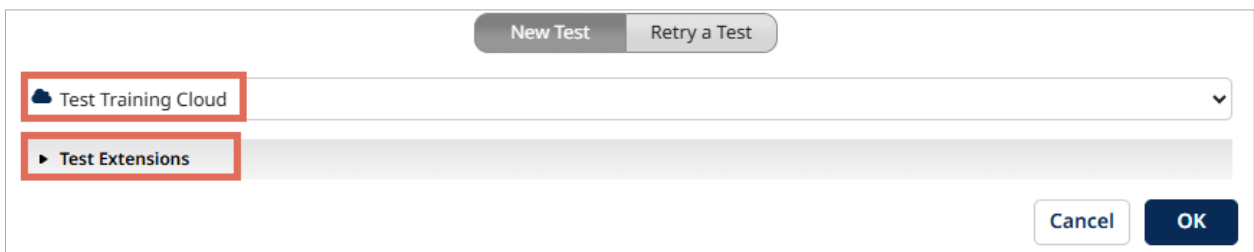

3. Select the **Process Properties** link, and the Print Status is automatically displayed. Uncheck the **Use Default** checkbox, then select **Yes** from the drop-down menu. Select **OK**.

Test Training Cloud

Test Extensions

Connection Settings Partner Settings Dynamic Process Properties Cross Reference PGP **Process Properties**

Process Property Print Status

Print Status

☒ Choose Yes

☐ Enter Enter a value

☐ Use Default

Cancel OK

4. Examine the results.

## Document Viewer

```
DBSTART|05e80266-d730-4d4b-b019-89b0fb73f679|2|@|BEGIN|2|@|OUT_START|3|@|443|^|Noah|^|Byrum|^|noah@consolidated-research.net|^|Y|#|243|^|Olivia|^|Tarter|^|oli-tart@egl-inc.info|^|Y|#|@|OUT_END|3|@|END|2|@|DBEND|05e80266-d730-4d4b-b019-89b0fb73f679|2|@|
```

**Note:** The `PRINT_STATUS` field now has the value `Y`. This is the value you extended.

## Package and Deploy the Process to the target environment.

**Note:** Not sure how to Package and Deploy your process? Check out [How to Package and Deploy a Process](#).

1. Package your process with the following details:

- **Version for all: EXT-MONYYYY-02**
- **Packaged Notes for All: Added Process Property Extensions**
- **Sharing: Not allowed**

### Create Packaged Components: Add Details

Optionally apply details to the newest version of your packaged components. When you have multiple packaged components selected at one time, the details you specify are applied in bulk to all selected components, though each selected component results in its own individual version.

| Component Name              | Latest Version  | Latest Notes | Action                                   |
|-----------------------------|--------------------------------------------------------------------------------------------------|--------------|------------------------------------------|
| Liberty Lux Customers Print | None                                                                                             | None         | <a href="#">View Included Components</a> |

Version for all

EXT-APR2024-02

If you do not supply a name, a version number is automatically generated for each individual packaged component, and increments based on the latest version number.

Package Notes for All

Added Process Property Extensions

3967 characters remaining.

Sharing 

☒ Not Allowed

☐ Allowed

This setting is ignored for components that cannot be shared.

Cancel

Back: Select Components

Create Packaged Component (1)

2. Deploy your process with the following details:

- **Deployment Environment: Test**
- **Deployment Notes: Added Process Property Extensions**

### Deploy: Select Environment

Select the environment in which to deploy your packaged component(s), and optionally add notes about the deployment.

Deployment Environment

Deployment Notes

Added Process Property Extensions

3967 characters remaining.


Cancel

Next: Select Versions


## Set the extension values in the environment and execute the process.

- To verify your output, check your file in the document viewer. You should see your extended value displayed.

1. Navigate to **Runtime Management**.

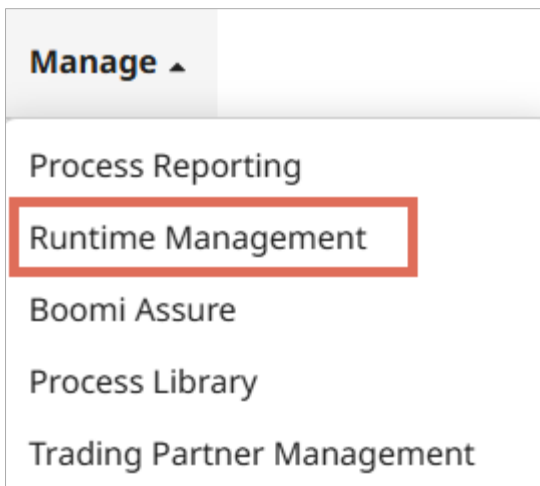

2. Choose the **Test** environment.



### 3. Select **Environment Extensions**.

Filter  Search runtimes as [+ New](#)

- Production
  - Production Training Cloud
- Test
  - Test Training Cloud
- Unattached Runtimes
  - Contact

☐ MDM Administrator  
☐ MDM Command Center Explorer  
☐ MDM Data Steward  
☐ MDM Developer  
☐ MDM Privileged Data Steward  
☐ MDM Standard User  
☐ MDM View Only  
☐ Production Support

**Attachments**  
1 item selected.

Choose Runtimes to attach...

☐ Contact  
☒ Test Training Cloud

**Administration**

[+ Environment Extensions](#)

[✗ Delete Environment](#)

### 4. Select **Process Properties**, uncheck **Use Default**, and select **Yes** for **Print Status**. Select **OK**.

Extensions

Process Filter:  All [Show Audit Logs](#)

Connection Settings

Operation Settings

Partner Settings

Dynamic Process Properties

**Process Properties**

Cross Reference


PGP

Data Maps


Process Property: **Print Status**

Print Status: ☒ Choose  Yes  Enter  Enter a value ☐ Use Default

5. Navigate to **Process Reporting**.

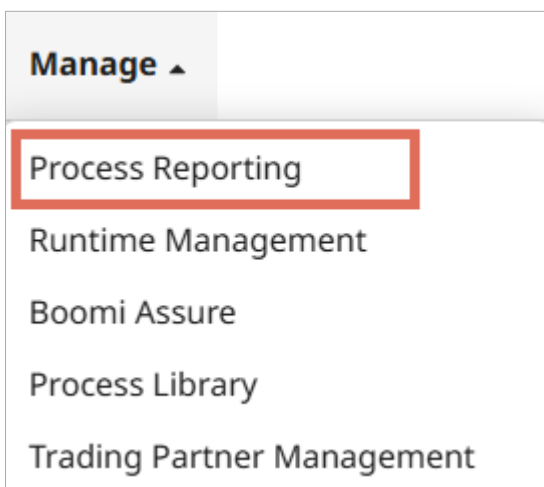

6. Select **Execute Process**, then **Test Training Cloud**. Select **Liberty Lux Customer Print** for the Process and **Execute**.

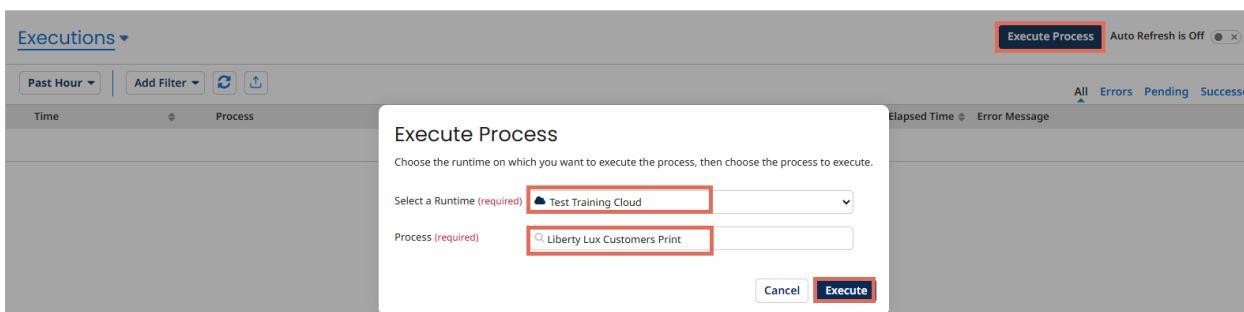

**Note:** You will need to refresh to view the process manually.

7. Select the **Date/Time** hyperlink to view the results.

| Executions ▾                                                                                                           |                                                                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Past Hour ▾                                                                                                            | Add Filter ▾   |
| Time                                                                                                                   | Process                                                                                                                                                                          |
|  <a href="#">23 Apr 2025 14:32:53</a> |  Liberty Lux Customers Print                                                                    |

8. Select the **Successes: 1** hyperlink under Database (Legacy) from the Document Viewer.

● Liberty Lux Customers Print

Time: 23 Apr 2025 14:32:53 | Elapsed Time: 0:04 | Documents In: 1 | Documents Out: 1 | Runtime: Test Training Cloud | Execution Type: Manual Execution

 Actions ▾

(Start) No Data

**Connection**  
nodata

**Operation**  
Start

[Successes: 1](#) [Errors: 0](#)

Database (Legacy)

**Connection**  
Liberty Lux Customer Print

**Operation**  
LLCustomer Insert Print

[Successes: 1](#) [Errors: 0](#)

9. From the **Actions** menu, select **View Document**.

● Liberty Lux Customers Print  
Time: 23 Apr 2025 14:32:53 | Elapsed Time: 0:04 | Documents In: 1 | Documents Out: 1 | Runtime: Test Training Cloud | Execution Type: Manual Execution

⚙️ Actions ▾

Database (Legacy)  
Connection Liberty Lux Customer Print

All Errors Successes

| ID | Actions                                                   | Size (kB) | Error Message |
|----|-----------------------------------------------------------|-----------|---------------|
| 2  | <div>⚙️<br/>View Document<br/>View Linked Documents</div> | 0.25      |               |

10. The output of the PRINT\_STATUS is Y. The extension causes this value.

## Document Viewer

```
DBSTART|05e80266-d730-4d4b-b019-89b0fb73f679|2|@|BEGIN|2|@|OUT_START|3|@|443|^|Noah|^|Byrum|^|noah@consolidated-research.net|^|Y|#|243|^|Olivia|^|Tarter|^|oli-tart@egl-inc.info|^|Y|#|OUT_END|3|@|END|2|@|DBEND|05e80266-d730-4d4b-b019-89b0fb73f679|2|@|
```



# Activities Wrap-Up

Congratulations, you completed all the Utilizing Extensions activities.

# Copyright & Trademarks

## **COPYRIGHTS AND TRADEMARKS**

This guide contains proprietary information protected by copyright and/or other legal grounds. The software described in this guide is furnished under a software license, service agreement, or nondisclosure agreement. This software may be used or copied only under the terms of the applicable agreement. No part of this guide may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording for any purpose without the written permission of Boomi, LP ("Boomi").

The information in this document is provided in connection with Boomi products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Boomi products and/or services. EXCEPT AS OUTLINED IN THE TERMS AND CONDITIONS AS SPECIFIED IN THE LICENSE AGREEMENT FOR THIS PRODUCT, Boomi (TOGETHER WITH Boomi TOPCO, LP AND ITS DIRECT AND INDIRECT SUBSIDIARIES) ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTIES RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL Boomi OR ITS AFFILIATES BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION OR LOSS OF, DAMAGE TO, OR CORRUPTION OF DATA OR INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT OR INFORMATION, EVEN IF PARTIES HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Boomi makes no representations or warranties concerning the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions in its sole and absolute discretion at any time without notice. Boomi is not committed to updating the information in this document.

If you have any questions regarding your potential use of this material, contact:

Boomi, LP

Attn: LEGAL Dept.

[Legal-Notice@boomi.com](mailto:Legal-Notice@boomi.com)

With a copy to:

Boomi, LP - Legal Department, 1400 Liberty Ridge Drive, Chesterbrook, PA 19087

## **Trademarks**

Copyright © 2025 Boomi, LP. All rights reserved. Boomi, the Boomi 'b' logo or astronaut logo, AtomSphere, Atom, Molecule, and AtomSphere Integration Cloud are trademarks of Boomi, LP and/or its affiliates in the United States and/or other countries. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products.