


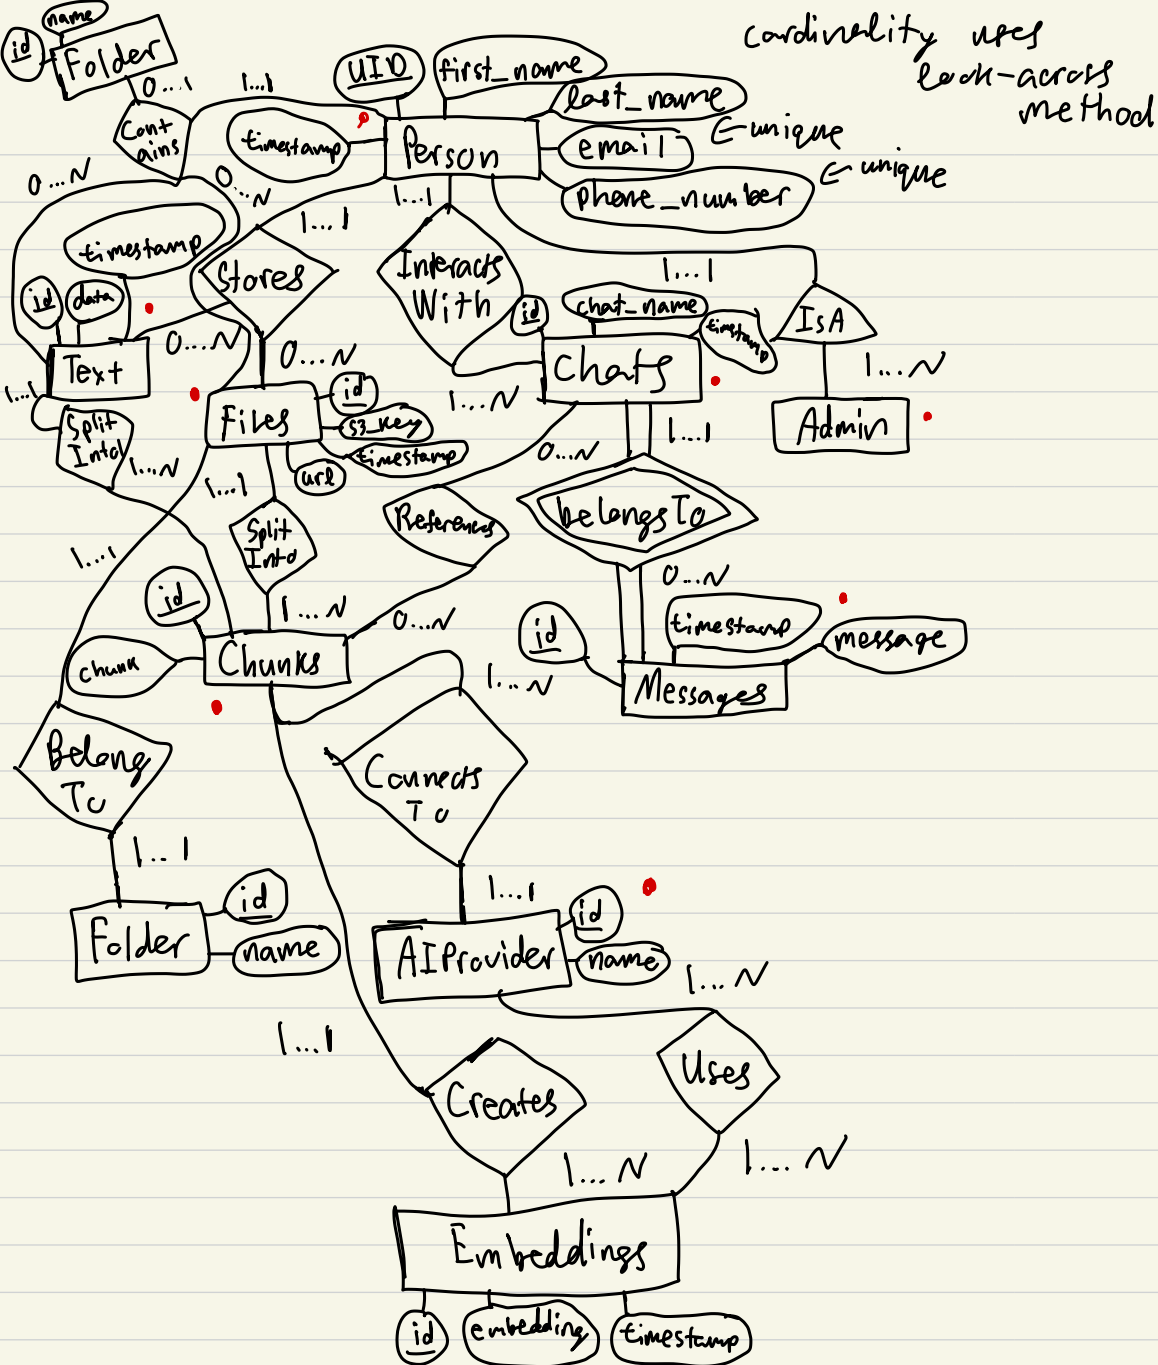

Person(UID, first_name, last_name, email, phone_number, timestamp, isAdmin) •

Text(id, data, timestamp) •

Files(id, s3_key, url, timestamp) •

Chats(id, chat_name, timestamp, PersonUID) •

Messages(MessageId, ChatId, timestamp, message) •

Chunks(id, chunk, FileId, TextId, AIProviderId, timestamp) •

References(chunkId, chatId) •

AIProvider(id, name) •

Embeddings(id, embedding, timestamp, ChunkId) •

Uses(AIProviderId, EmbeddingId)

FolderContainingFilesText(PersonUID, TextId, FileId, FolderId) •

X PersonStoresFilesText(PersonUID, FilesId, TextId) • redundant... basically same as above

Folder(id, name, timestamp)