





Riddick UI, translated for WPF implementation

- 1. Buttons, Controls and Widgets**
- 2. UI Specifications**
- 3. June 2018 Screen Captures**

Please check with UX group for additions, questions or updates

1. Buttons, Controls and Widgets


P. 2 - Main Button

Active	Hover	Focus	Select	Disabled
T_button_active  BORDER thickness: 1px HEX - 6D7071 RADIUS Radius: 6px FILL BG Gradient Top color: HEX - DBDBDA Bottom color - HEX - B2B3B3	T_button_hover  BORDER thickness: 1px HEX - 6D7071 RADIUS Radius: 6px FILL BG Gradient Top color: HEX - C8CACB Bottom color - HEX - A3A4A4	T_button_focus  RADIUS Radius: 6px FILL BG Gradient Top color: HEX - DBDBDA Bottom color - HEX - B2B3B3 BORDER 1 (BLUE) border thickness: 1px border color: HEX - 0BA3CC BORDER 2 (BLUE GLOW) - Blue glow around the edge HEX - 54CEEA Thickness: 4px Feather: 2px	T_button_sel  BORDER border thickness: 1px border color: HEX - 6D7071 RADIUS Radius: 6px FILL HEX - 26B7EA	T_button_dis  BORDER Thickness: 1px HEX - C5C6C6 RADIUS Radius: 6px FILL BG Gradient Top color: HEX - EDEDED Bottom color - HEX - E0E1E1


Button Example
















P. 3 - Dark (Main Button)

Active	Hover	Focus	Select	Disabled
readout_button_active  BORDER thickness: 1px HEX - 6D7071 RADIUS Radius: 6px FILL BG Gradient Top color: HEX - 464646 3/4 down color - HEX - 3A3B3B Bottom color - HEX - 161616	readout_button_hover  BORDER thickness: 1px HEX - 6D7071 RADIUS Radius: 6px FILL BG Gradient Top color: HEX - 2A2A2A 3/4 down color - HEX - 1E1D1E Bottom color - HEX - 111011	readout_button_focus  RADIUS Radius: 6px FILL BG Gradient Top color: HEX - 464646 3/4 down color HEX - 3A3B3B Bottom color HEX - 161616 BORDER 1 (BLUE) border thickness: 1px border color: HEX - 0BA3CC BORDER 2 (BLUE GLOW) - Blue glow around the edge HEX - 54CEEA Thickness: 4px Feather: 2px	readout_button_sel  BORDER border thickness: 1px border color: HEX - 6D7071 RADIUS Radius: 6px FILL HEX - 26B7EA	readout_button_dis  BORDER Thickness: 1px HEX - C5C6C6 RADIUS Radius: 6px NO FILL

Button Example

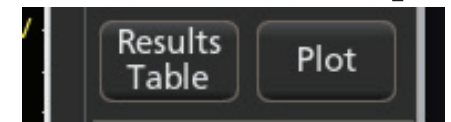

P. 4 - Toggle Button

Active	Hover	Focus	Select	Disabled
toggle_button_left_active  toggle_button_mid_active NO → BORDER  toggle_button_right_active NO → BORDER  BORDER thickness: 1px HEX - 6D7071 RADIUS Radius: 6px FILL BG Gradient Top color: HEX - DBDBDA Bottom color - HEX - B2B3B3	toggle_button_left_hover  toggle_button_mid_hover NO → BORDER  toggle_button_right_hover NO → BORDER  BORDER thickness: 1px HEX - 6D7071 RADIUS Radius: 6px FILL BG Gradient Top color: HEX - C8CACB Bottom color - HEX - A3A4A4	toggle_button_left_focus  toggle_button_mid_focus NO → BORDER  toggle_button_right_focus NO → BORDER  RADIUS Radius: 6px FILL BG Gradient Top color: HEX - DBDBDA Bottom color - HEX - B2B3B3 BORDER 1 (BLUE) border thickness: 1px border color: HEX - 0BA3CC BORDER 2 (BLUE GLOW) - Blue glow around the edge HEX - 54CEEA Thickness: 4px Feather: 2px	toggle_button_left_sel  toggle_button_left_sel_dis  toggle_button_mid_sel NO → BORDER  toggle_button_mid_sel_dis  toggle_button_right_sel NO → BORDER  toggle_button_right_sel_dis  BORDER thickness: 1px color: HEX - 6D7071 RADIUS Radius: 6px FILL HEX - 26B7EA BORDER thickness: 1px color: HEX - C5C6C6 RADIUS Radius: 4px FILL HEX - A8E2F7 	toggle_button_left_dis  toggle_button_mid_dis NO → BORDER  toggle_button_right_dis NO → BORDER  BORDER Thickness: 1px HEX - C5C6C6 RADIUS Radius: 6px FILL BG Gradient Top color: HEX - EDEDED Bottom color - HEX - E0E1E1

P. 5 - check box

Active	Hover	Focus	Select	Disabled	
 checkbox_bg_active CHECKBOX BORDER thickness: 1px HEX - 6D7071 RADIUS Radius: 4px FILL BG Gradient Top 3/4 color: HEX - E6E7E8 Bottom 1/4 color - HEX - CDCDCE	 checkbox_bg_hover CONTAINER BORDER thickness: 1px HEX - A7A9AC RADIUS Radius: 6px FILL HEX - D2D3D4	 checkbox_bg_focus CONTAINER RADIUS Radius: 6px FILL HEX - E6E7E8 BORDER 1 (BLUE) border thickness: 1px border color: HEX - 0BA3CC BORDER 2 (BLUE GLOW) - Blue glow around the edge HEX - 54CEEA Thickness: 4px Feather: 2px	checkbox_sel  CHECKBOX BORDER thickness: 1px HEX - 6D7071 RADIUS Radius: 4px FILL HEX - 26B7EA	checkbox_sel_dis  BORDER thickness: 1px color: HEX - C5C6C6 RADIUS Radius: 4px FILL HEX - A8E2F7	checkbox_bg_dis  BORDER thickness: 1px color: HEX - C5C6C6 RADIUS Radius: 6px FILL HEX - F2F3F3
				checkbox_dis  BORDER thickness: 1px HEX - C5C6C6 RADIUS Radius: 4px FILL BG Gradient Top 3/4 color: HEX - F5F5F6 Bottom 1/4 color - HEX - E9EAEA	

Example:





Auto Increment
File Name



Show Statistics
in Badge

P. 6 - Input Box


Active	Hover	Focus	Select	Disabled
input_box_active  BORDER thickness: 1px HEX - 6D7071 RADIUS Radius: 6px FILL HEX - C8CACB	input_box_hover  BORDER thickness: 1px HEX - 6D7071 RADIUS Radius: 6px FILL HEX - B9B9B9	input_box_focus  RADIUS Radius: 6px BORDER 1 (BLUE) border thickness: 1px border color: HEX - 0BA3CC BORDER 2 (BLUE GLOW) - Blue glow around the edge HEX - 54CEEA Thickness: 4px Feather: 2px FILL HEX - C8CACB		input_box_dis  RADIUS Radius: 6px BORDER border thickness: 1px border color: HEX - C5C6C6 FILL HEX - E0E1E1

Label


Position

P. 8 - Menu Bar and File Menu Drop Down

FILE MENU BAR

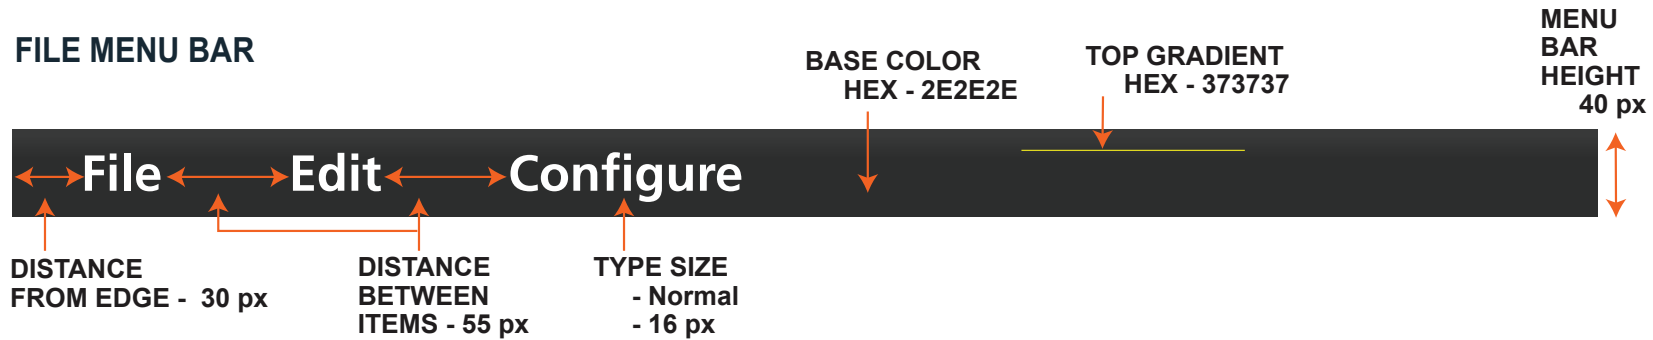


FILE MENU - PULL DOWN

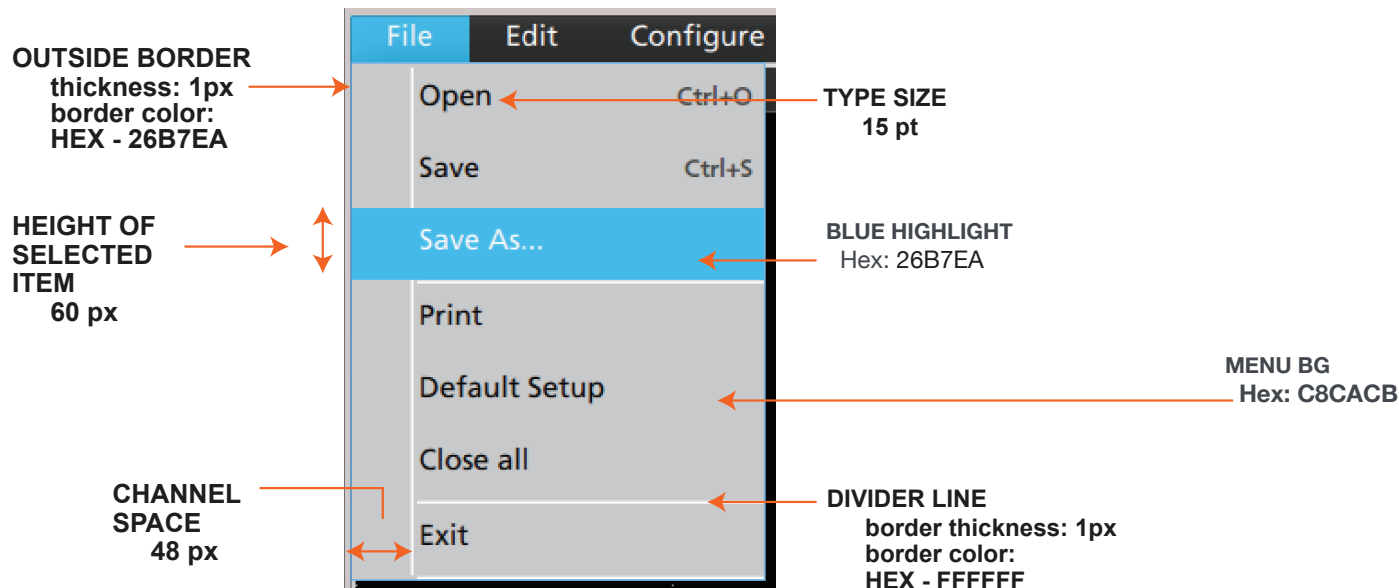

P. 9 - Drop Down List differences


Drop down in config menu*

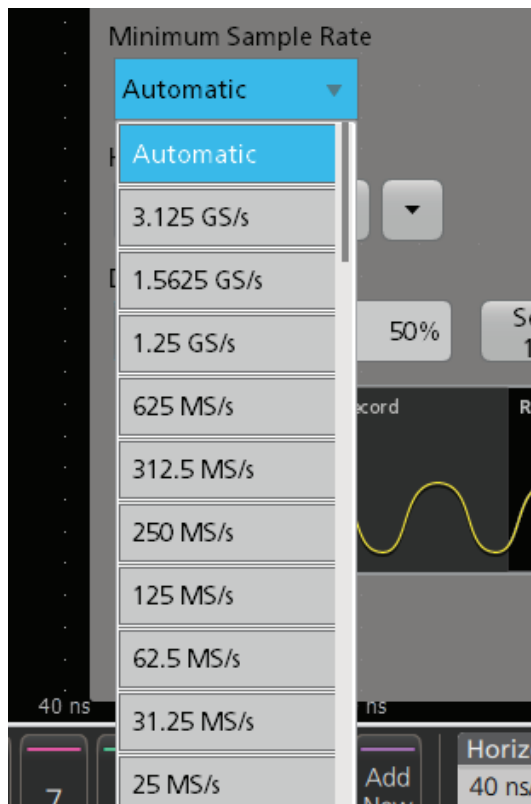

- Each item can have Active, Hover, Focus and Selected state.

- Extra space between items is needed to show the glow of the Focus state only for the top item that is selected.

Drop down in File menu*

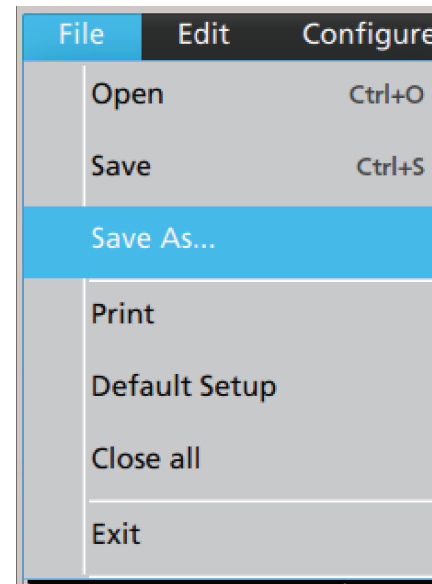

- Each item has an Active or Selected state - only.


- The Hover state is the Active state.

- No glow is used in this drop down.


*There is no disabled state in drop downs.
We don't show the item if it's not available.

P. 10 - Scroll Bar


scroll_bar_vertical_active

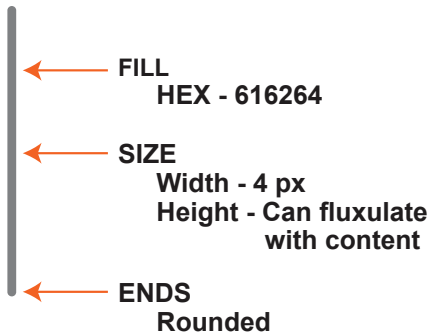


scroll_bar_vertical_focus

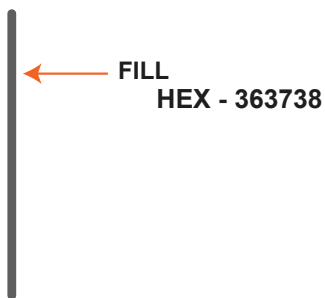


Scroll Bar - active

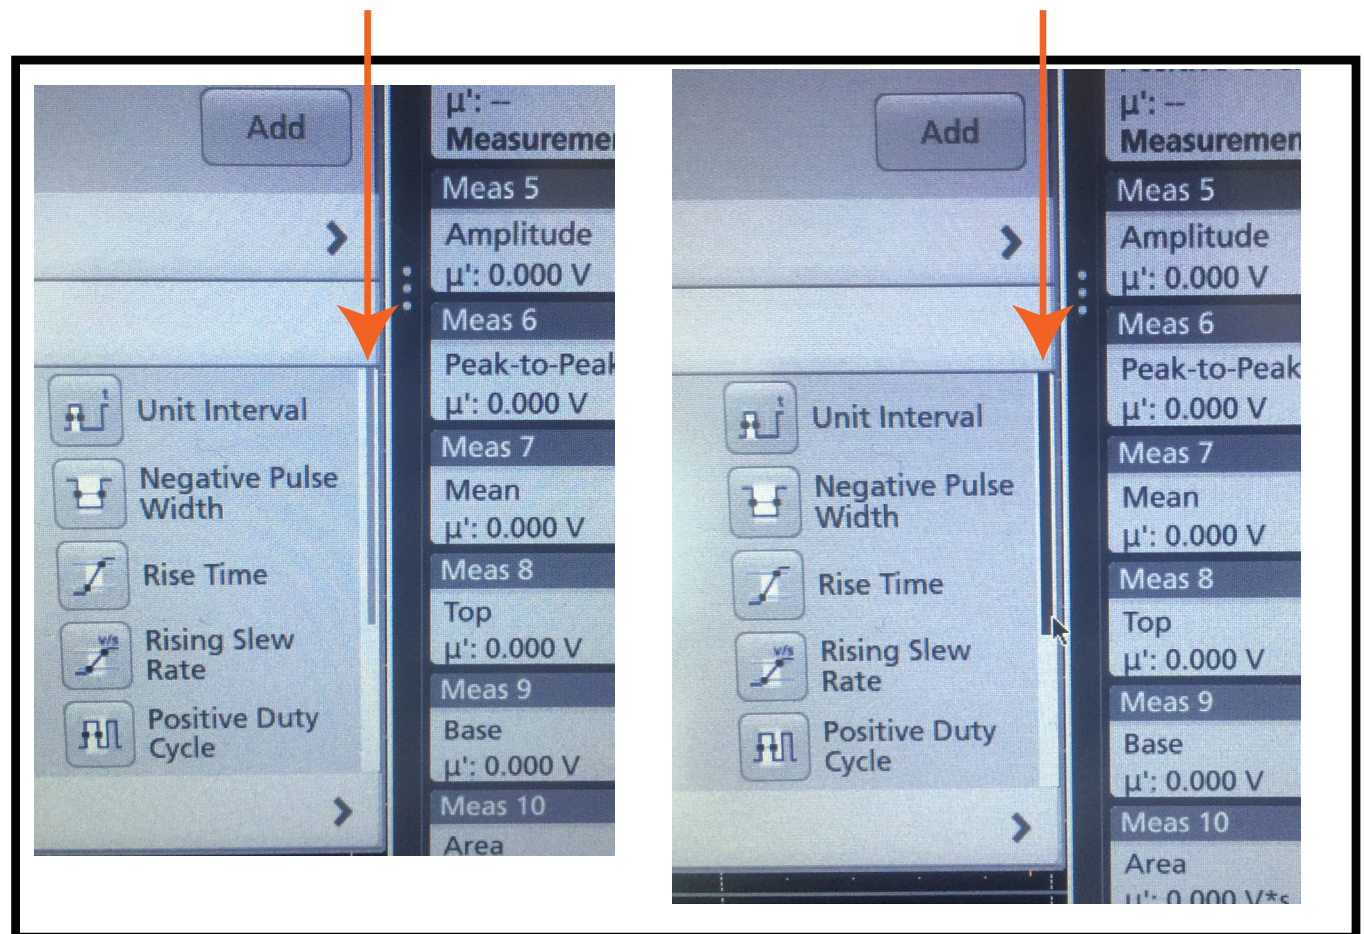

Scroll Bar - focus

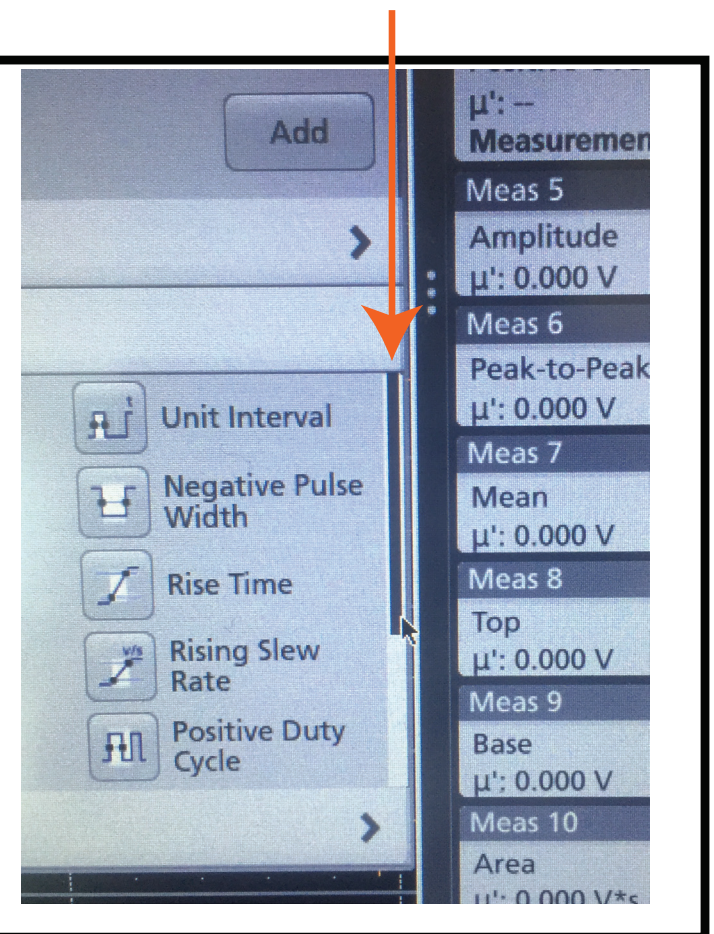


P. 11 - Progress Bar /Busy Indicator

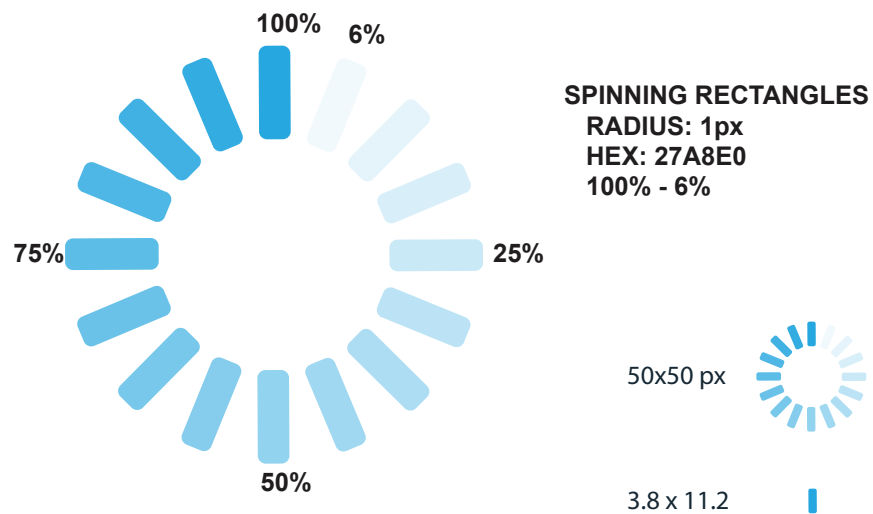

Loader tab
t_14x33px


Loader background
t_200x33px

Screen Capture, example

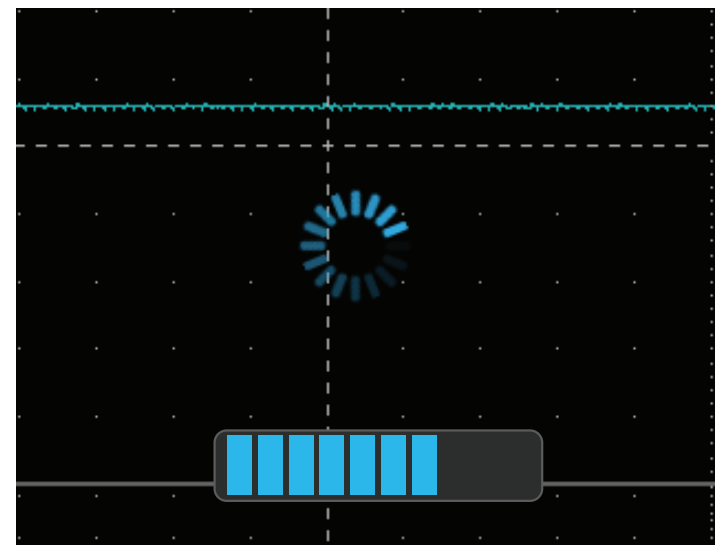

2. UI Specifications

P. 12 - Color Palette Overview

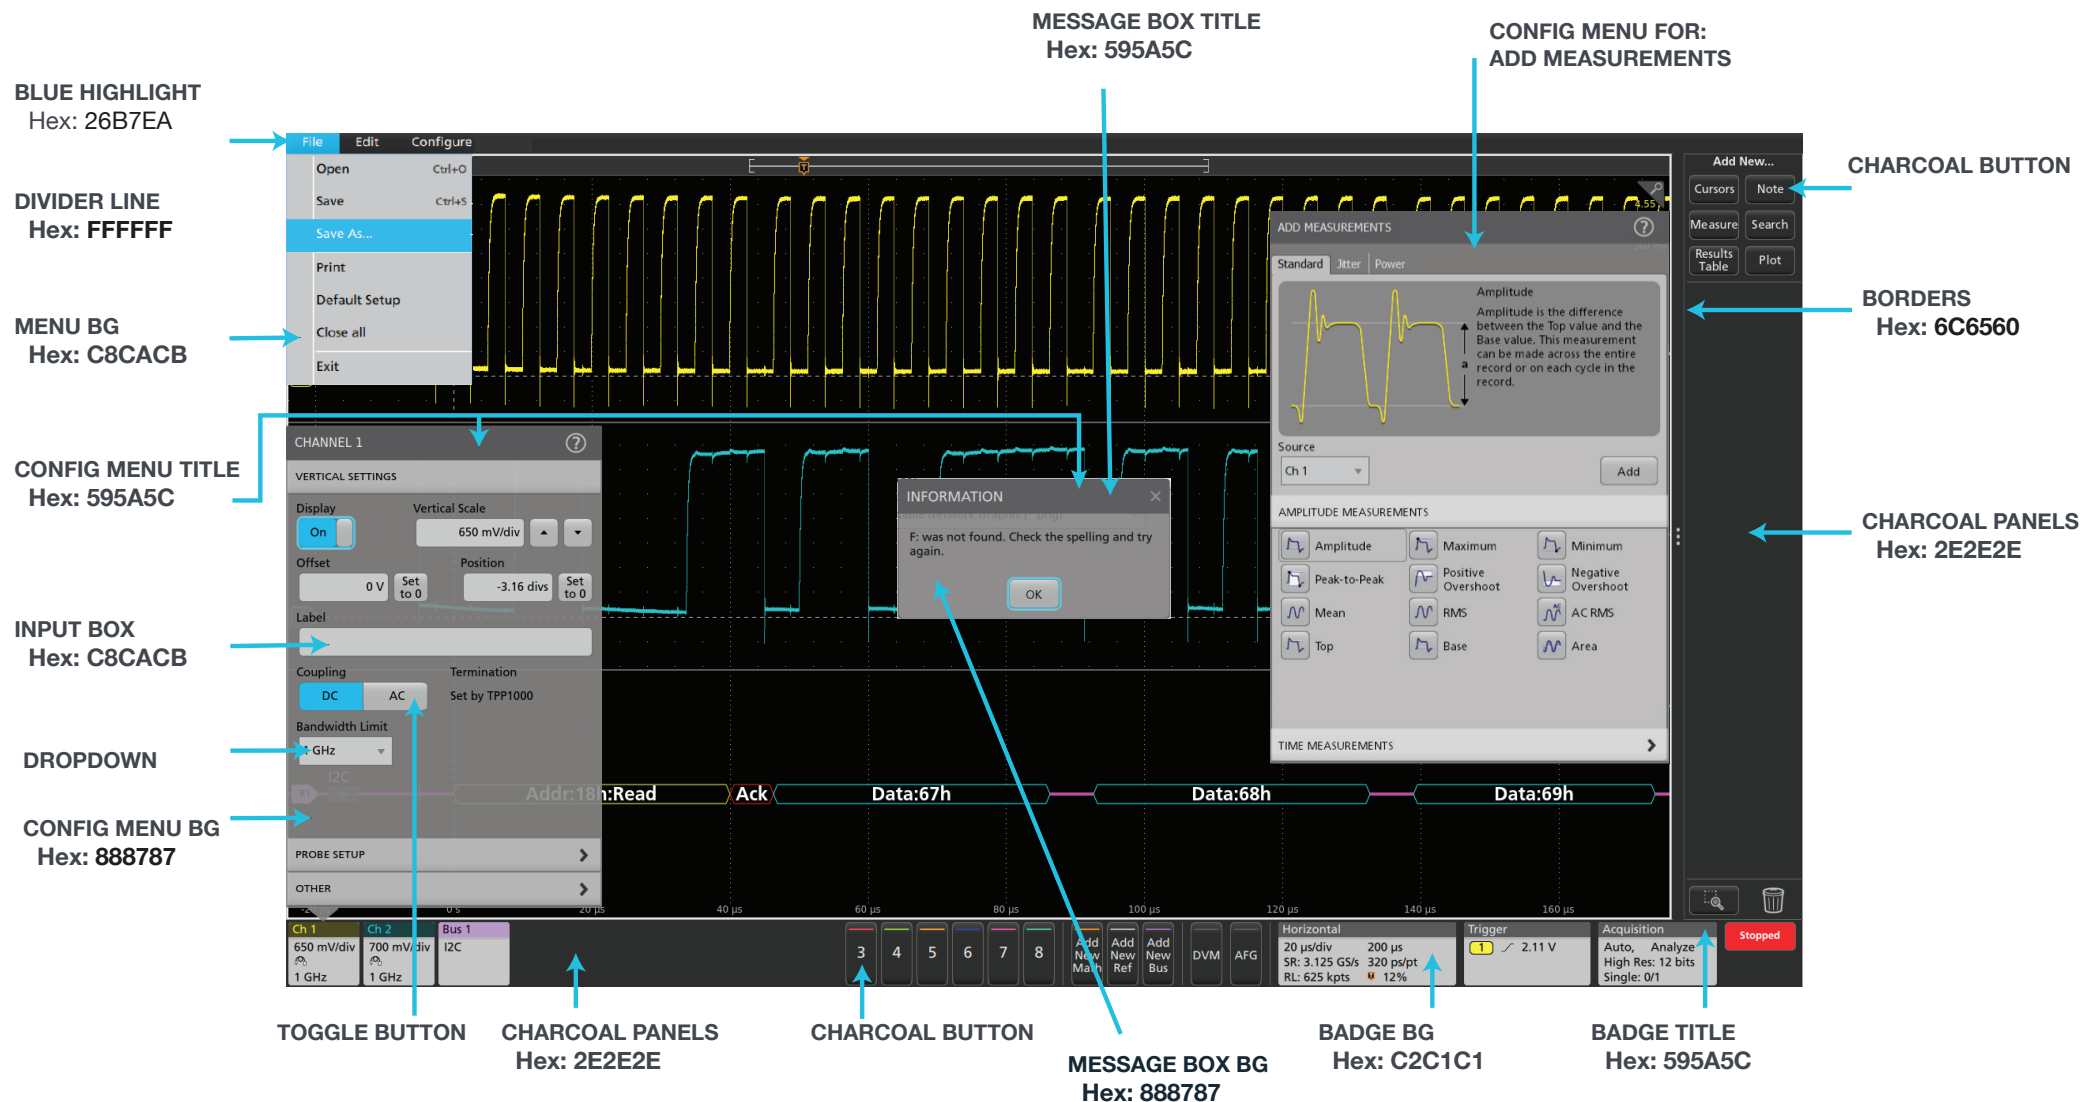

P. 13 - Channel and marker Color Palette

UI Waveform Color specifications

ANALOG

RGB Color Values

Pantone Color



CH1 Yellow Ch 1: 255, 245, 59	Pantone 3945C
CH2 Cyan Ch 2: 32, 207, 211	Pantone 319C
CH3 Red Ch 3: 234, 68, 96	Pantone 710C
CH4 Green Ch 4: 145, 206, 50	Pantone 376C
CH5 Orange Ch 5: 255, 152, 50	Pantone 1375C
CH6 Blue Ch 6: 38, 38, 191	Pantone 2098C
CH7 Magenta Ch 7: 226, 84, 166	Pantone 224C
CH8 Mint Ch 8: 0, 224, 155	Pantone 7479C
Radio Orange SA: 242, 104, 42	Pantone165C

REFS

RGB Color Values



R1: 179, 182, 195
R2: 120, 158, 211
R3: 179, 202, 170
R4: 164, 219, 221

MATH

RGB Color Values



M1: 235, 140, 39
M2: 110, 43, 133
M3: 166, 35, 35
M4: 150, 176, 60

BUS

RGB Color Values



B1: 158, 108, 174


DIGITAL

RGB Color Values



D0: 202, 212, 214
D1: 147, 103, 86
D2: 200, 87, 87
D3: 216, 121, 74
D4: 255, 241, 186
D5: 127, 185, 133
D6: 120, 187, 211
D7: 184, 121, 167


Search Mark Color specifications

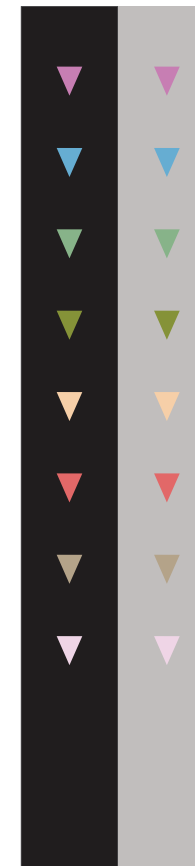

RGB Color Values

200, 127, 178
105, 174, 210
137, 179, 137
133, 144, 15
245, 207, 168
226, 105, 105
180, 164, 138
248, 212, 253

P. 14 - Text Field

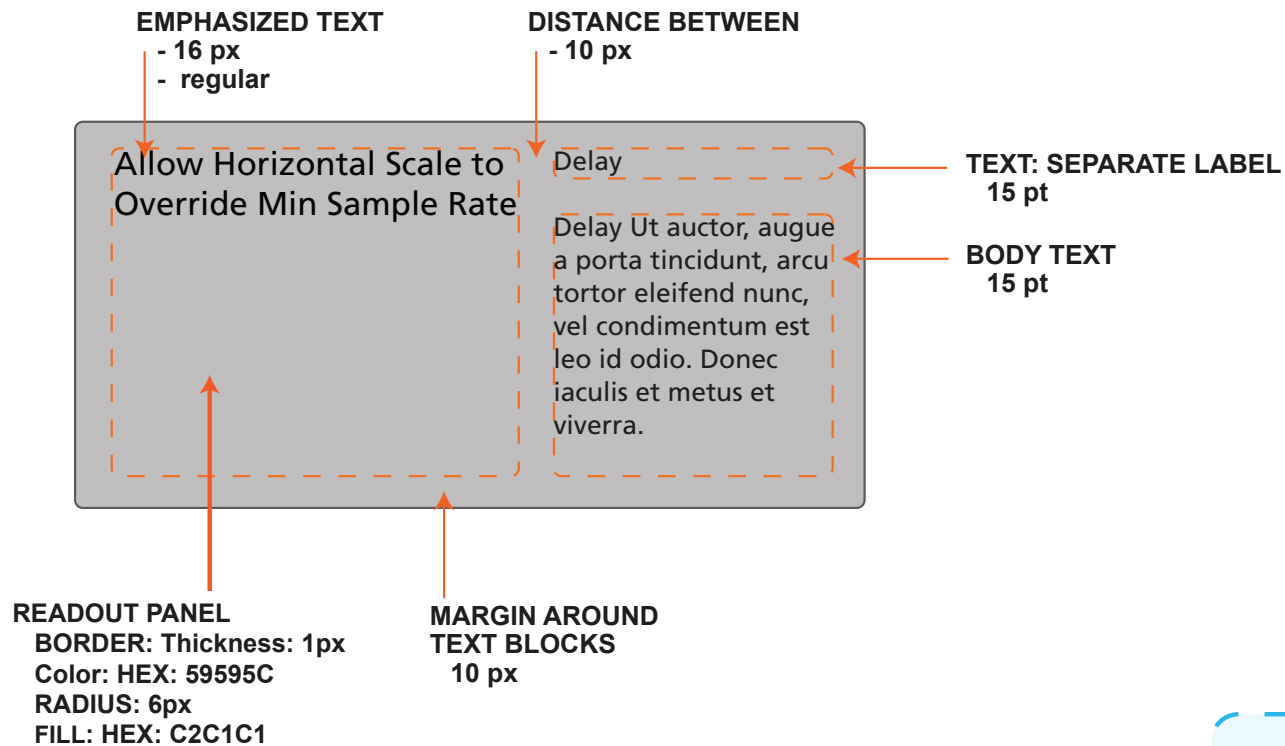

FONT USAGE: 14 - 16 pt

Normal type throughout the application is 15 px
Bold and Size can Deemphasize and Emphasize


Deemphasize type - 14 pt
To emphasize - 16 pt
To extra emphasize - 16 pt and Bold.

P. 15 - Configuration menu and message box

Message box

MENU TITLE BAR
HEIGHT 30 px

MESSAGE BOX BG
Hex: 888787
R136 G135 B135

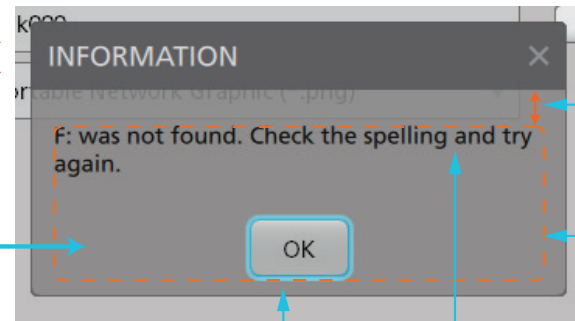

FIRST LINE STARTS
15 PX DOWN

MARGIN AROUND
TEXT BLOCK
10 px

ONE BUTTON
(CENTERED)


Black text
15pt

Config menu w/ cancel and ok buttons

MENU TITLE BAR
HEIGHT 30 px

Black text
15pt

MENU
BAR
HEIGHT
30 px

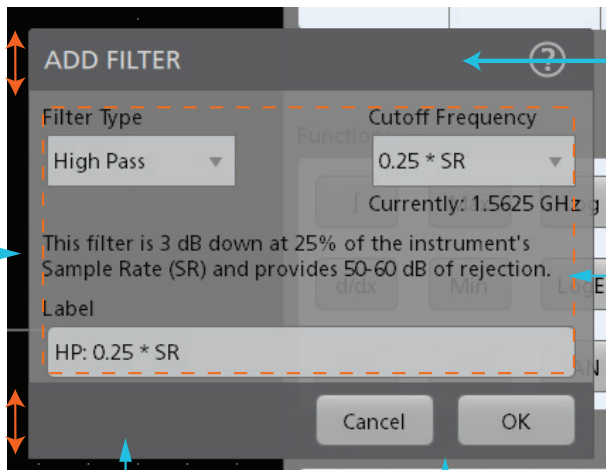

SAME COLOR
AS TITLE BAR

TWO BUTTONS
(RIGHT JUSTIFIED)

MENU TITLE BAR
Hex: 595A5C
R89 G90 B92

MARGIN AROUND
TEXT BLOCK
10 px

FONT USAGE:
14 - 16 pt

Normal type throughout the application is 15 px
Bold and Size can Deemphasize and Emphasize

Deemphasize type - 14 pt
To emphasize - 16 pt
To extra emphasize - 16 pt and Bold.

P. 16 - System information menu

Example

MENU TITLE BAR
HEIGHT 30 px

Black text
15pt

CONFIG MENU
Hex: 595A5C
R89 G90 B92

CONFIG MENU
Hex: 888787
R136 G135 B135

MARGIN AROUND TEXT BLOCK
10 px

The screenshot displays the 'ABOUT' menu of a Tektronix oscilloscope. The menu is titled 'ABOUT' and features the Tektronix logo. It provides system information including Model (MSO58 Mixed Signal Oscilloscope), Bandwidth (350 MHz), Serial Number (PQ3R1014), Host ID (TMS-AAAGAUBJ9DD2YKQ8), and Firmware Version (1.9.0.5244 -rel- (Date 2018-06-13 Time 18:31:38)). A link to download the latest firmware is provided. Below this, a table lists detected probes and their status. The 'Installed Options' section shows a table with one entry: 'ENG-DEVL-MSO5X' with the description 'ENGINEERING LICENSE - MSO5X - ENGINEERING DEVELOPMENT LICENSE'. The 'Option Details' section at the bottom shows license information: License Type (Node Locked), Checked Out (2:23:26 PM-23 Feb 2018), Installed (2:24:28 PM-23 Feb 2018), and Expires (2:23:26 PM-23 Feb 2019). Two buttons, 'Remove License' and 'Install License', are located at the bottom right.

Model: MSO58 Mixed Signal Oscilloscope
Bandwidth: 350 MHz
Serial Number: PQ3R1014
Host ID: TMS-AAAGAUBJ9DD2YKQ8
Firmware Version: 1.9.0.5244 -rel- (Date 2018-06-13 Time 18:31:38)
To download the latest firmware, visit www.tektronix.com/software

Probes Detected	Serial Number	Firmware Version
1 TPP1000	C062530	1.1
2 TPP1000	QU00225	1.1
3 No Probe Detected		
4 No Probe Detected		
5 No Probe Detected		
6 No Probe Detected		
7 No Probe Detected		
8 No Probe Detected		

Installed Options:


Name	Description
ENG-DEVL-MSO5X	ENGINEERING LICENSE - MSO5X - ENGINEERING DEVELOPMENT LICENSE

Option Details:
License Type: Node Locked
Checked Out: 2:23:26 PM-23 Feb 2018
Installed: 2:24:28 PM-23 Feb 2018
Expires: 2:23:26 PM-23 Feb 2019


Remove License  Install License 

P. 17 - Help text


Example

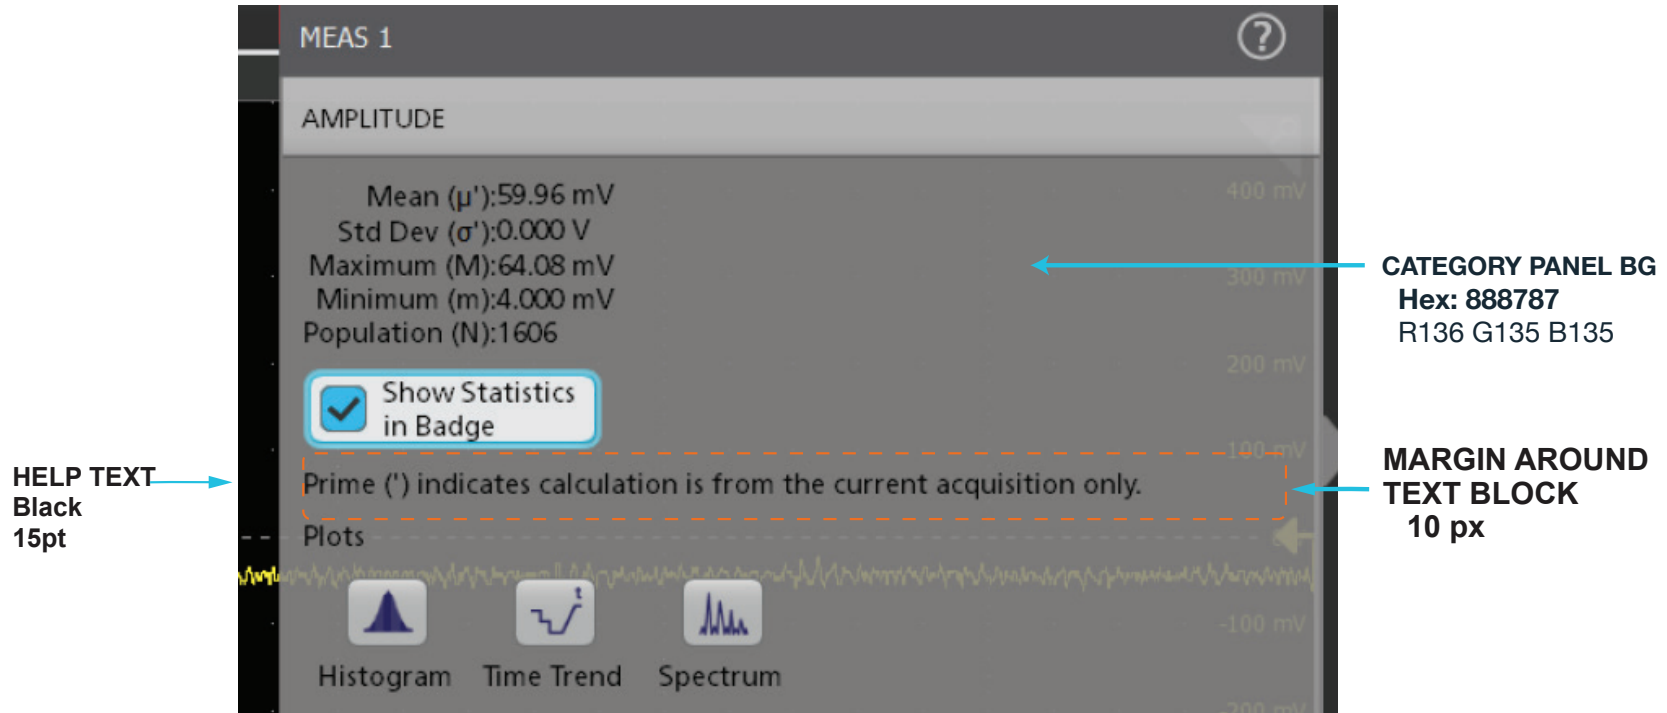


P. 18 - Horizontal Tab

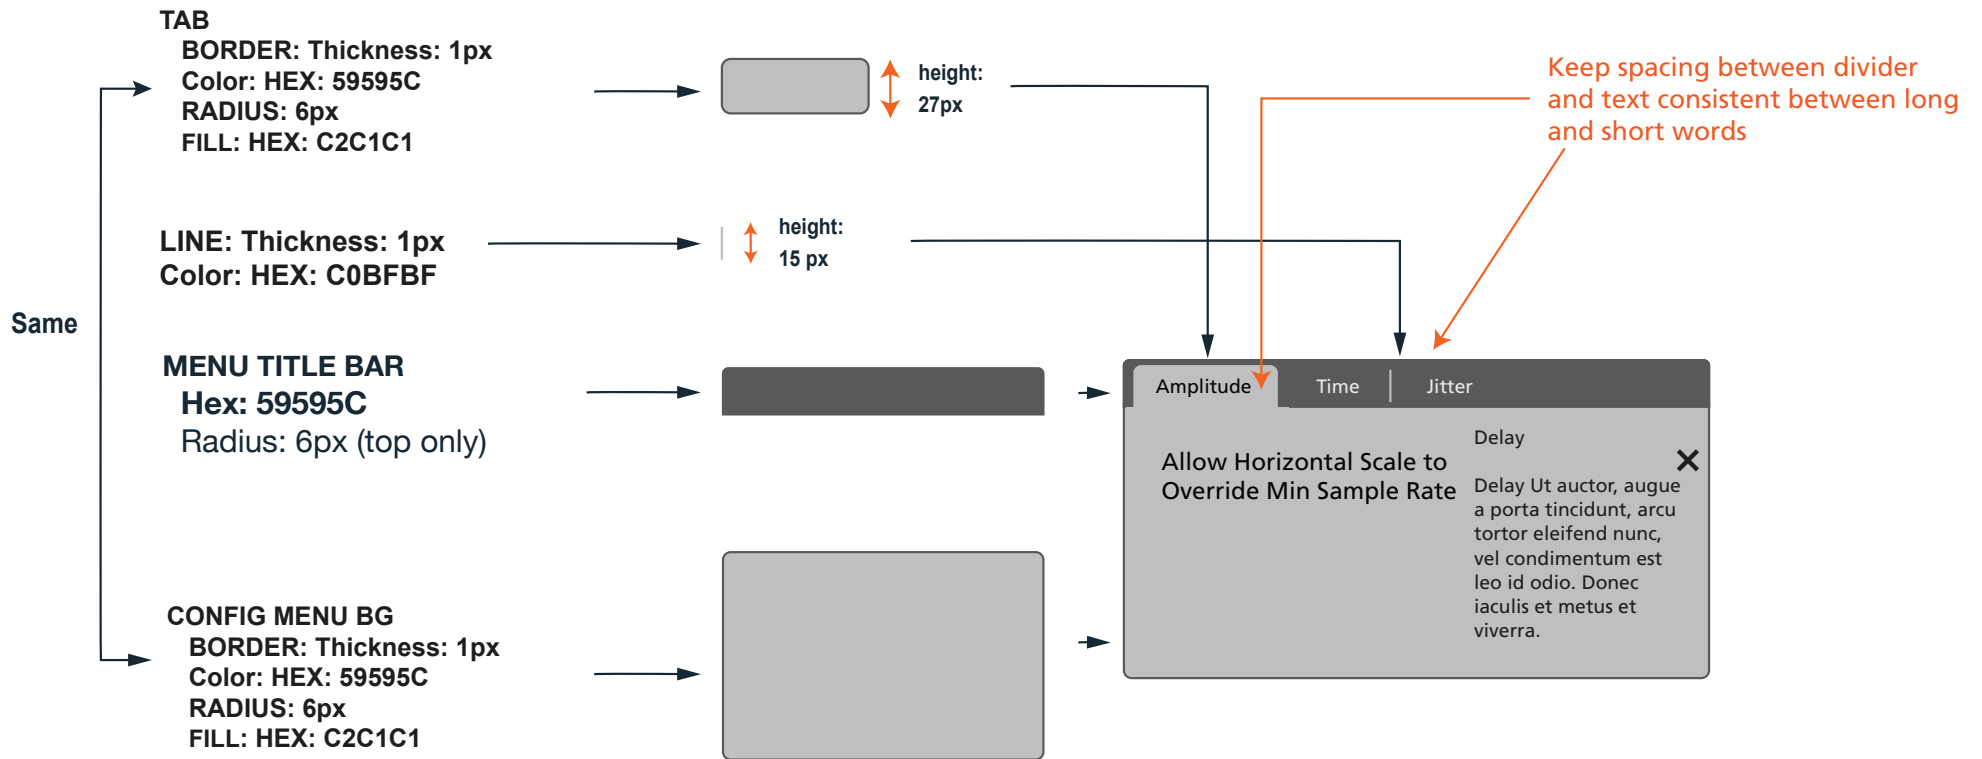

P. 19 - Vertical Tabs

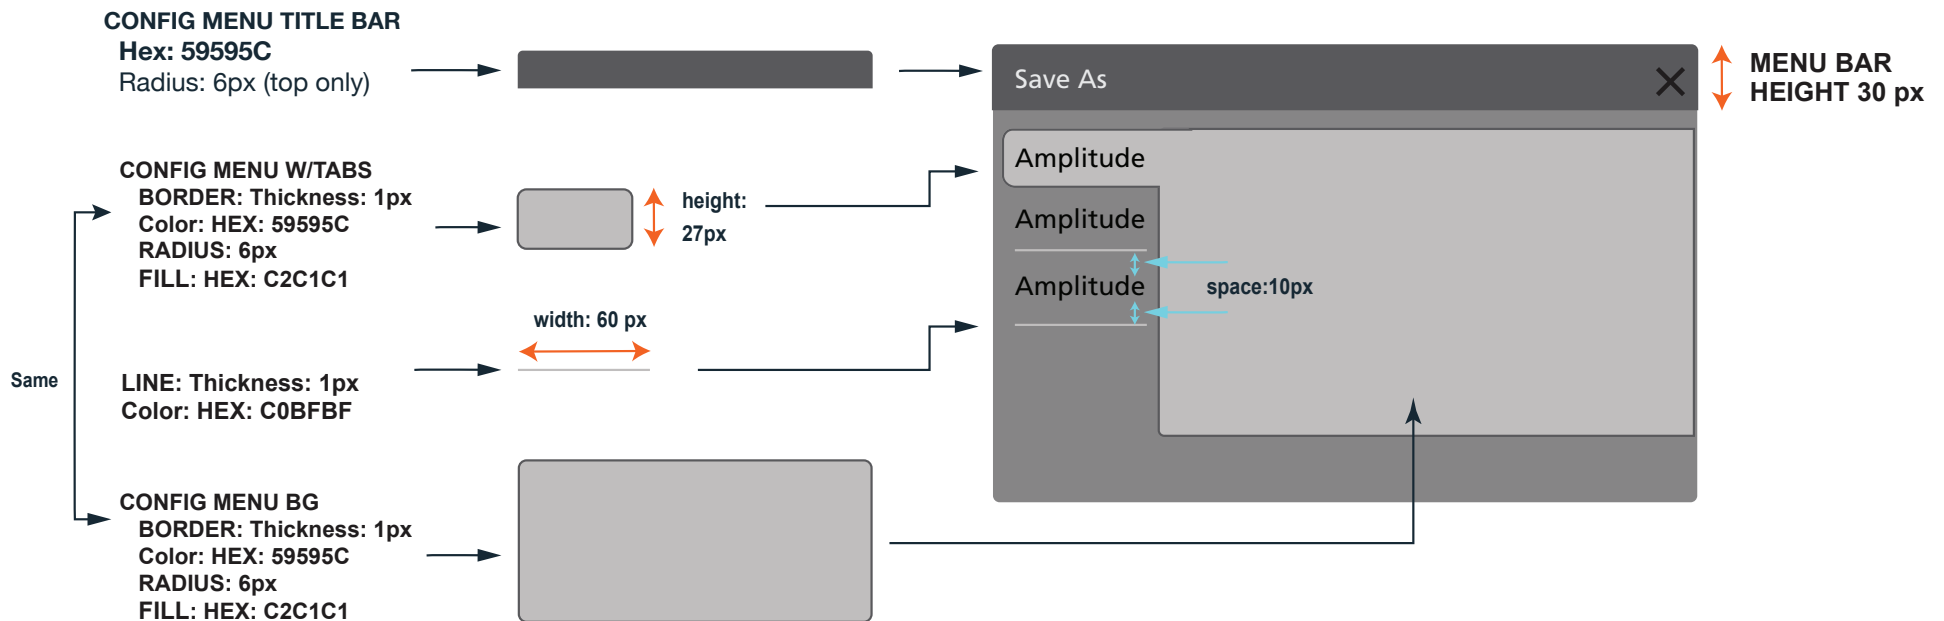

Example: Vertical Tabs

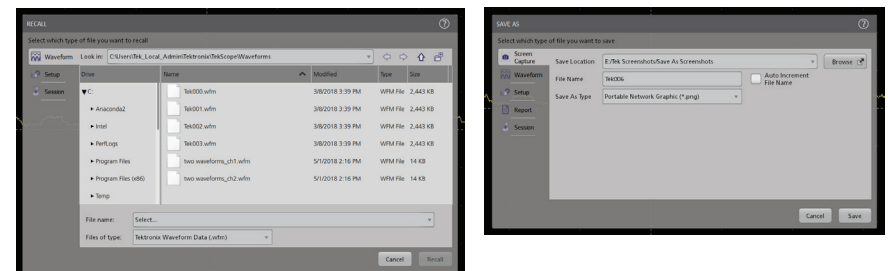

P. 20 - Riddick - Master Specifications

If you have any questions on specifications please refer to how Riddick is implemented.



Example of specifications.

```
// Title bar section
var TITLEBAR_TEXT_FONT = "Frutiger 65 Bold"
var TITLEBAR_TEXT_FONTSIZEPT = 14
var TITLEBAR_HEIGHT = 24
var TITLEBAR_TEXT_LEFTMARGIN = 13
var TITLEBAR_COLOR_ACTIVE = "#353534"
var TITLEBAR_COLOR_INACTIVE = "#231f20"
var TITLEBAR_COLOR_INACTIVE_DIVIDER = "#606163"
var TITLEBAR_TEXT_COLOR = "#f3f3f3"
var TITLEBAR_COLOR_DIVIDER_WIDTH = 1

var MAIN_WINDOW_MINIMUM_WIDTH = 1370
var MAIN_WINDOW_MINIMUM_HEIGHT = 600
var MENUBAR_DRAG_AREA_HEIGHT = TITLEBAR_HEIGHT + 10 //10 is added to compensate for the
white border above the Window, in Windows.
var MENUBAR_WINDOWS_MENU_WIDTH = 400
var MINIMIZED_SCREEN_DIMENSION_MULTIPLICATION_FACTOR = 0.75
//CR-10776 The height is set less than full screen height to overcome https://bugre-ports.qt.io/browse/QTBUG-47156.
//Giving MAXIMIZED_SCREEN_DIMENSION_MULTIPLICATION_FACTOR as 0.999 to have a very mini-
mal space possible below the scopeapp.If we give 0.9999 it is getting rounded off to 1.
var MAXIMIZED_SCREEN_DIMENSION_MULTIPLICATION_FACTOR = 0.999
var DRAG_SUPPORT_PRESSANDHOLD_TIMER = 300
```

3. August 2018 Screen Captures

P. 21 - Screen capture - About menu - License info

File Edit Applications Utility Help

WARNING: This oscilloscope has not been calibrated.

Waveform View

ABOUT

Tektronix

Model: MSO58 Mixed Signal Oscilloscope
Bandwidth: 350 MHz
Serial Number: PQ3R1014
Host ID: TMS-AAAGAUJB9DD2YKQ8
Firmware Version: 1.9.0.5244 -rel- (Date 2018-06-13 Time 18:31:38)
To download the latest firmware, visit www.tektronix.com/software

Probes Detected	Serial Number	Firmware Version
1 TPP1000	C062530	1.1
2 TPP1000	QU00225	1.1
3 No Probe Detected		
4 No Probe Detected		
5 No Probe Detected		
6 No Probe Detected		
7 No Probe Detected		
8 No Probe Detected		

Installed Options:

Name	Description
ENG-DEVL-MSO5X	ENGINEERING LICENSE - MSO5X - ENGINEERING DEVELOPMENT LICENSE

Option Details:


License Type: Node Locked
Checked Out: 2:23:26 PM-23 Feb 2018
Installed: 2:24:28 PM-23 Feb 2018
Expires: 2:23:26 PM-23 Feb 2019

Remove License Install License


20 V
15 V
10 V
5 V
-5 V
-10 V
-15 V
-20 V

Add New...
Cursors Note
Measure Search
Results Table Plot


P. 21 - Screen capture - About menu - License info

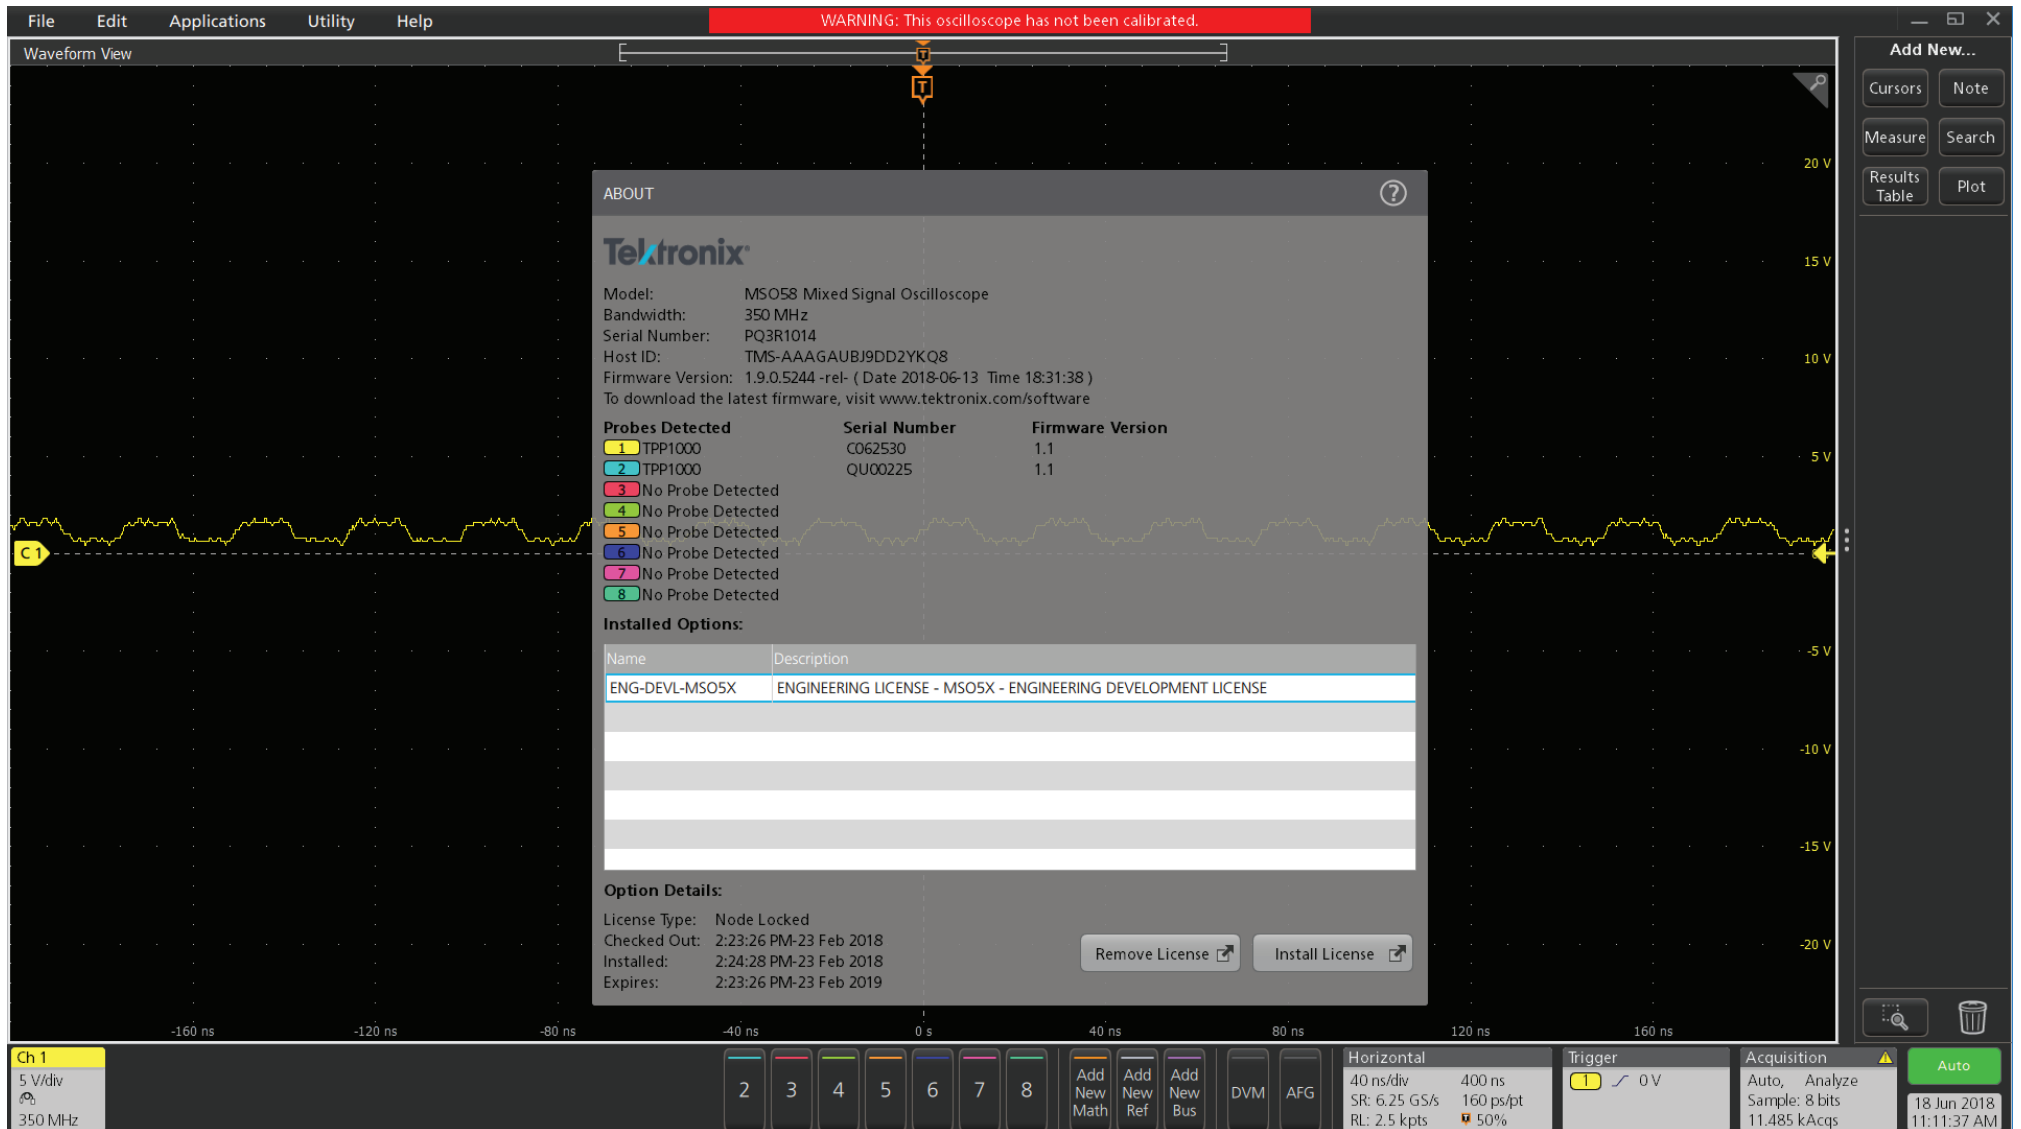


P. 22 - Screen capture - Busy Indicator

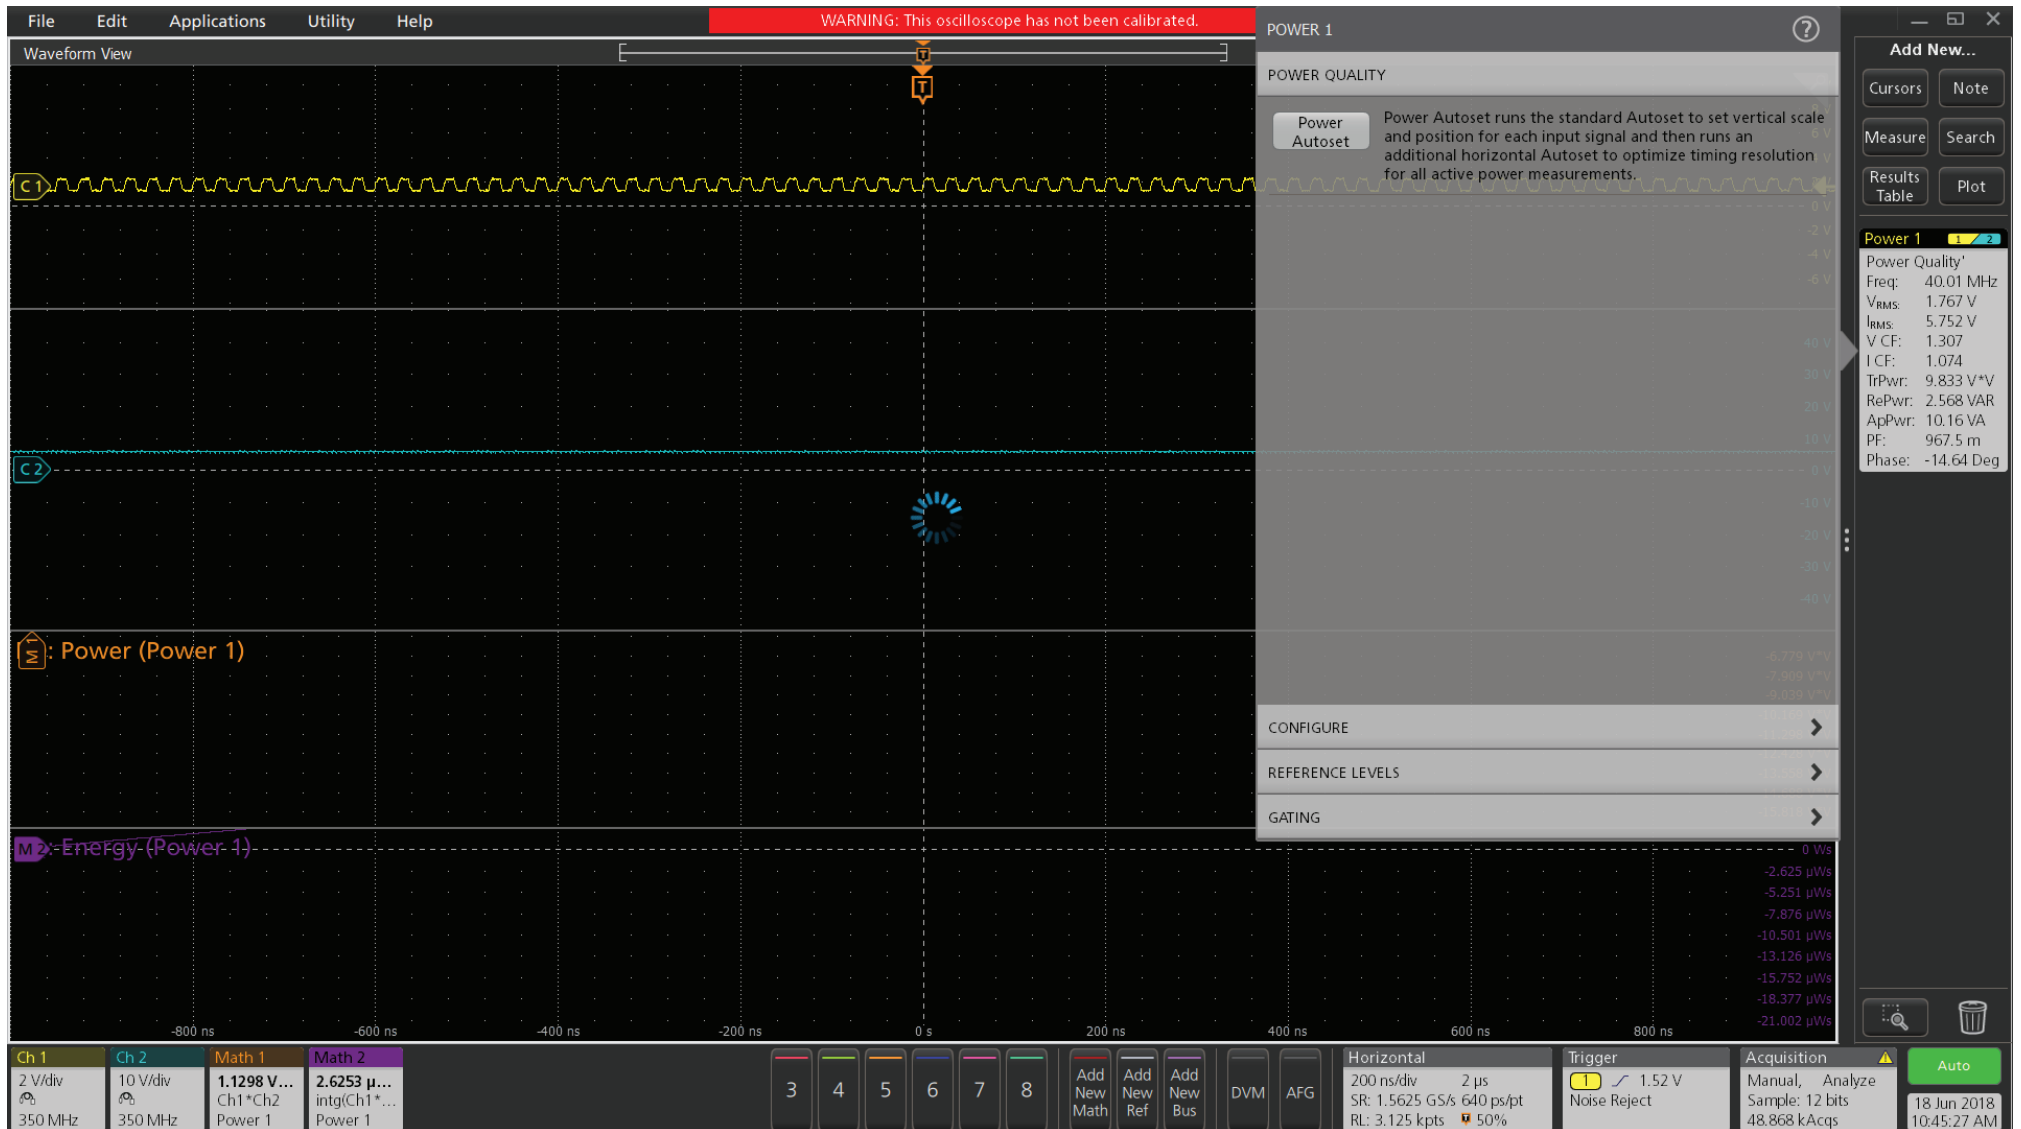

P. 23 - Screen capture - LAN Reset Config Menu_Cancel-OK

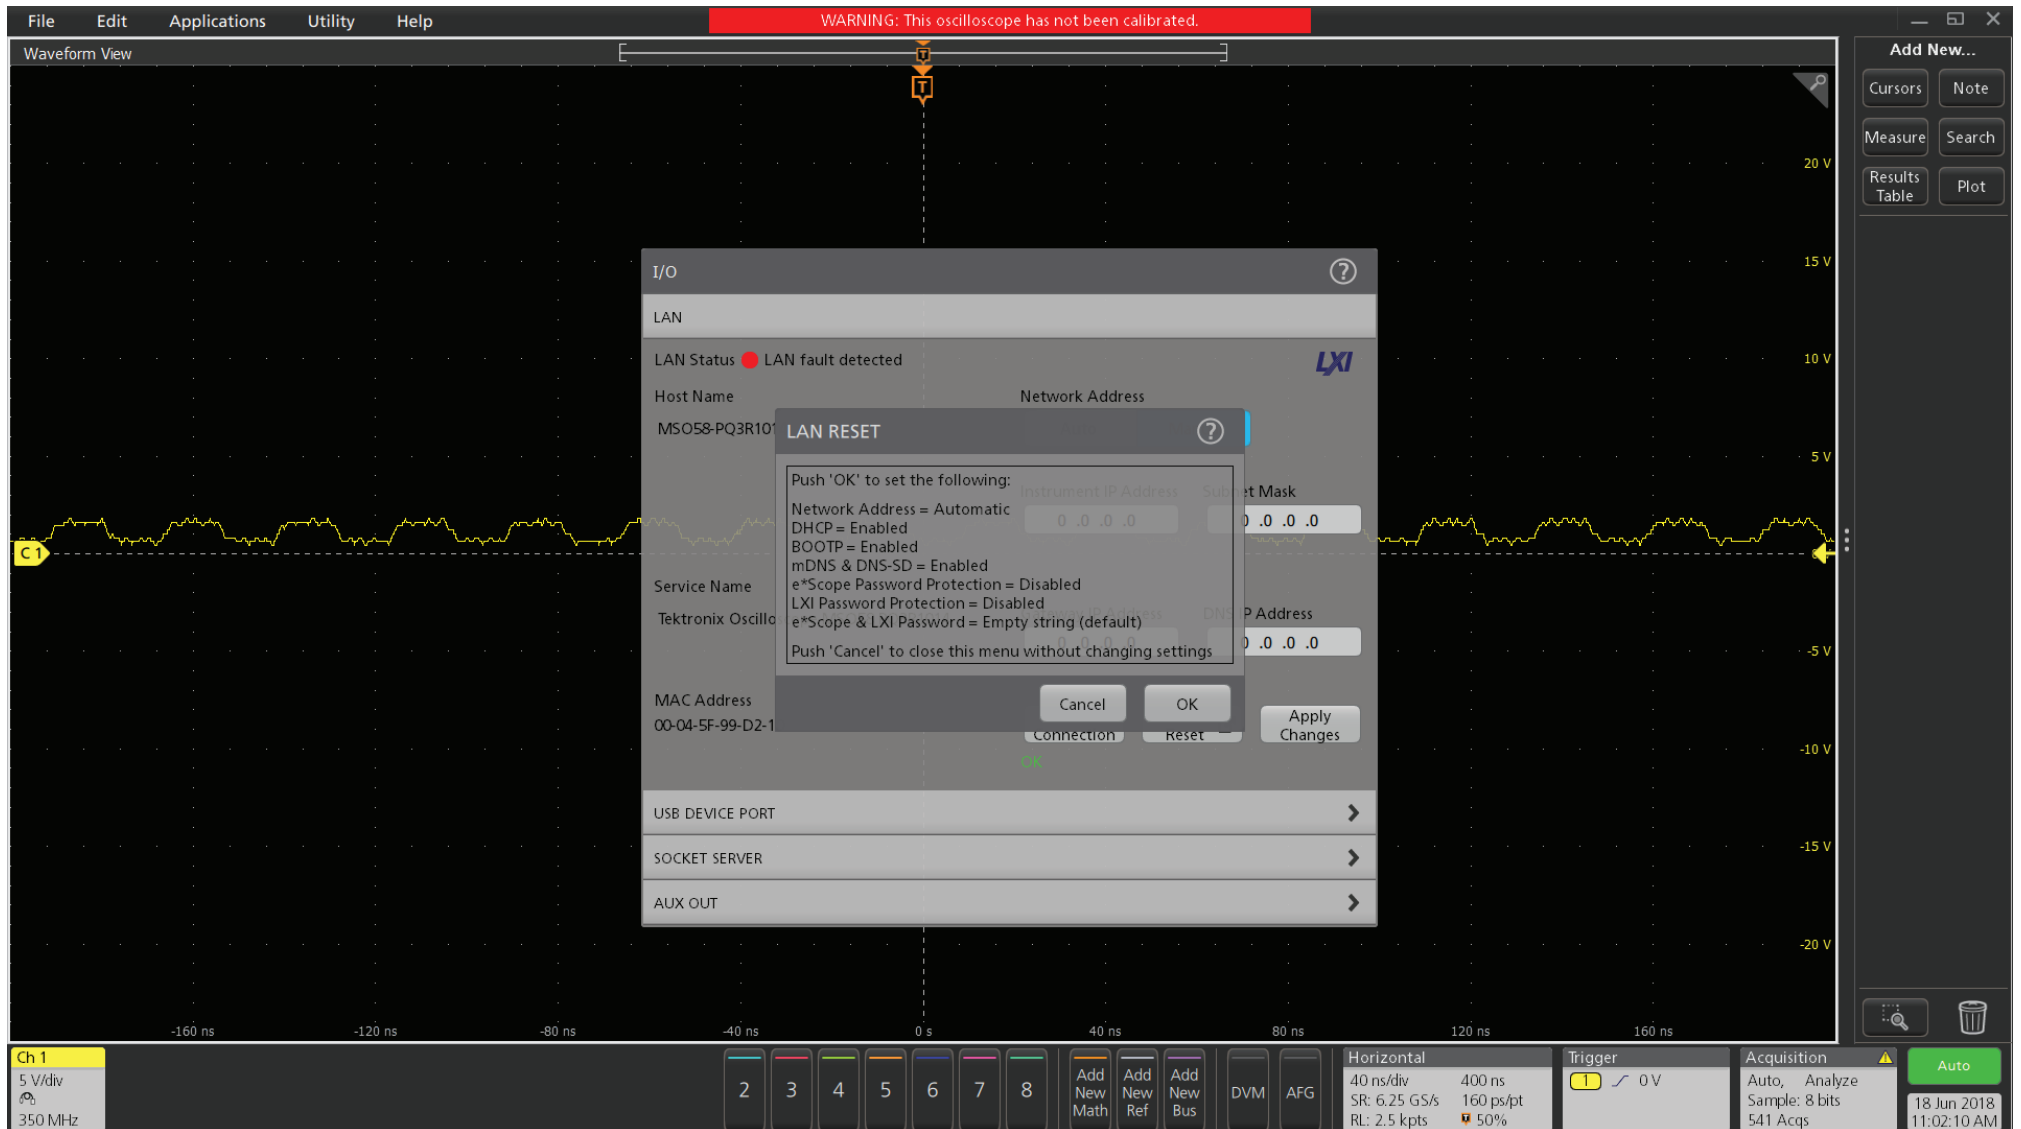

P. 24 - Screen capture - Message Box_OK button

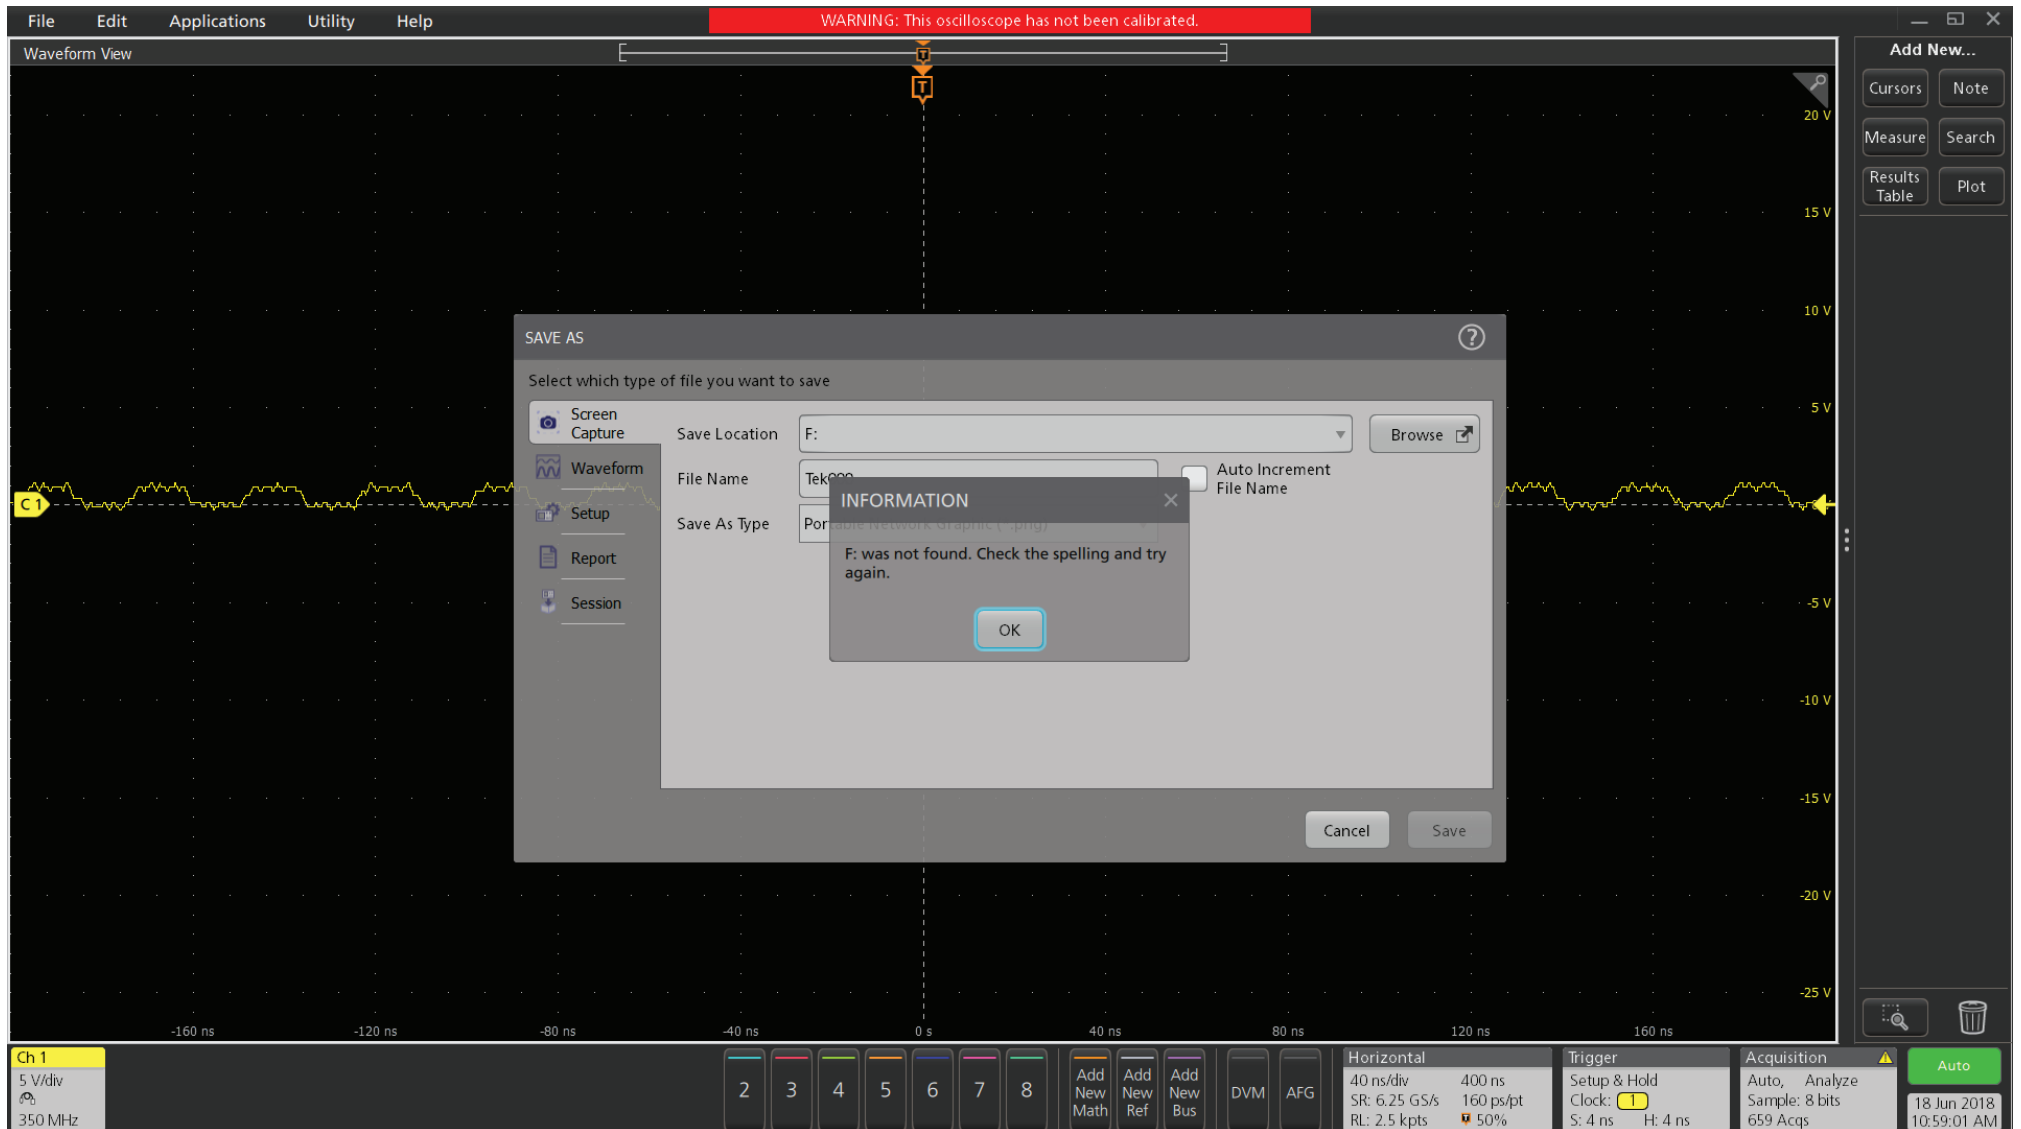

P. 25 - Screen capture - Vertical Tabs_Recall menu

File Edit Applications Utility Help

WARNING: This oscilloscope has not been calibrated.

Waveform View

20 V
15 V
10 V
5 V
-5 V
-10 V
-15 V
-20 V

Ch 1
5 V/div
350 MHz

Horizontal
40 ns/div
SR: 6.25 GS/s
RL: 2.5 kpts

Trigger
0 V

Acquisition
Auto, Analyze
Sample: 8 bits
259 Acqs

18 Jun 2018
10:46:36 AM

RECALL

Select which type of file you want to recall

Waveform Look in: C:\Users\Tek_Local_Admin\Tektronix\TekScope\Waveforms

Setup
Session


Drive	Name	Modified	Type	Size
▼ C:				
▶ Anaconda2	Tek000.wfm	3/8/2018 3:39 PM	WFM File	2,443 KB
▶ Intel	Tek001.wfm	3/8/2018 3:39 PM	WFM File	2,443 KB
▶ PerfLogs	Tek002.wfm	3/8/2018 3:39 PM	WFM File	2,443 KB
▶ Program Files	Tek003.wfm	3/8/2018 3:39 PM	WFM File	2,443 KB
▶ Program Files (x86)	two waveforms_ch1.wfm	5/1/2018 2:16 PM	WFM File	14 KB
▶ Temp	two waveforms_ch2.wfm	5/1/2018 2:16 PM	WFM File	14 KB

File name: Select...


Files of type: Tektronix Waveform Data (.wfm)

Cancel Recall


P. 26 - Screen capture - Right-click menus

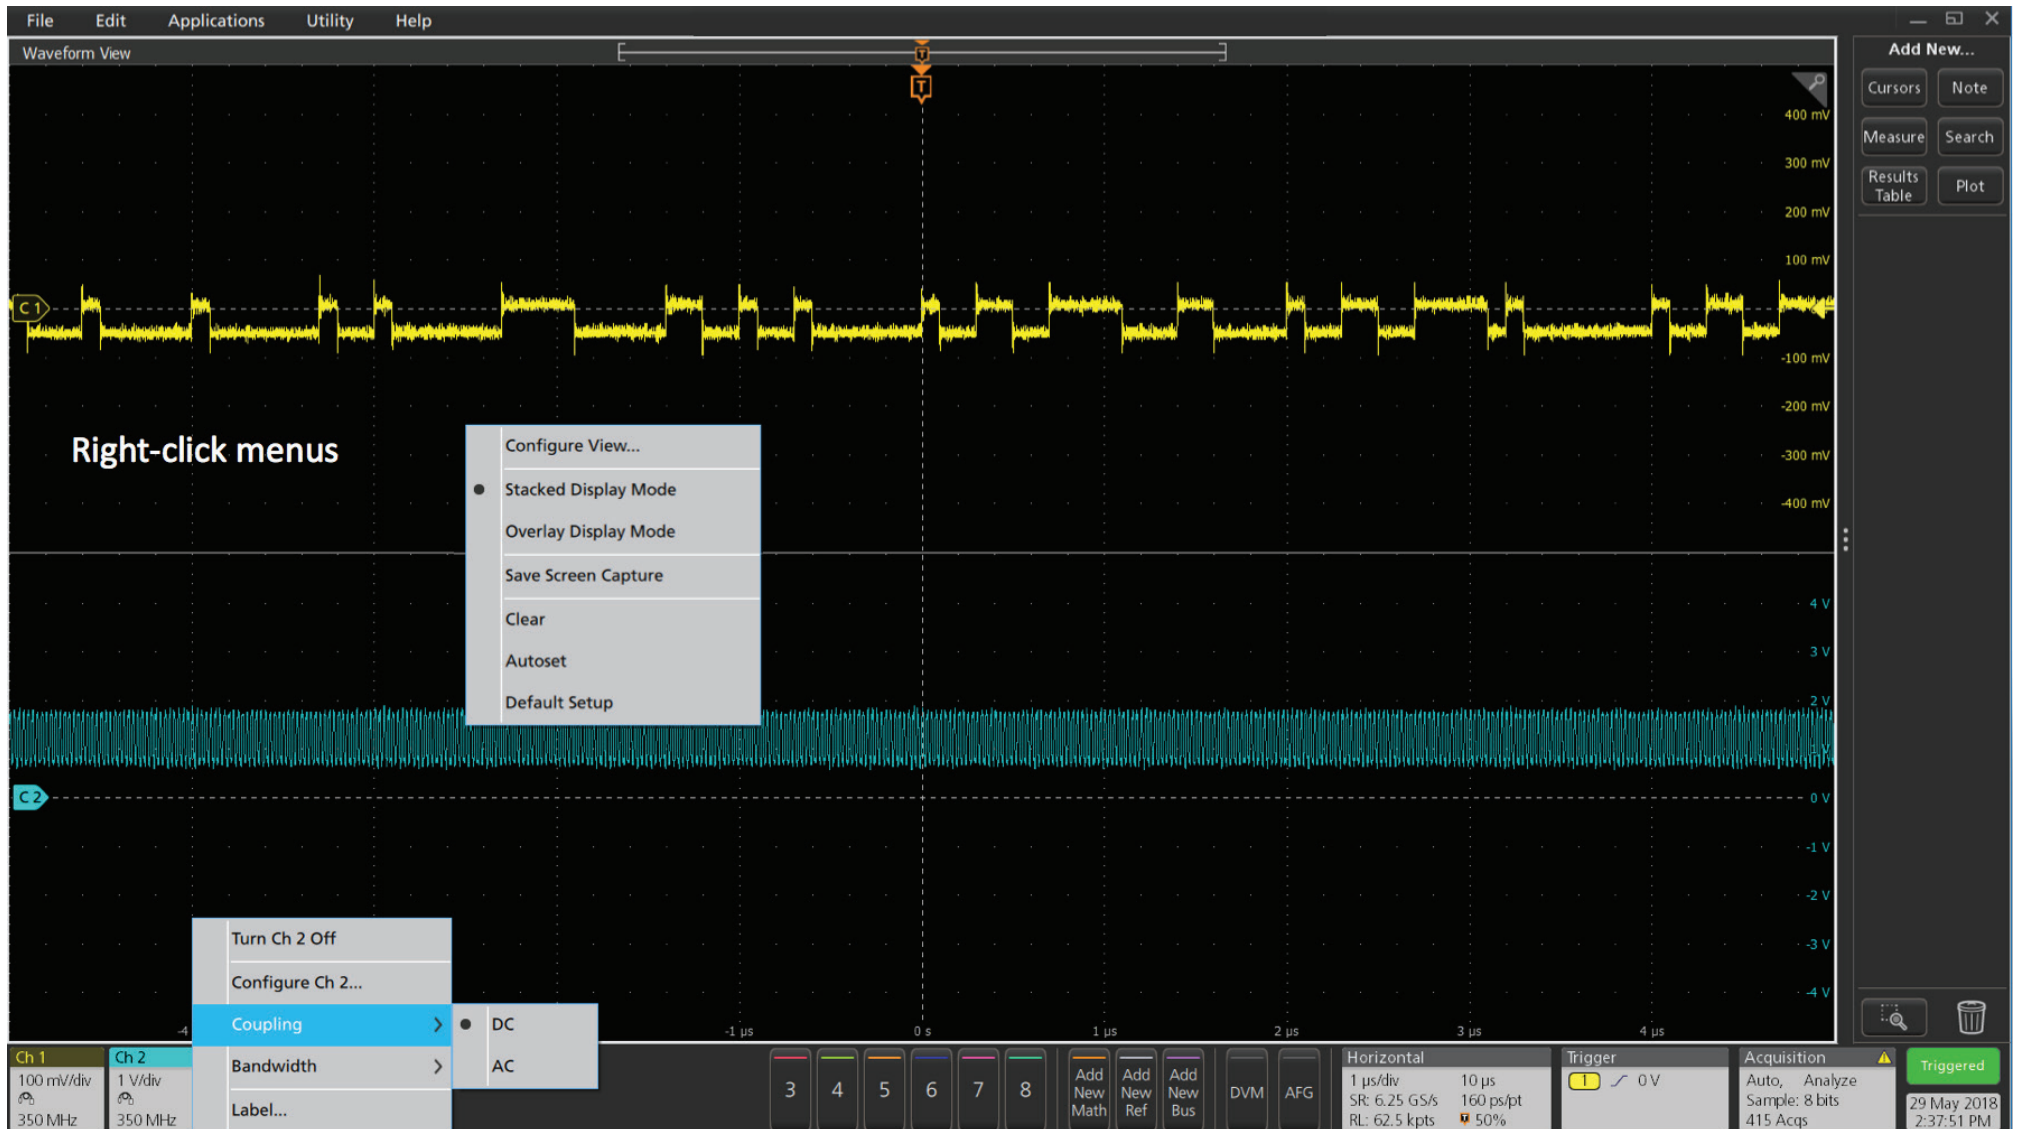

P. 27 - Screen capture - Configuration Menu for: Add Plot

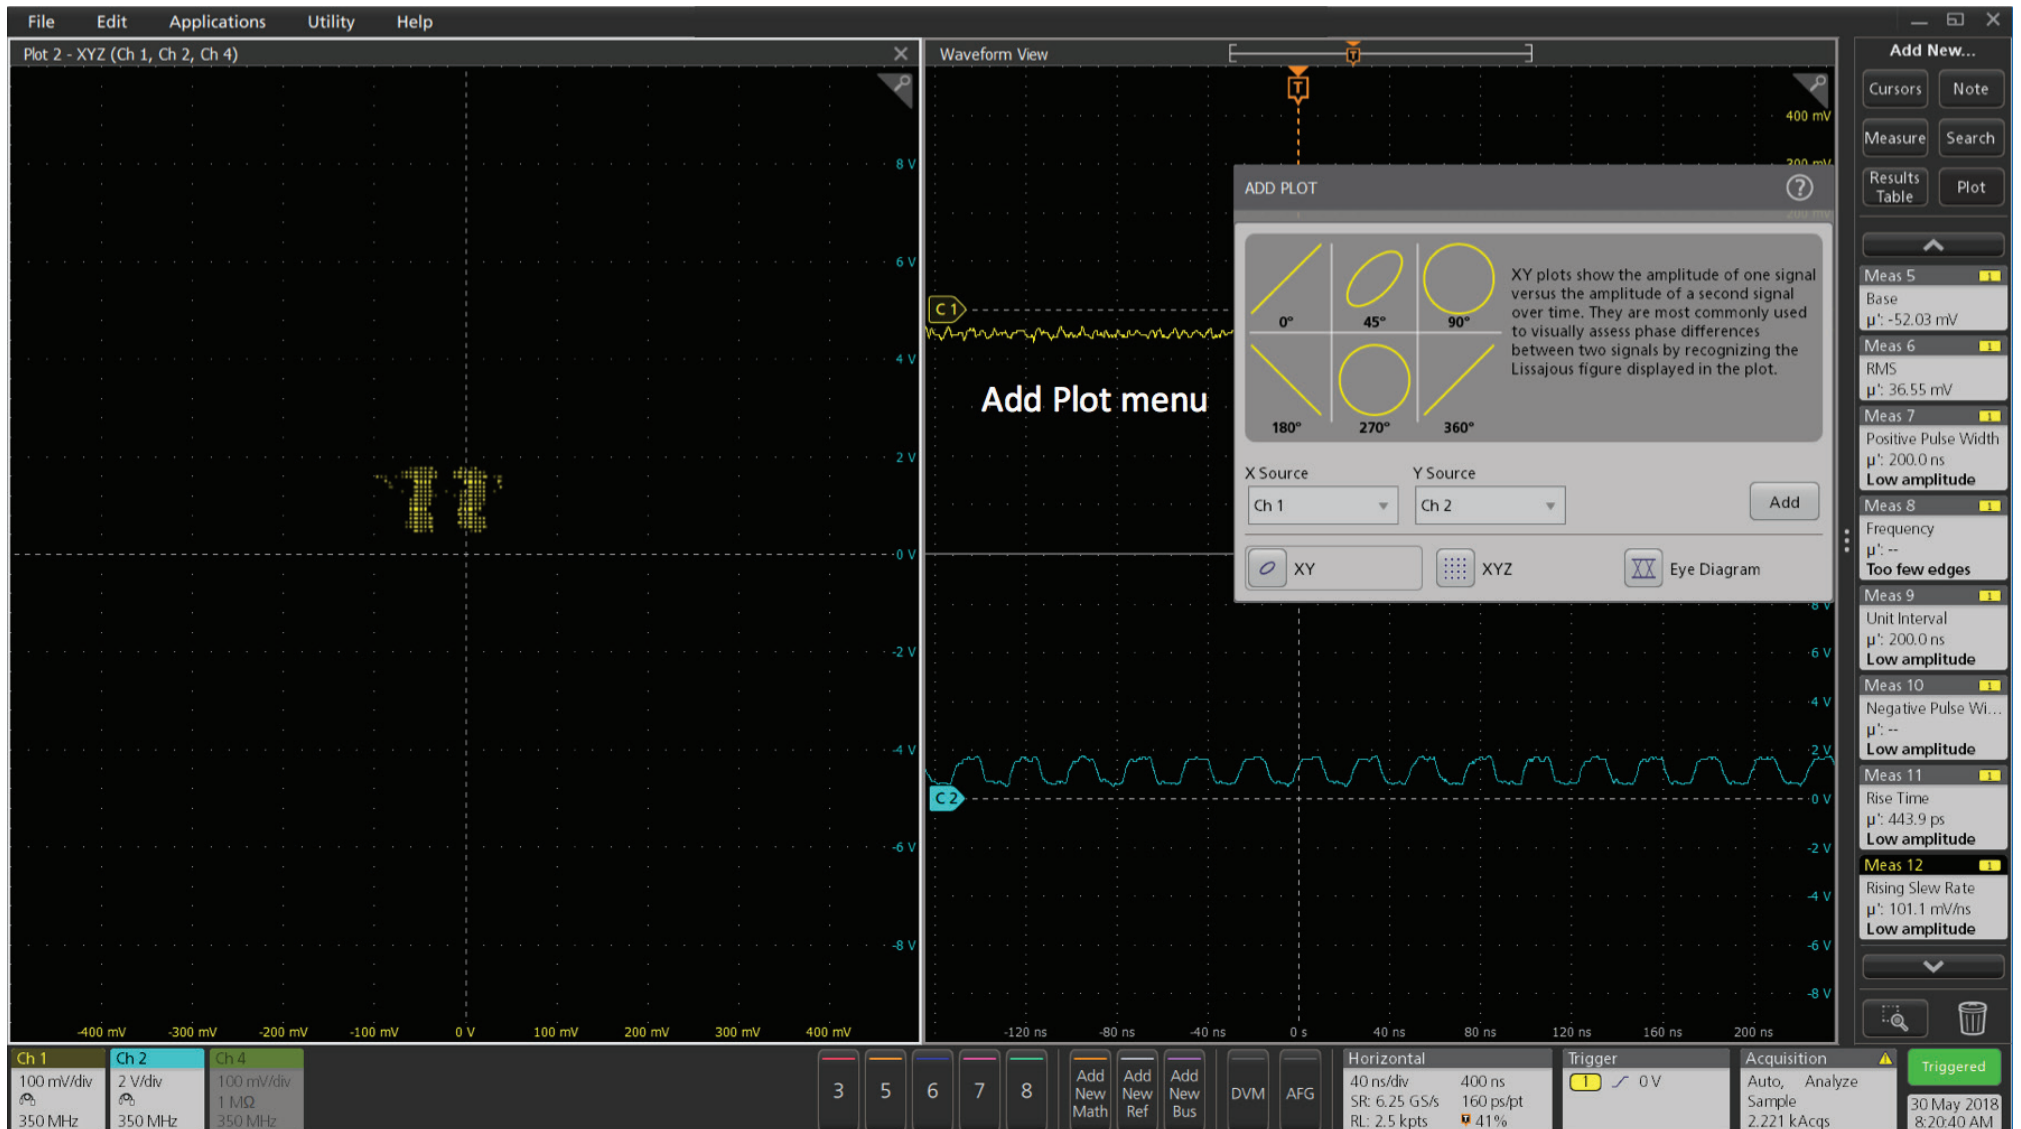

P. 28 - Screen capture - Configuration Menu for: Trigger

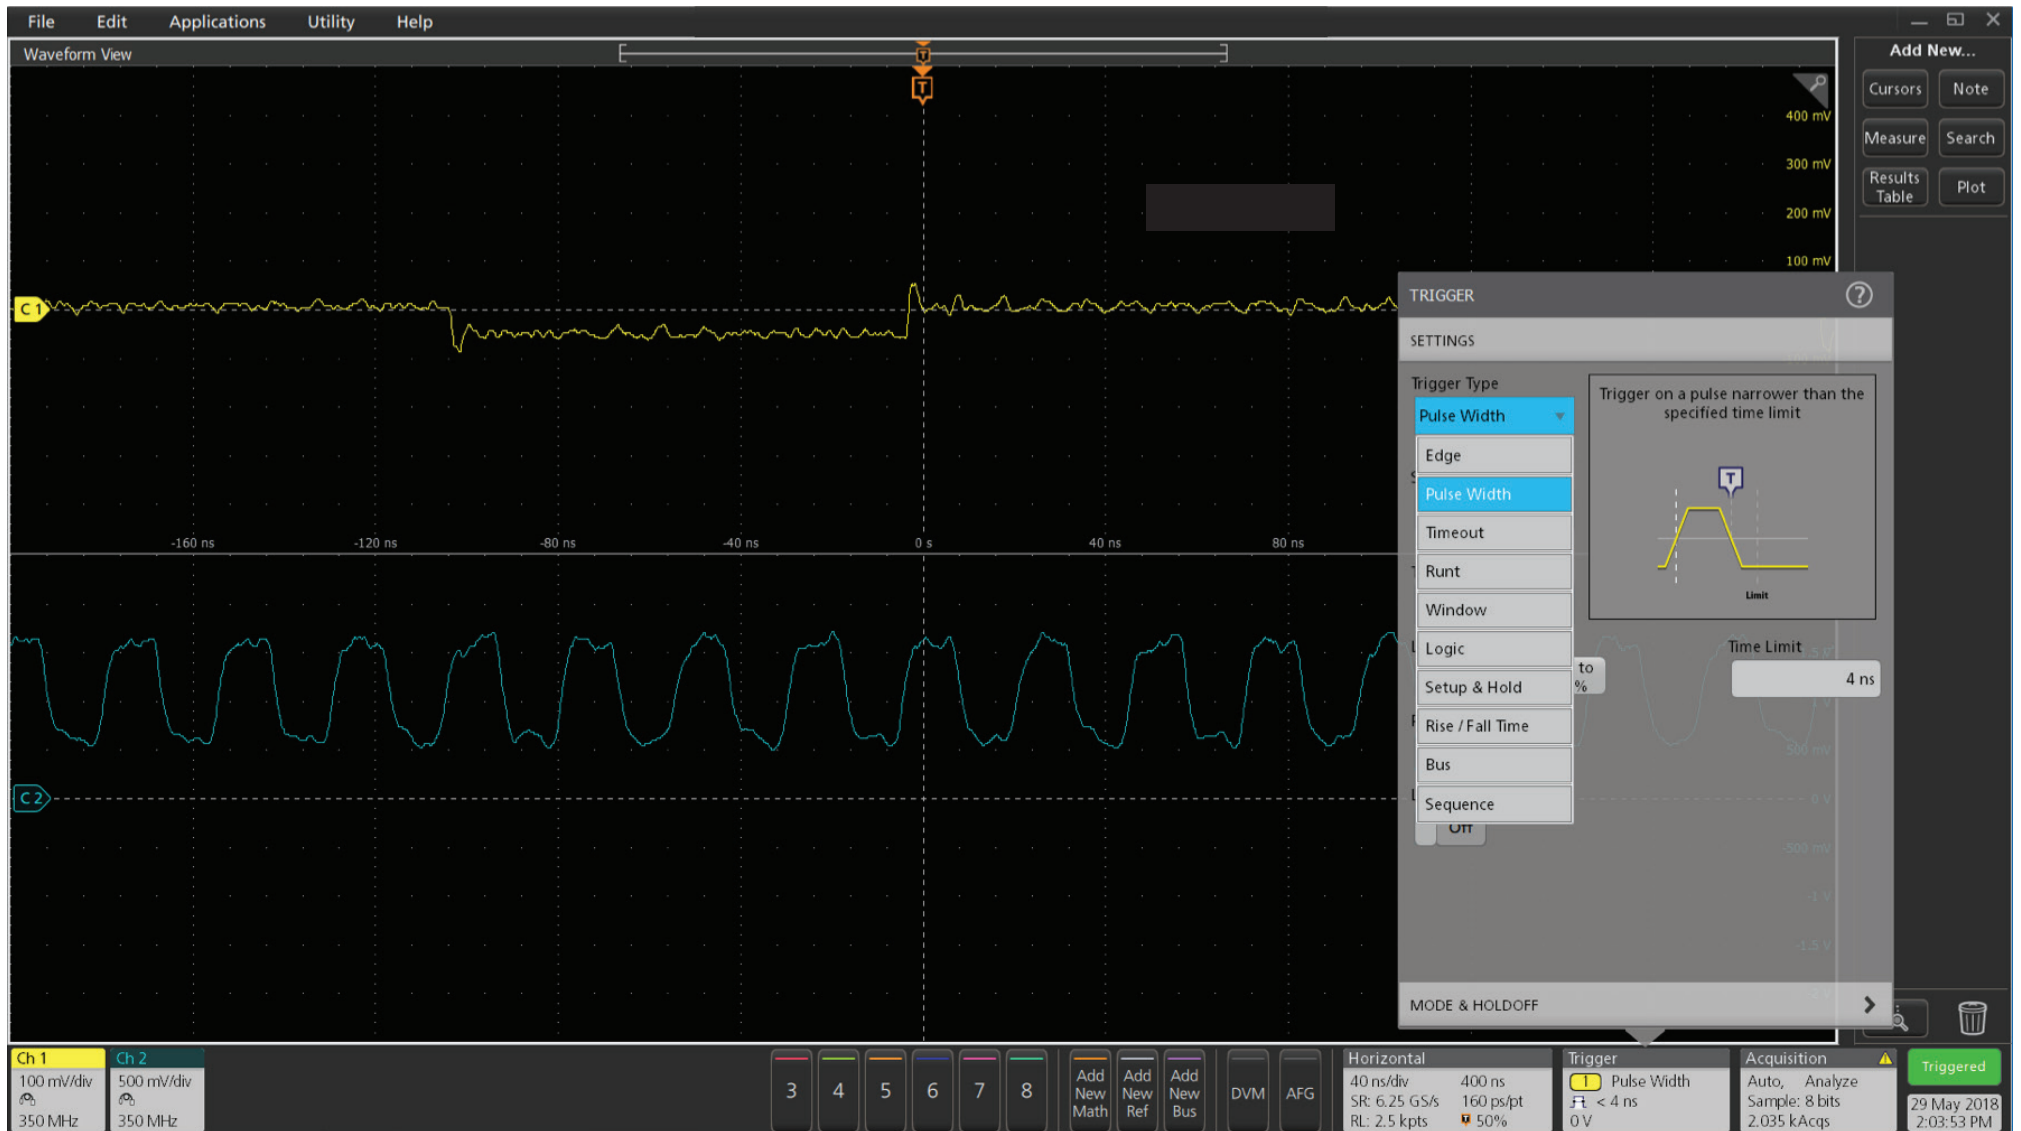

P. 29 - Screen capture - Equation Editor menu

The screenshot displays a digital oscilloscope interface with multiple windows and a central Equation Editor dialog box.

Waveform View: The background shows a multi-trace waveform. Channel 1 (Ch 1) is a yellow trace, Channel 2 (Ch 2) is a green trace, and Channel 5 (Ch 5) is an orange trace. The vertical scale for Ch 1 is 100 mV/div, for Ch 2 is 500 mV/div, and for Ch 5 is 100 mV/div. The horizontal scale is 40 ns/div.

EQUATION EDITOR: A central dialog box with the following sections:

- Sources:** A table with columns: Channels, Math, Ref., Meas., Filters, Variables. It lists Ch 1, Ch 2, and Ch 4 under Channels, and Math 1 under Math.
- Functions:** A grid of mathematical functions including $\int$, Max, Log, e^y , $\Gamma x1$, Invert, FFT Mag, FFT Phs, d/dx , Min, LogE, $\sqrt{x}$, LxJ, $|x|$, FFT Real, FFT Img, SIN, COS, TAN, $\sin^{-1}$, $\cos^{-1}$, $\tan^{-1}$, Deg, and Rad.
- Keypad:** A numeric keypad with operators (+, -, *, /), comparison operators (<, >, <=, >=), logical operators (AND, OR, NAND, NOR, XOR, EQV), and mathematical constants (n, e).
- Math 1 =**: A text input field containing the placeholder text "<math expression>".
- Buttons:** Apply, Cancel, and OK.

MATH 1 Dialog: A smaller dialog box in the bottom left corner with the following settings:


- Display:** On
- Vertical Scale:** 1 V/div
- Auto Scale:** Off
- Label:** (empty)
- Position:** 0 divs
- Alternate Units:** (empty)
- Average:** Off
- Math Type:** Basic, FFT, Advanced (selected)
- Math 1 =**: Select...
- Edit:** (icon)

Right Panel: Contains buttons for Cursors, Note, Measure, Search, Results Table, and Plot. It also shows a vertical scale for the rightmost trace from -400 mV to 400 mV.


Bottom Panel: Shows acquisition settings: Horizontal (40 ns/div), SR (6.25 GS/s), RL (2.5 kpts), Trigger (0 V), Acquisition (Auto, Analyze, 881 Acqs), and a status bar indicating "Triggered" on 29 May 2018 at 1:50:28 PM.

Text Annotation: A white text box with the text "Menu that doesn't have click away ability" is overlaid on the right side of the Equation Editor dialog box.

P. 30 - Screen capture - Cursors

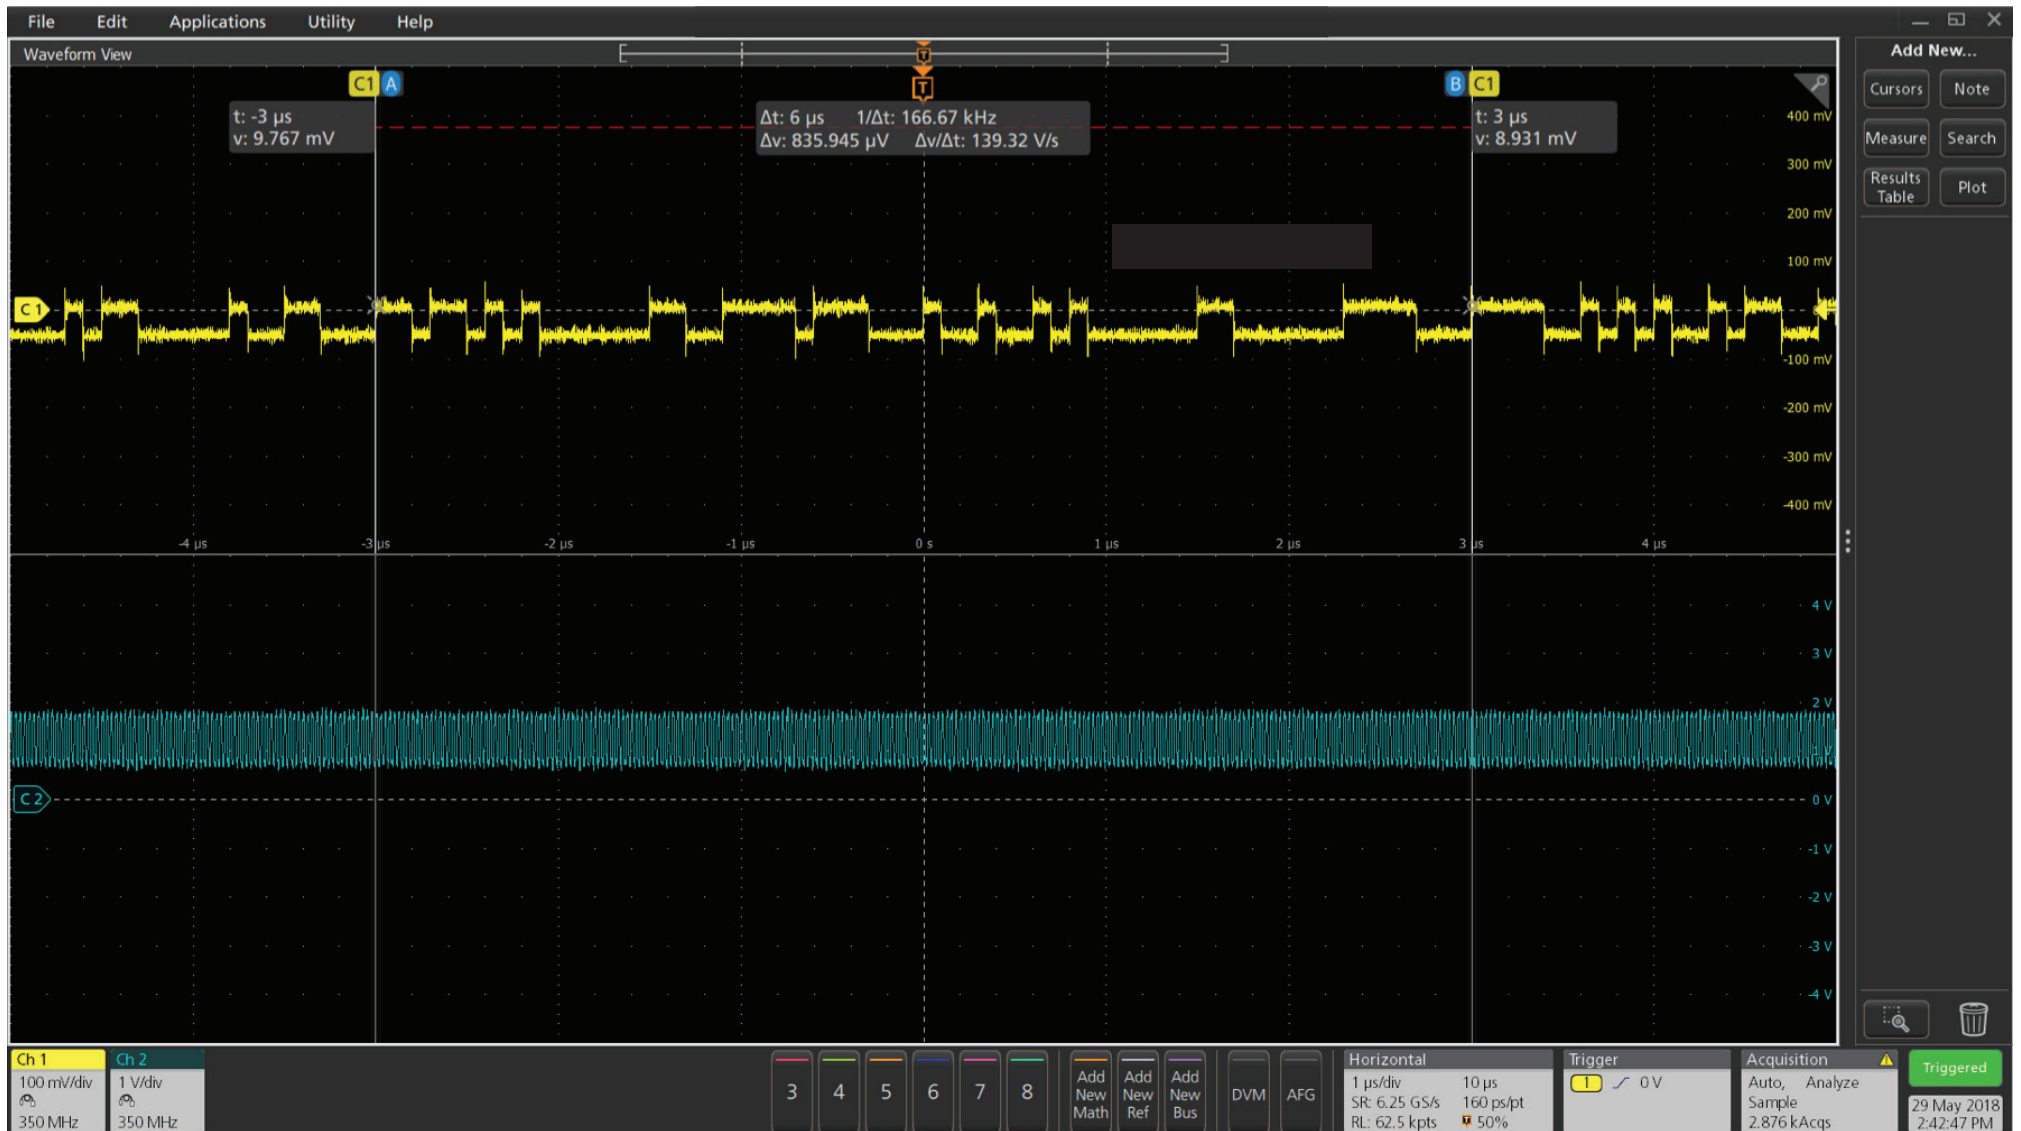

P. 31 - Screen capture - Plot window

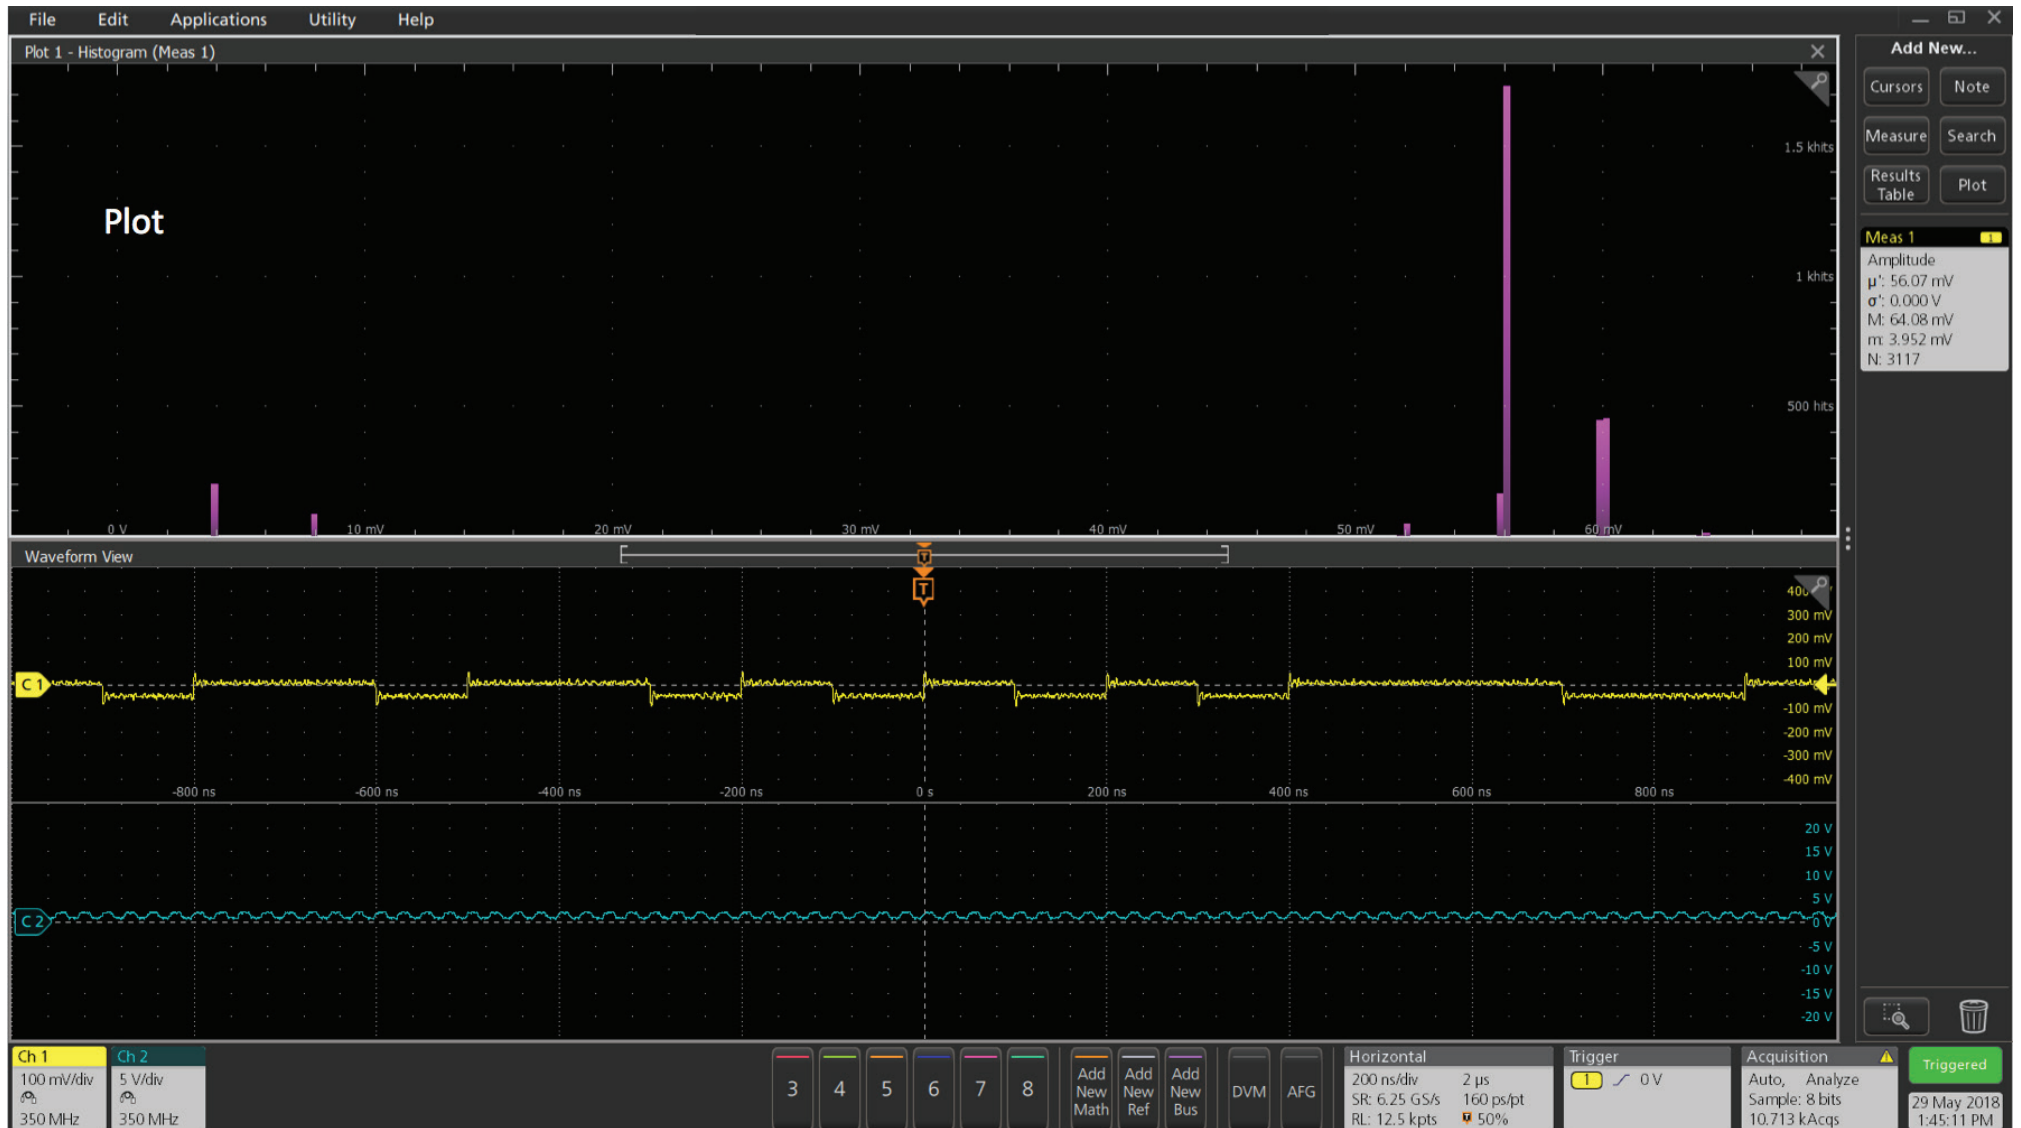

P. 32 - Screen capture - Results Table

