


Topology =

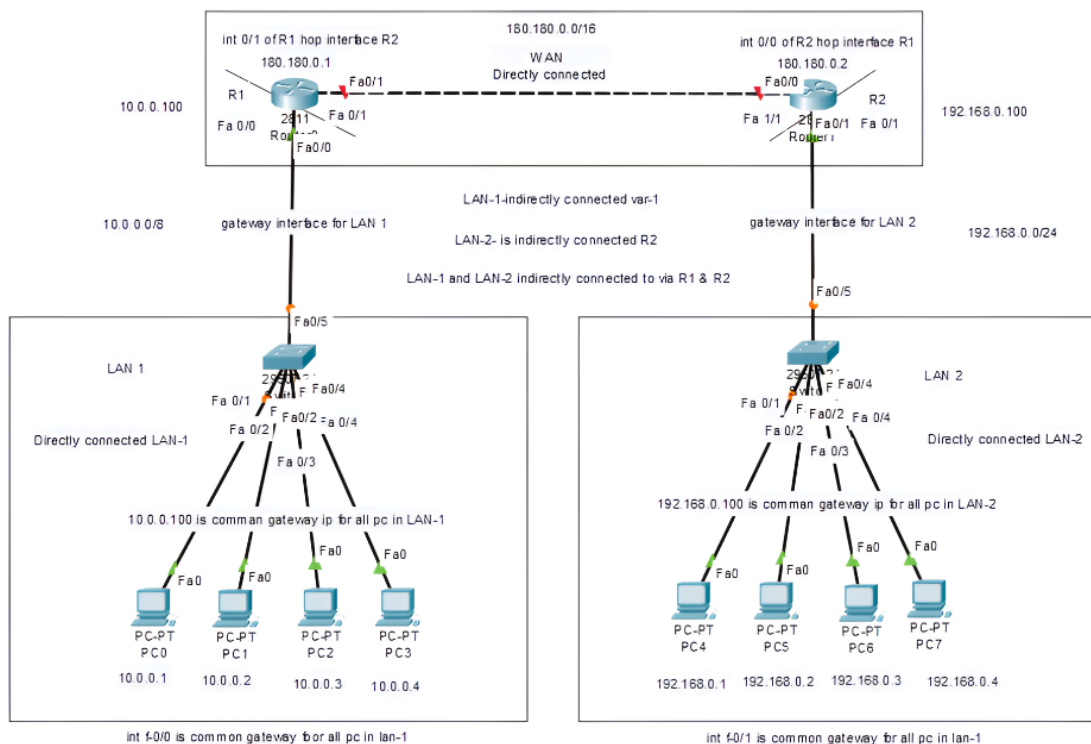

Router password security / Type 5 Encryption =

245836K Bytes of NVRAM System CompactFlash 0 (Read/Write)

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

```
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#username amit secret cisco@123
Router(config)#line console 0
Router(config-line)#login local
Router(config-line)#exit
Router(config)#
Router(config)#line aux 0
Router(config-line)#login local
Router(config-line)#exit
Router(config)#
Router(config)#enable secret cisco123
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#
```

Then log out and reconnect. The router should ask =

```
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#exit

Router con0 is now available

Press RETURN to get started.

User Access Verification

Username: amit
Password:

Router>
```