spring

EraaSoft

Bean Life cycle

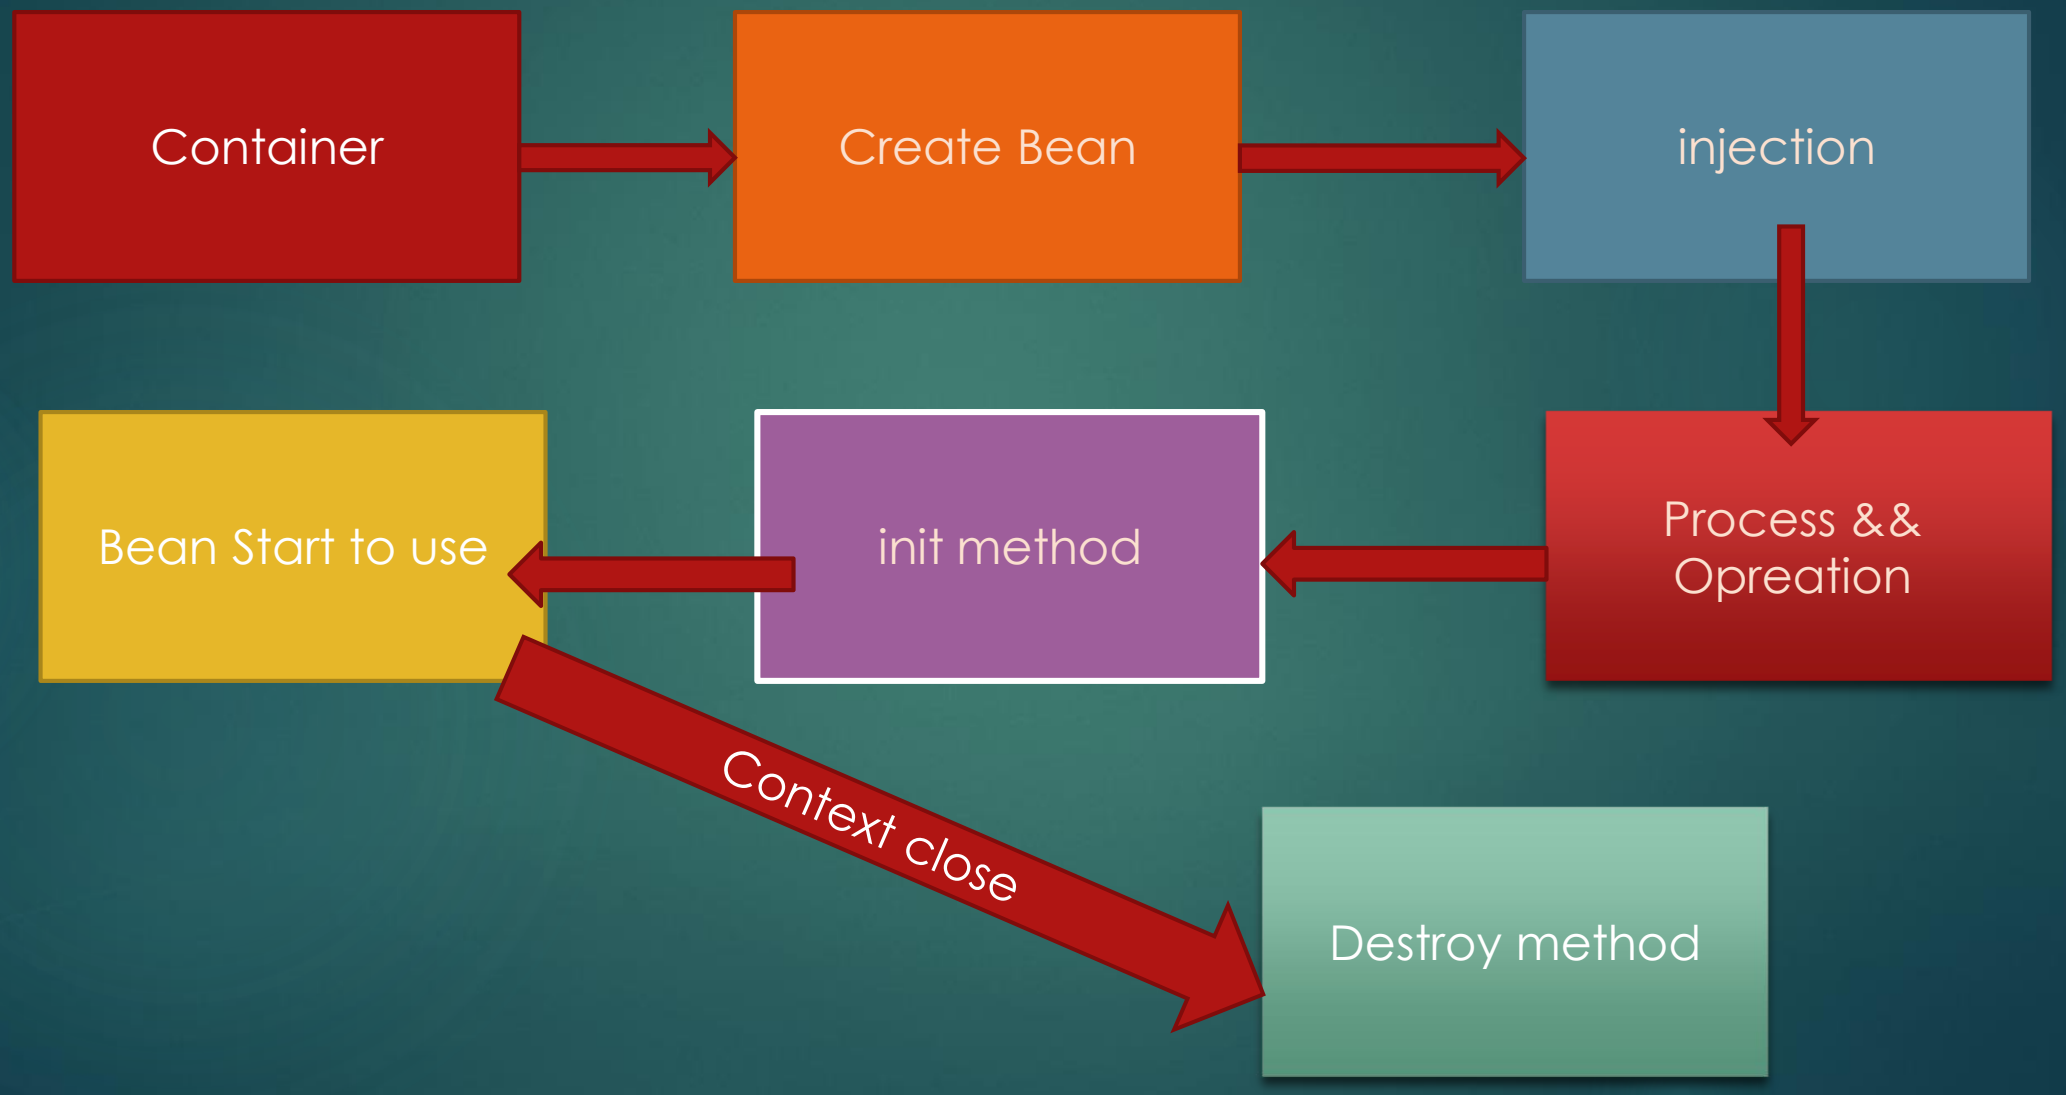

By Eslam Khder

Bean Life cycle

What benefit of using Init-method

Example of you get data from database you must open connection

If in your bean function to get data so you need to add open connection in init-method

What benefit of using destroy-method

It method contain code

Example of you get data from database you must close connection at the end so put code of close connection in destroy method

Java Aannotations

Java annotations are metadata that provide additional information about a program but do not affect its execution.

SUCH AS
@override

In Hibernate @Table …. etc

By Eslam Khder

Java Aannotations

We deal with XML Configuration
and it so hard in big project

Java annotation reduce code

By Eslam Khder

Component Annotations

Spring scan Java class with Annotations

automatic register bean in containers

By Eslam Khder

spring®

EraaSoft

What is Spring AutoWiringfor dependency injection

Spring Use AutoWiring to inject any thing in beanSpring look for class and matches property

Spring automatic inject property in container

By Eslam Khder

1. **Constructor Injection**
2. Function **Setter Injection**
3. **Field Injection**

By Eslam Khder

@Qulfier

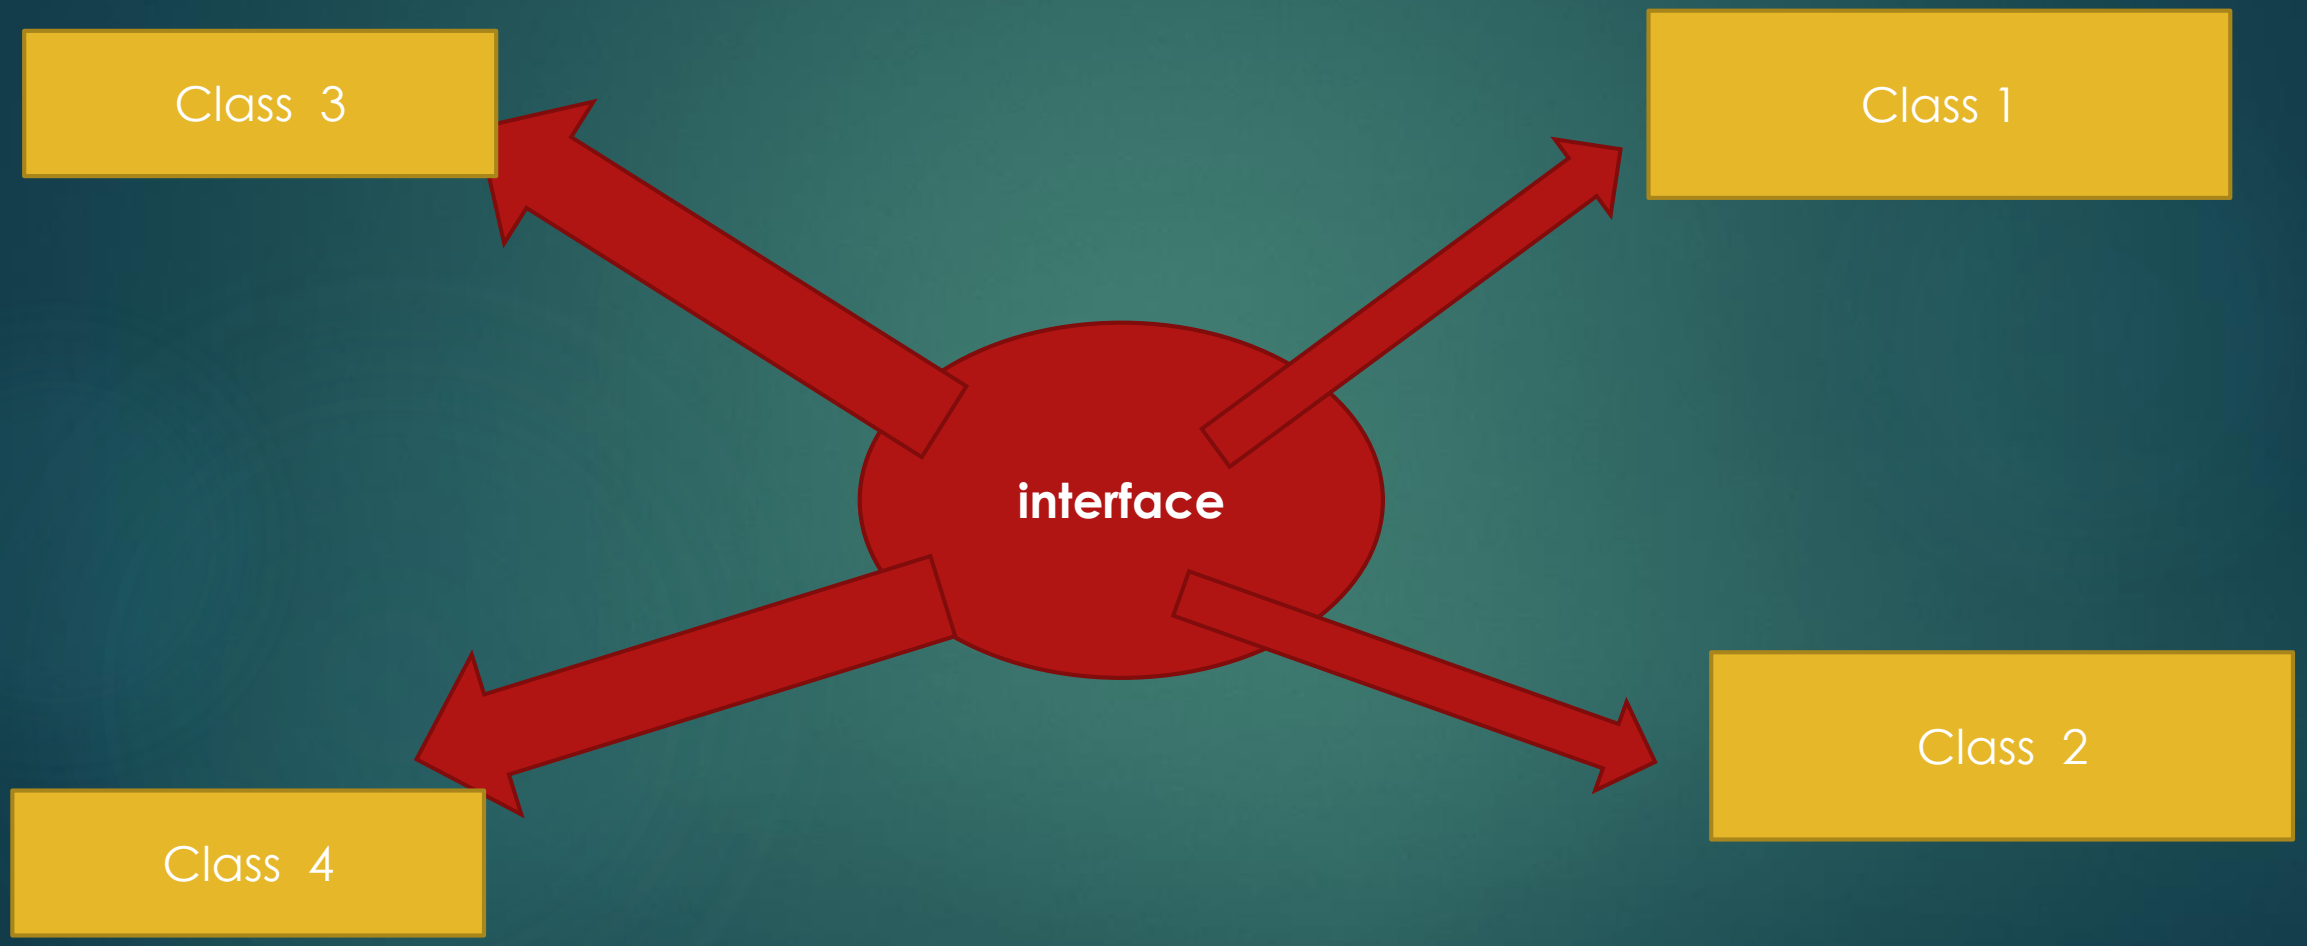

By Eslam Khder

Bean Lifecycle

Method Init-method Add custom code during bean initialization
Init-method @PostConstruct

Destroy-method Add custom code during bean initialization
Destroy-method @PreDestroy

By Eslam Khder

container

instead of using xml container

we will create container as java code

By Eslam Khder

Bean Life cycle

1

```xml
<?xml version="1.0" encoding="UTF-8"?>
<beans xmlns="http://www.springframework.org/schema/beans"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:context="http://www.springframework.org/schema/context"
    xsi:schemaLocation="http://www.springframework.org/schema/beans
    http://www.springframework.org/schema/beans/spring-beans.xsd
    http://www.springframework.org/schema/context
    http://www.springframework.org/schema/context/spring-context.xsd">

    <context:property-placeholder location="classpath:data.properties"/>

    <bean id ="hospital" class="spring.core.HospitalService">
        <!--  <constructor-arg ref="student"></constructor-arg> -->
        <property name="repoService" ref="student"></property>
        <property name="serviceName" value="${app.service.name}"></property>
    </bean>

    <bean id ="student" class="spring.core.StudentService">
```

By Eslam Khder

Bean Life cycle

1

```xml
<?xml version="1.0" encoding="UTF-8"?>
<beans xmlns="http://www.springframework.org/schema/beans"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:context="http://www.springframework.org/schema/context"
    xsi:schemaLocation="http://www.springframework.org/schema/beans
    http://www.springframework.org/schema/beans/spring-beans.xsd
    http://www.springframework.org/schema/context
    http://www.springframework.org/schema/context/spring-context.xsd">

    <context:property-placeholder location="classpath:data.properties"/>

    <bean id ="hospital" class="spring.core.HospitalService">
        <!--  <constructor-arg ref="student"></constructor-arg> -->
        <property name="repoService" ref="student"></property>
        <property name="serviceName" value="${app.service.name}"></property>
    </bean>

    <bean id ="student" class="spring.core.StudentService">
```

By Eslam Khder

3

```
@Configuration
@ComponentScan("com.spring.noxml")
public class SpringConfige {
```