Complete-run fitting and calibration; no frame-level split

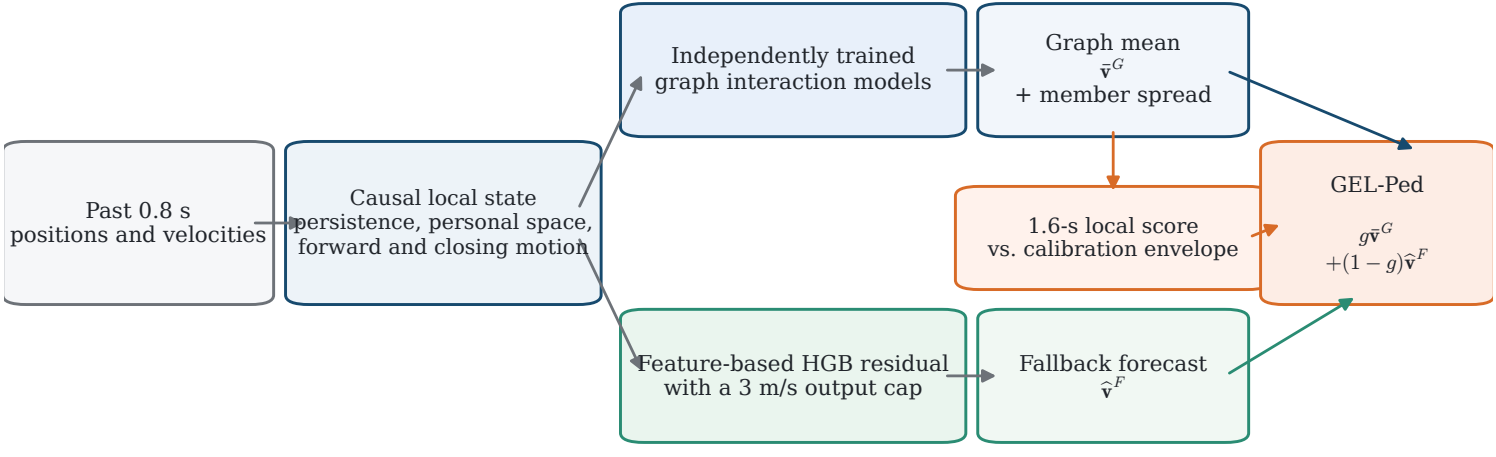

$g = 1$ inside the envelope; only an exceedance invokes the fallback