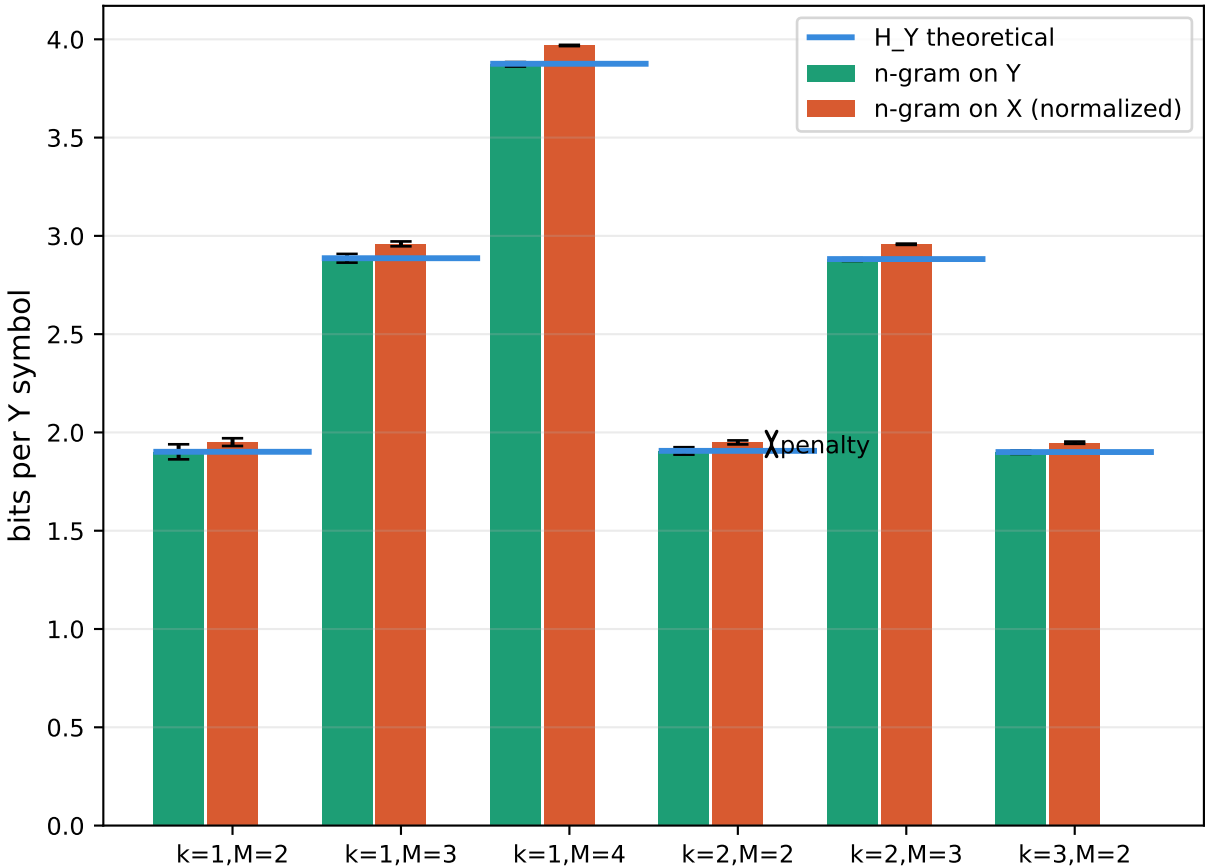
(a) Per-symbol loss comparison across configurations
bits per Y symbol
H_Y theoretical
n-gram on Y
n-gram on X (normalized)
X penalty
k=1,M=2
k=1,M=3
k=1,M=4
k=2,M=2
k=2,M=3
k=3,M=2

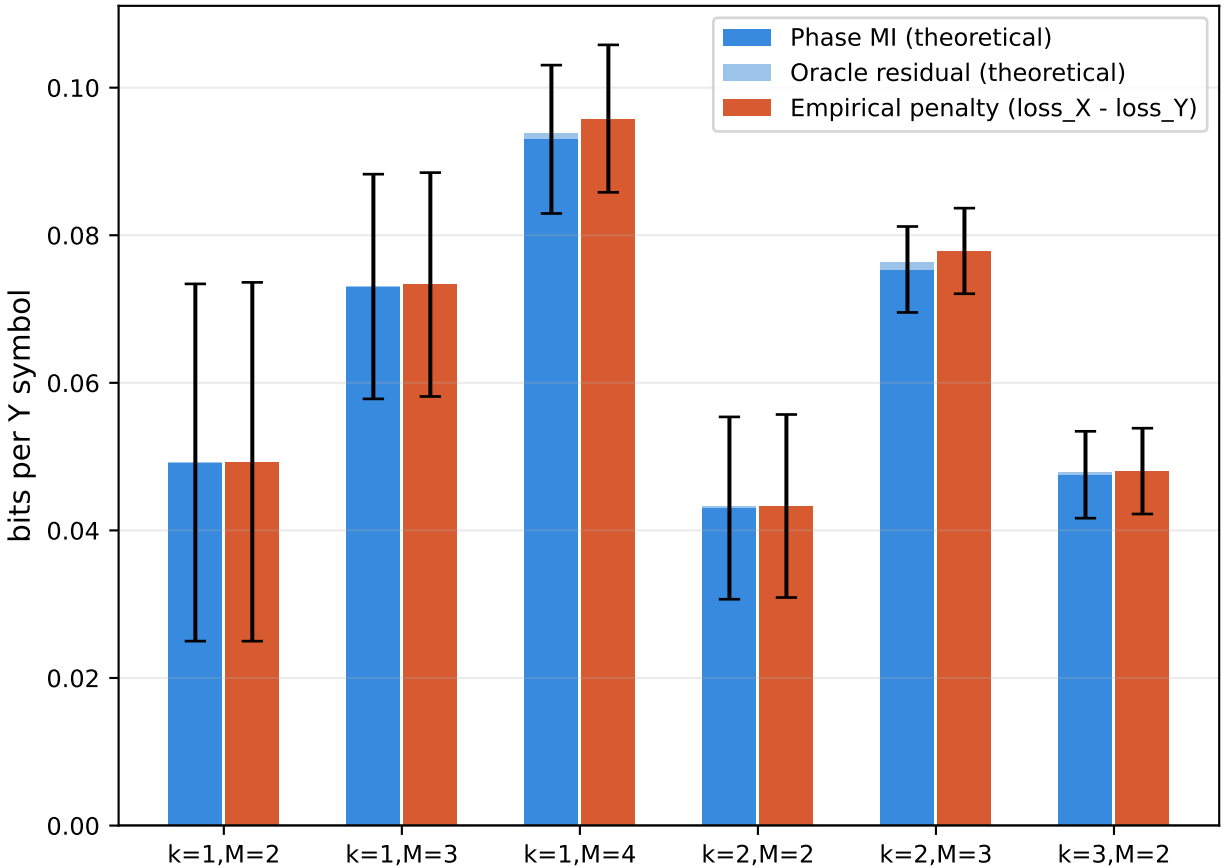
(b) Fragmentation penalty decomposition: theoretical vs empirical
bits per Y symbol
Phase MI (theoretical)
Oracle residual (theoretical)
Empirical penalty (loss_X - loss_Y)
k=1,M=2
k=1,M=3
k=1,M=4
k=2,M=2
k=2,M=3
k=3,M=2