



การตั้งค่าฝั่ง Client-Side ของ Veeam Cloud Connect

User Guide
May, 2017

รายละเอียด:


Gateway: 10.50.41.44

Username: VCC_nnnnnn

Password: *****

การตั้งค่า Veeam Cloud Connect:

ไปที่แท็บ "Cloud Connect" ของ Veeam แล้ว แล้วคลิกขวาที่ "Service Providers"
หลังจากนั้น คลิก "Click the Add Service Provider"

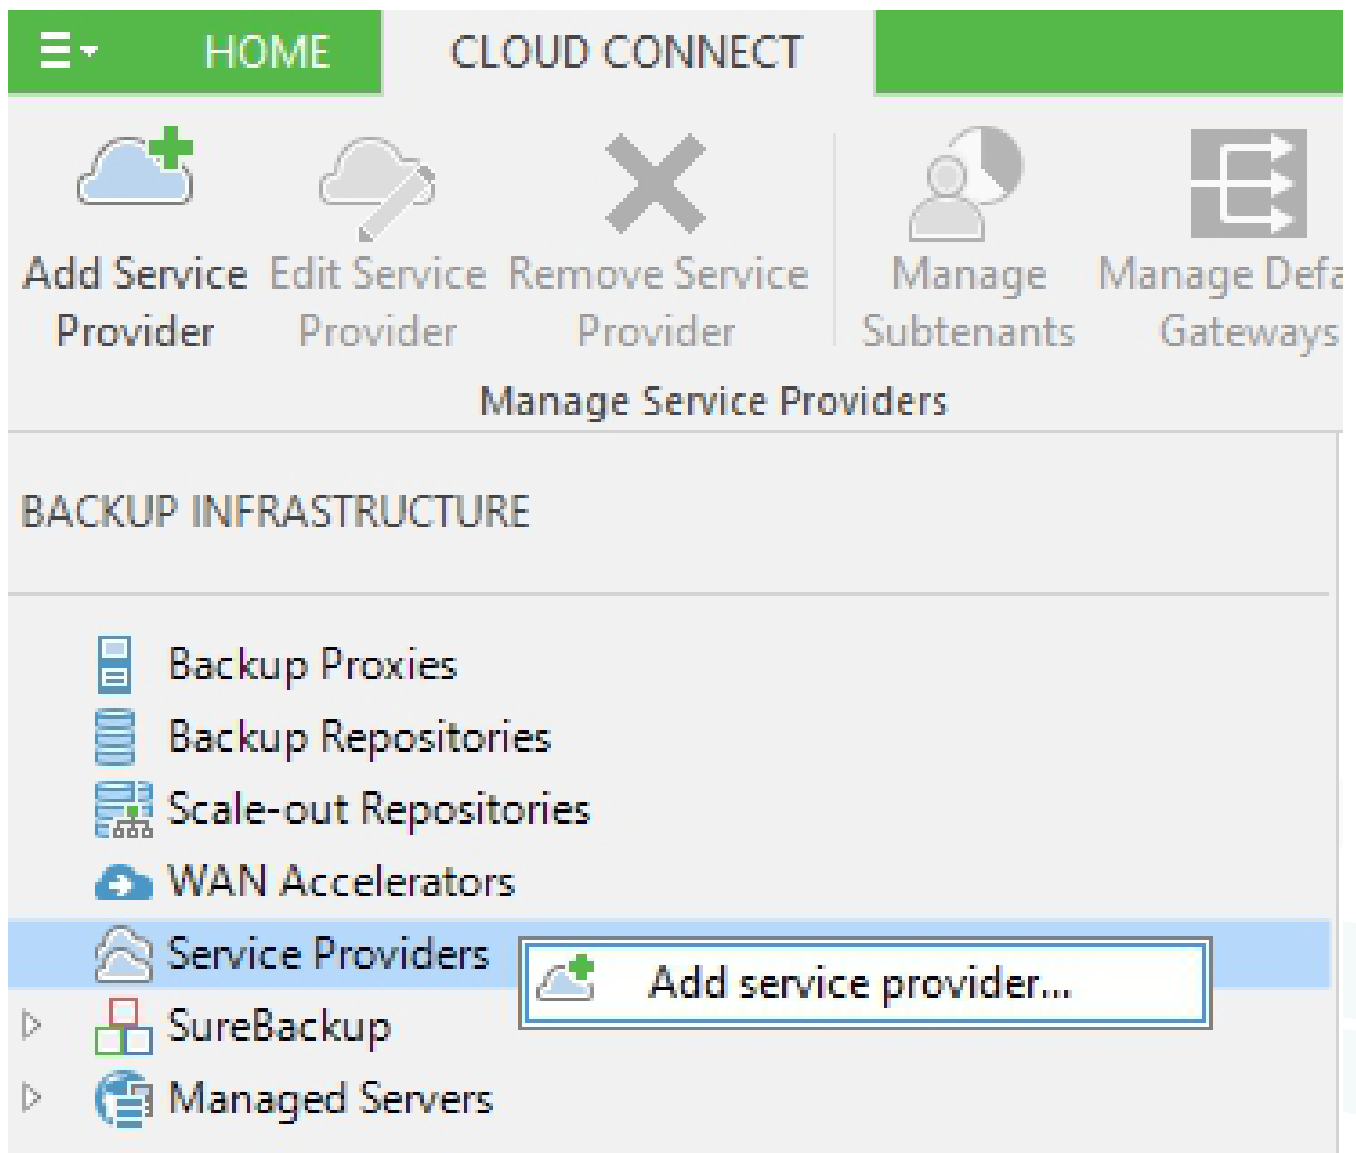


ที่แท็บ "Service Provider" ทำการกรอกข้อมูลดังนี้:

DNS name or IP address: 10.50.41.44

Port: 6180 (default)

เมื่อกรอก ข้อมูลเสร็จ คลิก "Next"

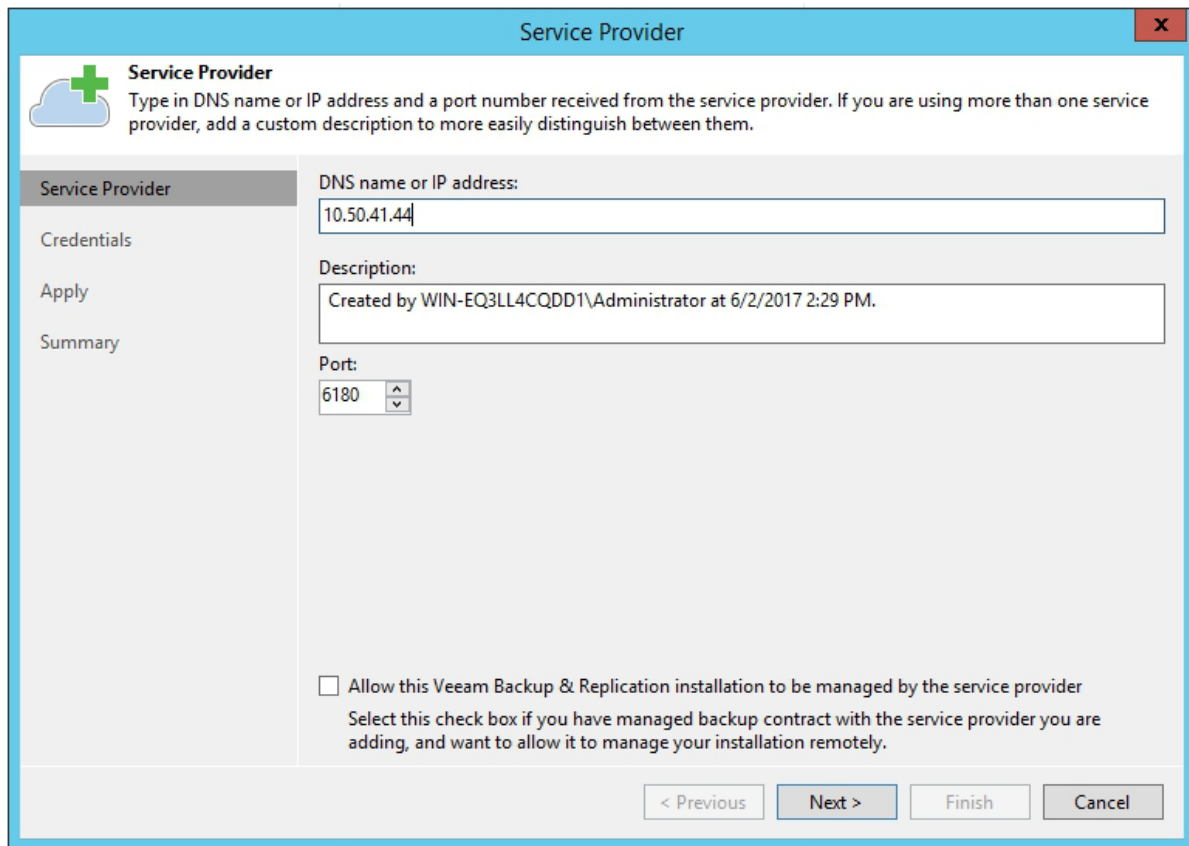

Service Provider

Type in DNS name or IP address and a port number received from the service provider. If you are using more than one service provider, add a custom description to more easily distinguish between them.

Service Provider

DNS name or IP address: 10.50.41.44


Description: Created by WIN-EQ3LL4CQDD1\Administrator at 6/2/2017 2:29 PM.

Port: 6180

☐ Allow this Veeam Backup & Replication installation to be managed by the service provider
Select this check box if you have managed backup contract with the service provider you are adding, and want to allow it to manage your installation remotely.

< Previous Next > Finish Cancel

ไปยังแท็บ Credentials ทำการ คลิก "Add"

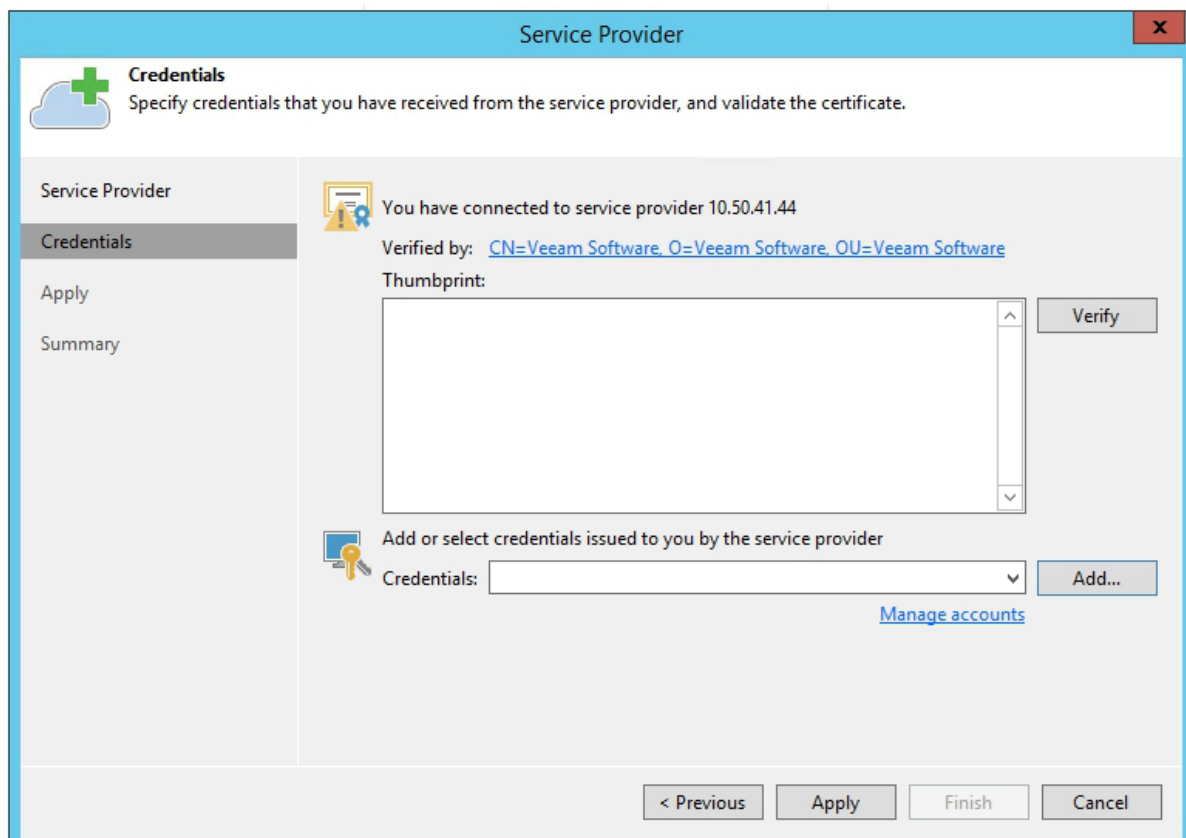

Service Provider

Credentials
Specify credentials that you have received from the service provider, and validate the certificate.

You have connected to service provider 10.50.41.44

Verified by: CN=Veeam Software, O=Veeam Software, OU=Veeam Software

Thumbprint:

Add or select credentials issued to you by the service provider


Credentials: [Dropdown Menu] Add...

Verify

Manage accounts

< Previous Apply Finish Cancel

ไปยังแท็บ Credentials ทำการ คลิก "Add"

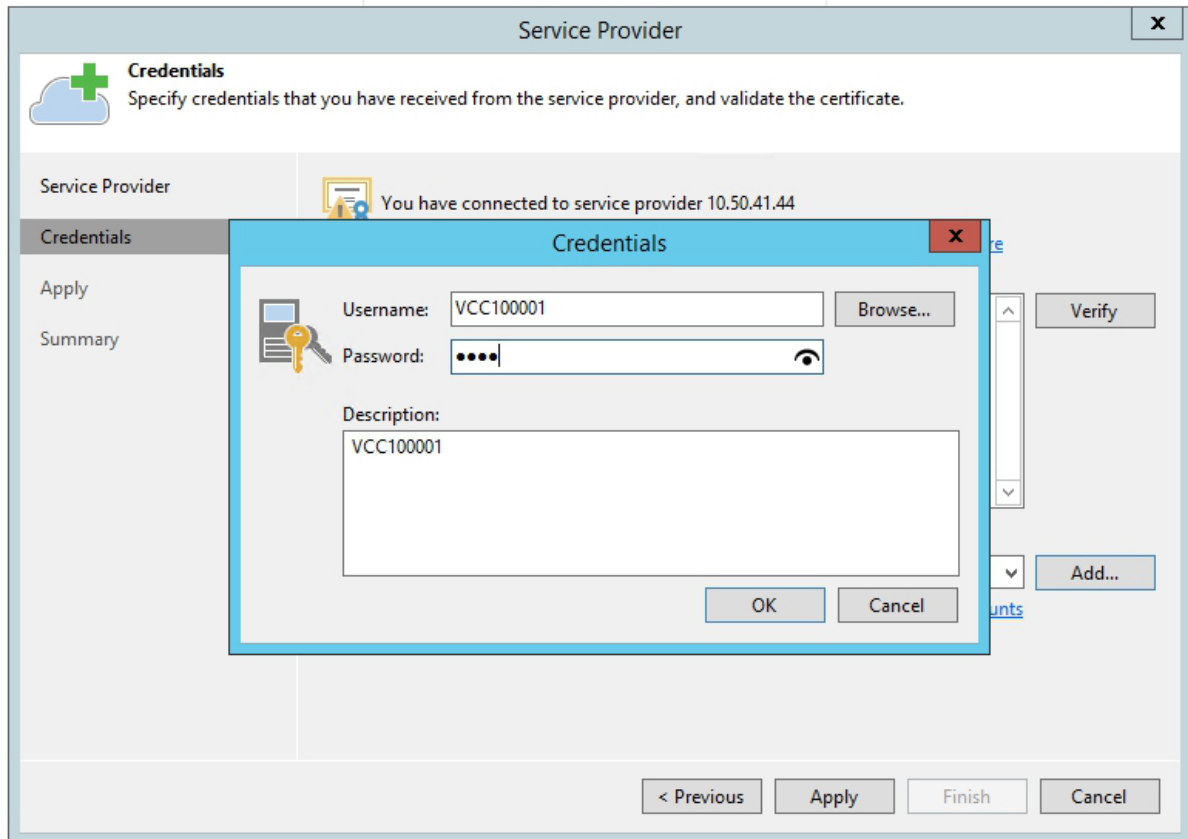

Service Provider

Credentials
Specify credentials that you have received from the service provider, and validate the certificate.

Service Provider You have connected to service provider 10.50.41.44

Credentials

Apply

Summary

Username: VCC100001 Browse...

Password: Verify


Description: VCC100001

OK Cancel

Add...

< Previous Apply Finish Cancel

คลิก "Apply" เพื่อดกกลงใช้ข้อมูลทีกรอกลงไปบน Credentials

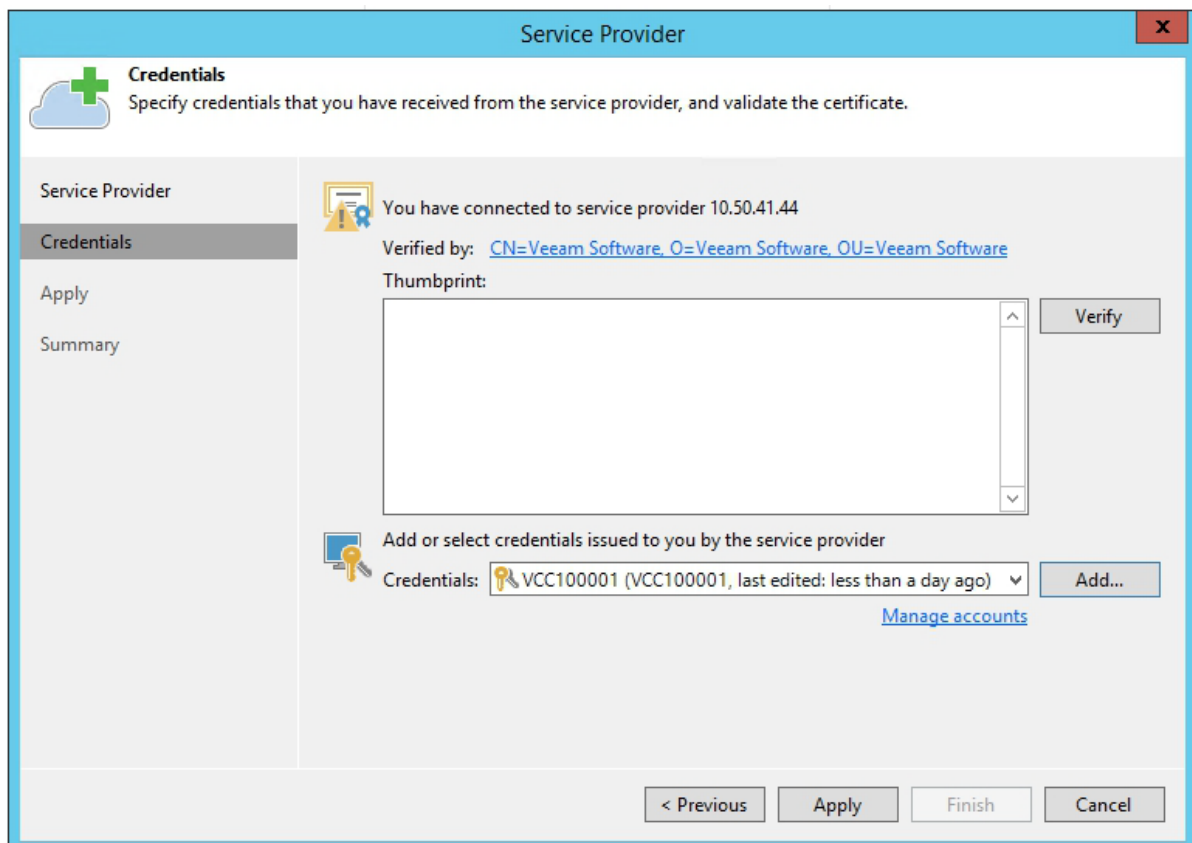

Service Provider

Credentials
Specify credentials that you have received from the service provider, and validate the certificate.

Service Provider You have connected to service provider 10.50.41.44

Credentials

Apply

Summary

Verified by: [CN=Veeam Software, O=Veeam Software, OU=Veeam Software](#)

Thumbprint:

Verify


Add or select credentials issued to you by the service provider

Credentials: VCC100001 (VCC100001, last edited: less than a day ago) Add...

[Manage accounts](#)

< Previous Apply Finish Cancel

ตรวจสอบ Cloud Repository and Capacity จากแท็บ Resources ว่าข้อมูลถูกต้องหรือไม่
หลังจากนั้น คลิก "Apply"

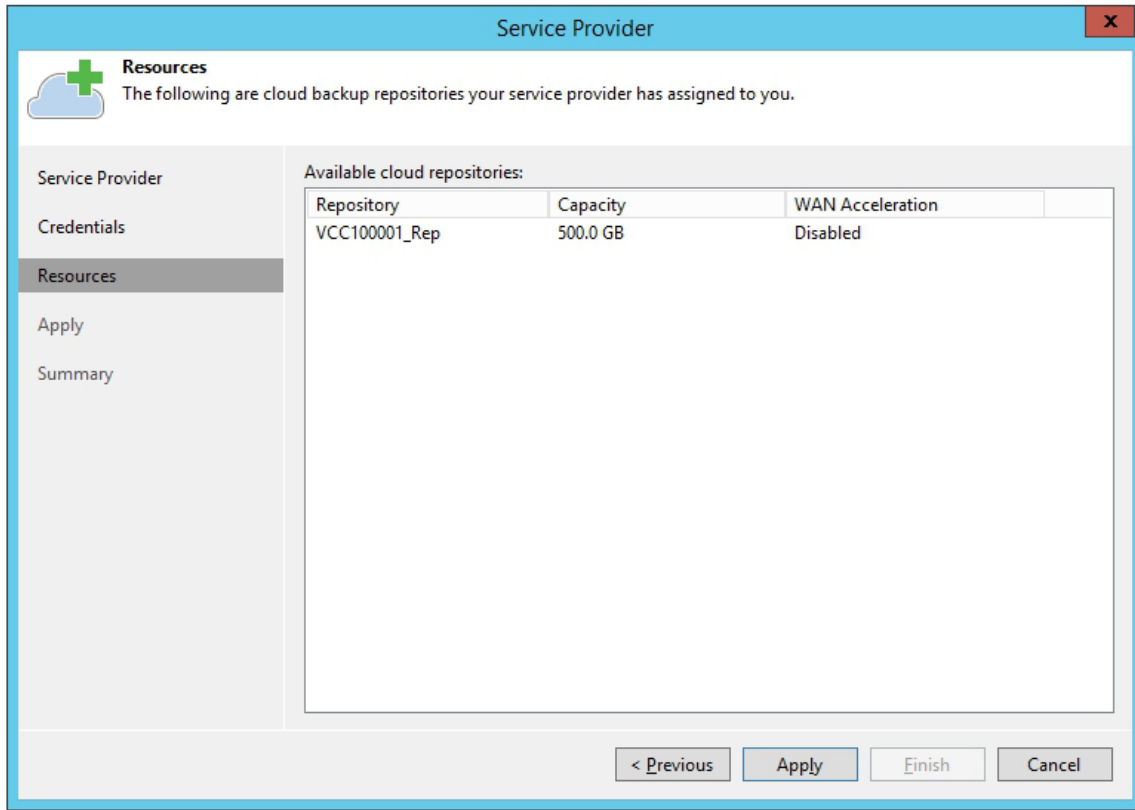

Service Provider

Resources
The following are cloud backup repositories your service provider has assigned to you.

Service Provider

Credentials

Resources

Apply


Summary

Available cloud repositories:

Repository	Capacity	WAN Acceleration
VCC100001_Rep	500.0 GB	Disabled

< Previous Apply Finish Cancel

ระบบจะทำการการตั้งค่าให้โดยอัตโนมัติ หลังจากนั้น คลิก "Next"

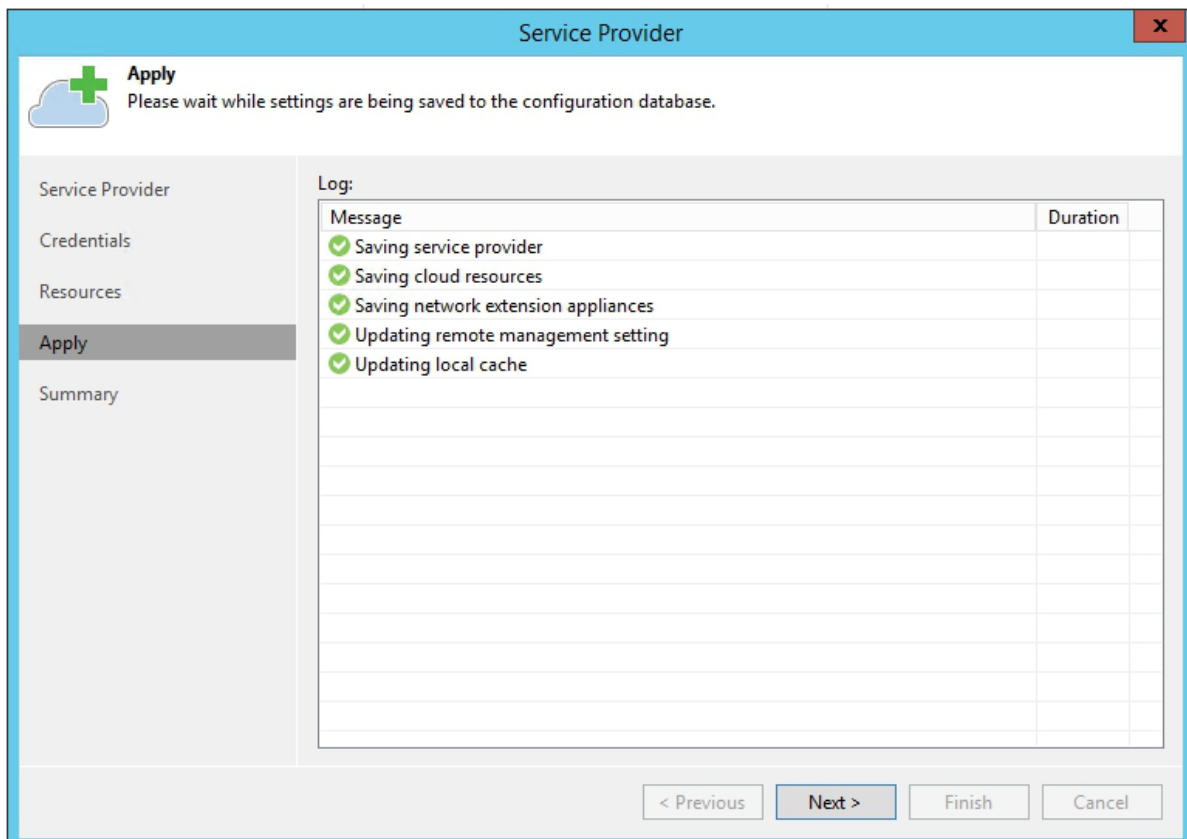

Service Provider

Apply
Please wait while settings are being saved to the configuration database.

Service Provider

Credentials

Resources

Apply


Summary

Log:

Message	Duration
✓ Saving service provider	
✓ Saving cloud resources	
✓ Saving network extension appliances	
✓ Updating remote management setting	
✓ Updating local cache	

< Previous Next > Finish Cancel

เมื่อระบบทำการสร้าง Repository และQuota ของคุณเสร็จแล้ว หน้าต่างการยืนยันจะปรากฏดังรูป ตรวจสอบแล้วคลิก "Next" หลังจากนั้นคลิก "Finish"

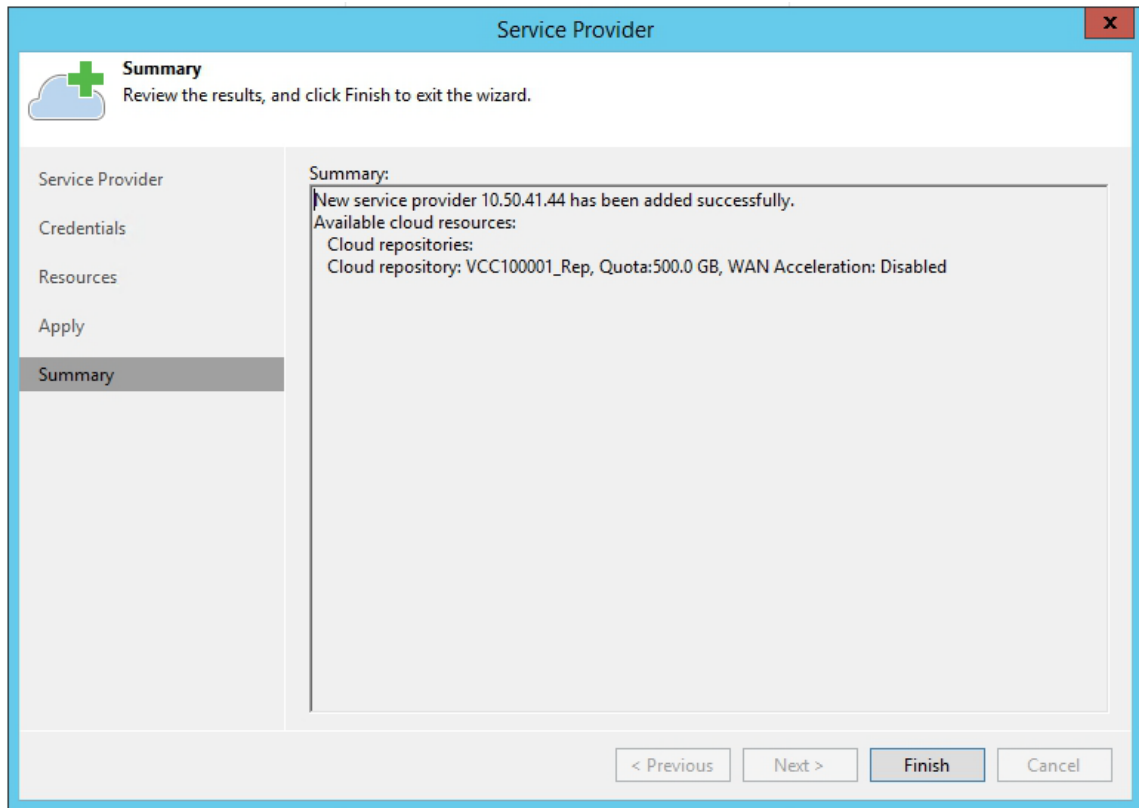

Cloud Connect Gateway จะปรากฏอยู่บนลิสต์ ของแท็บ "Service Provider"

