

Day-27(class , asynchronous , webapi , callback queue , eventloop , setTimeout() , arrow functions , super , constructor)

Monday, 16 October 2023 7:53 PM

class → syntactical sugar (constructor funcⁿ)

(new keyword) → object

Class → Inheritance ?

eg:

Student

class

Person | class

some

Arrow functions

ES6

syntactical sugar ↓
funcⁿ code also

alien

⇒

Phase - 3

(Safe Imp.)

JS → interpreted
single
weakly
dynamically
asynchronous
*** golden

JS engine \rightarrow waits for nobody
line by line

But what if merge wait Karna padhe?



#3 Set Timeout | ✓


Synta 2

`setTimeout ()` ✓

eg: $\text{setTimeout}(\text{cb func}^n, \text{delay})$



How is this possible?

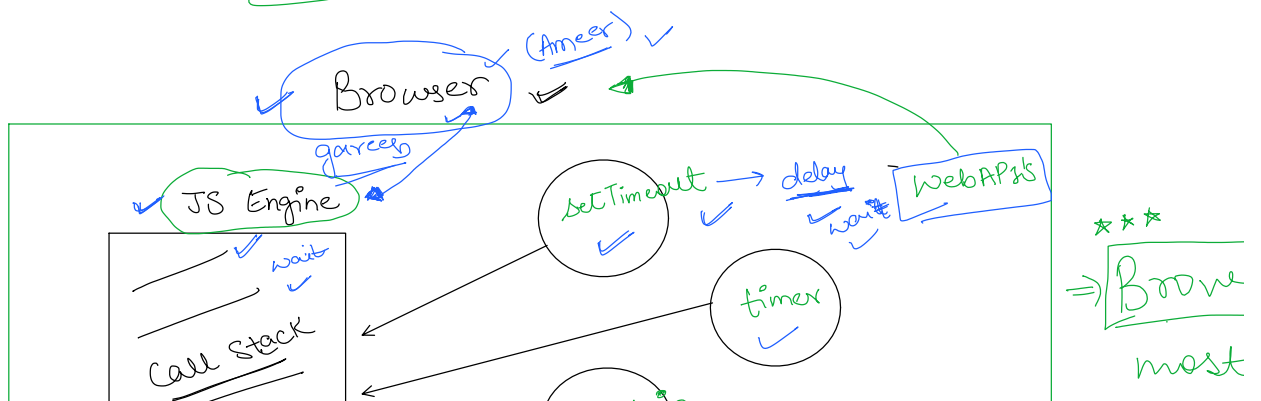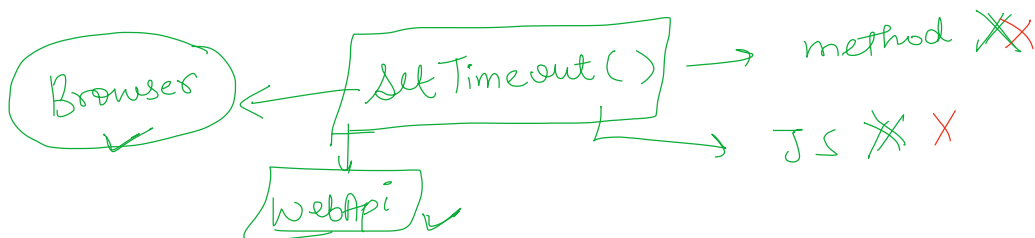

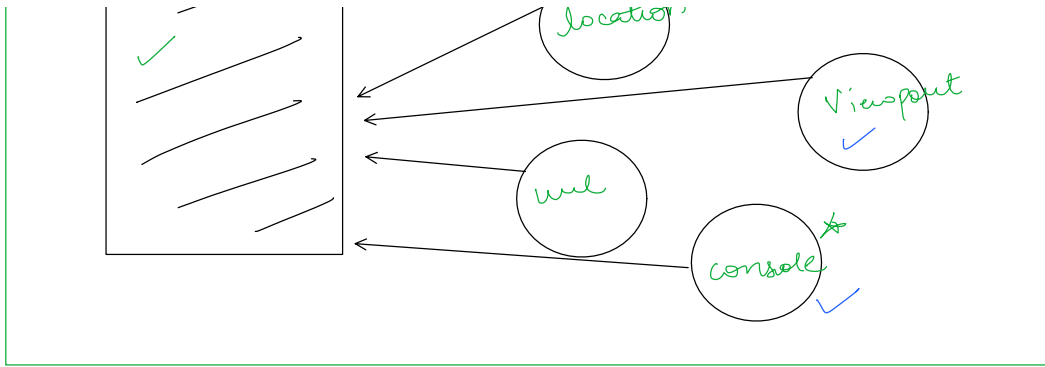

inve
m

———— X ———— X ———— X —

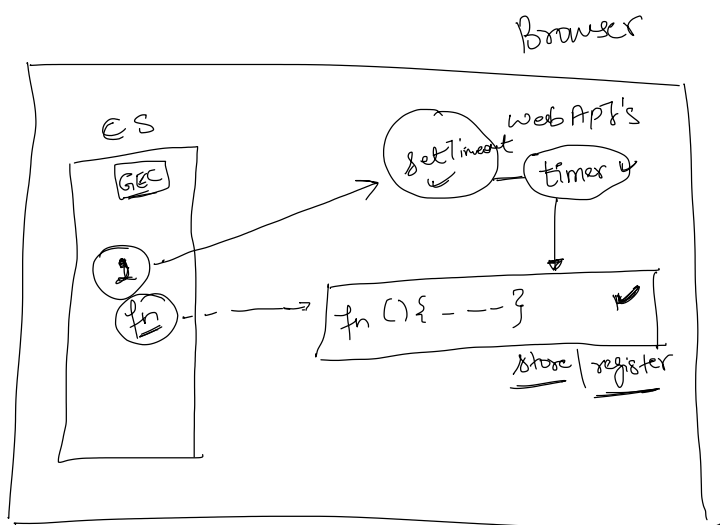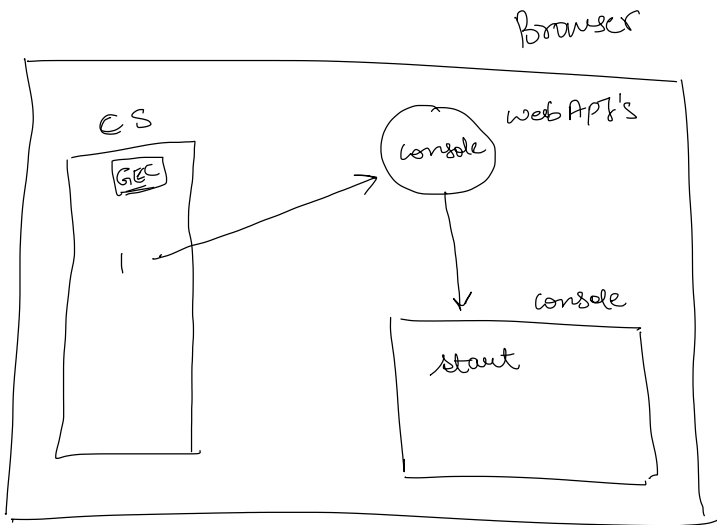

ab since CS
3111211 $\frac{28}{E}$ | (

Browser
—

